(19) Europäisches Patentamt
European Patent Office
Office européen des brevets

(11) EP 0 985 285 B1

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention of the grant of the patent:
21.06.2006 Bulletin 2006/25

(21) Application number: **98945928.4**

(22) Date of filing: **04.09.1998**

(51) Int Cl.:
H04B 7/26 *(2006.01)* ***H04Q 7/38*** *(2006.01)*

(86) International application number:
PCT/US1998/018611

(87) International publication number:
WO 1999/027661 (03.06.1999 Gazette 1999/22)

(54) **METHOD OF REGISTRATION IN A COMMUNICATION SYSTEM**

REGISTRIERUNGSVERFAHREN IN EINEM KOMMUNIKATIONSSYSTEM

PROCEDE D'ENREGISTREMENT DANS UN SYSTEME DE COMMUNICATION

(84) Designated Contracting States:
DE FR GB

(30) Priority: **25.11.1997 US 976975**

(43) Date of publication of application:
15.03.2000 Bulletin 2000/11

(73) Proprietor: **MOTOROLA, INC.**
Schaumburg, IL 60196 (US)

(72) Inventors:
- **CASSIDY, Marc**
  Fox River Grove, IL 60021 (US)
- **MACDONALD, Daniel, J.**
  Cary, IL 60013 (US)
- **EKL, Randy, L.**
  Lake Zurich, IL 60047 (US)

(74) Representative: **Cross, Rupert Edward Blount et al**
Boult Wade Tennant
Verulam Gardens
70 Gray's Inn Road
London WC1X 8BT (GB)

(56) References cited:
WO-A-91/16775
US-A- 4 713 805
US-A- 5 390 360
US-A- 5 423 061
US-A- 5 481 541
US-A- 5 491 835

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 985 285 B1

Description

Field of the Invention

[0001] This invention relates to communication unit frequency (R.F) communication systems, including but not limited to transmission of messages in RF communication systems.

Background of the Invention

[0002] The basic operation and structure of a land mobile communication unit system is well known. Land mobile communication unit systems typically comprise one or more communication units (e.g., vehicle-mounted or portable communication units in a land mobile system and communication unit/telephones in a cellular system) and one or more repeaters that transceive information via the RF communication resources. These communication resources may be narrow band frequency modulated channels, time division multiplex slots, frequency pairs, and so forth. Land mobile communication unit systems may be organized as trunked communication systems, where a plurality of communication resources is allocated amongst a group of users by assigning the repeaters on a communication-by-communication basis within an RF coverage area.

[0003] Large communication systems comprising a large number of communication units are known to exist. At times, when a site failure occurs in such a system, the communication units that are presently registered at a failed site will want to affiliate or register with an adjacent site in order to avoid being isolated from their group communications. At times, however, it is possible that a very large number of communication units will try to re-register at an adjacent site in a very short time frame, causing the control channel on which registration takes place to become flooded with requests and the site may subsequently become incapable of processing any requests, including normal communication requests.

[0004] At other times, there may be a need for a large number of communication units to transmit messages on a single channel in a short period of time. In a broadcast data system, a single transmission may target numerous receiving communication units, sometimes thousands of units. Because each of the units must send either an ACK (acknowledgment) or a NACK (negative acknowledgment) for each data frame, the return channel becomes inundated with thousands of messages, consuming valuable time on the communication channel. If use of the return channel is not coordinated, many of these messages are likely to coincide at least partially, resulting in corrupted ACKs and NACKs, rendering the transmitter unable to distinguish which messages were received successfully and which ones were not. One method for returning ACKs and NACKs via a return channel in a coordinated manner is to designate a particular time interval for each unit to transmit an ACK/NACK. When there are numerous communication units, such a system is wasteful of the communication channel, and messages will take a very long time to be transmitted.

[0005] WO 91/16775 discloses a communication system including data terminals and controllers. The controllers have distinct areas of responsibility in which they communicate with particular data terminals. The controllers map data terminals to groups and grant transmission time to each group in turn by polling. The controllers map the terminals to groups having a minimum number equal to a single terminal, corresponding to straight polling, and a maximum number equal to the total number of terminals in the system, corresponding to a singly-slotted ring, and dynamically change the group sizes and mappings in response to the system activity.

[0006] US 5,481,541 discloses communications apparatus, such as remote data/control apparatus. A first unit and a second unit are arranged to exchange messages over a communication channel. To avoid collision between responses between different remote units, the first unit has device for requesting a response from the second unit and circuit for communicating to the second unit a value representing a time delay and the second unit has device for monitoring the channel, determining when the channel becomes free and transmitting its response to the first unit delayed by that time delay after the channel becomes free.

[0007] US 5,390,360 discloses radio frequency communication system in which a primary unit interrogates a plurality of secondary units over a radio communication channel. The primary unit receives a command to initiate an interrogation cycle over the communication channel. The primary unit then selects a time delay from a set of time delays, and transmits an interrogation request to each secondary unit of at least a subset of the plurality of secondary units in series after the selected time delay if the channel is free at the end of the selected time delay. The primary unit then selects the longest time delay for the next interrogation cycle if a channel grant command is received, and selects a shorter time delay for the next interrogation cycle if no channel grant command is received.

[0008] Accordingly, there is a need for a method of coordinating transmission of a large number of messages on a single channel in an orderly fashion, such that all messages are received without taking an extraordinary amount of time or flooding the channel to such degree that the communication site becomes unusable.

Summary of the Invention

[0009] In a first aspect, the present invention provides a method of operation in a RF mobile communication system in which talkgroups may be established between communication units, as claimed in claim 1.

[0010] Further aspects are as claimed in the dependent claims.

Brief Description of the Drawings

[0011]

FIG. 1 is a block diagram of a communication system in accordance with the invention.

FIG. 2 is a flowchart showing a method of registering multiple communication units in accordance with the invention.

FIG. 3 is a flowchart showing a method of registering multiple communication units as performed by a controller in accordance with the invention.

Description of a Preferred Embodiment

[0012] The following describes an apparatus for and method of scheduling or coordinating transmission of a large number of messages on a single channel in an orderly fashion. In the case where a large number of communication units need to register in a system, messages are coordinated such that at least one communication unit of each talkgroup in the system is quickly registered, thereby enabling talkgroup activity to take place, and the remaining unregistered communication units are then expediently registered by transmitting their registration messages. All messages are received without taking an extraordinary amount of time or flooding the channel to such degree that the communication site becomes unusable.

[0013] A method of the present invention comprises the steps of detecting an elevated registration level of at least a part of a communication system, selecting a first time, determining a first random registration time that is less than or equal to the first time, registering a first communication unit from a first talkgroup at the first random registration time, and upon receiving a group activity message for the first talkgroup, delaying registration by at least a second communication unit from the first talkgroup. The method may additionally comprise the steps of selecting a second time, determining a second random registration time that is less than or equal to the second time, registering a first communication unit from a second talkgroup at the second random registration time, and upon receiving a registration acknowledgment for the second talkgroup, delaying registration by at least a second communication unit from the second talkgroup. The method may further comprise the steps of detecting a group activity message from each intended talkgroup of a plurality of talkgroups, selecting a third time, determining a third random registration time that is less than or equal to the third time, and registering at the third random registration time.

[0014] Another method of the present invention comprises the steps of detecting, by a controller, an elevated registration level of at least a part of a communication system, selecting a first time, broadcasting the first time to a plurality of communication units, receiving a registration from a first communication unit of a first talkgroup, and sending a registration acknowledgment to the first communication unit of the first talkgroup. The method may additionally comprise the steps of selecting a second time, broadcasting the second time to the plurality of communication units, receiving a registration from a first communication unit of a second talkgroup, and sending a registration acknowledgment to the first communication unit of the second talkgroup. The method may further comprise the steps of detecting a group activity message from each intended talkgroup of a plurality of talkgroups, selecting a third time, broadcasting the third time to the plurality of communication units, and receiving a registration from a non-registered communication unit of the plurality of communication units.

[0015] The step of selecting the first time may comprises the steps of determining at least one of: a number of communication units expected to register; a current inbound request load; and a tolerable registration failure rate; and selecting the first time by utilizing at least one of the number of communication units expected to register, the current inbound request load, and the tolerable registration failure rate. The step of selecting the second time or the third time may comprise the steps of determining at least one of: a number of communication units expected to register; a current inbound registration load; a current inbound non-registration load; and a tolerable registration failure rate; and selecting the second time by utilizing at least one of the number of communication units expected to register, the current inbound registration load, the current inbound non-registration load, and the tolerable registration failure rate.

[0016] Another method of the present invention comprises the steps of detecting, by a communication unit in a first talkgroup, an elevated registration level of at least a part of a communication system, selecting a first time, determining a first random registration time that is less than or equal to the first time, monitoring for a group activity message for the first talkgroup, and when the group activity message is received before the first random registration time, delaying registration by the communication unit. When the first random registration time occurs before the group activity message is received, the communication unit registers at the first random registration time. The method may additionally comprise the steps of monitoring for a group activity message for a talkgroup other than the first talkgroup, when group activity message for a talkgroup other than the first talkgroup is received, selecting a second time, determining a second random registration time that is less than or equal to the second time, and when a group activity message is received for the first talkgroup before the second random registration time, delaying registration by the communication unit. When the second random registration time occurs before the group activity message is received, the communication unit registers at the second random registration time. The method may further comprise the steps of detecting a group activity message from each intended talkgroup of a plurality of talkgroups, selecting a third time, deter-

mining a third random registration time that is less than or equal to the third time, and registering at the third random registration time.

[0017] A block diagram of a communication system is shown in FIG. 1. A controller 101, such as a Zone Controller available from Motorola, Inc., controls a communication system comprising at least three communication sites S1, S2, and S3 having three different coverage areas 103, 105, and 107, respectively. At each of these sites is a bank of repeaters or base stations 109 that source multiple communication resources. Distributed throughout the coverage area of a communication system are a number of communication units 111, 113, 115, and 117. If, for example, the site S2 controlling the middle coverage area 105 loses contact with the controller 101 or in some other way is unable to provide wide-area or inter-site communications, all the communication units 111, 113, 115, and 117 that are presently affiliated with the communication site S1 supporting coverage area 105 will go to the nearest adjacent site capable of wide-area communications and register. Typically, the communication units 111 and 113 will attempt to register at the first site S 1 and the communication units 115 and 117 will attempt to register at the third site S3. In the preferred embodiment, registering at a site comprises sending a message including a communication unit identification and a talkgroup identification.

[0018] The present invention provides a method of orderly registration by these communication units 111, 113, 115, and 117 such that collisions between the communication units when they try to register will be avoided, while recovering the ability to more efficiently provide communication resources to the communication system. The present invention also provides for an orderly coordination of transmission other types of messages, such as ACKs and NACKs, and all such messages will be referred to as registration messages, and the act of transmitting registration messages will be referred to as registering throughout the specification. Registering comprises transmitting a message comprising at least one of a communication unit identification, a talkgroup identification, and an acknowledgment.

[0019] A method of registering multiple communication units is shown in the flowchart of FIG. 2. Many of the steps of the flow chart of FIG. 2 may be performed by either a controller 101 or a communication unit 111. In the preferred embodiment, the controller 101 performs as many steps of the method of FIG. 2 as possible, i.e., by performing the method in the flowchart of FIG. 3, and the communication unit 111 performs the remaining steps. The flowchart of FIG. 2 will be described with respect to a communication unit 111, and those steps that may be performed by a controller 101 will be so designated. At step 201, an elevated registration level is detected. The elevated registration level may occur at one or more sites of the communication system. In one embodiment, such detection comprises detecting a site failure. Alternatively, the detection may comprise receiving an indication of the elevated registration level, for example, from controller 101. In addition, the detection may comprise the communication unit 111 determining the registration level of at least part of the communication system, and when the registration level is above a threshold, establishing that the registration level is elevated. The threshold may be, for example, three registration messages per second over a two minute time interval. Step 201 may be performed by a controller 101. The controller 101, in the preferred embodiment, detects an elevated registration level when an adjacent site failure is detected, for example, when communications or communication links to the adjacent site are not operational. Alternatively, the controller 101 may receive an indication of the elevated registration level from one of the sites S1, S2, or S3 or a communication unit 111 in the communication system. Further, the detection may comprise the controller 101 determining the registration level in at least part of the communication system, and when the registration level is above a threshold, establishing that the registration level is elevated. The threshold may be the same threshold as used by a communication unit 111.

[0020] At step 203, a group recovery time is selected. In this alternative embodiment, the step of selecting a group recovery time may comprise calculating a time large enough for a predetermined number of communication units to register when step 203 is performed by a communication unit 111. Alternatively, the communication unit 111 may select the group recovery time by extracting the group recovery time from a message received from the controller 101 or another infrastructure entity such as a site controller or intelligent repeater, such as an IntelliRepeater™ base station or repeater available from Motorola, Inc. The group recovery time may be stored in the communication unit 111. The controller may also perform the step of determining the group recovery time at step 203, as described in the description for FIG. 3. The process then continues with step 205, where a random registration time is determined from the group recovery time. Ideally, the random registration time is less than or equal to the group recovery time.

[0021] At step 207, it is determined if the random registration time has occurred. If the random registration time has occurred at step 207, the communication unit 111 registers at step 209, and the process ends. If at step 207, the random registration time has not yet occurred, the process continues with step 211, where it is determined if group activity has occurred. Group activity in the preferred embodiment comprises receiving a group activity message such as a registration acknowledgment, a group call message, or a group signalling message. A registration acknowledgement includes a response by the controller to a registration request message. A group call message includes a message indicating that a group call is active at the communication site. Group signalling includes any type of signalling that relates to a group service, such as an emergency alarm message, that indicates an emergency situation is occuring on a particular

talkgroup. The group activity message includes an identification of a talkgroup in the preferred embodiment. Detection of such activity may take place by the communication unit 111 monitoring a control channel within the communication system. The controller 101 checks for group activity by observing the control channel at step 211 and through processing of talkgroups from communication registrations or other group activity messages as described above. If there is no group activity at step 211, the process continues with step 207. If there is group activity at step 211, the process continues with step 212, where it is determined if the activity belongs to the talkgroup in which the communication unit 111 belongs. If the talkgroup activity belongs to the unit's talkgroup, the process continues with step 213, where registration is delayed. In the preferred embodiment, registration is delayed for communication units in the talkgroup for which group activity was detected at step 211 for those the communication units 111 that had not yet registered. The delay time may comprise delaying until at least one communication unit from each talkgroup within the plurality of talkgroups in the communication system is registered.

[0022] At step 215, it is determined if all the talkgroups intended for use in this communication site are active. Talkgroups intended for use are those talkgroups at this communication site that will be initiating or participating in a conversation. Thus, a talkgroup is active when some form of group activity, such as registration by a member of the talkgroup, is detected. A communication unit 111 may make such a determination by setting a timer and detecting expiration of the timer. The time for the timer would be set to an estimate of time taken for each of the talkgroups in the communication unit's system to have activity detected. An alternative method for the communication unit 111 to determine when all talkgroups are active is to determine when no new talkgroup activity occurs over a predetermined time on the control channel. Alternatively, the communication unit may determine when new communication unit registration on the control channel falls below a threshold, such as average registration levels, during a predetermined time period. See FIG. 3 for a description of how step 215 is performed by a controller 10 1.

[0023] If talkgroup activity at step 212 did not belong to the unit's talkgroup, the process continues with step 217, where a new group recovery time is selected. When a communication unit selects the new group recovery time, the new group recovery time may simply be a decreased value from the previous group recovery time, and may be a fixed time. See FIG. 3 for examples of how a controller 101 selects a new group recovery time. Step 215 is performed until all talkgroups are active. If at step 215, all talkgroups are active, the process continues with step 219, where an individual recovery time is selected. The communication unit 111 may select an individual recovery time in a manner similar to the manner for selecting an initial group recovery time at step 203. The controller 101 may set a time in a manner similar to how it would select a time at step 203. Either the communication unit 111 or the controller 101 may select the individual recovery time at step 219, and such a process is not dependent upon which of these devices determined the group recovery time at step 203. Further, the individual recovery time may be set equal to the original group recovery time from step 203. At step 221, the random registration time is determined by the communication unit, and at step 223, the communication unit registers at the random registration time, and the process ends.

[0024] A method, as may be performed by a controller 101, of scheduling communication unit registration is shown in the flowchart of FIG. 3. At step 301, an elevated registration level is detected by the controller 101. An elevated registration level may be present in only a part of the communication system, such as at one or two of the many sites in a communication system. Elevated levels typically occur when one site of a multiple site communication system fails, loses contact with the rest of the system, or loses the capability of inter-site communications, also referred to as wide-are communications. An elevated level may also be assumed for specific times of day, such as a the change of a work shift or in an emergency situation.

[0025] At step 303, a group recovery time is selected. In the preferred embodiment, the controller determines the number of communication units expected to register at a particular site, a current inbound request load at the site, and a tolerable registration failure rate. The controller 101 then selects the group recovery time by utilizing the number of communication units expected to register, the current inbound request load, and the tolerable registration failure rate. The following equation may be used:

$$T = a*S/(\ln(F) - \ln(c) - a*B),$$

where: T = time value, in seconds; a = constant; S = expected number of communication units to register; F = failure rate, as a percentage (0 to 100, not 0.00 to 1.00); c = constant; and B = baseline traffic load, in messages per second. In the preferred embodiment, the constants have the values a = 1.4 and c = 0.06. The expected number of communication units can be calculated as follows:

$$S = T*(N - M),$$

where: S = expected number of communication units; T = time value, calculated above; N = new registration rate, in registrations per second; and M = baseline registration rate, i.e., the number of registrations per second prior to the elevated registration level. The formula for T is used first, with a starting value of S, which may be the (total number of communication units)/(number of adjacent

sites) in the situation where a site becomes unavailable, or an estimate related to the reason for the elevated registration level, such as a message sent to S communication units that requires an ACK from each communication unit. Then, the second formula is used to update the expected number of communication units based on measuring what is going on in the system. To prevent (ln(F) - ln(c) - a*B) from being negative or 0, in the preferred embodiment, if (ln(F) - ln(c) - a*B) is less than a small positive value (such as 0.1), then T is set as a large positive value (such as 1000 seconds).

[0026] At step 305, the group recovery time selected at step 303 is broadcasted to the appropriate target communication units, such as those at the site for which an elevated registration level was detected at step 301. At step 307, any incoming registrations are processed by the controller 101. The controller 101 may detect group activity by receiving a registration for a talkgroup, processing a group call message, or processing a group signalling message, as described above. The process continues with step 311, where the controller determines if all of the talkgroups intended for use at the site are active. In the preferred embodiment, the controller 101 makes such a determination by waiting until a communication unit has registered for each of the talkgroups that the controller 101 has registered in the system. Such registration may have occured prior to step 301. The controller may also allow for fewer than all talkgroups to be active, if no activity for inactive talkgroups occurs over a certain period of time.

[0027] If all the talkgroups are not presently active at step 311, the process continues with step 313, where the controller selects a new group recovery time, and the process continues with step 305. The new group recovery time may be determined by first determining at least a number of communication units expected to register at the site, a current inbound registration load at the site, a current inbound non-registration load at the site, and a tolerable registration failure rate. The current inbound registration load at the site is the rate at which registration messages are being received, in messages per second. The current inbound non-registration load at the site is the rate at which any other inbound message is received, in messages per second. The tolerable registration failure rate is the percentage of registration messages that can fail and still consider the system to be operating with acceptable performance. The controller 101 then utilizes at least one of the number of communication units expected to register, the current inbound registration load, the current inbound non-registration load, and the tolerable registration failure rate to determine a new group recovery time. This information may be found in a table within the controller, or calculated using an equation, such as the one described above. Typically, the new group recovery time is a shorter time than the previous group recovery time. Once all talkgroups are active at step 311, the process continues with step 315, where an individual recovery time is selected by the controller 101. In the preferred embodiment, the controller 101 determines at least one of the number of communication units expected to register, a current inbound registration load at the site, a current inbound non-registration load at the site, and a tolerable registration failure rate. The controller 101 then utilizes at least one of these factors to yield the individual recovery time at step 315. An equation such as described above may be used. At step 317, the individual recovery time is broadcasted, and individual registrations are processed as is known in the art at step 319, and the process ends. In the preferred embodiment, the steps of the flowchart of FIG. 3 are performed on a site-by-site basis, i.e., for each site where an elevated registration level is detected.

[0028] The following describes a particular application for the present invention. Upon detection of a failure of one site S2 of a multiple-site communication system, the controller 101 determines how many communication units 111, 113, 115, and 117 could possibly move to each of the wide-area sites S1 and S2 adjacent to the failed site S2, by determining the number of communication units registered at the failed site, and dividing that among the number of sites adjacent to the failed site. The controller 101 then broadcasts a group recovery time needed for all communication units to register without colliding. Each of the communication units then determines a random registration time based on the broadcasted group recovery time and registers at the random registration time, unless talkgroup activity for the talkgroup associated with the communication unit is detected before the random registration time for that particular communication unit. If talkgroup activity is detected, all communication units in that talkgroup that have not yet registered will delay registration. Each time talkgroup activity or a new registration with a not yet registered (i.e., affiliated) talkgroup occurs, the controller 101 recalculates a new recovery time to take into account that the recently registered or active talkgroup no longer needs to register to obtain talkgroup resources at that site. This new recovery time will be shorter than the previous group recovery time. Each time activity for a new talkgroup is detected, the group recovery time shrinks until all talkgroups are accounted for in the system. When all the talkgroups have been registered, or have had activity within them in the system, the controller then requests the remaining unregistered communication units 113, 115, and 117, register within the site. Typically, group activity for each of the talkgroups will occur in a time much shorter than the originally calculated group recovery time, and thus all the communication units can participate in talkgroup activity in a much shorter time than if all communication units had registered, without the need to register. The controller will calculate a new recovery time for the remaining individuals, which time is needed to recover the total number of communication units less those already recovered, via the entire registration process. Typically, approximately one communication unit per talkgroup will have registered during the previous recovery of talk

groups at that site. Hence, the vast majority of the communication units will still need to register with their new site, although the units can participate in group calls until such registration takes place. The controller broadcasts the individual recovery time, and each of the communication units determines a new random time to register based on this individual recovery time, and registers at that new random time.

[0029] The present method may be embodied in an individual communication unit 111, without assistance by a controller or other device within the infrastructure of the communication system. In such a method, each of the communication units, upon detection of a site failure or reception of a message containing an indication that an elevated level of registration is presently required in the system. Each communication unit then picks a large random time necessary to recover all the communication units without collisions in the system. This number may be programmed into the communication unit based on load levels known within the communication system. The communication unit then monitors group registrations while waiting to register. If the communication unit that is waiting to register notices a group registration or other talkgroup activity for another talkgroup, the communication unit will decrease the random group registration time based on the level of control channel traffic. Group recovered communication units start an intermediate fixed timer. When the fixed timer expires, the unregistered, remaining, communication units then begin a random individual timer and register when that random individual timer expires.

[0030] An advantage of this method is that talkgroups are provided for within the communication system, and talkgroup communications can successfully be performed in the system without need for all the individual communication units to register with the system. When at least one communication unit per talkgroup registers as quickly as possible in the system, the system can allocate resources and direct calls to the individuals in the talkgroups to facilitate communications in the system. Without allocating resources and directing calls to talkgroups, the individuals in the talkgroups would miss communications intended for them. It is advantageous to register these individuals and talkgroups as quickly as possible so that a minimum of communications is missed. Also, this invention controls the rate at which communication units register, thereby optimizing the time it takes to register communication units without overloading the control channel. Other types of messages, such as acknowledgments, may also benefit from the present invention.

Claims

1. A method of operation in a RF mobile communication system in which talkgroups may be established between communication units (111, 113, 115, 117), the method comprising the steps of:

communication units (111, 113, 115, 117) each sending a registration request message to register with a given site of the system,
detecting (201, 301) an elevated registration level in which a number of registration request messages per unit time for a given site exceeds or will exceed a threshold; and
when the elevated registration level is detected applying a procedure for registration of communication units (111, 113, 115, 117) with the site;
characterised in that the procedure includes:

calculating a group recovery time large enough for an expected number of communication units (111, 113, 115, 117) to register with the site;
determining for registration of a given communication (111, 113, 115, 117) unit a random registration time that is less than or equal to the group recovery time;
registering the given communication unit (111, 113, 115, 117) when the random registration time for that unit has elapsed;
detecting whether a registered communication unit (111, 113, 115, 117) is a member of a talkgroup and, if it is, delaying registration by at least one further communication unit of that talkgroup.

2. A method according to claim 1 wherein registration of a communication unit (111, 113, 115, 117) includes sending a registration request message by the communication unit (111, 113, 115, 117) to a controller 101.

3. A method according to any one preceding claim, wherein the step of detecting the elevated registration level comprises detecting a site failure (201, 301).

4. A method according to claim 1 or claim 2, wherein the step of detecting comprises measuring a number of registration requests per unit time.

5. A method according to any one preceding claim, wherein the presence of a talkgroup activity is determined by a group activity message comprising one of a registration acknowledgement, a group call message, and a group signalling message.

6. A method according to claim 5 wherein the group activity message includes a talkgroup identification.

7. A method according to any one preceding claim, further comprising the steps of:

calculating a second group recovery time;
determining for a second given communication unit (111, 113, 115, 117) a second random registration time that is less than or equal to the second group recovery time;
registering the second given communication unit (111, 113, 115, 117) when the second random registration time for that unit has elapsed;
detecting whether the second communication unit (111, 113, 115, 117) is a member of a second talkgroup and, if it is, delaying registration by at least one further communication unit (111, 113, 115, 117) of that second talkgroup.

8. A method according to any one preceding claim including detecting the elevated registration level by a controller (101).

9. A method according to any one preceding claim wherein a group recovery time is broadcast to a plurality of communication units (111, 113, 115, 117).

10. A method according to any one preceding claim, wherein the step of determining a group recovery time includes determining at least one of:

a number of communication units (111, 113, 115, 117) expected to register;
a current inbound registration request load; and
a tolerable registration failure rate.

11. A method according to any one preceding claim and wherein a registration acknowledgement message is sent to each communication unit (111, 113, 115, 117) in response to a registration request message.

12. A method according to claim 1 wherein the elevated registration level is detected by a communication unit (111, 113, 115, 117).

13. A method according to claim 7 including:

calculating a third group recovery time;
determining a third random registration time that is less than or equal to the third time;
registering a given communication unit (111, 113, 115, 117) when the third random registration time has elapsed.

14. A method according to any one preceding claim, including delaying registration of communication units (111, 113, 115, 117) until at least one communication unit from each talkgroup of a plurality of talkgroups is registered.

Patentansprüche

1. Verfahren für den Betrieb in einem mobilen Funkkommunikationssystem oder RF-Kommunikationssystem, in welchem Gesprächsgruppen zwischen Kommunikationseinheiten (111, 113, 115, 117) gebildet werden können, wobei das Verfahren die folgenden Schritte aufweist:

Senden jeweils einer Registrieraufforderungsnachricht mit Hilfe der Kommunikationseinheiten (111, 113, 115, 117), um auf einer bestimmten Website des Systems registriert zu werden,
Erfassen (201, 301) einer höheren Registrierungsebene, in welcher eine Anzahl an Registrieraufforderungsnachrichten pro Zeiteinheit für eine bestimmte Website einen Schwellenwert übersteigt oder übersteigen wird; und
bei Erfassung der höheren Registrierungsebene, Anwenden einer Prozedur zur Registrierung von Kommunikationseinheiten (111, 113, 115, 117) auf der Website; **dadurch gekennzeichnet, dass** die Prozedur folgende Schritte einschließt:

Berechnen einer Gruppen-Wiederherstellungszeit, welche lang genug ist, um eine erwartete Anzahl an Kommunikationseinheiten (111, 113, 115, 117) auf der Website zu registrieren;
Bestimmen einer willkürlichen Registrierzeit für die Registrierung einer bestimmten Kommunikationseinheit (111, 113, 115, 117), wobei die willkürliche Registrierzeit kürzer oder gleich der Gruppen-Wiederherstellungszeit ist;
Registrieren der vorgegebenen Kommunikationseinheit (111, 113, 115, 117), wenn die willkürliche Registrierzeit für diese Einheit abgelaufen ist;
Erfassen, ob eine registrierte Kommunikationseinheit (111, 113, 115, 117) ein Mitglied einer Gesprächsgruppe ist, und falls dies der Fall ist, Verzögern der Registrierung um mindestens eine weitere Kommunikationseinheit dieser Gesprächsgruppe.

2. Verfahren nach Anspruch 1, **dadurch gekennzeichnet, dass** die Registrierung einer Kommunikationseinheit (111, 113, 115, 117) das Senden einer Registrieraufforderungsnachricht mit Hilfe der Kommunikationseinheit (111, 113, 115, 117) an einen Regler 101 einschließt.

3. Verfahren nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** der Schritt der Erfassung der höheren Registrierungsebene das Erfassen eines Website-Versagens (201, 301)

aufweist.

4. Verfahren nach Anspruch 1 oder 2, **dadurch gekennzeichnet, dass** der Erfassungsschritt das Messen einer Anzahl von Registrieraufforderungen pro Zeiteinheit aufweist.

5. Verfahren nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** das Vorhandensein einer Gesprächsgruppentätigkeit durch eine Gruppen-Tätigkeitsnachricht bestimmt wird, welche entweder eine Registrierungsbestätigung, eine Gruppen-Rufnachricht oder eine Gruppen-Signalisierungsnachricht aufweist.

6. Verfahren nach Anspruch 5, **dadurch gekennzeichnet, dass** die Gruppen-Tätigkeitnachricht eine Gesprächsgruppen-Identifzierung aufweist.

7. Verfahren nach einem der vorhergehenden Ansprüche, welches weiter die folgenden Schritte aufweist:

Berechnen einer zweiten Gruppen-Wiederherstellungszeit;
Bestimmen einer zweiten willkürlichen Registrierungszeit für eine zweite bestimmte Kommunikationseinheit (111, 113, 115, 117), wobei die zweite willkürliche Registrierungszeit kürzer oder gleich der zweiten Gruppen-Wiederherstellungszeit ist;
Registrieren der zweiten bestimmten Kommunikationseinheit (111, 113, 115, 117), wenn die zweite willkürliche Registrierungszeit für diese Einheit abgelaufen ist;
Erfassen , ob die zweite Kommunikationseinheit (111, 113, 115, 117) ein Mitglied einer zweiten Gesprächsgruppe ist, und, falls dies der Fall ist, Verzögern der Registrierung um mindestens eine weitere Kommunikationseinheit (111, 113, 115, 117) dieser zweiten Gesprächsgruppe.

8. Verfahren nach einem der vorhergehenden Ansprüche, welches die Erfassung der höheren Registrierungsebene mit Hilfe eines Reglers (101) einschließt.

9. Verfahren nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** eine Gruppen-Wiederherstellungszeit an eine Vielzahl von Kommunikationseinheiten (111, 113, 115, 117) übertragen wird.

10. Verfahren nach einem der vorhergehenden Ansprüche, **dadurch gekennzeichnet, dass** der Schritt der Bestimmung einer Gruppen-Wiederherstellungszeit die Bestimmung zumindest entweder
einer Anzahl von Kommunikationseinheiten (111, 113, 115, 117), deren Registrierung erwartet wird;
einer augenblicklichen ankommenden Registrieraufforderungslast; oder
einer zulässigen Registrierungs-Versagensrate einschließt.

11. Verfahren nach einem der vorhergehenden Ansprüche und weiter **dadurch gekennzeichnet, dass** eine Registrierungs-Bestätigungsnachricht an jede Kommunikationseinheit (111, 113, 115, 117) ansprechend auf eine Registrieraufforderungsnachricht gesendet wird.

12. Verfahren nach Anspruch 1, **dadurch gekennzeichnet, dass** die höhere Registrierebene mit Hilfe einer Kommunikationseinheit (111, 113, 115, 117) erfasst wird.

13. Verfahren nach Anspruch 7, welches folgende Schritte aufweist:

Berechnen einer dritten Gruppen-Wiederherstellungszeit;
Bestimmen einer dritten willkürlichen Registrierungszeit, die kürzer oder gleich der dritten Zeit ist;
Registrieren einer bestimmten Kommunikationseinheit (111, 113, 115, 117), wenn die dritte willkürliche Registrierungszeit abgelaufen ist.

14. Verfahren nach einem der vorhergehenden Ansprüche, welches die Verzögerung einer Registrierung von Kommunikationseinheiten (111, 113, 115, 117) aufweist, bis mindestens eine Kommunikationseinheit von jeder Gesprächsgruppe aus einer Vielzahl von Gesprächsgruppen registriert ist.

Revendications

1. Procédé d'exploitation dans un système de communication mobile RF, dans lequel des groupes de conversation peuvent être établis entre des unités de communication (111, 113, 115, 117), le procédé comprenant les étapes consistant à :

proposer des unités de communication (111, 113, 115, 117), chacune envoyant un message de demande d'enregistrement pour s'enregistrer à un site donné du système,
détecter (201, 301) un niveau d'enregistrement élevé, dans lequel un nombre de messages de demande d'enregistrement par unité de temps pour un site donné dépasse, ou va dépasser, un seuil ; et
lorsque le niveau d'enregistrement élevé est détecté, appliquer une procédure pour l'enregistrement d'unités de communication (111, 113, 115, 117) au site ; **caractérisé en ce que** la

procédure comprend les étapes consistant à :

calculer un temps de récupération de groupe suffisamment important pour qu'un nombre attendu d'unités de communication (111, 113, 115, 117) s'enregistrent au site ;
déterminer, pour l'enregistrement d'une unité de communication (111, 113, 115, 117) donnée, un temps d'enregistrement aléatoire qui est inférieur ou égal au temps de récupération de groupe ;
enregistrer l'unité de communication donnée (111, 113, 115, 117) lorsque le temps d'enregistrement aléatoire pour cette unité s'est écoulé ;
détecter si une unité de communication enregistrée (111, 113, 115, 117) est un membre d'un groupe de conversation et, si tel est le cas, retarder l'enregistrement d'au moins une autre unité de communication de ce groupe de conversation.

2. Procédé selon la revendication 1, dans lequel l'enregistrement d'une unité de communication (111, 113, 115, 117) comprend d'envoyer un message de demande d'enregistrement par l'unité de communication (111, 113, 115, 117) à un contrôleur (101).

3. Procédé selon l'une quelconque des revendications précédentes, dans lequel l'étape consistant à détecter le niveau d'enregistrement élevé comprend de détecter une défaillance du site (201, 301).

4. Procédé selon la revendication 1 ou la revendication 2, dans lequel l'étape consistant à détecter comprend de mesurer un nombre de demandes d'enregistrement par unité de temps.

5. Procédé selon l'une quelconque des revendications précédentes, dans lequel la présence de l'activité d'un groupe de conversation est déterminée par un message d'activité de groupe comprenant un message parmi un accusé de réception d'enregistrement, un message d'appel de groupe et un message de signalisation de groupe.

6. Procédé selon la revendication 5, dans lequel le message d'activité de groupe comprend une identification de groupe de conversation.

7. Procédé selon l'une quelconque des revendications précédentes, comprenant en outre les étapes consistant à :

calculer un second temps de récupération de groupe ;
déterminer, pour une seconde unité de communication (111, 113, 115, 117) donnée, un second temps d'enregistrement aléatoire qui est inférieur ou égal au second temps de récupération de groupe ;
enregistrer la seconde unité de communication donnée (111, 113, 115, 117) lorsque le second temps d'enregistrement aléatoire pour cette unité s'est écoulé ;
détecter si la seconde unité de communication (111, 113, 115, 117) est un membre d'un second groupe de conversation et, si tel est le cas, retarder l'enregistrement d'au moins une autre unité de communication (111, 113, 115, 117) de ce second groupe de conversation.

8. Procédé selon l'une quelconque des revendications précédentes, comprenant de détecter le niveau d'enregistrement élevé par un contrôleur (101).

9. Procédé selon l'une quelconque des revendications précédentes, dans lequel un temps de récupération de groupe est diffusé à une pluralité d'unités de communication (111, 113, 115, 117).

10. Procédé selon l'une quelconque des revendications précédentes, dans lequel l'étape consistant à déterminer un temps de récupération de groupe comprend de déterminer au moins un élément parmi les suivants :

un nombre d'unités de communication (111, 113, 115, 117) attendues s'enregistrer ;
une charge de demande d'enregistrement entrante courante ; et
un taux d'erreur d'enregistrement tolérable.

11. Procédé selon l'une quelconque des revendications précédentes et dans lequel un message d'accusé de réception d'enregistrement est envoyé à chaque unité de communication (111, 113, 115, 117) en réponse à un message de demande d'enregistrement.

12. Procédé selon la revendication 1, dans lequel le niveau d'enregistrement élevé est détecté par une unité de communication (111, 113, 115, 117).

13. Procédé selon la revendication 7 comprenant les étapes consistant à :

calculer un troisième temps de récupération de groupe ;
déterminer un troisième temps d'enregistrement aléatoire qui est inférieur ou égal au troisième temps ;
enregistrer une troisième unité de communication donnée (111, 113, 115, 117) lorsque le troisième temps d'enregistrement aléatoire s'est écoulé.

14. Procédé selon l'une quelconque des revendications précédentes, comprenant de retarder l'enregistrement d'unités de communication (111, 113, 115, 117) jusqu'à ce qu'au moins une unité de communication de chaque groupe de conversation, parmi une pluralité de groupes de conversation, soit enregistrée.

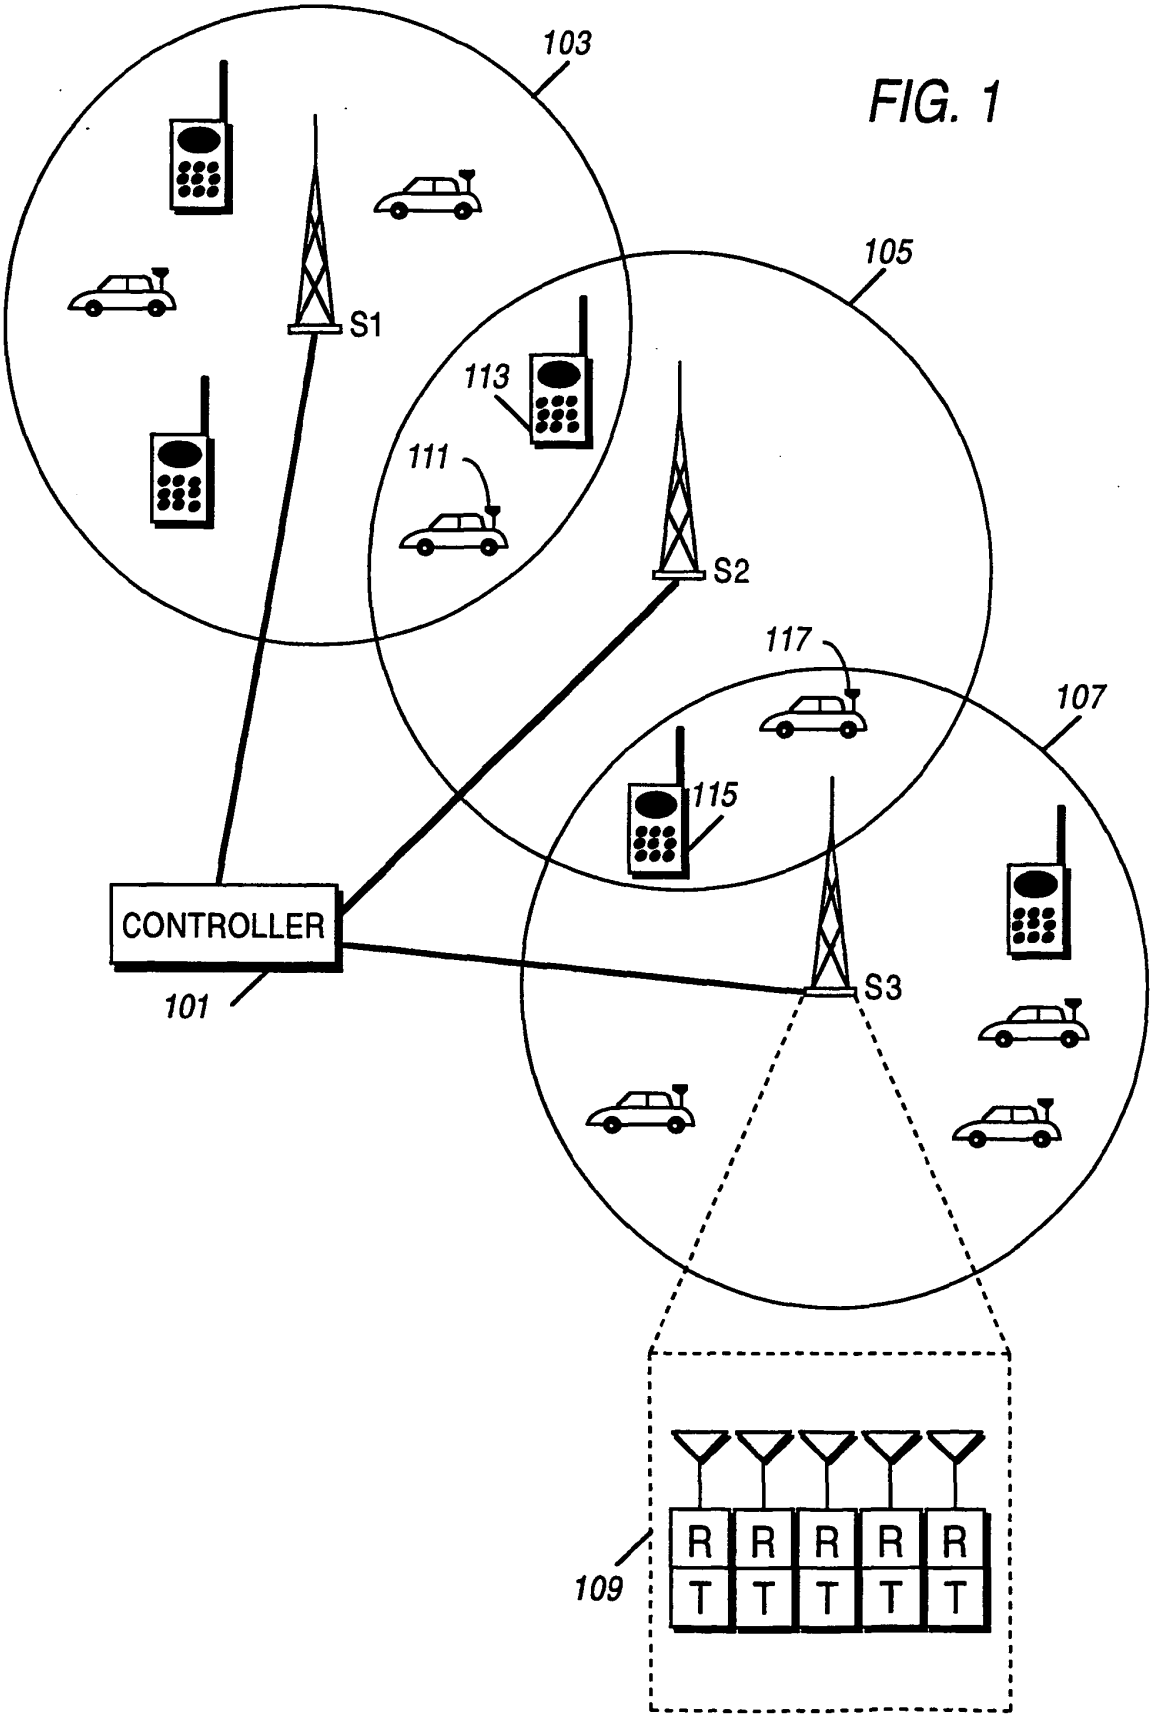
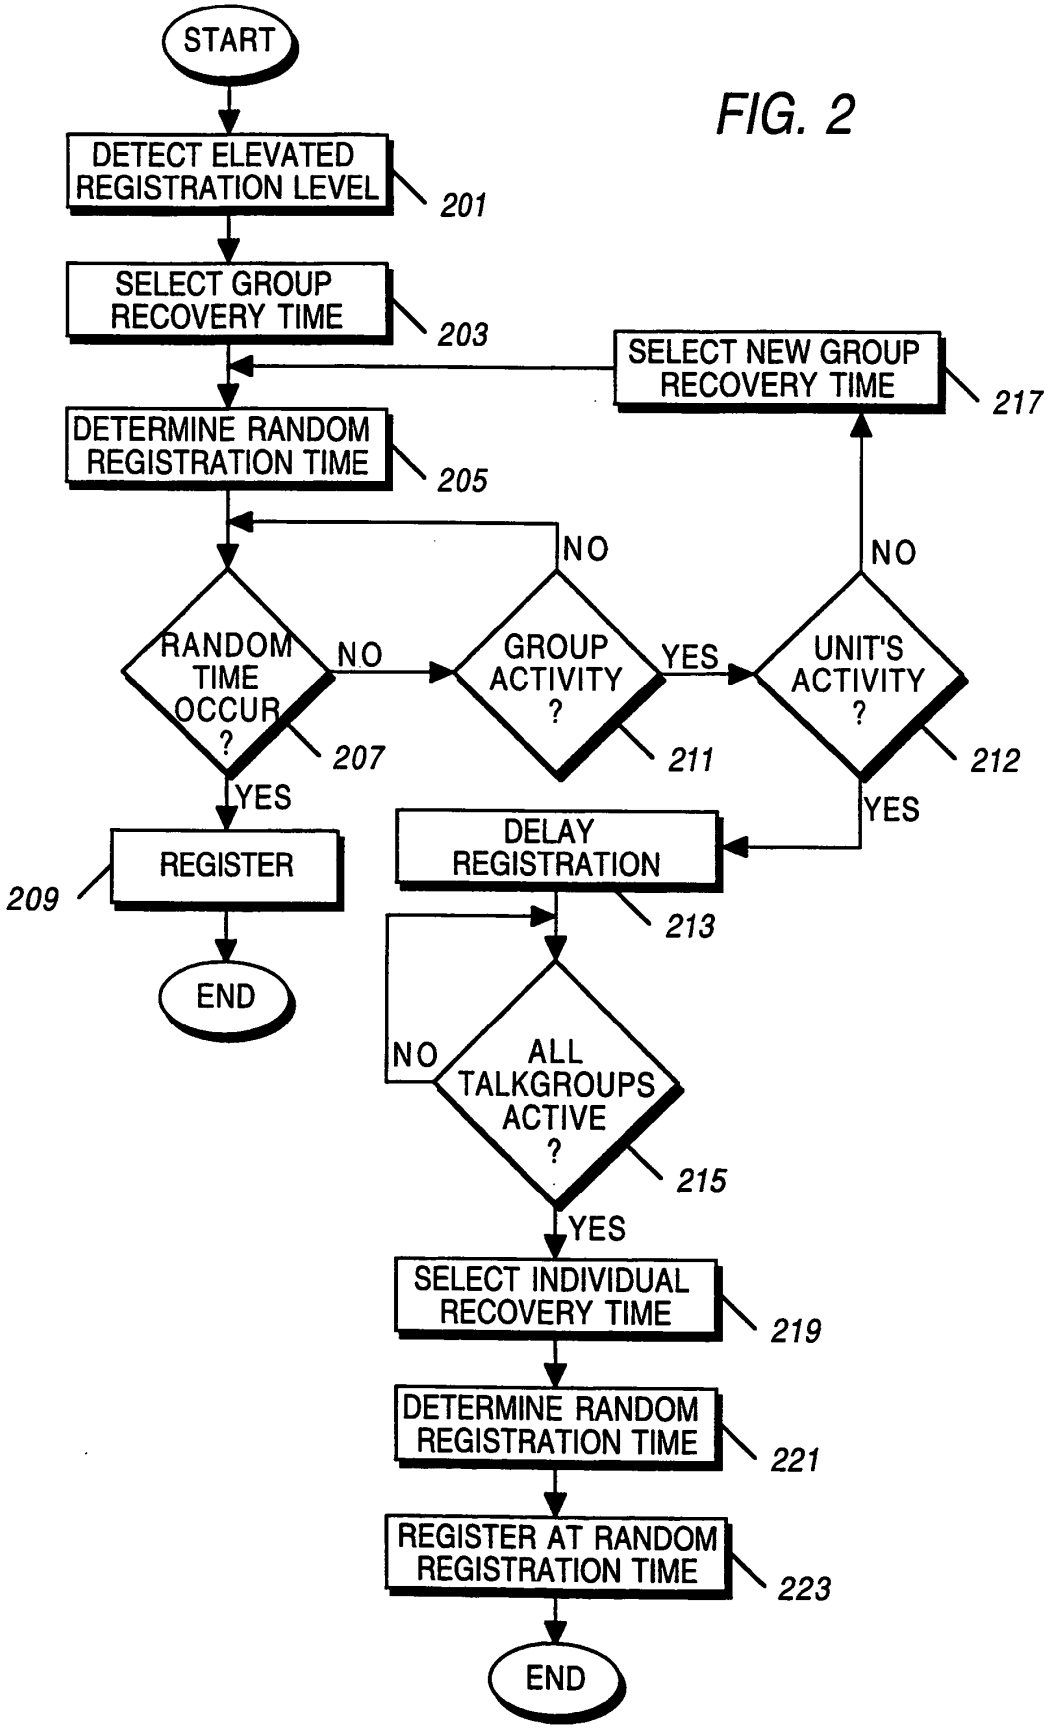


FIG. 1

FIG. 2


START
DETECT ELEVATED REGISTRATION LEVEL
201
SELECT GROUP RECOVERY TIME
203
SELECT NEW GROUP RECOVERY TIME
217
DETERMINE RANDOM REGISTRATION TIME
205
NO
NO
RANDOM TIME OCCUR ?
NO
GROUP ACTIVITY ?
YES
UNIT'S ACTIVITY ?
207
211
212
YES
YES
REGISTER
209
DELAY REGISTRATION
213
END
NO
ALL TALKGROUPS ACTIVE ?
215
YES
SELECT INDIVIDUAL RECOVERY TIME
219
DETERMINE RANDOM REGISTRATION TIME
221
REGISTER AT RANDOM REGISTRATION TIME
223
END

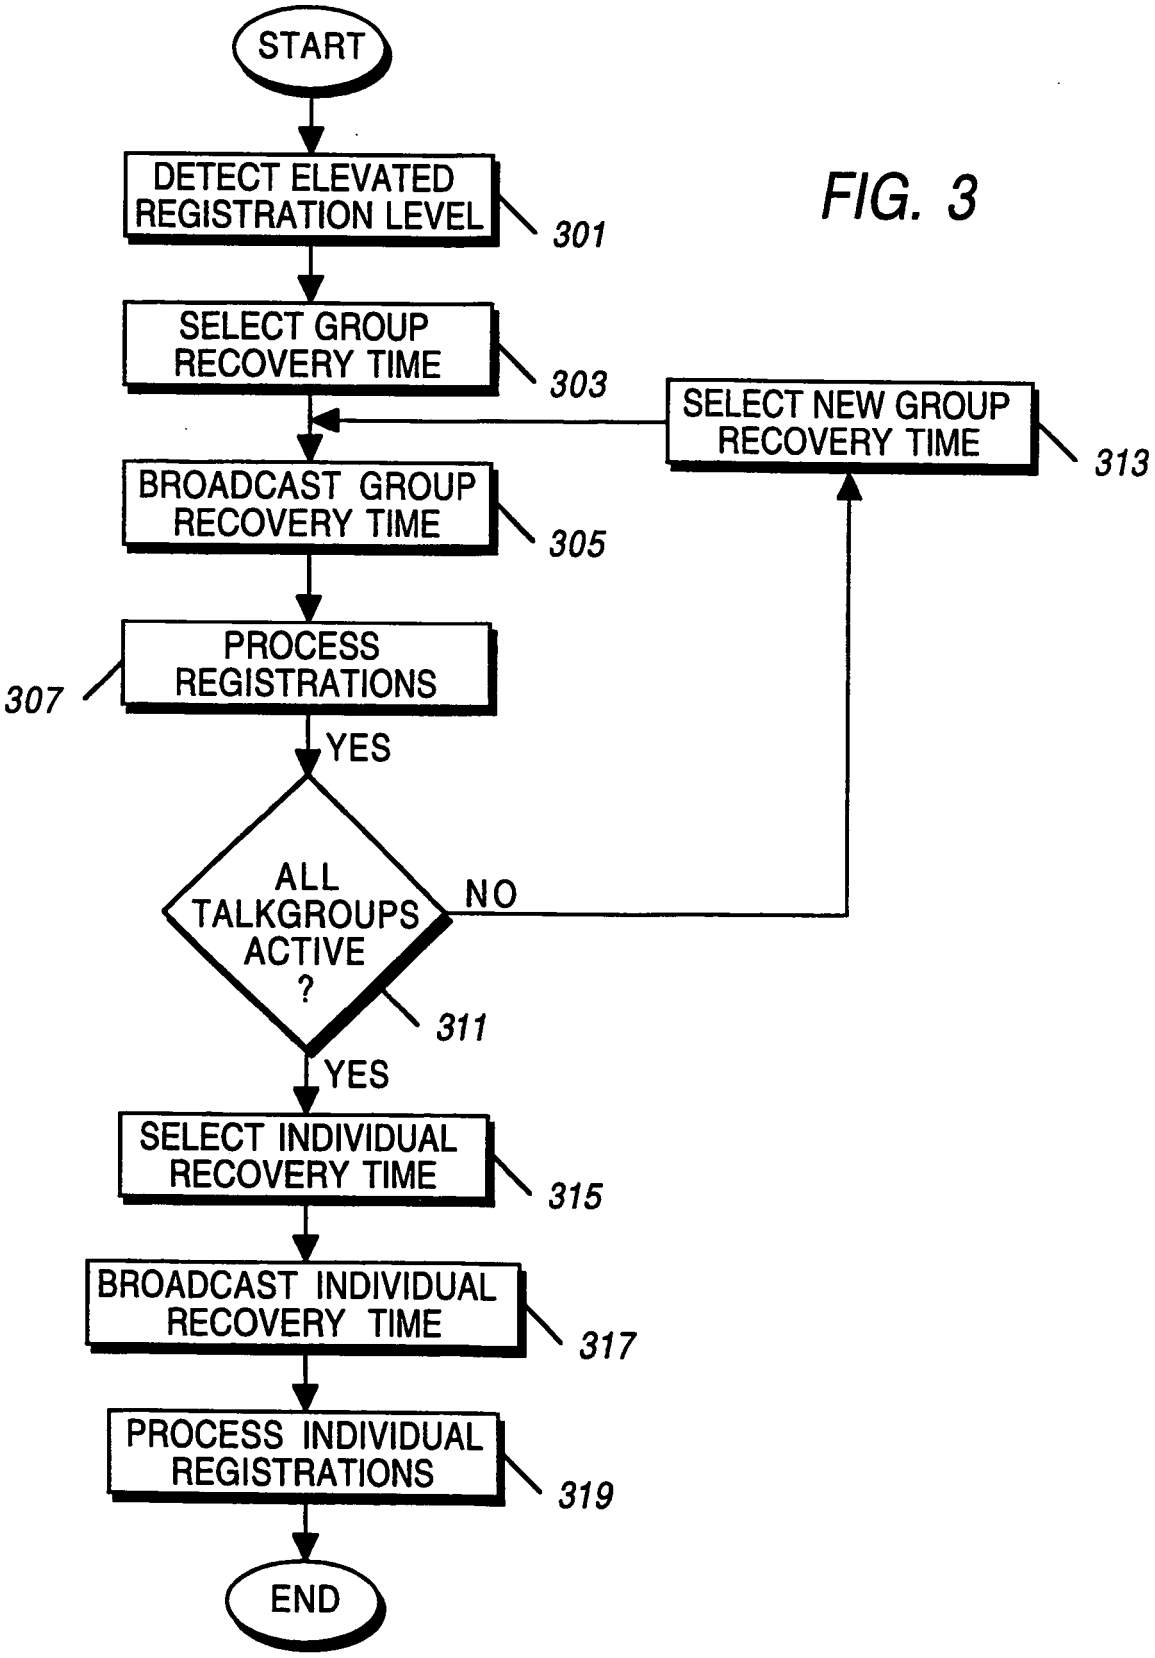

START
DETECT ELEVATED REGISTRATION LEVEL
301
SELECT GROUP RECOVERY TIME
303
SELECT NEW GROUP RECOVERY TIME
313
BROADCAST GROUP RECOVERY TIME
305
PROCESS REGISTRATIONS
307
YES
ALL TALKGROUPS ACTIVE ?
NO
311
YES
SELECT INDIVIDUAL RECOVERY TIME
315
BROADCAST INDIVIDUAL RECOVERY TIME
317
PROCESS INDIVIDUAL REGISTRATIONS
319
END

FIG. 3