



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 988 975 B9**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

Note: Bibliography reflects the latest situation

(15) Correction information:
Corrected version no 1 (W1 B1)
Corrections, see page(s) 2

(51) Int Cl.7: **B41J 2/165**

(48) Corrigendum issued on:
29.10.2003 Bulletin 2003/44

(45) Date of publication and mention
of the grant of the patent:
26.03.2003 Bulletin 2003/13

(21) Application number: **99118384.9**

(22) Date of filing: **16.09.1999**

(54) **Ink jet recording apparatus and cleaning control method for the same**

Tintenstrahlaufzeichnungsgerät und Steuerungsverfahren zu seiner Reinigung

Appareil d'enregistrement à jet d'encre et méthode de commande pour son nettoyage

(84) Designated Contracting States:
DE FR GB

(30) Priority: **16.09.1998 JP 26212398**
09.08.1999 JP 22551199
02.08.1999 JP 21894799

(43) Date of publication of application:
29.03.2000 Bulletin 2000/13

(60) Divisional application:
00119917.3
00119918.1
00124647.9 / 1 099 557
00124651.1 / 1 090 764

(73) Proprietor: **SEIKO EPSON CORPORATION**
Shinjuku-ku, Tokyo (JP)

(72) Inventors:
• **Takahashi, Nobuhito**
Suwa-shi, Nagano (JP)

• **Hara, Kazuhiko**
Suwa-shi, Nagano (JP)
• **Uchiyama, Yukihiro**
Suwa-shi, Nagano (JP)

(74) Representative:
Diehl, Hermann, Dr. Dipl.-Phys. et al
DIEHL, GLÄSER, HILTL & PARTNER
Patentanwälte
Augustenstrasse 46
80333 München (DE)

(56) References cited:
EP-A- 0 562 118 **EP-A- 0 585 923**
EP-A- 0 630 754 **EP-A- 0 785 084**
EP-A- 0 819 541 **EP-A- 0 850 765**
EP-A- 0 867 296 **GB-A- 2 284 576**
US-A- 5 625 385

EP 0 988 975 B9

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to an ink jet recording apparatus.

[0002] Since owing to the development of personal computers graphic processing can be performed relatively easily, a demand exists for recording apparatuses that can, for example, output high quality hard copies of color images displayed on screens. In response to this demand, recording apparatuses in which ink jet recording heads are mounted are being produced. Since during printing the noise made by such ink jet recording apparatuses is relatively low, and since the apparatuses can deposit small dots at a high density, the apparatuses are presently being used to perform a variety of different types of printing, to include color printing.

[0003] Such an ink jet recording apparatus comprises: ink jet recording heads, for receiving ink from ink cartridges; and a paper feeding mechanism, for moving a recording sheet relative to the recording head. During the printing process, the recording heads, which are carried along by a carriage while it moves the width of a recording sheet, eject ink droplets that are deposited on the recording sheet. Mounted on the common carriage are a black recording head for ejecting black ink, and color recording heads for ejecting yellow, cyan and magenta inks, for example, so that not only can text be printed in black ink, but also full color printing can be performed by changing the ratio of the inks to be ejected.

[0004] Since the ink jet recording heads perform printing by pressurizing ink in a pressure generating chamber and then ejecting that ink through nozzles as ink droplets, a print failure can be caused by an increase in the viscosity of the ink or the solidification of the ink due to the evaporation of a solvent through nozzle orifices, by the attachment of dust particles, or by the entry of air bubbles.

[0005] Therefore, the ink jet recording apparatus further comprises a cap for sealing the nozzle orifices of the recording head while printing is not being performed, and a wiping blade for cleaning a nozzle plate as needed. The cap not only serves as a lid for protecting ink at the nozzle orifices from being dried out when printing is not being performed, but when the nozzle orifices are clogged, it also seals a nozzle plate and induces a flow of ink through the nozzle orifices so as to resolve an ink ejection failure that is caused by the clogging of the nozzle orifices due to the solidification of ink, or due to air bubbles that have entered an ink channel.

[0006] The forcible ink suction process, which is performed to prevent the clogging of the recording head or the entry of air bubbles into an ink channel, is normally called a cleaning operation. The cleaning operation is begun when printing is restarted after the apparatus has been halted for a long time, or when a user manipulates a cleaning switch to resolve the degrading of the quality of a recorded image. For this process, ink droplets are drawn out through the nozzle orifices by the application

of a negative pressure, and the wiping blade, constituted by an elastic rubber plate, wipes the surface of the recording head.

[0007] The capping member also has a capability of discharging ink droplets by application to the recording head of a drive signal that is irrelevant to printing. This function is called a flushing operation. The flushing operation is performed at predetermined cycles for the purposes of: recovering menisci, which are irregularly formed in the vicinity of nozzle orifices of the recording head as a result of wiping action of the wiping blade during the cleaning operation; preventing mixture of colors, which would be removed by the capping member applying weak suction to the ink at the nozzle orifices; and preventing clogging in the nozzle orifices from which a small amount of ink droplets is ejected during a printing operation, which would otherwise be caused by an increase in the viscosity of ink.

[0008] There has recently been provided an ink jet recording apparatus which uses at least six colors of ink; that is, dark magenta, light magenta, dark cyan, light cyan, yellow, and black, in order to improve the quality of a print at the time of color printing.

[0009] The ink jet recording apparatus that uses multiple colors of ink requires at least six rows of nozzle orifices. In order to improve yield in the manufacturing processes and to simplify the sealing effected by the capping member, two recording heads are usually mounted on one carriage. Further, the capping member is provided with cap units for individually sealing the respective recording heads and two suction pumps for applying negative pressure to the respective cap units. The two suction pumps are connected to a paper feed motor by way of a joint mechanism which is brought into or out of a contact with a paper feed mechanism according to the position of the carriage.

[0010] Although such a configuration enables a reduction in load imposed on the motor at the time of actuation of the pump, it disadvantageously requires much time for maintenance of the recording head or a built-in mechanism provided in the pumps for selecting between the two pumps according to the direction of rotation, which in turn results in complication of the structure of the pumps or renders the pumps bulky.

[0011] In order to greatly improve the resolution of an image recorded on the recording sheet, the number of nozzle orifices formed on each recording head tends to be increased more and more, or the diameter of the nozzle orifices tends to be reduced further. In the configuration of the ink jet recording apparatus, in which the individual recording heads are alternately sucked by means of a single suction pump, a deficiency arises in the suction capability of the pump.

[0012] For example, air bubbles, which have entered the ink channel in association with replacement of an ink cartridge, go on to enter the recording head, thereby resulting in ink ejecting failures.

[0013] In order to prevent the ink ejecting failures, the

air bubbles are discharged from the inside of the recording head (i.e., a replacement cleaning operation is performed) simultaneous with suction and discharge of ink from the recording head. In a case where the flow rate of ink is lower than a predetermined flow rate as a result of a deficiency arising in the suction capability of the pumps, air bubbles present in the recording head remain caught within a complicated flow channel within the recording head. The replacement cleaning operation may result in mere consumption of ink but never ends in elimination of the air bubbles. For this reason, a flow rate faster than the predetermined flow rate must be achieved in order to sufficiently discharge the ink, whose viscosity has been increased, and air bubbles from the inside of the recording head. To this end, the suction capability of the pump must be increased greatly.

[0014] This type of recording apparatus generally employs, as a suction pump, a tube pump which generates negative pressure by sequentially squeezing a tube arranged in a circular-arch pattern through use of a roller, for the purpose of implementing an inexpensive suction pump, ensuring the operation of the suction pump, and preventing ink stains.

[0015] A conceivable measure to improve the suction capability of such a tube pump is to increase the number of rotations of the pump, as well as to increase the radius of the tube arranged in the circular-arch pattern.

[0016] However, if the number of rotations of the pump is increased, the number of times the tube is squeezed by the roller is increased, thus shortening the life of the pump. In contrast, if the radius of the tube arranged in the circular-arch pattern is increased, the outer diameter of the pump is inevitably increased. In this type of recording apparatus intended to be made compact, an extreme difficulty is encountered in determining the layout of such a pump, and therefore the designer encounters great difficulty in designing a product.

[0017] Generation of the fastest possible flow of ink within the ink channel between the ink reservoir; e.g., an ink cartridge, and nozzle orifices of the recording head is an effective measure for performing the previously-described cleaning operation. The fastest flow enables discharge of the air bubbles present within the flow channel to a certain extent together with removal of ink whose viscosity has been increased. Simultaneously, ink solids adhering to the vicinity of the nozzle orifices can also be removed. However, increasing the flow rate of ink during the cleaning operation requires an increase in the suction capability of the tube pump for the purpose of generating large negative pressure. This involves the problems such as those mentioned previously.

[0018] In order to generate a fast flow of ink, there is proposed a recording apparatus comprising a valve member disposed within an ink channel between the ink cartridge and the recording head for opening/closing the channel. When suction of ink is initiated by way of the capping member at the time of a cleaning operation, the

valve member is closed. After negative pressure has been accumulated within an internal space of the capping member as a result of actuation of a suction pump, the valve member is opened to instantaneously increase the flow rate of ink within the recording head.

[0019] By means of this configuration, ink is instantaneously discharged with momentum to the inside of the capping member by the action of the accumulated negative pressure, thereby enabling discharge of air bubbles present in the channel, along with ink whose viscosity has been increased.

[0020] Since the valve member is opened while the suction pump remains idle, the ink discharged to the inside of the capping member remains frothed. The bubbles of ink adhere to the nozzle formation plane of the recording head and re-enter the nozzle orifices. This phenomenon results in a failure in the normal ejecting of ink droplets from the nozzle orifices, as well as printing of an image in mixed colors as a result of mixing of black ink and three color inks. In order to prevent the failures, there must be performed many repetitions of flushing operation, re-suction of ink while the negative pressure is reduced, and wiping operation.

[0021] Even when an attempt is made to forcibly remove ink clogging the nozzle orifices by means of only the accumulated negative pressure, the ink may not be readily removed if the adhesion of the ink to the nozzle orifices is relatively strong. The technical solution for increasing the suction capability of the pump is again sought, which in turn entails an increase in the size of the pump and the recording apparatus, as mentioned previously. Thus, means for solving the problems simultaneously is sought.

[0022] EP-A-0 585 923 discloses an ink jet recording apparatus according to the preamble of claim 1.

[0023] It is therefore the object of the present invention to provide an ink jet recording apparatus which overcomes the drawbacks of the prior art products. This object is solved by the ink jet recording apparatus according to independent claim 1. Further advantageous features, aspects and details of the invention are evident from the dependent claims, the description and the drawings.

[0024] In the ink jet recording apparatus the interior space of the cap units is evacuated by means of a plurality of suction pumps which simultaneously perform suction operation. As a result, the suction capability of the recording heads can be improved, and the ink, which is stored in the recording heads and whose viscosity has been increased, and air bubbles can be efficiently discharged. Accordingly, high-grade print quality of the recording apparatus can be ensured.

[0025] In this case, a tube pump which squeezes a tube by means of nipping action of a roller is used as the suction pump. As a result, the suction pumps can be connected by linearly connecting the drive shafts of the tube pumps in tandem, thereby reducing the volume occupied by the plurality of pumps.

[0026] Thus, the recording apparatus can be made compact as a whole. Further, the loads exerted on the pumps can be averaged by arranging the pumps such that the rollers squeeze the tubes such that the rollers come out of phase with one another from pump to pump in the direction of rotation of the pump wheel. Consequently, a motor having a large output rating is not required to be used as a drive source. This also contributes to a reduction in the size of the overall recording apparatus.

[0027] The above mentioned and other features of the present invention and the invention itself will be better understood by reference to the following detailed description of preferred embodiments of the invention, when considered in conjunction with the accompanying drawings, in which:

Fig. 1 is a top view showing the entire configuration of an ink jet recording apparatus according to a first embodiment of the present invention;

Fig. 2 is a perspective view showing one example of a capping device mounted on the recording apparatus shown in Fig. 1;

Fig. 3 is an exploded perspective view showing one example of a pump unit mounted on the recording apparatus shown in Fig. 1;

Fig. 4 is a section view showing a portion of structure of the pump unit;

Figs. 5A and 5B are section views showing the positions of rollers with respect to a tube within the pump unit;

Figs. 6A to 6F are diagrams showing processes of a method of cleaning the recording apparatus;

Fig. 7 is a section view showing a cap unit and suction channels in an ink jet recording apparatus according to a second embodiment of the present invention;

Fig. 8 is a section view showing a cap unit and suction channels in an ink jet recording apparatus according to a third embodiment of the present invention;

Fig. 9 is a section view showing a cap unit and suction channels in an ink jet recording apparatus according to a fourth embodiment of the present invention;

Fig. 10 is a section view showing a cap unit and suction channels in an ink jet recording apparatus according to a fifth embodiment of the present invention;

Fig. 11 is a section view showing a cap unit and suction channels in an ink jet recording apparatus according to a sixth embodiment of the present invention;

Fig. 12 is a section view showing one example of a valve member disposed in each of the suction channels;

Fig. 13 is a section view showing one example of a variable flow resistor disposed in each of the suction

channels;

Fig. 14 is a section view showing a cap unit and suction channels in an ink jet recording apparatus according to a seventh embodiment of the present invention;

Fig. 15 is a section view showing a cap unit and suction channels in an ink jet recording apparatus according to an eighth embodiment of the present invention;

Fig. 16 is a block diagram showing one example of a management system for connecting the amount of ink flowing into a waste-ink tank;

Figs. 17A and 17B are side views showing the arrangement of a spacer provided on the carriage and an absorbing member provided on the capping member in an ink jet recording apparatus according to a ninth embodiment of the present invention;;

Fig. 18 is a perspective view showing the entire configuration of an ink jet recording apparatus according to a tenth embodiment of the present invention;

Figs. 19A and 19B are section views showing the configuration of ink channels extending from an ink cartridge to a recording head provided in the recording apparatus shown in Fig. 18;

Fig. 20 is a section view showing a cap unit and suction channels in the recording apparatus shown in Fig. 18;

Fig. 21 is a section view showing a cap unit and suction channels in an ink jet recording apparatus according to an eleventh embodiment of the present invention;

Fig. 22 is a block diagram showing an example of a control circuit provided in the recording apparatuses shown in Fig. 18;

Fig. 23 is a flowchart showing a cleaning operation sequence performed by the recording apparatus shown in Fig. 20;

Fig. 24 is a flowchart showing a cleaning operation sequence performed by the recording apparatus shown in Fig. 21; and

Figs. 25A and 25B is a perspective view and a plan view respectively showing a cap unit in an ink jet recording apparatus according to a twelfth embodiment of the present invention.

[0028] An ink jet recording apparatus according to the present invention will be described hereinbelow by reference to illustrated embodiments. Fig. 1 is a top view showing the overall configuration of a recording apparatus according to a first embodiment of the present invention. In Fig. 1, reference numeral 1 designates a carriage which is guided along a guide member and travels back and forth in a longitudinal direction of a paper guide member 5, by way of a timing belt 2 actuated by a carriage motor 3. A first recording head 7 and a second recording head 8 are mounted on an upper face of the carriage 1 facing a recording sheet, side by side in the direction of movement of the carriage 1.

[0029] Sub-tank units 10 and 11 having a dumping capability for supplying ink to the first and second recording heads 7 and 8 are mounted on the upper face of the carriage 1. Ink is supplied to the sub-tank units 10 and 11 from an unillustrated ink cartridge by way of ink supply tubes 9.

[0030] In a non-printing area on the channel along which the recording heads 7 and 8 travel, there is provided a capping device 12 for sealing a nozzle plate, in which nozzle orifices are formed, of the recording heads 7 and 8.

[0031] The capping device 12 is provided with a slider 15. As shown in Fig. 2, when the carriage 1 has moved to the non-printing area, the slider 15 moves up and down while traveling over a guide face 14 formed on a basement 13 so as to follow the movement of the carriage 1. The slider 15 is provided with cap units 16 and 17 for sealing the recording heads 7 and 8, respectively.

[0032] In the cap unit 16, there is formed an inlet 18 to be connected to an end 32a of a tube 32 of a suction pump (pump unit) 30 to be described later. In the cap unit 17, there is formed an inlet 19 to be connected to an end 33a of a tube 33 of the suction pump 30. A tube 25 whose one end is connected to an air hole 21 of a valve seat member 20 is connected at its other end to the cap unit 16, and a tube 26 whose one end is connected to an air hole 22 of the valve seat member 20 is connected at its other end to the cap unit 17.

[0033] In the area where the valve seat member 20 is situated when the cap units 16 and 17 have traveled to the position where they can seal the recording heads 7 and 8, there is provided a valve member 24 which is urged toward the valve seat member 20 at all times by means of a spring 23. In conjunction with the valve member 24, the valve seat member 20 constitutes an air valve.

[0034] In a print area with respect to the capping device 12, there is disposed a cleaning unit 65 equipped with a wiping blade 66. The wiping blade 66 is brought into elastic contact with the nozzle plates of the recording heads 7 and 8 that travel in association with the actuation of the carriage 1. The wiping blade 66 of the cleaning unit 65 is arranged so as to be able to travel back and forth horizontally along the travel channel of the recording heads 7 and 8, by means of the power of a drive source for driving the pump unit 30, to be described later.

[0035] Fig. 3 is an exploded perspective view showing one example of the pump unit. In the present embodiment, negative pressure is simultaneously applied to the two cap units 16 and 17. For this reason, in a pump frame 31 which also serves as a substrate, there are formed into a substantially semicircular-shaped tube support surfaces 34 and 35 for supporting the tubes 32 and 33 therealong, so as to constitute two tube pumps. The tube support surfaces 34 and 35 are integrally attached together such that their backs face each other.

[0036] Pump wheels 40 and 41 have cylindrical outer

wheels which mesh with a row of wheels driven by the unillustrated paper feed motor that act as the power source. In the pump wheel 40, support grooves 42 and 43 are formed so as to extend around the center of the wheel while being directed to the outer periphery thereof. In the pump wheel 41, support grooves 44 and 45 are formed so as to extend around the center of the wheel while being directed to the outer periphery thereof. A roller 36 is supported on the support groove 44 in a rotatable manner, and a roller 37 is supported on the support groove 45 in the same manner. Further, a roller 38 is supported on the support groove 42 in a rotatable manner, and a roller 39 is supported on the support groove 43 in the same manner. The pump wheels 40 and 41 are provided within the pump frame 31, whereby the individual rollers 36, 37, 38, and 39 are located inside the respective tubes 32 and 33.

[0037] By employment of the foregoing configuration, when the pump wheels 40 and 41 are rotated in one direction, the pair of rollers 36 and 37 and the pair of rollers 38 and 39 travel toward the outside along the corresponding support grooves 42, 43, 44, and 45, thus bringing the tubes 32 and 33 into pressing contact with the tube support surfaces 34 and 35. Accordingly, the tubes 32 and 33 are squeezed. In association with the rotation of the individual rollers 36, 37, 38, and 39, the tubes 32 and 33 act as suction pumps and impart negative pressure to the internal spaces of the respective cap units 16 and 17, by way of the inlets 18 and 19 formed in the cap units 16 and 17.

[0038] In contrast, when the pump wheels 40 and 41 are rotated in another direction, the pair of rollers 36 and 37 and the pair of rollers 38 and 39 travel toward the inside along the support grooves 42, 43, 44, and 45 formed on the pump wheels 40 and 41, thereby bringing the tubes 32 and 33 out of pressing contact with the rollers 36, 37, 38, and 39. The tubes 32 and 33 are thus released.

[0039] As shown in Fig. 4, an engagement member 46 is formed at the center axis of the pump wheel 40, and an engagement member 47 is formed at the center axis of the pump wheel 41. The engagement members 46 and 47 are provided so as to face each other and are engaged with and connected to each other in the direction of rotation within the pump frame 31.

[0040] As shown in Figs. 5A and 5B, the angle of engagement of the engagement members 46 and 47 is controlled such that the squeezing (pressing) of the tube 32 by means of the rollers 36 and 37 in one pump and the squeezing (pressing) of the tube 33 by means of the rollers 38 and 39 in another pump are about 90° out of phase with each other with reference to the direction of rotation of the pump wheels 40 and 41.

[0041] As shown in Fig. 3, the pump wheel 40 is rotatably supported on a cylindrical holder 50 attached to a support plate 48, and the pump wheel 41 is rotatably supported on a cylindrical holder 51 attached to a support plate 49. The support plates 48 and 49 are integrally

attached to the pump frame 31 by means of unillustrated screws, thus constituting the pump unit 30.

[0042] As shown in Fig. 1, outlets of the tubes 32 and 33 constituting the pump unit 30 are connected to waste-ink tanks 61 and 63 housing waste-fluid absorbing members 60 and 62.

[0043] In the previously-described embodiment, when power is applied to the recording apparatus or when there is a need to forcibly discharge ink from the recording heads 7 and 8 after replacement of unillustrated ink cartridges or to refill the ink cartridge with ink, the carriage motor 3 is actuated, to thereby move the carriage 1 to a position where the recording heads 7 and 8 can be sealed by means of the capping device 12. The cap units 16 and 17 are moved over and raised from the basement 13 in association with the recording heads 10 and 11, thus sealing the recording heads 10 and 11. Further, the air holes 21 and 22 of the cap units 16 and 17 are moved together with the valve seat member 20 and are brought into resilient contact with the valve member 24. Thus, the air holes 21 and 22 are sealed.

[0044] When the paper feed motor is driven in reverse in this state, at least one of the pump wheels 40 and 41 of the pump unit 30 is imparted with drive force from the paper feed motor and is rotated. As a result, the rollers 36 and 37 rotatably attached to the pump wheel 40 squeeze the tube 32, and the rollers 38 and 39 rotatably attached to the pump wheel 41 squeeze the tube 33 such that the pair of rollers 36 and 37 remain 90° out of phase with the pair of rollers 38 and 39, thereby simultaneously imparting negative pressure to the two cap units 16 and 17.

[0045] The recording heads 7 and 8 are imparted with negative pressure and discharge ink to the inside of the cap units 16 and 17 by way of nozzle orifices. After a predetermined amount of ink has been suctioned, the carriage 1 is moved to a recording area, to thereby breaking contact between the air holes 21 and 22 and the valve member 24 while the recording heads 7 and 8 are sealed by the cap units 16 and 17. The cap units 16 and 17 are released in the air.

[0046] If the pump unit 30 is again actuated in this state, only the ink discharged from the cap units 16 and 17 is sucked by the tubes 32 and 33, without involvement of flow of ink from the recording heads 7 and 8, and the ink is discharged to the respective waste-ink tanks 61 and 63.

[0047] In this way, since ink is discharged from the respective tubes 32 and 33 to the independent waste-ink tanks 61 and 63, the capabilities of the waste-fluid absorbing members 60 and 62 of the waste-ink tanks 61 and 63 are maximized, and the storage capability of the waste-ink tanks can be improved. Further, even when the tank is tilted, if the head is made small, leakage of a waste fluid (i.e., ink) can be prevented.

[0048] The pair of rollers 36 and 37 that impart negative pressure to the tube 32 and the pair of rollers 38 and 39 that impart negative pressure to the tube 33 op-

erate while remaining about 90° out of phase with each other from the beginning of squeezing action until the end of the same. Accordingly, loads are averaged, and the drive source does not have to be a motor having a large output rating. Further, suction operation is performed simultaneously with squeezing of the tubes, thus shortening suction time.

[0049] In the event that clogging arises in the recording heads 7 and 8, the paper feed motor is driven in reverse, thus enabling the wiping blade 66 to advance a travel region of the recording heads 7 and 8. If the recording heads 7 and 8 are moved in one direction in this state, as shown in Fig. 6A, the wiping blade 66 is brought into resilient contact with the first recording head 7, as shown in Fig. 6B, thereby scraping off, together with the ink K, waste-ink or paper dust adhering to the nozzle formation plane.

[0050] At a point in time when the wiping blade 66 comes to a position between the first and second recording heads 7 and 8 after completion of cleaning of the first recording head 7, the carriage motor 3 is deactivated, whereby the wiping blade enters a state shown in Fig. 6C. As shown in Fig. 6D, the resiliently-deformed wiping blade 66 returns to its original state.

[0051] As mentioned above, after lapse of the time required for the wiping blade to return to its original state by means of the resiliency of the wiping blade; for example, 0.5 seconds, the carriage motor 3 is again activated in order to move the carriage 1. As shown in Fig. 6E, the ink K adhering to the tip end of the wiping blade 66 comes into contact with the side surface of the second recording head 8, so that the ink is scraped off from the wiping blade by the side surface. Subsequently, as shown in Fig. 6F, the wiping blade 66 wipes the nozzle formation plane of the second recording head 8. As a result, ink K' can be reliably scraped away from the second recording head 8 without involvement of adhesion of the ink scraped from the first recording head 7 onto the second recording head 8.

[0052] In a case where the two recording heads 7 and 8 are caused to perform continuous cleaning operation without interruption of movement of the carriage 1, a contact area between the ink K adhering to the wiping blade 66 that is resiliently deformed by the first recording head 7 and the side surface of the second recording head 8 becomes small, and a large amount of ink stills remain on the wiping blade 66. Consequently, there arises a problem of a reduction in the effect of cleaning the second recording head 8 and a problem of application of a large physical impact on the recording head 8 by means of restoration force of the wiping blade 66.

[0053] Consequently, the first and second recording heads 7 and 8 can be sufficiently cleaned by execution of the foregoing cleaning method. Further, the foregoing cleaning method can prevent damages to; for example, a meniscus formed over a nozzle orifice, which would otherwise be caused by application of physical shock to the second recording head 8.

[0054] Fig. 7 shows a second embodiment of the present invention, in which negative pressure is imparted to the inside of the cap unit 16 through use of the suction pump 30 shown in Figs. 3 through 5. Reference numeral 16 shown in Fig. 7 schematically shows the cross-section of a single cap unit. The cap unit 16 comprises a rectangular cap case 16a whose upper face is opened; and a cap member 16b formed from an elastic substance, such as rubber material, housed within the cap case 16a. The cap member 16b is formed such that the upper edge of the cap member 16b projects slightly beyond the cap case 16a.

[0055] An ink-absorbing member 16c formed from porous material is housed on the inner bottom of the cap member 16b. This ink-absorbing member 16c is retained by means of a retainer 16d integrally formed with the cap member 16b. Two inlets 18A and 18B and an air hole 16e are formed in the bottom portion of the cap case 16a so as to penetrate through the cap case 16a and the cap member 16b.

[0056] In the embodiment shown in Fig. 7, the two inlets 18A and 18B are drawn as being disposed side by side in the longitudinal direction of the cap unit 16. Preferably, the inlets 18A and 18B are formed in one longitudinal end of the inner bottom of the cap unit 16 so as to overlap each other in the direction perpendicular to the drawing paper of Fig. 7. More preferably, the inlets 18A and 18B are located as close to each other as possible. Preferably, the air hole 16e is formed in the other longitudinal end opposite the end of the cap unit 16 where the inlets 18A and 18B are formed.

[0057] By means of the inlets 18A and 18B and the air hole 16e, in the case of discharge of ink from the cap unit 16e, ink can be discharged from the inside of the cap unit 16 in one direction neatly, thereby reliably evacuating ink from the inside of the cap unit 16.

[0058] Reference numeral 7 shown in Fig. 7 designates the cross-section of one of the recording heads whose nozzle formation planes are sealed by means of the cap unit 16. As mentioned previously, the recording head 7 is configured such that the nozzle formation plane; that is, a nozzle plate 7a, is capped by the cap unit 16 when the cap unit 16 is moved upward. Nozzle orifices 7b are formed in the nozzle plate 7a and are arranged so as to be able to eject ink by means of action of a piezoelectric vibrators 7c arranged so as to correspond to the respective nozzle orifices 7b.

[0059] The tube 32 is connected to the inlet 18A formed in the cap case 16a, and the tube 33 is connected to the inlet 18B formed in the same. As shown in Fig. 3, the tubes 32 and 33 constitute a part of the pump unit (or tube pump). An outlet of a pump unit 30A constituted of the tube 32 is connected to the waste-ink tank 61, which houses the waste-fluid absorbing member 60. Further, a pump unit 30B constituted of the other tube 33 is connected to the waste-ink tank 63, which houses the waste-fluid absorbing member 62. The air hole 16e formed in the cap case 16a is connected to the tube 25,

and the tube 25 is connected to the air hole 21 of the valve seat member 20, thus constituting an air valve, as shown in Fig. 2.

[0060] By means of the configuration shown in Fig. 7, the inside space of the cap unit 16 is evacuated and imparted with negative pressure by the two suction pumps 30A and 30B, which receive power from a single drive source and perform suction operations simultaneously.

[0061] As a result, a rising characteristic relating to suction of ink by way of the individual nozzle orifices 7b of the recording head 7 can be improved greatly. Consequently, the flow rate at which ink is suctioned from the recording heads can be increased to a predetermined flow rate immediately after actuation of the pump, thereby enabling quick discharge of air bubbles that have entered the recording heads.

[0062] Eventually, there can be yielded advantages of shortening the time required for suction of ink and reliable discharge of air bubbles from the inside of the recording head.

[0063] In the embodiment shown in Fig. 7, two tube pumps are disposed so as to correspond to a single cap unit. In this case, if the recording apparatus is equipped with two cap units, as shown in Fig. 2, four tube pumps are required. This configuration can be implemented without involvement of an increase in the volume occupied by the tube pumps, by connecting the drive shafts of the individual tube pumps in tandem. When compared with the designing of a pump layout in a case where the radius of the circular-arch tube is increased for the purpose of increasing the capacity of the tube pump, design of a pump layout in the foregoing configuration is much easier. The overall size of the recording apparatus can be made compact while the suction capability of the pump is increased.

[0064] Fig. 8 shows a third embodiment, in which negative pressure is imparted to the inside of the cap unit 16 through use of a similar pump unit. In Fig. 8, those reference numerals that are the same as those used in Fig. 7 designate the same elements, and repetition of their explanations is omitted here for brevity.

[0065] In the embodiment shown in Fig. 8, a tube 71 is connected to a single inlet 18 formed in the cap unit 16. The other end of the tube 71 is bifurcated into the tube 32, which constitutes the suction pump 30A, and the tube 33, which constitutes the suction pump 30B.

[0066] In the configuration shown in Fig. 8, the suction side of the tube 32 facing the suction pump 30A and the suction side of the tube 33 facing the suction pump 30B, the tubes 32 and 33 being bifurcated from the tube 71, are drawn to substantially the same length. The lengths of the tubes 32 and 33 can be effectively utilized as means for controlling the suction capability of the suction pumps 30A and 30B. Specifically, if the lengths of the tubes 32 and 33 are identical, the suction pumps 30A and 30B can be controlled so as to assume substantially the same suction capability. In this case, preferably, the waste-fluid absorbing members 60 and 62

housed in the respective waste-ink tanks 61 and 63 are set so as to be substantially identical in size.

[0067] In contrast, if the tubes 32 and 33 are set so as to differ in length from each other; for example, if the suction-side portion of the tube 33 is set so as to become longer than the suction-side portion of the tube 32, the suction capability of the suction pump 30A connected to the tube 32 can be set higher than the suction capability of the suction pump 30B connected to the tube 33. Accordingly the waste-ink tank 61 and the waste-fluid absorbing member 60 housed therein can be set so as to become larger, whereas the waste-ink tank 63 and the waste-fluid absorbing member 62 housed therein can be set so as to become smaller. Thus, the degree of freedom of layout of the individual ink tanks 61 and 63 can be improved.

[0068] Measure for making the inner diameters of the tubes 32 and 33 bifurcated from the tube 71 different may also be employed as means for controlling the suction capability of the individual suction pumps 30A and 30B. In this case, suction resistance of the suction pump having a larger inner diameter can be reduced, and the suction capability of the pump can be improved accordingly.

[0069] Fig. 9 shows a fourth embodiment of the present invention, in which negative pressure is imparted to the inside of the cap units through use of a similar pump unit. In a configuration shown in Fig. 9, a tube 72 is connected to the inlet 18 formed in the cap unit 16, and a tube 73 is connected to an inlet 19 formed in a cap unit 17. The tubes 72 and 73 are integrated into a single integrated section by means of one end of a tube 74, which constitutes a suction channel. The other end of the tube 74 is bifurcated into the tubes 32 and 33, which constitute the suction pumps 30A and 30B.

[0070] As in the case of the embodiment shown in Fig. 8, by means of the configuration, the suction capability of the suction pumps 30A and 30B can be controlled by making the lengths or inner diameters of the tubes 32 and 33 different from each other. Consequently, as in the case of the previous embodiment, the sizes of the waste-ink tank 61 and the waste-fluid absorbing member 60 housed therein or the sizes of the waste-ink tank 63 and the waste-fluid absorbing member 62 housed therein can be set appropriately.

[0071] Further, by means of the configuration shown in Fig. 9, the suction efficiencies of the cap units 16 and 17 can be controlled by rendering the connection tube 72, which connects the inlet 18 formed in the cap unit 16 to the tube 74, different in length or inner diameter from the connection tube 73, which connects the inlet 19 formed in the cap unit 17 to the tube 74.

[0072] Consequently, the suction efficiency of the cap unit 16 or 17 can be set according to the characteristics of waste-ink to be handled in the cap unit 16 or 17. According to the characteristics of ink to be handled or the number of nozzles provided in the recording head, the suction efficiency of the cap unit can be set rationally.

[0073] For example, in a cap unit for handling ink which is susceptible to an increase in viscosity, the suction efficiency of the cap unit is preferably set so as to become larger than that of a cap unit for handling ink least susceptible to an increase in viscosity. In this case, the tube connected to the cap unit for handling ink susceptible to an increase in viscosity is shortened, or a tube having a larger inner diameter is used as this tube, thus achieving an appropriate balance in the cap units in terms of suction efficiency.

[0074] Fig. 10 shows a fifth embodiment of the present invention, in which negative pressure is imparted to the inside of the cap unit through use of a similar suction pump. The embodiment shown in Fig. 10 is based on the embodiment shown in Fig. 8. Therefore, like reference numerals designate like elements. In the embodiment shown in Fig. 10, valve member capable of opening or closing the suction channel is disposed in at least one of the suction channels extending from the bifurcation between the connection tubes to the individual suction pumps.

[0075] As shown in the drawing, the connection tube 71 is connected to the single inlet 18 formed in the cap unit 16, and the other end of the tube 71 is bifurcated into the tube 32 connected to the suction pump 30A and the tube 33 connected to the suction pump 30B. In this case, valve member 76A, which can open or close the suction channels and will be described later, is disposed in; e.g., the suction channels extending from the bifurcation of the connection tube 71 to the individual suction pumps 30A and 30B; i.e., the intermediate portions of the respective tubes 32 and 33. Alternatively, a variable flow register 76B, which can vary the resistance of the flow channel and will be described later, may be disposed in lieu of the valve member 76A.

[0076] By means of such a configuration, in a suction operation mode which does not require suction of a large amount of ink from the recording head (e.g., as will be described later, a manual cleaning operation performed by way of user's operation or a timer cleaning operation performed automatically during the idle operations of the recording apparatus), the amount of ink to be discharged can be controlled by closing the valve member 76A or choking the flow channel by means of the variable flow register 76B. Thus, the amount of ink to be supplied to the waste-ink tank can be reduced, and the interval for maintenance of the waste-ink tank can be prolonged. Further, the waste of ink of the ink cartridge can be reduced.

[0077] As in the case of the embodiment shown in Fig. 10, the valve member 76A or the variable flow register 76B, which may be provided in lieu of the valve member 76A, is not necessarily disposed in each of the two suction channels; i.e., a suction channel between the bifurcation of the tube 71 and the suction pump 30A and a suction channel between the bifurcation of the tube 71 and the suction pump 30B. The valve member 76A or the variable flow register 76B may be disposed in one

of the two suction channels.

[0078] Fig. 11 shows a sixth embodiment of the present invention capable of yielding the same working effects and results as those yielded in the previous embodiments. The embodiment shown in Fig. 11 is based on the embodiment shown in Fig. 9, and like reference numerals designate like elements. Even in the embodiment shown in Fig. 11, the valve member 76A or the variable flow register 76B, which may be provided in lieu of the valve member 76A, is disposed in each of the two suction channels; i.e., the tube 32 between the bifurcation of a connection tube 74 and the suction pump 30A and the tube 32 between the bifurcation of the connection tube 74 and the suction pump 30B.

[0079] Even in the embodiment shown in Fig. 11, the valve member 76A or the variable flow register 76B, which may be provided in lieu of the valve member 76A, is not necessarily disposed in each of the two suction channels; i.e., a suction channel between the bifurcation of the tube 74 and the suction pump 30A and a suction channel between the bifurcation of the tube 74 and the suction pump 30B; alternatively, the valve member 76A or the variable flow register 76B may be disposed in one of the two suction channels.

[0080] Fig. 12 shows one example of the basic configuration of the previously-described valve member 76A, and Fig. 13 shows one example of the basic configuration of the previously-described variable flow register 76B. The valve member 76A whose cross section is shown in Fig. 12 is connected between tubes constituting the suction channel and comprises a base member 76a, in which a communication hole 76b to be connected to the tubes is formed, and a shaft member 76c which is located in the base member 76a so as to be rotatable about a shaft hole formed in the base member 76a. A communication hole 76d is also formed in the shaft member 76c.

[0081] Selection can be made between a valve-closed state shown in the drawing and an valve-open state in which the communication holes are brought into alignment, by rotation and actuation of the shaft member 76c within a range of about 90° by means of an unillustrated actuator.

[0082] The variable flow register 76B whose cross section is shown in Fig. 13 comprises a base member 76g, and a communication hole 76h is formed in the base member 76g so as to assume a semi-circular cross section. An extendable elastic member 76i is attached to the opening of the communication hole 76h so as to hermetically seal the communication hole 76h. An actuating member 76j whose tip end is formed into a semi-circular columnar shape or a semi-spherical shape is brought into contact with substantially the center of the resilient member 76i.

[0083] By means of the foregoing configuration, the variable flow register 76B can change the resistance of the flow channel of the suction channel by the actuation member 76j being brought into contact with the elastic

member 76i by means of drive force of the unillustrated actuator, and by the elastic member 76i being deformed toward the communication hole 76h according to the degree of contact.

[0084] The curvature of the communication hole 76h formed in the base member 76g is made substantially equal to the curvature of the tip end of the actuating member 76j (strictly, the curvature of the tip end of the actuating member 76j is diminished by an amount corresponding to the thickness of the deformed elastic member 76i). In a state in which the actuating member 76 has entered to the deepest position of the communication hole 76h, the suction channels can be closed. By means of the foregoing configuration, the valve opening and closing actions similar to those achieved by the valve member 76A shown in Fig. 12 can be achieved.

[0085] Fig. 14 shows a seventh embodiment of the present invention, in which the valve member 76A or the variable flow register 76B is used. The embodiment shown in Fig. 14 is based on that shown in Fig. 7, and like reference numerals designate like elements. In the embodiment shown in Fig. 14, at least one valve member capable of opening and closing a suction channel is disposed in at least one of a plurality of suction channels, each suction channel extending between an inlet formed in the cap unit, and a suction pump.

[0086] More specifically, in the embodiment shown in Fig. 14, the previously-described valve member 76A (see Fig. 12) is disposed in the tube 32 connecting an inlet 18A formed in the cap unit 16 to the pump unit 30A, as well as in the tube 33 connecting an inlet 18B formed in the cap unit 16 to the pump unit 30B. The previously-described variable flow register 76B (see Fig. 13) may be disposed in lieu of the valve member 76A.

[0087] By means of this configuration, in a suction mode in which there is no need to suction a large amount of ink from the recording head, the flow channel can be squeezed by closing the valve member 76A, as needed, or by activation of the variable flow register 76B. As a result, the amount of ink supplied to the waste-ink tank can be reduced, the interval for maintenance of the waste-ink tank can be extended, and the amount of ink stored in the ink cartridge that is wasted can be diminished.

[0088] As in the case of the embodiment shown in Fig. 14, the valve member 76A, or the variable flow register 76B provided in lieu of the valve member 76A, is not necessarily required to be disposed in both the tube 32 and the tube 33 constituting the suction channels; the valve member 76A or the variable flow register 76B may be disposed in either the tube 32 or the tube 33.

[0089] Fig. 15 shows an eighth embodiment of the present invention, in which the valve member 76A or the variable flow register 76B is employed. The embodiment shown in Fig. 15 is essentially based on the embodiment shown in Fig. 9, and like reference numerals designate like elements. In the embodiment shown in Fig. 15, valve member capable of opening or closing a suction chan-

nel, or variable flow register provided in lieu of the valve member, is disposed in at least one of a plurality of suction channels, each suction channel extending from an inlet formed in the first or second cap unit to a junction section.

[0090] More specifically, in the embodiment shown in Fig. 15, the valve member 76A, or the variable flow register 76B provided in lieu of the valve member 76A, is disposed in a suction channel (tube 72) extending between the inlet 18 formed in the first cap unit 16, and a junction section constituted of a tube 74, as well as in a suction channel (tube 73) extending between the inlet 19 formed in the second cap unit 17 and the junction section constituted of the tube 74.

[0091] This configuration enables control of the negative pressure imparted to each of the recording heads 7 and 8 sealed by the first and second cap units 16 and 17, through use of the valve member 76A or the variable flow register 76B provided in lieu of the valve member 76A. As in the case of the embodiment shown in Fig. 15, the valve member 76A, or the variable flow register 76B provided in lieu of the valve member 76A, is not necessarily required to be disposed in both the tube 72 and the tube 73 constituting the suction channels; the valve member 76A or the variable flow register 76B may be disposed in either the tube 72 or the tube 73.

[0092] In the configuration shown in Fig. 15, the valve member 76A or the variable flow register 76B is disposed in a suction channel of the cap unit which seals a recording head having a small number of nozzles or ejecting ink resistant to an increase in viscosity. As a result, a large suction flow can be imparted to a recording head which has a large number of nozzles or ejects ink susceptible to an increase in viscosity.

[0093] Fig. 16 is a block diagram showing one example of a management system which counts and manages the amount of ink flowing into the waste-ink tank by means of suction action of each of the suction pumps. In Fig. 16, the same reference numerals as in previously described embodiments are assigned to the recording heads 7 and 8, the sub-tank units 10 and 11, the cap units 16 and 17, and the suction pumps 30A and 30B, and repetition of their explanations will be omitted here for brevity.

[0094] In Fig. 16, a print controller 80 generates bit-mapped data from print data transmitted from an unillustrated host computer, causes a head driver 81 to produce a drive signal on the basis of the bit-mapped data for causing the recording heads 7 and 8 to eject ink droplets. The head driver 81 is configured so as to output, in addition to the drive signal based on the print data, a drive signal for flushing operation to the recording heads 7 and 8, upon receipt of a flushing instruction signal transmitted from a flushing controller 82.

[0095] A pump driver 84 is activated upon receipt of an instruction from a cleaning controller 83, thereby activating and controlling the suction pumps 30A and 30B. Further, the cleaning controller 83 is configured so as to

receive a cleaning instruction signal from the print controller 80, a cleaning instruction detector 85, and a cleaning mode setting section 87.

[0096] The cleaning instruction detector 85 is connected to an instruction switch 86. For example, the user manually depresses the instruction switch 86, to thereby activate the instruction detector 85. Consequently, the head cleaning operation is performed manually.

[0097] Upon receipt of an instruction from the host computer of the unillustrated recording apparatus, the cleaning mode setting section 87 sets a cleaning mode and sends to the cleaning controller 83 a cleaning instruction corresponding to the cleaning mode. The cleaning mode comprises, in addition to the previously-described timer cleaning operation, initial refilling operation for initially introducing ink to the recording apparatus and replacement cleaning operation, which is performed when an ink cartridge is replaced by a new ink cartridge.

[0098] The cleaning mode setting section 87 sends to the cleaning controller 83 a suction instruction based on an ink suction program which is previously set according to the cleaning mode. The cleaning controller 83 activates the pump driver 84, whereby the suction pumps 30A and 30B perform suction operations.

[0099] A first valve controller 88 and a second valve controller 89 are configured so as to activate and open or close an unillustrated actuator of the valve member 76A shown in Fig. 12, upon receipt of an instruction signal from the cleaning mode setting section 87. Alternatively, the valve controller 88 and 89 may be configured so as to active an unillustrated actuator of the variable flow register 76B shown in Fig. 13 and provided in lieu of the valve member 76A, to thereby control the resistance of the flow channel.

[0100] A first counter 90 counts the amount of ink flowing into the waste-ink tank 61 by means of the suction pump 30A which operates in association with the opening and closing action of the first valve controller 88. A second counter 91 counts the amount of ink flowing into the waste-ink tank 63 by means of the suction pump 30B which operates in association with the opening and closing action of the first valve controller 89.

[0101] The first and second counters 90 and 91 are configured so as to summate and count the amount of ink flowing into the respective waste-ink tanks 61 and 63, on the basis of parameters specified so as to correspond to an ink suction operation mode.

[0102] For instance, during the manual cleaning operation performed by way of the user's operation, an ink suction operation (large amount), a first ink suction operation (small amount), and a second ink suction operation (small amount) are performed in sequence. Parameters which are set beforehand according to the above respective operations are read from ROM 93. The counters 90 and 91 perform summation and counting operations in association with the opening or closing action of the valve controller 88 and 89.

[0103] In a case where the variable flow register 76B such as that shown in Fig. 13 is used, coefficients corresponding the resistance of the flow channel set by the valve controller 88 and 89 are provided to each of the counters 90 and 91, by a coefficient setting section 92. Consequently, the counts made by the counters 90 and 91 are corrected, summated, and counted again. The count made by the counter 90 corresponds to the amount of ink flowing into the waste-ink tank 61 is summated and managed according to the cleaning mode or the control status of the valve controller 88. The count made by the counter 91 corresponds to the amount of ink flowing into the waste-ink tank 63 is summated and managed according to the cleaning mode or the control status of the valve controller 89.

[0104] The count made by the counter 90 and the count made by the counter 91 are output to an indicator 94. When the count reaches one of predetermined threshold values managed by the respective waste-ink tanks 61 and 63, the indicator 94 displays the status of the waste-ink tank 61 or 63. Accordingly, the user can become aware that the amount of waste-ink in either the waste-ink tanks 61 and 63 exceeds the predetermined level.

[0105] The counters 90 and 91 output their counts to a deactivator 95. If the count reaches one of the predetermined threshold values managed by the waste-ink tanks 61 and 63, the deactivator 95 issues an instruction signal and forcibly stops use of the recording apparatus, thus preventing an overflow of waste-ink from the waste-ink tank 61 or 63, which would cause a failure of the recording apparatus.

[0106] Figs. 17A and 17B show a ninth embodiment of the present invention, in which ink adhering to the nozzle formation planes of the respective first and second recording heads is wiped away by means of a wiping blade after ink has been discharged from the recording heads by means of the foregoing configuration. As shown in Fig. 17A, a spacer 97 is interposed between the first and second recording heads 7 and 8 mounted on the carriage 1 so that a wiping blade 66 can come into contact with the spacer 97.

[0107] Preferably, the spacer 97 is interposed between the first and second recording heads 7 and 8 so as to become flush with the nozzle formation planes of the recording heads. As shown in Fig. 17A, when the carriage 1 is moved in the direction designated by an arrow, after the tip end of the wiping blade 66 has wiped off the nozzle formation plane of the first recording head 7, the tip end wipes away the nozzle formation plane of the second recording head 8 while remaining in contact with the spacer 97. Consequently, during the course of the wiping operation, the deformed state of the wiping blade 66 does not change at all, thus effecting a stable wiping operation.

[0108] In this case, the spacer 97 is formed from material possessing a water-absorbing characteristic. If the spacer 97 is formed from material possessing the water-

absorbing characteristic, the ink wiped away from the nozzle formation plane of the first recording head 7 is absorbed by the spacer 97 by way of the wiping blade 66, so that the wiping blade 66 can properly wipe away ink from the nozzle formation plane of the second recording head 8.

[0109] As shown in Fig. 17B, an absorbing member 98 is preferably interposed between the cap units 16 and 17 sealing the nozzle formation planes of the first and second recording heads 7 and 8. In a state in which the nozzle formation planes of the recording heads are sealed, the absorbing member 98 comes into contact with the spacer 97 of the carriage 1.

[0110] By means of the foregoing configuration, the ink suctioned by the spacer 97 mounted on the carriage 1 is sequentially suctioned by the absorbing member 98 mounted on the capping device 12 from the spacer 97, while the cap units are capped by means of the capping device 12. Consequently, the amount of ink suctioned by and stored in the spacer 97 can be maintained at an appropriate level, and ink can be stably suctioned from the wiping blade 66.

[0111] In the previously-described embodiments, negative pressure is imparted to the cap units by means of two suction pumps which receive power from a single drive source and perform suction operations simultaneously. Alternatively, three or more suction pumps which perform suction operations simultaneously may also be used.

[0112] An explanation will now be given of an ink jet recording apparatus according to a tenth embodiment of the present invention which adopts a cleaning control method according to the present invention. In Fig. 18, a carriage 101 is guided by a guide member 104 and is moved back and forth in the axial direction of a platen 105, by way of a timing belt 103 driven by a carriage motor 102.

[0113] Although not shown in Fig. 18, an ink jet recording head is located on the area of the carriage 101 facing a recording sheet 106. A black ink cartridge 107 and a color ink cartridge 108, which serve as ink reservoirs for supplying ink to the recording head, are removably attached to the top of the ink jet recording head.

[0114] A capping device 109 is disposed at a home position (on the right side of the drawing) corresponding to a non-print area of the recording apparatus. When the recording head, which is mounted on the carriage 101 and will be described later, is moved to the home position, the capping device 109 can seal a nozzle formation plane of the recording head. A pump unit 110 is disposed below the capping device 109 for imparting negative pressure to the interior space of the capping device 109.

[0115] The capping device 109 serves as a cover for preventing nozzle orifices of the recording head from being dried while the recording apparatus is idle, serves as an ink receiver during a flushing operation during which ink droplets are ejected by application to the recording head of a drive signal irrelevant to printing, and

serves as a cleaning member which discharges ink from the recording head by imparting to the recording head negative pressure from suction pumps, which will be described later and constitute the pump units 110.

[0116] A wiping blade 111 is disposed in a print area in the vicinity of the capping device 109 and is formed from an elastic plate such as rubber. For example, the wiping blade 111 is located so as to advance and recede horizontally with respect to the locus of movement of the recording head. When the carriage 101 travels back and forth toward the capping device 109, the carriage 101 can wipe away the nozzle formation plane of the recording head, as needed.

[0117] Figs. 19A and 19B show the configuration of a valve unit interposed between the ink cartridge and the recording head in the recording apparatus shown in Fig. 18. Figs. 19A and 19B are section views which represent views from mutually orthogonal directions. Both Figs. 19A and 19B show a state in which the nozzle formation plane of a recording head 115 is sealed by the capping device 109 which is elevated from a lower position.

[0118] An ink cartridge 107 is usually arranged so as to be able to prevent vaporization of ink solvent, which is reserved therein by means of a film member (not shown) laminated to an ink supply port 107a.

[0119] When a new ink cartridge is attached to the recording head, the ink supply port 107a of the cartridge 107 is caused to face down toward a hollow ink supply needle 121 provided in an upright position on the reverse surface of the recording head 115. In this state, the cartridge 107 can be attached to the recording head by pushing. As a result, the ink supply needle 121 penetrates through the film laminated to the ink supply port 107a and is brought into close connection with a rubber seal member 107b provided within the ink cartridge 107, whereby ink is supplied to the recording head 115 from the ink cartridge 107.

[0120] As shown in Figs. 19A and 19B, a valve unit 123 is disposed, as valve member for closing or opening an ink supply channel 122, in the ink supply channel 122 extending from the ink supply needle 121 to the recording head 115. The valve unit 123 is provided with a shaft 124 which is inserted so as to cross the ink supply channel 122 and which can rotate through substantially an angle of 90°. Further, airtight integrity is maintained by means of a pair of O-rings 123a. In the portion of the shaft 124 which crosses the ink supply channel 122, a communication hole 123b is formed at right angles to the shaft so as to intersect the axial direction of the shaft.

[0121] By rotation of the shaft 124 back and forth within a range of about 90° through use of an unillustrated actuator, selection is made between a valve-open state, in which the communication hole 123b is aligned with the ink supply channel 122, and a valve-closed state, in which the communication hole 123b is orthogonal to the ink supply channel 122.

[0122] A filter member 115d is placed in the ink supply

channel 122 between the valve unit 123 and the recording head 115. As shown in the drawing, the filter member 115d is placed immediately below the valve unit 123, to thereby filter out foreign matter included in the ink supplied from the ink cartridge 107. Further, in the event that foreign matter is generated as a result of opening and closing action of the valve unit 123, the filter member 115d prevents entry of the foreign matter into the recording head 115, thus preventing print failures from arising in the recording head 115.

[0123] The valve unit 123 shown in Figs. 19A and 19B is configured so as to open and close the ink supply channel 122 between; e.g., the black ink cartridge 107 and nozzle orifices of the recording head 115 for black ink. Similarly, a valve unit is disposed in each of the channels for supplying color inks, such as cyan ink, magenta ink, and yellow ink, from the color ink cartridge 108. Needless to say, the valve unit 123 is not limited to a specific valve such as that shown in Figs. 19A and 19B; a valve unit of another configuration can also be used as the valve unit 123.

[0124] Fig. 20 schematically shows one example of a suction channel and an ink discharge channel, which extend from the recording head to the capping device. The capping device 109 comprises a square cap case 109a whose upper face is open; and a cap member 109b which is housed in the cap case 109a and is formed from a square elastic substance, such as rubber, whose upper face is open. The cap member 109b is formed such that the upper edge of the cap member 109b protrudes slightly beyond the cap case 109a.

[0125] An ink-absorbing member 109c formed from porous material is housed on the interior bottom of the cap member 109b. The ink-absorbing member 109c is retained in a retainer 109d integrally formed with the cap member 109b. Two inlets 109e and 109f and an air hole 109g are formed in the interior bottom of the cap case 109a so as to penetrate through the cap case 109a and the cap member 109b.

[0126] In the embodiment shown in Fig. 20, the two inlets 109e and 109f are spaced apart from each other in the longitudinal direction of the cap member 109b. The air hole 109g is formed at a position slightly closer to the inlet 109f than to the inlet 109e.

[0127] Reference numeral 115 shown in Fig. 20 designates the cross section of a recording head whose nozzle formation plane is sealed by the capping device 109. As mentioned previously, the recording head 115 is configured such that a nozzle plate 105a, which serves as the nozzle formation plane of the recording head, is capped by the cap member 109b when the recording head 115 is moved to a position above the capping device 109. Nozzle orifices 115b are formed in the nozzle plate 115a. Ink can be ejected from the nozzle orifices 115b by means of action of piezoelectric oscillators 115c provided so as to correspond to the respective nozzle orifices 115b.

[0128] A tube 110a is connected to the inlet 109e

formed in the cap case 109a, and a tube 110b is connected to the inlet 109f formed in the same. As shown in Fig. 20, the tube 110a constitutes a part of a first suction pump (tube pump) constituting the pump unit 110, and the tube 110b constitutes a part of a second suction pump (tube pump) constituting the same. The outlet of the suction pump 110A is connected to a waste-ink tank 130 housing a waste fluid absorbing member 130a, and the outlet of the suction pump 110B is connected to a waste-ink tank 131 housing a waste-fluid absorbing member 131a.

[0129] A tube 132 is connected to the air hole 109g formed in the cap case 109a, and the air hole 109g is connected to an air valve 133. When the carriage 101 travels to the home position and cleaning operation is performed, the air valve 133 is configured so as to be opened or closed by means of a mechanism similar to that employed in the embodiment shown in Fig. 2, in association with movement of the carriage 101.

[0130] By means of the configuration shown in Fig. 20, negative pressure can be imparted to the interior space of the cap member 109b alternately or simultaneously by means of the two suction pumps 110A and 110B connected to the two inlets 109e and 109f formed in the cap case 109a.

[0131] Fig. 21 schematically shows an eleventh embodiment of the present invention, in which the suction channel and the ink discharge channel extend from the recording head and the capping device to the respective waste-ink tanks. In Fig. 21, the same reference numerals are assigned to elements corresponding to those shown in Fig. 20. The present embodiment differs from the tenth embodiment shown in Fig. 20 in that the valve member 76A capable of opening and closing a suction channel, which is shown in Fig. 12, is disposed at a position along a channel between the inlet 109e formed in the capping member to the suction pump 110A; i.e., an intermediate position in the tube 110a, as well as at a position along a channel between the inlet 109f to the suction pump 110B; i.e., an intermediate position in the tube 110b. The variable flow register 76B, which is shown in Fig. 13 and is capable of changing the resistance of the suction channel, may also be placed in lieu of the valve member 76A.

[0132] In the configuration shown in Fig. 21, negative pressure can be applied to the interior space of the cap members 109b alternately or simultaneously by means of opening or closing the valve member 76A or by means of controlling the resistance of a flow channel through use of resistance variation means 76B.

[0133] Fig. 22 shows one example of a control circuit provided in the recording apparatus having the foregoing configuration. In Fig. 22, the same reference numerals are assigned to the carriage 101, the carriage motor 102, the ink cartridges 107 and 108, the capping device 109, the suction pumps 110A and 110B constituting the pump unit 110, the recording head 115, the air valve 133, and the two valve member 76A, which have already

been described, and their detailed explanations are omitted here for brevity.

[0134] In Fig. 22, a print controller 140 generates bit-mapped data on the basis of the print data supplied from a host computer, generates a drive signal from the bit-mapped data through use of a head driver 141, and ejects ink by way of the recording head 115. The head driver 141 is also configured so as to output, in addition to the drive signal based on the print data, a drive signal for flushing operation to the recording head 115, upon receipt of a flushing instruction signal transmitted from a flushing controller 142.

[0135] A cleaning controller 143 is configured so as to supply an instruction signal to a cleaning sequence controller 144. A pump driver 145 is operated in response to the instruction signal supplied from the cleaning sequence controller 144, thereby actuating the suction pumps 110A and 110B simultaneously or selectively.

[0136] Further, the cleaning controller 143 is configured so as to receive a cleaning instruction signal transmitted from the host computer by way of the print controller 140. Moreover, the cleaning controller 143 is configured so as to receive a cleaning instruction signal transmitted from a cleaning instruction detector 146. An instruction switch 147 is connected to the cleaning instruction detector 146. For example, if the user manually depresses the instruction switch 147, the cleaning instruction detector 146 is activated, to thereby perform manual cleaning operation.

[0137] Upon receipt of an instruction signal from the cleaning controller 143, the cleaning sequence controller 144 can send control signals also to a valve unit driver 148 provided in an ink supply channel, as well as to first and second valve driver 149 and 150 provided in suction channels. In addition, the cleaning sequence controller 144 can transmit a control signal to the carriage driver 151 also.

[0138] The valve unit driver 148 sends an instruction signal to an unillustrated actuator mounted on the carriage 101, to thereby rotate the shaft 124 constituting the valve unit 123 shown in Figs. 19A and 19B through an angle of about 90°. As a result, the valve unit 123 is opened or closed. The carriage driver 151 drives and controls the carriage motor 102 shown in Fig. 18 such that the carriage 101 is moved to; e.g., a home position and the recording head 115 is capped by the capping device 109.

[0139] In the case of the configuration according to the embodiment shown in Fig. 21, the first and second valve drivers 149 and 150 send an instruction signal to an unillustrated actuator, to thereby simultaneously or selectively (or alternately) open or close the valve member 76A or the variable flow register 76B provided in lieu of the valve member 76A.

[0140] Fig. 23 is a flowchart showing cleaning operation of the recording head in a case where the configuration of the recording apparatus previously described

is employed; particularly where there is employed the tenth embodiment using the suction channels and ink discharge channels shown in Fig. 20. The sequence of the cleaning operation will now be described by reference to Fig. 23. For example, in a case where a cleaning instruction is received on a utility of a printer driver stored in the host computer, a control signal is transmitted to the cleaning controller 143 from the host computer by way of the print controller 140, and cleaning operation is started.

[0141] As shown in step S11, when the cleaning operation is started, the nozzle formation plane of the recording head 115 is wiped away by means of the wiping blade 111. This wiping action is achieved by determination of a cleaning sequence by the cleaning controller 143; transmission of a control signal to the carriage driver 151 from the cleaning sequence controller 144 on the basis of the cleaning sequence signal; advancement of the wiping blade 111 to the travel channel of the recording head 115 during the course of movement of the carriage 101 toward the home position; and wiping of the nozzle formation plane of the recording head 115. As a result, the airtight integrity of the cap is ensured by removal of paper dust adhering to the nozzle formation plane of the recording head 115.

[0142] Next, as shown in step S12, the carriage 101 still moves toward the home position. In association with the movement of the carriage 101, the capping device 109 wipes the nozzle formation plane of the recording head 115 (S13). Simultaneously, the air valve 133 communicating with the air hole 109g formed in the capping device 109 is also closed (S14).

[0143] Next, the suction pumps are actuated simultaneously (S15). At this time, the valve unit 123 disposed in the ink supply channel 122 is in an open state, ink is suctioned by way of the nozzle orifices as a result of simultaneous actuation of the suction pumps, and the cap member 109b is filled with the thus-suctioned ink.

[0144] In this state, there are closed the valve unit 123 disposed in the black ink supply channel and the valve units 123 disposed in the respective color ink supply channels, such as a cyan ink supply channel, a magenta ink supply channel, and a yellow ink supply channel (S16). The closing action is achieved by transmission of a control signal from the cleaning sequence controller 144 shown in Fig. 22 to the valve unit controller 148.

[0145] Subsequently, the suction pumps are actuated selectively (S17). Specifically, the suction pumps 110A and 110B alternately perform suction operation in response to transmission of a control signal from the cleaning controller 143 shown in Fig. 22 to the cleaning sequence controller 144, and transmission of a control signal from the cleaning sequence controller 144 to the pump driver 145.

[0146] Negative pressure is accumulated in the interior space of the cap member 109b while being alternately applied to the two inlets 109e and 109f, which are formed so as to be spaced apart from each other in the

lower bottom of the cap case 109a shown in Fig. 20. Through such suction operation, negative pressure is alternately applied to the clogged nozzle orifices of the recording head 115 in different directions, thus imparting vibration to the solid ink present in the nozzle orifices. Alternatively, a flow which vibrates the ink stored in the cap member 109b arises, and ink actively comes into contact with the clogged nozzle orifices, thereby enabling promotion of softening or dissolution of ink solids.

[0147] Next, the suction pumps are actuated simultaneously (S18). Through the simultaneous actuation of the suction pumps, further negative pressure is accumulated in the interior space of the cap member 109b. In this state, the valve units 123 are opened (S19). As shown in Fig. 22, the opening of the valve units 123 is achieved by transmission of control signal from the sequence controller 144 to the valve unit driver 148.

[0148] A fast ink flow can be momentarily caused in the ink channel extending from the ink cartridge 107 to the recording head 115, by means of the valve unit 123 being opened in step S19. Consequently, the solids that have already undergone vibration or which are in a softened state can be readily removed from the nozzle orifices by virtue of the fast ink flow. Further, the air bubbles present within the ink channels can also be removed by means of the fast ink flow, thus recovering the functions of the recording head.

[0149] Subsequently, a determination is made as to whether or not the suction pump has been actuated for a predetermined period of time (S20). By means of opening of the valve unit 123 in step S19, ink is discharged into the capping device 109. Through subsequent continuous actuation of the suction pumps, the ink discharged to the capping device 109 is immediately emitted to the waste-ink tanks 130 and 131.

[0150] Through the foregoing discharging operation, there can be effectively prevented a print failure or mixing of colors, which would otherwise be caused when ink froths up within the capping device 109 and by entry of ink into the nozzle orifices under negative pressure.

[0151] In step S20, if a predetermined period of time is determined to have elapsed, the actuation of the pumps is stopped (S21). Subsequently, a determination is made as to whether or not the suction of ink has been performed a predetermined number of times (S22). If the number of times is less than the predetermined number of times, processing pertaining to steps S13 through S21 are repeated.

[0152] In step S22, a determination is made that ink has been suctioned a predetermined number of times, the recording head is released from a capped state (S23). Subsequently, as shown in step S24, wiping operation is performed, to thereby wipe away ink adhering to the nozzle formation plane of the recording head, by means of the wiping blade 111. In step S25, the recording head 115 is again capped by means of the capping device 109 and awaits arrival of print data.

[0153] Although a determination is made, according

to the sequence shown in Fig. 23, as to whether or not ink has been suctioned a predetermined number of times in step S22, there is no need to repeat suction operation a predetermined number of times, so long as a sufficient cleaning result is obtained through a single ink suction operation.

[0154] Although, according to the sequence shown in Fig. 23, the suction pumps are selectively actuated in step S17 and the suction pumps are simultaneously actuated in step S18, the same operation and working effects are achieved even if steps S17 and S18 are interchanged.

[0155] Negative pressure can be quickly accumulated in the interior space of the cap member 109b by simultaneous actuation of the suction pumps 110A and 110B while the valve unit 123 is closed. The suction pumps are selectively actuated in this state, to thereby impart vibration to solids adhering to the nozzle orifices under large negative pressure. Accordingly, removal of solids accumulated on the nozzle orifices is promoted.

[0156] Fig. 24 is a flowchart showing the cleaning operation of the recording head in the case of employment of the eleventh embodiment provided with the suction and ink discharge channels shown in Fig. 21. As mentioned previously, in the embodiment shown in Fig. 21, the valve member 76A or the variable flow register 76B provided in lieu thereof is disposed in each of the suction channels extending from the inlets 109e and 109f formed in the capping member to the respective suction pumps 110A and 110B. Operation, which is the same as that performed when the suction pumps 110A and 110B are alternately actuated, can be achieved by opening or closing the valve member 76A or the variable flow register 76B provided in lieu thereof while the suction pumps 110A and 110B are held in suction operation.

[0157] Fig. 24 shows a cleaning sequence executed through the foregoing operation. Control operations relating to steps S17 and S18 in the sequence shown in Fig. 23 are replaced by those relating to steps S31 through S33 shown in Fig. 24.

[0158] More specifically, after the valve unit 123 has been closed in step S16, simultaneous actuation of the suction pumps is commenced in step S31. In step S32, the valve member 76A or the variable flow register 76B provided in lieu thereof, which is disposed in each of the suction channels, is opened or closed immediately. The opening or closing action is achieved by transmission of a control signal to the first and second valve driver 149 and 150, by means of the cleaning sequence controller 144 shown in Fig. 22.

[0159] The operation, which is the same as that performed when the suction pumps 110A and 110B alternately perform suction operation, is achieved by the foregoing operations. As a result, negative pressure is accumulated in the interior space of the cap member 109b while negative pressure alternately acts on the two inlets 109e and 109g. As mentioned previously, negative pressure alternately acts on the clogged nozzle or-

ifices of the recording head 115 in different directions, thus imparting vibration to ink solids adhering to the nozzle orifices.

[0160] Subsequently, the valve member 76A or the variable flow register 76B provided in lieu thereof are all closed (S33). The closing action is also achieved by transmission of a control signal to the first and second valve driver 149 and 150 from the sequence controller 144.

[0161] As a result, the operation, which is the same as that performed when the suction pumps 110A and 110B simultaneously perform suction operation, is achieved, and negative pressure is further accumulated in the interior space of the cap member 109b. In this state, processing proceeds to step S19. A fast ink flow instantaneously arises in the ink channel extending from the ink cartridge 107 to the recording head 115 by opening of the valve unit 123. As in the case of the previously-described operation, the solids that have undergone vibration or that are in a softened state can be readily removed from nozzle orifices. Further, air bubbles present in the ink channel can also be removed by means of a fast ink flow, thus recovering the functions of the recording head.

[0162] The same operation and working effects can be achieved even when steps S32 and S33 shown in Fig. 24 are interchanged. Specifically, the valve member 76A or the variable flow register 76B provided in lieu thereof are opened, to thereby quickly accumulate negative pressure in the interior space of the cap member 109b. Subsequently, the valve member 76A or the variable flow register 76B provided in lieu thereof are selectively opened, and vibration is imparted to the solids adhering to the nozzle orifices under great negative pressure, thus enabling promotion of removal of the solids accumulated on the nozzle orifices.

[0163] In the embodiment shown in Fig. 21, the valve member 76A or the variable flow register 76B provided in lieu thereof is disposed in each of the tubes 110a and 110b, which constitute the suction channels. Even if one valve member is disposed in at least one of the suction channels, vibration, which may not necessarily be sufficient, can be imparted to the solids adhering to the nozzle orifices.

[0164] The previous description of the cleaning operation is based on a case where the valve units 123 disposed in the black ink supply channel and the color ink supply channels, such as a cyan ink supply channel, a magenta ink supply channel, and a yellow ink supply channel, are simultaneously opened upon receipt of a control signal from the valve unit controller 148. There may also be employed controller which opens a valve unit disposed in a channel for supplying ink which is most susceptible to an increase in viscosity; for example, a black ink supply channel, and opens and closes the valve units 123 disposed in the other color ink supply channels according to the previously-described sequence. By means of such a control sequence, the valve

unit disposed in the black ink supply channel is opened, to thereby enable active discharge of black ink susceptible to an increase in viscosity.

[0165] Even in a case where there is effected control operation for maintaining in an open state only the valve unit disposed in the channel for supplying ink most susceptible to an increase in viscosity; for example, a black ink supply channel, the same operation and working effects can be achieved even when steps S17 and S18 shown in Fig. 23 are interchanged. As described in connection with Fig. 24, the controller can be employed in the same manner as in the previous descriptions, even in a case where the valve member 76A or the variable flow register 76B provided in lieu thereof, which are disposed in the suction channels, are opened or closed.

[0166] In the embodiments shown in Figs. 20 and 21, the two inlets 109e and 109f are formed so as to be spaced apart from each other in the longitudinal direction of the cap case 109a. Preferably, as shown in Figs. 25A and 25B, in a state in which the nozzle formation plane of the recording head is sealed by the capping member, inlets are formed so as to be spaced apart from each other in the areas of the bottom of the capping member corresponding to both ends of the row of nozzles which eject ink most susceptible to an increase in viscosity.

[0167] More specifically, Fig. 25A shows a perspective view of the recording head 115 sealed by the capping device 109. In the nozzle formation plane 115a of the recording head 115, there are formed in sequence from the left a pair of BL nozzles for ejecting black ink, a pair of CY nozzles for ejecting cyan ink, a pair of MA nozzles for ejecting magenta ink, and a pair of YE nozzles for ejecting yellow ink.

[0168] Fig. 25B shows, in plan view, the configuration of the capping device 109 which seals the nozzle formation plane 115a from below. The two inlets 109e and 109f are formed so as to be spaced apart from each other at the positions on the bottom of the capping device 109 corresponding to both ends of the row of nozzles for ejecting ink most susceptible to an increase in viscosity; for example, the row of nozzles BL for ejecting black ink.

[0169] In the configuration shown in Fig. 25, when the two inlets 109e and 109f are alternately suctioned, vibration can be effectively imparted to both ends of the row of BL nozzles for ejecting black ink, which are most susceptible to an increase in viscosity, thus effectively removing clogging caused by black ink.

[0170] Preferably, as shown in Fig. 25B, the air hole 109g is formed in the longitudinal end of the cap unit opposite the end where the inlets 109e and 109f are formed. With such an arrangement of the inlets and the air hole, ink can flow orderly within the cap unit when ink is discharged from the interior of the cap unit, thus enabling thorough wiping of ink from the interior of the cap unit.

[0171] Although in the previous embodiment the two

inlets 109e and 109f are formed in the capping device 109, three or more inlets may be formed and sucked by means of corresponding suction pumps. In this case, for example, a tube pump is used as the suction pump, and the drive shafts of the tube pumps are connected in tandem, thereby realizing a suction pump unit without an increase in the area occupied by the pumps. In contrast with limitations imposed on the case where the radius of the circular-arch pattern of the tube is increased for the purpose of increasing the suction capability of the tube pump, limitations imposed on the layout of the pumps are much less restrictive. The entire recording apparatus can be made compact while the suction capability of the pumps is increased.

[0172] Further, although the previous embodiments describe the on-carriage type recording apparatus whose ink cartridges serving as ink reservoirs are mounted on a carriage, it goes without saying that the present invention can also be applied to a recording apparatus whose sub-tanks serving as ink reservoirs are placed on a carriage, as shown in Fig. 1, and are refilled with inks from ink cartridges (or main ink tanks) provided in a portion of the recording apparatus by way of; e.g., tubes.

Claims

1. An ink jet recording apparatus comprising:

at least one recording head (7, 8)-mounted on a carriage (1) to be moved reciprocally in the widthwise direction of a recording sheet and having a face on which a plurality of nozzle orifices (7b) are formed;

a capping device (12) disposed in a non-print region of the recording head (7, 8), the capping device (12) including at least one cap unit (16, 17) for providing an interior space and sealing the face of the at least one recording head (7, 8) on which the plurality of nozzle orifices (7b) are formed; and

a plurality of suction pumps (30) for applying negative pressure to the interior space of the at least one cap unit (16, 17), wherein the number of the suction pumps (30) is at least equal to the number of the cap units (16, 17) of the capping device (12);

characterized in that

the at least one cap unit (16, 17) is associated with plural suction pumps (30A, 30B) of the plurality of suction pumps (30) such that each of the plural suction pumps (30A, 30B) is provided for applying the negative pressure to the interior space of the cap unit (16, 17).

2. The ink jet recording apparatus as set forth in claim 1, wherein one cap unit (16; 109) has first and second suction ports (18A, 18B; 109e, 109f), said first suction port (18A; 109e) communicating with a first suction pump (30A; 110A) and said second suction port (18B; 109f) communicating with a second suction pump (30B; 110B). 5
3. The ink jet recording apparatus as set forth in claim 2, wherein a valve member (76A) or a variable flow resistor (76B) is provided in a tube (110a, 110b) communicating said first suction port (109e) with said first suction pump (110A) and/or said second suction port (109f) with said second suction pump (110B). 10
4. The ink jet recording apparatus as set forth in claim 1, wherein one cap unit (16) has one suction port (18) connected to a bifurcation, wherein a first and a second suction pump (30A, 30B) are connected to said bifurcation. 15
5. The ink jet recording apparatus as set forth in claim 4, wherein a valve member (76A) or a variable flow resistor (76B) is provided in a tube (32, 33) communicating said bifurcation with said first suction pump (30A) and/or said bifurcation with said second suction pump (30B). 20
6. The ink jet recording apparatus as set forth in claim 1, wherein two cap units (16, 17) are provided, each cap unit (16, 17) having one suction port (18, 19) connected to a common junction, wherein said common junction is connected to a bifurcation, and wherein a first and a second suction pump (30A, 30B) are connected to said bifurcation. 25
7. The ink jet recording apparatus as set forth in claim 6, wherein a valve member (76A) or a variable flow resistor (76B) is provided in a tube (72, 73) communicating a first suction port (18) with said common junction and/or a second suction port (19) with said common junction. 30
8. The ink jet recording apparatus as set forth in claim 6, wherein a valve member (76A) or a variable flow resistor (76B) is provided in a tube (32, 33) communicating said bifurcation with said first suction pump (30A) and/or said bifurcation with said second suction pump (30B). 35
9. The ink jet recording apparatus as set forth in claim 1, wherein a first recording head (7) and a second recording head (8) are mounted on the carriage (1), wherein the capping device (12) includes a first cap unit (16) and a second cap unit (17) provided for the first recording head (7) and the second recording head (8) respectively, and 40
- wherein the plural suction pumps (30) include a first suction pump and a second suction pump for applying negative pressure with respect to the first and second cap units (16, 17) respectively.
10. The ink jet recording apparatus as set forth in claim 1 or 9, wherein the respective suction pumps (30) cooperate with a single drive source. 45
11. The ink jet recording apparatus as set forth in any one of the claims 1, 9 or 10, wherein the cap unit (16, 17) includes a plurality of suction ports respectively communicating with the interior space thereof and connected to the respective suction pumps (30) via the suction tubes, and 50
- wherein the respective suction pumps (30) perform the suction operation simultaneously.
12. The ink jet recording apparatus as set forth in claim 11, wherein the suction ports are formed on an inner bottom portion of the cap unit (16, 17) and at one end portion in the longitudinal direction thereof.
13. The ink jet recording apparatus as set forth in claim 11, wherein the suction ports are arranged closely to one another. 55
14. The ink jet recording apparatus as set forth in claim 12 or 13, wherein an air hole is formed on an inner bottom portion of the cap unit (16, 17) and at the other end portion in the longitudinal direction thereof.
15. The ink jet recording apparatus as set forth in any one of claims 1 and 9 to 14, wherein the capping device includes a plurality of cap units (16, 17), wherein each of the cap units includes a suction port communicating with the respective interior space thereof, and 60
- wherein each of the suction tubes connected to the respective suction ports has a junction portion for combining tubes connected to the respective suction pumps which perform the suction operation simultaneously.
16. The ink jet recording apparatus as set forth in any one of claims 1 and 9 to 15, wherein the capping device (12) includes a plurality of cap units (16, 17), wherein each of the cap units (16, 17) includes a suction port communicating with the respective interior space thereof, and 65
- wherein the suction tubes include a first junction portion for combining subtubes connected to the respective suction ports and a second junction portion connected to the first junction portion for combining subtubes connected to the respective suction pumps which perform the suction operation simultaneously.

17. The ink jet recording apparatus as set forth in claim 15 or 16, wherein the subtubes connected to the respective suction pumps are substantially the same in length. 5
18. The ink jet recording apparatus as set forth in claim 15 or 16, wherein the subtubes connected to the respective suction pumps (30) are different from each other in length. 10
19. The ink jet recording apparatus as set forth in claim 15 or 16, wherein the subtubes connected to the respective suction pumps (30) are different from each other in inner diameter. 15
20. The ink jet recording apparatus as set forth in claim 15 or 16, wherein a valve member is provided in at least one of the subtubes connected to the respective suction pumps (30) for opening/closing the same. 20
21. The ink jet recording apparatus as set forth in claim 15 or 16, wherein a variable flow resistor is provided in at least one of the subtubes connected to the respective suction pumps (30) for varying flow resistance thereof. 25
22. The ink jet recording apparatus as set forth in claim 16, wherein the subtubes connected to the respective suction ports are different from each other in length. 30
23. The ink jet recording apparatus as set forth in claim 16, wherein the subtubes connected to the respective suction ports are different from each other in inner diameter. 35
24. The ink jet recording apparatus as set forth in claim 16, wherein the subtubes connected to the respective suction ports and the tubes connected to the respective suction pumps (30) are made of different materials. 40
25. The ink jet recording apparatus as set forth in claim 24, wherein the subtubes connected to the respective suction ports are made of a material having high gas-barrier characteristic. 45
26. The ink jet recording apparatus as set forth in claim 9, wherein the suction tubes include a first suction tube for connecting the first cap unit (16) and the first suction pump (30) and a second suction tube for connecting the second cap unit (17) and the second suction pump (30), which are different from each other in length. 50
27. The ink jet recording apparatus as set forth in claim 9, wherein the suction tubes include a first suction tube for connecting the first cap unit (16) and the first suction pump (30) and a second suction tube for connecting the second cap unit (17) and the second suction pump (30), which are different from each other in inner diameter. 55
28. The ink jet recording apparatus as set forth in claim 22 or 26, wherein the recording head, which is sealed by the cap unit (16, 17) having shorter suction tube, has larger number of the nozzle orifices.
29. The ink jet recording apparatus as set forth in claim 22 or 26, wherein the recording head, which is sealed by the cap unit (16, 17) having thicker suction tube, has larger number of the nozzle orifices.
30. The ink jet recording apparatus as set forth in any of claims 11 to 14, wherein a valve member is provided in at least one of the suction tubes for opening/closing the same.
31. The ink jet recording apparatus as set forth in any of claim 11 to 14, wherein a variable flow resistor is provided in at least one of the suction tubes for varying flow resistance thereof.
32. The ink jet recording apparatus as set forth in claim 16, wherein a valve member is provided in at least one of the subtubes connected to the respective suction ports for opening/closing the same.
33. The ink jet recording apparatus as set forth in claim 16, wherein a variable flow resistor is provided in at least one of the subtubes connected to the respective suction ports for varying flow resistance thereof.
34. The ink jet recording apparatus as set forth in claim 32, wherein the subtube in which the valve member is provided is connected to a cap unit for sealing a recording head having relatively smaller number of nozzle orifices.
35. The ink jet recording apparatus as set forth in claim 33, wherein the subtube in which the variable flow resistor is provided is connected to a cap unit (16, 17) for sealing a recording head having relatively smaller number of nozzle orifices.
36. The ink jet recording apparatus as set forth in any of claims 1, 9 to 16, 22 to 27, and 32 to 35, wherein each of the suction pumps (30) includes:
- a frame body having a semicircular support face for supporting one of the suction tubes therealong;
- a wheel body rotated by the drive source in the frame body; and

a plurality of rollers rotatably provided on the wheel body for squeezing the suction tube supported on the support surface,

wherein the rollers squeeze the suction tubes so as to become out of phase in the rotation direction of the wheel body with one another from the suction pump to the suction pump.

37. The ink jet recording apparatus as set forth in claim 36, wherein the plural suction pumps (30) are composed of a first suction pump and a second suction pump, wherein the frame bodies of the first and second suction pumps are attached with each other so as to make the central axis of the wheel bodies coincident with each other, and wherein the rollers squeeze the suction tubes so as to be 90° out of phase in the rotation direction of the wheel body with one another from the first suction pump to the second suction pump.
38. The ink jet recording apparatus as set forth in claim 36 or 37, wherein outlets of the plural suction pumps (30) are lead to different waste-ink tanks.
39. The ink jet recording apparatus as set forth in claim 38, further comprising: means for counting the amount of ink flowing into the waste-ink tanks.
40. The ink jet recording apparatus as set forth in claim 39, wherein the counting means counts accumulatively the amount of ink by selective use of parameters specified according to respective ink suction operation modes.
41. The ink jet recording apparatus as set forth in claim 40, further comprising: means for indicating whether the amount of ink counted by the counting means reaches a predetermined value.
42. The ink jet recording apparatus as set forth in claim 40, further comprising: means for deactivating the apparatus when the amount of ink counted by the counting means reaches a predetermined value.
43. The ink jet recording apparatus as set forth in claim 38, wherein waste fluid absorbing members disposed in the respective waste-ink tanks are substantially the same in size.
44. The ink jet recording apparatus as set forth in claim 38, wherein waste fluid absorbing members disposed in the respective waste-ink tanks are different from each other in size.
45. The ink jet recording apparatus as set forth in any of claims 39 to 44, wherein the counting means is

provided for each of the waste-ink tanks.

46. The ink jet recording apparatus as set forth in claim 9, further comprising:

an elastic wiping blade abutted against the nozzle-formed faces of the first and second recording heads for wiping away ink adhering thereto; and

a spacer disposed between the first and second recording head so as to be touched by the wiping blade.

47. The ink jet recording apparatus as set forth in claim 46, wherein the spacer is made of a water-absorbing material.

48. The ink jet recording apparatus as set forth in claim 47, further comprising:

an absorber made of a water-absorbing material, and disposed between the first and second cap units so as to be brought into contact with the spacer while the nozzle-formed faces of the first and second recording heads are sealed by the first and second cap units.

49. The ink jet recording apparatus as set forth in claim 1, further comprising:

an ink reservoir for supplying ink to the recording head via a channel;

a valve member provided in the channel, the valve member opened when the negative pressure is sufficiently accumulated within the interior space of the cap unit;

at least two suction ports formed on the cap unit so as to be spaced apart from each other and connected to the respective suction pumps via the suction tubes; and

control means for opening/closing the valve member and for driving the suction pumps either selectively or simultaneously.

50. The ink jet recording apparatus as set forth in claim 49, comprises a plurality of ink reservoirs, channels and valve members.

51. The ink jet apparatus as set forth in claim 1, further comprising:

an ink reservoir for supplying ink to the recording head via a channel;

a first valve member provided in the channel, the valve member opened when the negative pressure is sufficiently accumulated within the interior space of the cap unit;

5

at least two suction ports formed on the cap unit so as to be spaced apart from each other and connected to the respective suction pumps via the suction tubes;

10

a second valve member provided in at least one of the suction tubes; and

control means for opening/closing the second valve member and for simultaneously driving the suction pumps while the first valve member is closed.

15

52. The ink jet recording apparatus as set forth in claim 22 or 26, wherein the recording head for ejecting ink most susceptible to an increase in viscosity is sealed by the cap unit having shorter suction tube.

20

53. The ink jet recording apparatus as set forth in claim 22 or 26, wherein the recording head for ejecting ink most susceptible to an increase in viscosity is sealed by the cap unit having thicker suction tube.

25

54. The ink jet recording apparatus as set forth in claim 32, wherein the subtube in which the valve member is provided is connected to a cap unit for sealing a recording head for ejecting ink most susceptible to an increase in viscosity.

30

55. The ink jet recording apparatus as set forth in claim 33, wherein the subtube in which the variable flow resistor is provided is connected to a cap unit for sealing a recording head for ejecting ink most susceptible to an increase in viscosity.

35

56. The ink-jet recording apparatus as set forth in any one of claims 49 to 51, wherein the suction ports are formed on a bottom face of the cap unit so as to be situated at both ends of a row of nozzle orifices for jetting ink most susceptible to an increase in viscosity while the nozzle forming face of the recording head is sealed by the cap unit.

40

45

Patentansprüche

50

1. Tintenstrahlaufzeichnungsvorrichtung, umfassend:

wenigstens einen Aufzeichnungskopf (7, 8), welcher an einem Schlitten (1) angebracht ist, um in der Breitenrichtung eines Aufzeichnungsblatts hin- und herbewegt zu werden, und eine Fläche aufweist, an welcher eine Mehrzahl

55

von Düsenöffnungen (7b) ausgebildet sind;

eine Abdeckvorrichtung (12), welche in einer Nichtdruckregion des Aufzeichnungskopfs (7, 8) angeordnet ist, wobei die Abdeckvorrichtung (12) wenigstens eine Abdeckeinheit (16, 17) zum Bereitstellen eines Innenraums und Abdichten der Fläche des wenigstens einen Aufzeichnungskopfs (7, 8), an welcher die Mehrzahl von Düsenöffnungen (7b) ausgebildet sind, und

eine Mehrzahl von Saugpumpen (30) zum Ausüben eines negativen Drucks auf den Innenraum der wenigstens einen Abdeckeinheit (16, 17), wobei die Anzahl der Saugpumpen (30) wenigstens gleich der Anzahl der Abdeckeinheiten (16, 17) der Abdeckvorrichtung (12) ist;

dadurch gekennzeichnet, dass

die wenigstens eine Abdeckeinheit (16, 17) mit mehreren Saugpumpen (30A, 30B) der Mehrzahl von Saugpumpen (30) verbunden ist, so dass jede der mehreren Saugpumpen (30A, 30B) zum Ausüben des negativen Drucks auf den Innenraum der Abdeckeinheit (16, 17) vorgesehen ist.

2. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 1, wobei eine Abdeckeinheit (16; 109) erste und zweite Saugöffnungen (18A, 18B; 109e, 109f) aufweist, die erste Saugöffnung (18A; 109e) mit einer ersten Saugpumpe (30A; 110A) in Verbindung steht und die zweite Saugöffnung (18B; 109f) mit einer zweiten Saugpumpe (30B; 110B) in Verbindung steht.

3. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 2, wobei ein Ventilelement (76A) oder ein veränderlicher Strömungswiderstand (76B) in einem Schlauch (110a, 110b) vorgesehen ist, welcher die erste Saugöffnung (109e) mit der ersten Saugpumpe (110A) und/oder die zweite Saugöffnung (109f) mit der zweiten Saugpumpe (110B) verbindet.

4. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 1, wobei eine Abdeckeinheit (16) eine Saugöffnung (18) aufweist, welche mit einer Verzweigung verbunden ist, wobei eine erste und eine zweite Saugpumpe (30A, 30B) mit der Verzweigung verbunden sind.

5. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 4, wobei ein Ventilelement (76A) oder ein veränderlicher Strömungswiderstand (76B) in einem Schlauch (32, 33) vorgesehen ist, welcher die Verzweigung mit der ersten Saugpumpe (30A) und/oder die Verzweigung mit der zweiten Saugpumpe

(30B) verbindet.

6. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 1, wobei zwei Abdeckeinheiten (16, 17) vorgesehen sind und jede Abdeckeinheit (16, 17) eine Saugöffnung (18, 19) aufweist, welche mit einer gemeinsamen Verbindungsstelle verbunden ist, wobei die gemeinsame Verbindungsstelle mit einer Verzweigung verbunden ist und wobei eine erste und eine zweite Saugpumpe (30A, 30B) mit der Verzweigung verbunden sind. 5
7. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 6, wobei ein Ventilelement (76A) oder ein veränderlicher Strömungswiderstand (76B) in einem Schlauch (72, 73) vorgesehen sind, welcher eine erste Saugöffnung (18) mit der gemeinsamen Verbindungsstelle verbindet und/oder eine zweite Saugöffnung (19) mit der gemeinsamen Verbindungsstelle verbindet. 10
8. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 6, wobei ein Ventilelement (76A) oder ein veränderlicher Strömungswiderstand (76B) in einem Schlauch (32, 33) vorgesehen ist, welcher die Verzweigung mit der ersten Saugpumpe (30A) und/oder die Verzweigung mit der zweiten Saugpumpe (30B) verbindet. 15
9. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 1, wobei ein erster Aufzeichnungskopf (7) und ein zweiter Aufzeichnungskopf (8) an dem Schlitten (1) angebracht sind, wobei die Abdeckvorrichtung (12) eine erste Abdeckeinheit (16) und eine zweite Abdeckeinheit (17) umfasst, welche für den ersten Aufzeichnungskopf (7) beziehungsweise den zweiten Aufzeichnungskopf (8) vorgesehen sind, und wobei die mehreren Saugpumpen (30) eine erste Saugpumpe und eine zweite Saugpumpe zum Ausüben von negativem Druck in Bezug auf die ersten beziehungsweise zweiten Abdeckeinheiten (16, 17) umfassen. 20
10. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 1 oder 9, wobei die jeweiligen Saugpumpen (30) mit einer einzigen Antriebsquelle zusammenwirken. 25
11. Tintenstrahlaufzeichnungsvorrichtung gemäß einem der Ansprüche 1, 9 oder 10, wobei die Abdeckeinheit (16, 17) eine Mehrzahl von Saugöffnungen umfasst, welche jeweils mit dem Innenraum davon in Verbindung stehen und über die Saugschläuche mit den jeweiligen Saugpumpen (30) verbunden sind, und wobei die jeweiligen Saugpumpen (30) den Saugvorgang gleichzeitig ausführen. 30
12. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 11, wobei die Saugöffnungen an einem inneren Bodenabschnitt der Abdeckeinheit (16, 17) und an einem Endabschnitt in der Längsrichtung davon ausgebildet sind. 35
13. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 11, wobei die Saugöffnungen dicht beieinander angeordnet sind. 40
14. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 12 oder 13, wobei ein Luftloch an einem inneren Bodenabschnitt der Abdeckeinheit (16, 17) und am anderen Endabschnitt in der Längsrichtung davon ausgebildet ist. 45
15. Tintenstrahlaufzeichnungsvorrichtung gemäß einem der Ansprüche 1 und 9 bis 14, wobei die Abdeckvorrichtung eine Mehrzahl von Abdeckeinheiten (16, 17) umfasst, wobei jede der Abdeckeinheiten eine Saugöffnung umfasst, welche mit dem jeweiligen Innenraum davon in Verbindung steht, und wobei jeder der Saugschläuche, welche mit den jeweiligen Saugöffnungen verbunden sind, einen Verbindungsabschnitt aufweist zum Zusammenschließen von Schläuchen, die mit den jeweiligen Saugpumpen, welche den Saugvorgang gleichzeitig ausführen, verbunden sind. 50
16. Tintenstrahlaufzeichnungsvorrichtung gemäß einem der Ansprüche 1 und 9 bis 15, wobei die Abdeckvorrichtung (12) eine Mehrzahl von Abdeckeinheiten (16, 17) umfasst, wobei jede der Abdeckeinheiten (16, 17) eine Saugöffnung umfasst, welche mit dem jeweiligen Innenraum davon in Verbindung steht, und wobei die Saugschläuche einen ersten Verbindungsabschnitt zum Zusammenschließen von Nebenschläuchen, welche mit den jeweiligen Saugöffnungen verbunden sind, und einen zweiten Verbindungsabschnitt umfassen, welcher mit dem ersten Verbindungsabschnitt zum Zusammenschließen von Nebenschläuchen verbunden ist, die mit den jeweiligen Saugpumpen, welche den Saugvorgang gleichzeitig ausführen, verbunden sind. 55
17. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 15 oder 16, wobei die Nebenschläuche, welche mit den jeweiligen Saugpumpen verbunden sind, im Wesentlichen dieselbe Länge aufweisen.
18. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 15 oder 16, wobei sich die Nebenschläuche, welche mit den jeweiligen Saugpumpen (30) verbunden sind, in der Länge voneinander unterscheiden.

19. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 15 oder 16, wobei sich die Nebenschläuche, welche mit den jeweiligen Saugpumpen (30) verbunden sind, im Innendurchmesser voneinander unterscheiden. 5
20. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 15 oder 16, wobei ein Ventilelement in wenigstens einem der Nebenschläuche, welche mit den jeweiligen Saugpumpen (30) verbunden sind, zum Öffnen/Schließen derselben vorgesehen ist. 10
21. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 15 oder 16, wobei ein veränderlicher Strömungswiderstand in wenigstens einem der Nebenschläuche, welche mit den jeweiligen Saugpumpen (30) verbunden sind, zum Verändern des Strömungswiderstands davon vorgesehen ist. 15
22. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 16, wobei sich die Nebenschläuche, welche mit den jeweiligen Saugöffnungen verbunden sind, in der Länge voneinander unterscheiden. 20
23. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 16, wobei sich die Nebenschläuche, welche mit den jeweiligen Saugöffnungen verbunden sind, im Innendurchmesser voneinander unterscheiden. 25
24. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 16, wobei die Nebenschläuche, welche mit den jeweiligen Saugöffnungen verbunden sind, und die Schläuche, welche mit den jeweiligen Saugpumpen (30) verbunden sind, aus verschiedenen Materialien hergestellt sind. 30
25. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 24, wobei die Nebenschläuche, welche mit den jeweiligen Saugöffnungen verbunden sind, aus einem Material mit hohen Gasbarriereigenschaften hergestellt sind. 35
26. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 9, wobei die Saugschläuche einen ersten Saugschlauch zum Verbinden der ersten Abdeckeinheit (16) und der ersten Saugpumpe (30) und einen zweiten Saugschlauch zum Verbinden der zweiten Abdeckeinheit (17) und der zweiten Saugpumpe (30) umfassen, welche sich in der Länge voneinander unterscheiden. 40
27. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 9, wobei die Saugschläuche einen ersten Saugschlauch zum Verbinden der ersten Abdeckeinheit (16) und der ersten Saugpumpe (30) und einen zweiten Saugschlauch zum Verbinden der zweiten Abdeckeinheit (17) und der zweiten Saugpumpe (30) umfassen, welche sich im Innendurchmesser voneinander unterscheiden. 45
28. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 22 oder 26, wobei der Aufzeichnungskopf, welcher durch die Abdeckeinheit (16, 17) mit kürzerem Saugschlauch abgedichtet ist, eine größere Anzahl der Düsenöffnungen aufweist. 50
29. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 22 oder 26, wobei der Aufzeichnungskopf, welcher durch die Abdeckeinheit (16, 17) mit dickerem Saugschlauch abgedichtet ist, eine größere Anzahl der Düsenöffnungen aufweist.
30. Tintenstrahlaufzeichnungsvorrichtung nach einem der Ansprüche 11 bis 14, wobei ein Ventilelement in wenigstens einem der Saugschläuche zum Öffnen/Schießen derselben vorgesehen ist.
31. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 11 bis 14, wobei ein veränderlicher Strömungswiderstand in wenigstens einem der Saugschläuche zum Verändern des Strömungswiderstands davon vorgesehen ist.
32. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 16, wobei ein Ventilelement in wenigstens einem der Nebenschläuche, welche mit den jeweiligen Saugöffnungen verbunden sind, zum Öffnen/Schließen derselben vorgesehen ist.
33. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 16, wobei ein veränderlicher Strömungswiderstand in wenigstens einem der Nebenschläuche, welche mit den jeweiligen Saugöffnungen verbunden sind, zum Verändern des Strömungswiderstands davon vorgesehen ist.
34. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 32, wobei der Nebenschlauch, in welchem das Ventilelement vorgesehen ist, mit einer Abdeckeinheit zum Abdichten eines Aufzeichnungskopfs mit einer verhältnismäßig kleineren Anzahl von Düsenöffnungen verbunden ist.
35. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 33, wobei der Nebenschlauch, in welchem der veränderliche Strömungswiderstand vorgesehen ist, mit einer Abdeckeinheit (16, 17) zum Abdichten eines Aufzeichnungskopfs mit einer verhältnismäßig kleineren Anzahl von Düsenöffnungen verbunden ist.
36. Tintenstrahlaufzeichnungsvorrichtung gemäß einem der Ansprüche 1, 9 bis 16, 22 bis 27 und 32 bis 35, wobei jede der Saugpumpen (30) umfasst:
- einen Rahmenkörper mit einer halbkreisförmigen

gen Haltefläche zum Tragen einer der Saugschläuche entlang davon;

einen Radkörper, welcher durch eine Antriebsquelle im Rahmenkörper gedreht wird; und

eine Mehrzahl von Walzen, welche an dem Radkörper zum Zusammendrücken des Saugschlauchs, der an der Haltefläche gehalten ist, drehbar vorgesehen sind;

wobei die Walzen die Saugschläuche so zusammendrücken, dass sie in der Drehrichtung des Radkörpers von der Saugpumpe zur Saugpumpe untereinander phasenverschoben werden.

37. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 36, wobei die mehreren Saugpumpen (30) aus einer ersten Saugpumpe und einer zweiten Saugpumpe bestehen, wobei die Rahmenkörper der ersten und zweiten Saugpumpen so aneinander befestigt sind, dass die Mittelachsen der Radkörper miteinander übereinstimmen, und wobei die Walzen die Saugschläuche so zusammendrücken, dass sie in der Drehrichtung des Radkörpers von der ersten Saugpumpe zur zweiten Saugpumpe untereinander um 90° phasenverschoben sind.
38. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 36 oder 37, wobei Auslässe der mehreren Saugpumpen (30) zu verschiedenen Abfalltintentanks geführt werden.
39. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 38, ferner umfassend: Mittel zum Zählen der Menge von Tinte, welche in die Abfalltintentanks fließt.
40. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 39, wobei das Zählmittel die Tintenmenge durch wahlweise Verwendung von Parametern, welche gemäß den jeweiligen Tintenabsaugbetriebsarten spezifiziert werden, zusammenzählt.
41. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 40, ferner umfassend: Mittel zum Anzeigen, ob die Tintenmenge, welche durch das Zählmittel gezählt wird, einen vorgegebenen Wert erreicht.
42. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 40, ferner umfassend: Mittel zum Ausschalten der Vorrichtung, wenn die Tintenmenge, welche durch das Zählmittel gezählt wird, einen vorgegebenen Wert erreicht.

43. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 38, wobei Abfallflüssigkeitsabsorptionselemente in den jeweiligen Abfalltintentanks im Wesentlichen dieselbe Größe aufweisen.

44. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 38, wobei sich Abfallflüssigkeitsabsorptionselemente, welche in den jeweiligen Abfalltintentanks angeordnet sind, in der Größe voneinander unterscheiden.

45. Tintenstrahlaufzeichnungsvorrichtung gemäß einem der Ansprüche 39 bis 44, wobei das Zählmittel für jeden der Abfalltintentanks vorgesehen ist.

46. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 9, ferner umfassend:

ein elastisches Wischblatt, welches gegen die mit Düsen ausgebildeten Flächen der ersten und zweiten Aufzeichnungsköpfe zum Wegwischen von Tinte, welche daran haftet, angrenzt; und

einen Abstandhalter, welcher so zwischen dem ersten und zweiten Aufzeichnungskopf angeordnet ist, dass er durch das Wischblatt berührt wird.

47. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 46, wobei der Abstandhalter aus einem wasserabsorbierenden Material hergestellt ist.

48. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 47, ferner umfassend:

einen Absorber, welcher aus einem wasserabsorbierenden Material hergestellt ist und so zwischen den ersten und zweiten Abdeckeinheiten angeordnet ist, dass er mit dem Abstandhalter in Kontakt gebracht wird, während die mit Düsen ausgebildeten Flächen der ersten und zweiten Aufzeichnungsköpfe durch die ersten und zweiten Abdeckeinheiten abgedichtet sind.

49. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 1, ferner umfassend:

einen Tintenbehälter zum Zuführen von Tinte über einen Kanal zum Aufzeichnungskopf;

ein Ventilelement, welches im Kanal vorgesehen ist, wobei das Ventilelement sich öffnet, wenn der negative Druck innerhalb des Innenraums der Abdeckeinheit genügend zugenommen hat;

wenigstens zwei Saugöffnungen, welche an der Abdeckeinheit so ausgebildet sind, dass sie voneinander beabstandet und über die Saugschläuche mit den jeweiligen Saugpumpen verbunden sind; und

5

Steuermittel zum Öffnen/Schließen des Ventilelements und zum entweder wahlweisen oder gleichzeitigen Steuern der Saugpumpen.

10

50. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 49, welche eine Mehrzahl von Tintenbehältern, Kanälen und Ventilelementen umfasst.

51. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 1, ferner umfassend:

15

einen Tintenbehälter zum Zuführen von Tinte über einen Kanal zum Aufzeichnungskopf;

20

ein erstes Ventilelement, welches im Kanal vorgesehen ist, wobei das Ventilelement sich öffnet, wenn der negative Druck innerhalb des Innenraums der Abdeckeinheit genügend zugenommen hat;

25

wenigstens zwei Saugöffnungen, welche an der Abdeckeinheit so ausgebildet sind, dass sie voneinander beabstandet und über die Saugschläuche mit den jeweiligen Saugpumpen verbunden sind;

30

ein zweites Ventilelement, welches in wenigstens einem der Saugschläuche vorgesehen ist; und

35

Steuermittel zum Öffnen/Schließen des zweiten Ventilelements und zum gleichzeitigen Steuern der Saugpumpen, während das erste Ventilelement geschlossen ist.

40

52. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 22 oder 26, wobei der Aufzeichnungskopf zum Ausstoßen von Tinte, welche für eine Zunahme der Viskosität am anfälligsten ist, durch die Abdeckeinheit mit kürzerem Saugschlauch abgedichtet ist.

45

53. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 22 oder 26, wobei der Aufzeichnungskopf zum Ausstoßen von Tinte, welche für eine Zunahme der Viskosität am anfälligsten ist, durch die Abdeckeinheit mit dickerem Saugschlauch abgedichtet ist.

50

54. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 32, wobei der Nebenschlauch, in welchem das Ventilelement vorgesehen ist, mit einer Ab-

55

deckeinheit zum Abdichten eines Aufzeichnungskopfs zum Ausstoßen von Tinte, welche für eine Zunahme der Viskosität am anfälligsten ist, verbunden ist.

55. Tintenstrahlaufzeichnungsvorrichtung gemäß Anspruch 33, wobei der Nebenschlauch, in welchem der veränderliche Strömungswiderstand vorgesehen ist, mit einer Abdeckeinheit zum Abdichten eines Aufzeichnungskopfs zum Ausstoßen von Tinte, welche für eine Zunahme der Viskosität am anfälligsten ist, verbunden ist.

56. Tintenstrahlaufzeichnungsvorrichtung gemäß einem der Ansprüche 49 bis 51, wobei die Saugöffnungen an einer Bodenfläche der Abdeckeinheit so ausgebildet sind, dass sie an beiden Enden einer Reihe von Düsenöffnungen zum Ausstoßen von Tinte, welche für eine Zunahme der Viskosität am anfälligsten ist, angeordnet sind, während die düsenbildende Fläche des Aufzeichnungskopfs durch die Abdeckeinheit abgedichtet ist.

Revendications

1. Appareil d'enregistrement à jets d'encre, comprenant ;

au moins une tête d'enregistrement (7, 8) montée sur un chariot (1) destiné à se déglacer alternativement dans la direction de la largeur d'une feuille d'enregistrement et ayant une face sur laquelle sont formés plusieurs orifices (7b) de buse,

un dispositif à capuchon (12) diaposé dans une région sans impression de la tête d'enregistrement (7, 8), le dispositif à capuchon (12) comportant au moins une unité à capuchon (16, 17) destinée à délimiter un espace interne et à fermer de manière étanche la face de la tête d'enregistrement au moins (7, 8) sur laquelle sont formés les orifices de buse (7b), et

une pluralité de pompes d'aspiration (30) destinées à appliquer une dépression à l'espace interne de l'unité à capuchon au moins (16, 17), le nombre de pompes d'aspiration (30) étant au moins égal au nombre d'unités à capuchon (16, 17) du dispositif à capuchon (12),

caractérisé en ce que

l'unité à capuchon au moins (16, 17) est associée à plusieurs pompes d'aspiration (30A, 30B) de la pluralité de pompes d'aspiration (30) de manière que chacune des pompes parmi lesdites plusieurs pompes d'aspiration (30A, 30B) soit destinée à appliquer la dépression à l'espace interne de l'unité à capuchon (16, 17).

2. Appareil d'enregistrement à jets d'encre selon la revendication 1, dans lequel une unité à capuchon

- (16 ; 109) possède un premier et un second orifice d'aspiration (18A, 18B ; 109e, 109f), le premier orifice d'aspiration (18A ; 109e) communiquant avec une première pompe d'aspiration (30A ; 110A) et le second orifice d'aspiration (18B ; 109f) communi-
quant avec une seconde pompe d'aspiration (30B ; 110B).
3. Appareil d'enregistrement à jets d'encre selon la revendication 2, dans lequel un organe obturateur (76A) ou un organe (76B) créant une résistance variable à la circulation est disposé dans un tube (110a, 110b) qui fait communiquer le premier orifice d'aspiration (109e) avec la première pompe d'aspiration (110A) et/ou le second orifice d'aspiration (109f) avec la seconde pompe d'aspiration (110B).
 4. Appareil d'enregistrement à jets d'encre selon la revendication 1, dans lequel une unité à capuchon (16) possède un orifice d'aspiration (18) raccordé à une bifurcation, et dans lequel une première et une seconde pompe d'aspiration (30A, 30B) sont raccordées à la bifurcation.
 5. Appareil d'enregistrement à jets d'encre selon la revendication 4, dans lequel un organe obturateur (76A) ou un organe (76B) créant une résistance variable à la circulation est disposé dans un tube (32, 33) qui fait communiquer la bifurcation avec la première pompe d'aspiration (30A) et/ou la bifurcation avec la seconde pompe d'aspiration (30B).
 6. Appareil d'enregistrement à jets d'encre selon la revendication 1, dans lequel deux unités à capuchon (16, 17) sont incorporées, chaque unité à capuchon (16, 17) possédant un orifice d'aspiration (18, 19) raccordé à une jonction commune, dans lequel la jonction commune est raccordée à une bifurcation, et dans lequel une première et une seconde pompe d'aspiration (30A, 30B) sont raccordées à la bifurcation.
 7. Appareil d'enregistrement à jets d'encre selon la revendication 6, dans lequel un organe obturateur (76A) ou un organe (76B) créant une résistance variable à la circulation est disposé dans un tube (72, 73) qui fait communiquer un premier orifice d'aspiration (18) avec la jonction commune et/ou un second orifice d'aspiration (19) avec la jonction commune.
 8. Appareil d'enregistrement à jets d'encre selon la revendication 6, dans lequel un organe obturateur (76A) ou un organe (76B) créant une résistance variable à la circulation est incorporé à un tube (32, 33) qui fait communiquer la bifurcation avec la première pompe d'aspiration (30A) et/ou la bifurcation avec la seconde pompe d'aspiration (30B).
 9. Appareil d'enregistrement à jets d'encre selon la revendication 1, dans lequel une première tête d'enregistrement (7) et une seconde tête d'enregistrement (8) sont montées sur le chariot (1),
dans lequel le dispositif à capuchon (12) comporte une première unité à capuchon (16) et une seconde unité à capuchon (17) destinées respectivement à la première tête (7) et à la seconde tête (8) d'enregistrement, et
dans lequel les pompes d'aspiration parmi lesdites plusieurs pompes (30) comportent une première pompe d'aspiration et une seconde pompe d'aspiration destinées à appliquer une dépression par rapport aux première et seconde unités à capuchon (16, 17) respectivement.
 10. Appareil d'enregistrement à jets d'encre selon la revendication 1 ou 9, dans lequel les pompes respectives d'aspiration (30) coopèrent avec une source motrice unique.
 11. Appareil d'enregistrement à jets d'encre selon l'une quelconque des revendications 1, 9 et 10, dans lequel l'unité à capuchon (16, 17) comporte une pluralité d'orifices d'aspiration qui communiquent respectivement avec l'espace interne et raccordés aux pompes respectives d'aspiration (30) par les tubes d'aspiration, et
dans lequel les pompes respectives d'aspiration (30) exécutent l'opération d'aspiration simultanément.
 12. Appareil d'enregistrement à jets d'encre selon la revendication 11, dans lequel les orifices d'aspiration sont formés dans une partie inférieure interne de l'unité à capuchon (16, 17) et à une première extrémité dans sa direction longitudinale.
 13. Appareil d'enregistrement à jets d'encre selon la revendication 11, dans lequel les orifices d'aspiration sont disposés très près les uns des autres.
 14. Appareil d'enregistrement à jets d'encre selon la revendication 12 ou 13, dans lequel un trou d'air est formé dans une partie inférieure interne de l'unité à capuchon (16, 17) et à l'autre partie d'extrémité dans sa direction longitudinale.
 15. Appareil d'enregistrement à jets d'encre selon l'une quelconque des revendications 1 et 9 à 14, dans lequel le dispositif à capuchon comporte plusieurs unités à capuchon (16, 17),
dans lequel chacune des unités à capuchon comporte un orifice d'aspiration qui communique avec l'espace interne respectif, et
dans lequel chacun des tubes d'aspiration raccordés aux orifices respectifs d'aspiration possède une partie de jonction destinée à combiner

des tubes raccordés aux pompes respectives d'aspiration qui exécutent simultanément l'opération d'aspiration.

16. Appareil d'enregistrement à jets d'encre selon l'une quelconque des revendications 1 et 9 à 15, dans lequel le dispositif à capuchon (12) comporte une pluralité d'unités à capuchon (16, 17),
dans lequel chacune des unités à capuchon (16, 17) comporte un orifice d'aspiration communiquant avec l'espace interne respectif, et
dans lequel les tubes d'aspiration comportent une première partie de jonction destinée à combiner les tubes auxiliaires raccordés aux orifices respectifs d'aspiration et une seconde partie de jonction raccordée à la première partie de jonction et destinée à combiner les tubes auxiliaires raccordés aux pompes respectives d'aspiration qui exécutent simultanément l'opération d'aspiration.
17. Appareil d'enregistrement à jets d'encre selon la revendication 15 ou 16, dans lequel les tubes auxiliaires raccordés aux pompes respectives d'aspiration ont pratiquement la même longueur.
18. Appareil d'enregistrement à jets d'encre selon la revendication 15 ou 16, dans lequel les tubes auxiliaires raccordés aux pompes d'aspiration respectives (30) ont des longueurs différentes.
19. Appareil d'enregistrement à jets d'encre selon la revendication 15 ou 16, dans lequel les tubes auxiliaires raccordés aux pompes respectives d'aspiration (30) ont des diamètres internes différents.
20. Appareil d'enregistrement à jets d'encre selon la revendication 15 ou 16, dans lequel un organe obturateur est placé dans l'un au moins des tubes auxiliaires raccordés aux pompes respectives d'aspiration (30) afin qu'ils soient ouverts-fermés.
21. Appareil d'enregistrement à jets d'encre selon la revendication 15 ou 16, dans lequel un organe créant une résistance variable à la circulation est placé dans l'un au moins des tubes auxiliaires raccordés aux pompes respectives d'aspiration (30) afin qu'il en fasse varier la résistance à la circulation.
22. Appareil d'enregistrement à jets d'encre selon la revendication 16, dans lequel les tubes auxiliaires raccordés aux orifices respectifs d'aspiration ont des longueurs qui diffèrent mutuellement.
23. Appareil d'enregistrement à jets d'encre selon la revendication 16, dans lequel les tubes auxiliaires raccordés aux orifices respectifs d'aspiration diffèrent par leur diamètre interne.

24. Appareil d'enregistrement à jets d'encre selon la revendication 16, dans lequel les tubes auxiliaires raccordés aux orifices respectifs d'aspiration et les tubes raccordés aux pompes respectives d'aspiration (30) sont formés de matériaux différents.
25. Appareil d'enregistrement à jets d'encre selon la revendication 24, dans lequel les tubes auxiliaires raccordés aux orifices respectifs d'aspiration sont formés d'un matériau ayant des caractéristiques élevées d'arrêt de gaz.
26. Appareil d'enregistrement à jets d'encre selon la revendication 9, dans lequel les tubes d'aspiration comportent un premier tube d'aspiration destiné à raccorder la première unité à capuchon (16) et la première pompe d'aspiration (30), et un second tube d'aspiration destiné à raccorder la seconde unité à capuchon (17) et la seconde pompe d'aspiration (30), qui diffèrent mutuellement par leur longueur.
27. Appareil d'enregistrement à jets d'encre selon la revendication 9, dans lequel les tubes d'aspiration comportent un premier tube d'aspiration destiné à raccorder la première unité à capuchon (16) et la première pompe d'aspiration (30), et un second tube d'aspiration destiné à raccorder la seconde unité à capuchon (17) et la seconde pompe d'aspiration (30), qui diffèrent par leur diamètre interne.
28. Appareil d'enregistrement à jets d'encre selon la revendication 22 ou 26, dans lequel la tête d'enregistrement, qui est fermée de manière étanche par l'unité à capuchon (16, 17) qui a un tube d'aspiration relativement court, possède un plus grand nombre d'orifices de buse.
29. Appareil d'enregistrement à jets d'encre selon la revendication 22 ou 26, dans lequel la tête d'enregistrement, qui est fermée de manière étanche par l'unité à capuchon (16, 17) qui a un tube d'aspiration relativement épais, possède un plus grand nombre d'orifices de buse.
30. Appareil d'enregistrement à jets d'encre selon l'une quelconque des revendications 11 à 14, dans lequel un organe obturateur est disposé dans l'un au moins des tubes d'aspiration afin que ceux-ci soient ouverts-fermés.
31. Appareil d'enregistrement à jets d'encre selon l'une quelconque des revendications 11 à 14, dans lequel un organe créant une résistance variable à la circulation est incorporé à l'un au moins des tubes d'aspiration afin qu'il en fasse varier la résistance à la circulation.
32. Appareil d'enregistrement à jets d'encre selon la re-

vendication 16, dans lequel un organe obturateur est disposé dans l'un au moins des tubes auxiliaires raccordés aux orifices respectifs d'aspiration afin que ceux-ci soient ouverts-fermés.

33. Appareil d'enregistrement à jets d'encre selon la revendication 16, dans lequel un organe créant une résistance variable à la circulation est disposé dans l'un au moins des tubes auxiliaires raccordés aux orifices respectifs d'aspiration afin qu'il en fasse varier la résistance à la circulation.

34. Appareil d'enregistrement à jets d'encre selon la revendication 32, dans lequel le tube auxiliaire dans lequel est placé l'organe obturateur est raccordé à une unité à capuchon destinée à fermer de manière étanche une tête d'enregistrement ayant un nombre relativement petit d'orifices de buse.

35. Appareil d'enregistrement à jets d'encre selon la revendication 33, dans lequel le tube auxiliaire dans lequel est disposé l'organe créant une résistance variable à la circulation est raccordé à une unité à capuchon (16, 17) destinée à fermer de manière étanche une tête d'enregistrement ayant un nombre relativement petit d'orifices de buse.

36. Appareil d'enregistrement à jets d'encre selon l'une quelconque des revendications 1, 9 à 16, 22 à 27 et 32 à 35, dans lequel chacune des pompes d'aspiration (30) comporte :

un corps de châssis possédant une face de support en demi-cercle, destiné à supporter sur sa longueur l'un des tubes d'aspiration, un corps de roue entraîné en rotation par la source motrice dans le corps de châssis, et plusieurs rouleaux disposés afin qu'ils tournent sur le corps de roue et destinés à serrer le tube d'aspiration supporté par la surface de support,

dans lequel les rouleaux serrent les tubes d'aspiration afin qu'ils soient déphasés dans la direction de rotation du corps de roue l'un par rapport à l'autre, de la pompe d'aspiration à la pompe d'aspiration.

37. Appareil d'enregistrement à jets d'encre selon la revendication 36, dans lequel les pompes parmi lesdites plusieurs pompes d'aspiration (30) sont composées d'une première pompe d'aspiration et d'une seconde pompe d'aspiration,

dans lequel les corps de châssis des première et seconde pompes d'aspiration sont fixés mutuellement afin que l'axe central des corps de roue coïncident mutuellement, et

dans lequel les rouleaux serrent les tubes d'aspiration afin qu'ils soient déphasés de 90° dans

la direction de rotation du corps de roue l'un par rapport à l'autre, de la première pompe d'aspiration à la seconde pompe d'aspiration.

38. Appareil d'enregistrement à jets d'encre selon la revendication 36 ou 37, dans lequel les matières sorties desdites plusieurs pompes d'aspiration (30) sont conduites à des réservoirs différents d'encre usée.

39. Appareil d'enregistrement à jets d'encre selon la revendication 38, comprenant en outre un dispositif de comptage de la quantité d'encre qui circule vers les réservoirs d'encre usée.

40. Appareil d'enregistrement à jets d'encre selon la revendication 39, dans lequel le dispositif de comptage compte de façon cumulée la quantité d'encre par utilisation sélective de paramètres spécifiés suivant les modes respectifs d'opérations d'aspiration d'encre.

41. Appareil d'enregistrement à jets d'encre selon la revendication 40, comprenant en outre un dispositif destiné à indiquer si la quantité d'encre comptée par le dispositif de comptage atteint une valeur prédéterminée.

42. Appareil d'enregistrement à jets d'encre selon la revendication 40, comprenant en outre un dispositif de désactivation de l'appareil lorsque la quantité d'encre comptée par le dispositif de comptage atteint une valeur prédéterminée.

43. Appareil d'enregistrement à jets d'encre selon la revendication 38, dans lequel les organes d'absorption de fluides usés disposés dans les réservoirs respectifs d'encre usée ont pratiquement la même dimension.

44. Appareil d'enregistrement à jets d'encre selon la revendication 38, dans lequel les organes d'absorption de fluides usés disposés dans les réservoirs respectifs d'encre usée diffèrent par la dimension.

45. Appareil d'enregistrement à jets d'encre selon l'une quelconque des revendications 38 à 44, dans lequel le dispositif de comptage est présent pour chacun des réservoirs d'encre usée.

46. Appareil d'enregistrement à jets d'encre selon la revendication 9, comprenant en outre :

une lame élastique d'essuyage qui est en butée contre les faces ayant les buses et appartenant aux première et seconde têtes d'enregistrement afin que l'encre qui adhère à celles-ci soit entraînée par essuyage, et

une entretoise disposée entre les première et seconde têtes d'enregistrement afin qu'elle puisse être touchée par la lame d'essuyage.

47. Appareil d'enregistrement à jets d'encre selon la revendication 46, dans lequel l'entretoise est formée d'un matériau absorbant l'eau. 5

48. Appareil d'enregistrement à jets d'encre selon la revendication 47, comprenant en outre : 10

un absorbeur formé d'un matériau absorbant l'eau et disposé entre les première et seconde unités à capuchon afin qu'il soit mis au contact de l'entretoise alors que les faces ayant les buses et appartenant aux première et seconde têtes d'enregistrement sont formées de manière étanche par les première et seconde unités à capuchon. 15

49. Appareil d'enregistrement à jets d'encre selon la revendication 1, comprenant en outre 20

un réservoir d'encre destiné à transmettre de l'encre à la tête d'enregistrement par l'intermédiaire d'un canal, 25
un organe obturateur placé dans le canal, l'organe obturateur étant ouvert lorsque la dépression est suffisamment accumulée dans l'espace interne de l'unité à capuchon, 30
au moins deux orifices d'aspiration fermés sur l'unité à capuchon afin qu'ils soient espacés mutuellement et raccordés aux pompes respectives d'aspiration par les tubes d'aspiration, et 35
un dispositif de commande destiné à ouvrir-fermer l'organe obturateur et à entraîner les pompes d'aspiration soit sélectivement soit simultanément. 40

50. Appareil d'enregistrement à jets d'encre selon la revendication 49, qui comprend plusieurs réservoirs d'encre, canaux et organes obturateurs. 45

51. Appareil d'enregistrement à jets d'encre selon la revendication 1, comprenant en outre : 45

un réservoir de transmission d'encre à la tête d'enregistrement par l'intermédiaire d'un canal, 50
un premier organe obturateur placé dans le canal, l'organe obturateur étant ouvert lorsque la dépression est suffisamment accumulée dans l'espace interne de l'unité à capuchon, 55
au moins deux orifices d'aspiration formés sur l'unité à capuchon afin qu'ils soient distante l'un de l'autre et raccordés aux pompes respectives d'aspiration par les tubes d'aspiration,
un second organe obturateur placé dans l'un

au moins des tubes d'aspiration, et
un dispositif de commande destiné à ouvrir-fermer le second organe obturateur et à entraîner simultanément les pompes d'aspiration lorsque le premier organe obturateur est fermé.

52. Appareil d'enregistrement à jets d'encre selon la revendication 22 ou 26, dans lequel la tête d'enregistrement destinée à projeter l'encre la plus susceptible de présenter une augmentation de viscosité est fermée de manière étanche par l'unité à capuchon ayant un tube d'aspiration relativement court.

53. Appareil d'enregistrement à jets d'encre selon la revendication 22 ou 26, dans lequel la tête d'enregistrement destinée à projeter l'encre la plus susceptible de présenter une augmentation de viscosité est fermée de manière étanche par l'unité à capuchon ayant le tube d'aspiration relativement épais.

54. Appareil d'enregistrement à jets d'encre selon la revendication 32, dans lequel le tube auxiliaire dans lequel est disposé l'organe obturateur est raccordé à une unité à capuchon destinée à fermer de manière étanche une tête d'enregistrement destinée à projeter l'encre la plus susceptible de présenter une augmentation de viscosité.

55. Appareil d'enregistrement à jets d'encre selon la revendication 33, dans lequel le tube auxiliaire dans lequel est disposé l'organe créant une résistance variable à la circulation est raccordé à une unité à capuchon destinée à fermer de manière étanche une tête d'enregistrement destinée à projeter l'encre la plus susceptible de présenter une augmentation de viscosité.

56. Appareil d'enregistrement à jets d'encre selon l'une quelconque des revendications 49 à 51, dans lequel des orifices d'aspiration sont formés à une face inférieure de l'unité à capuchon afin qu'ils se trouvent aux deux extrémités d'une rangée d'orifices de buse destinés à projeter l'encre la plus susceptible de présenter une augmentation de viscosité lorsque la face formant les buses dans la tête d'enregistrement est fermée de manière étanche par l'unité à capuchon.

FIG. 1

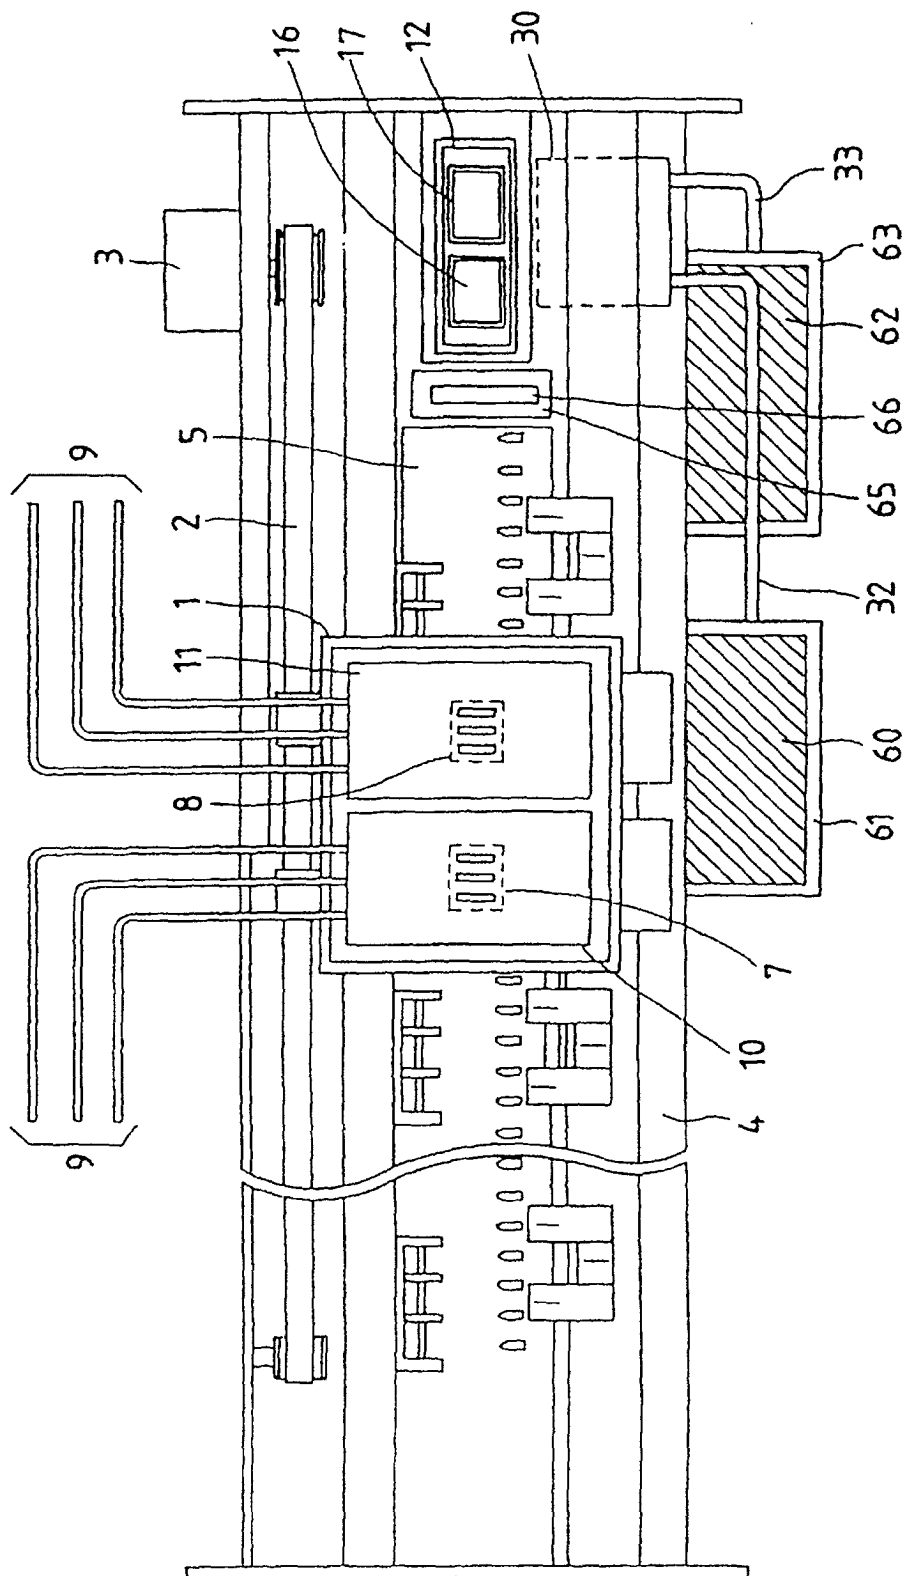


FIG. 2

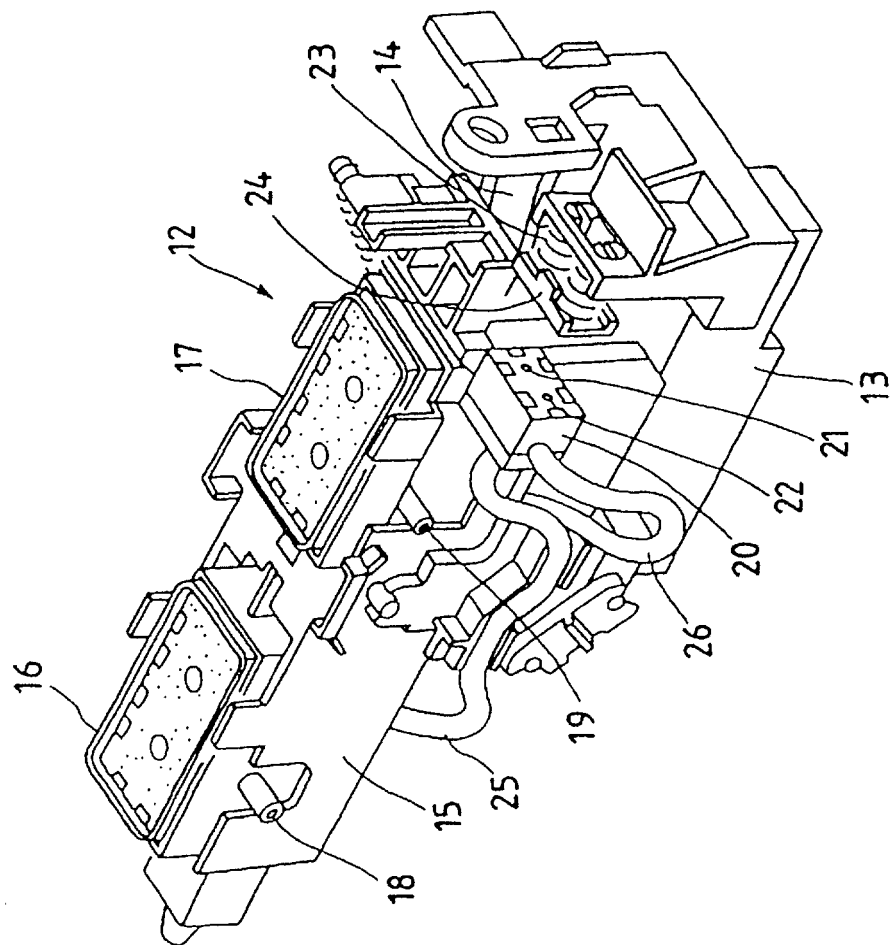


FIG. 3

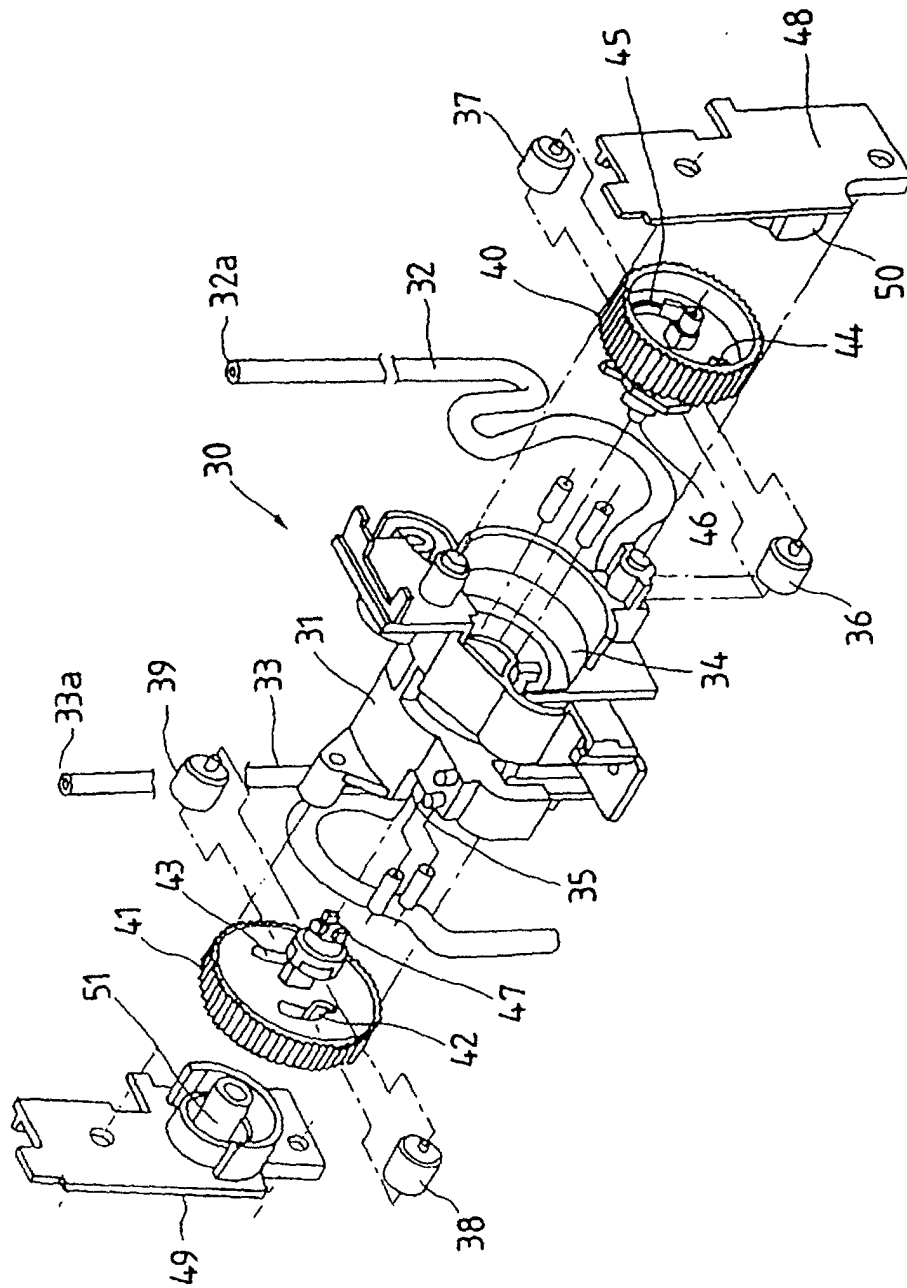


FIG. 4

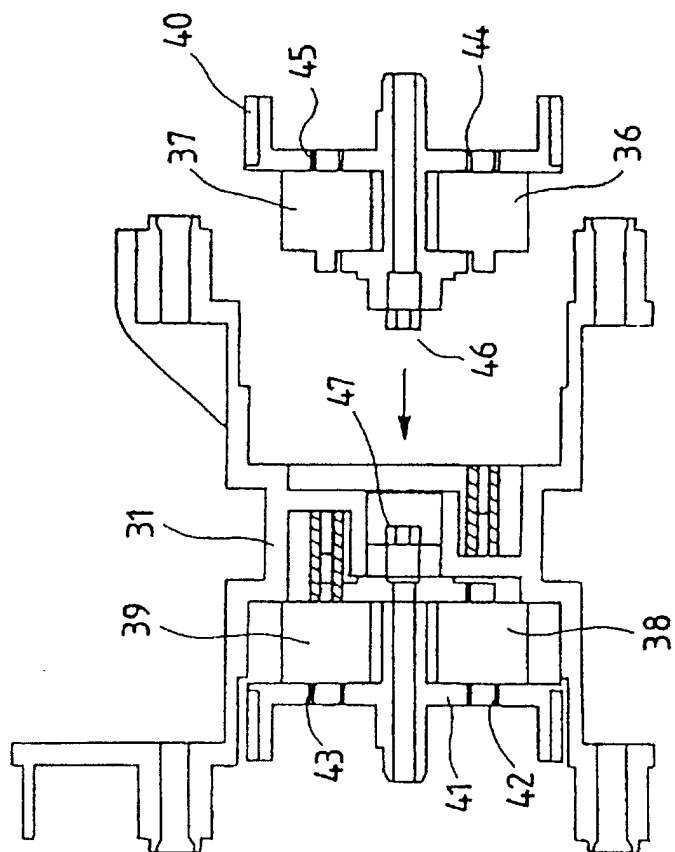


FIG. 5B

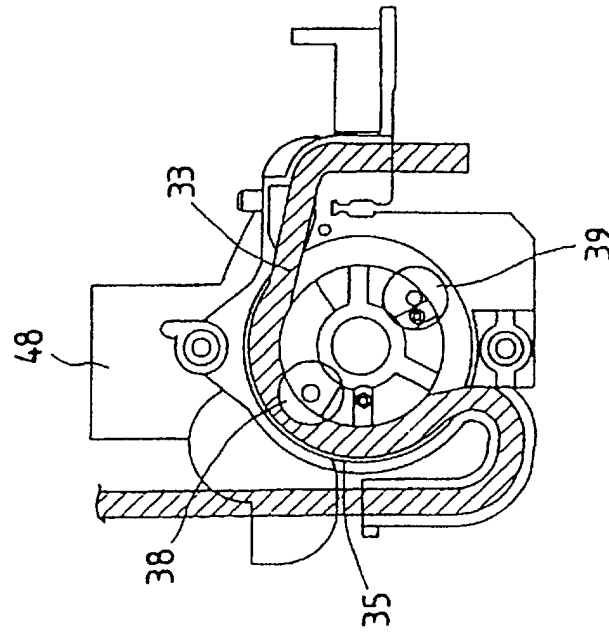


FIG. 5A

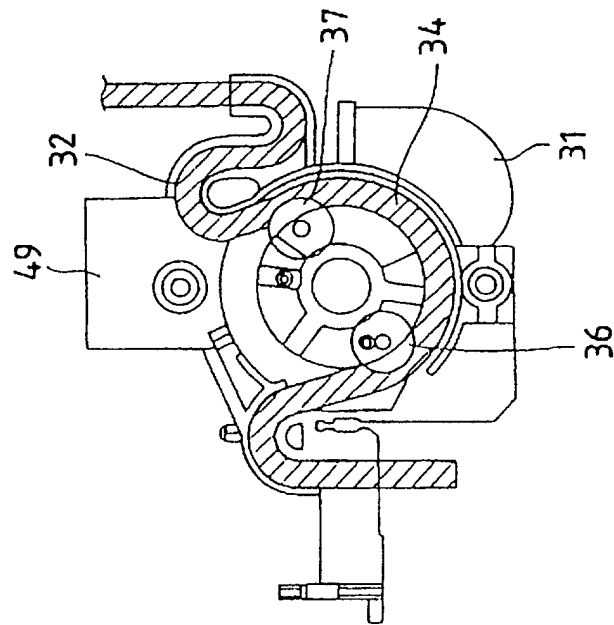


FIG. 6A

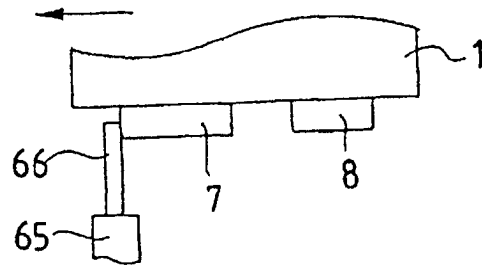


FIG. 6B

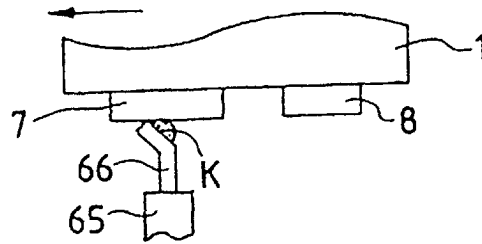


FIG. 6C

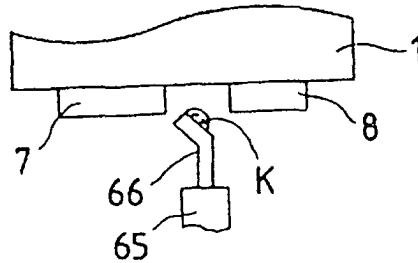


FIG. 6D

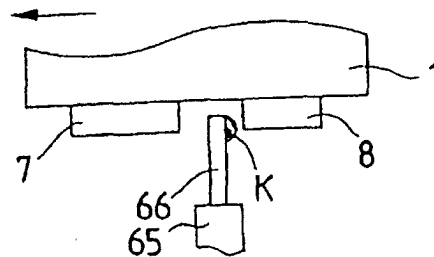


FIG. 6E

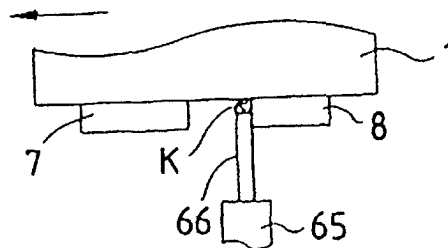


FIG. 6F

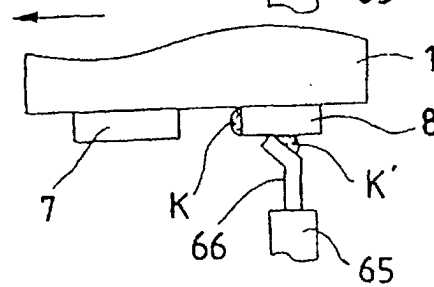


FIG. 7

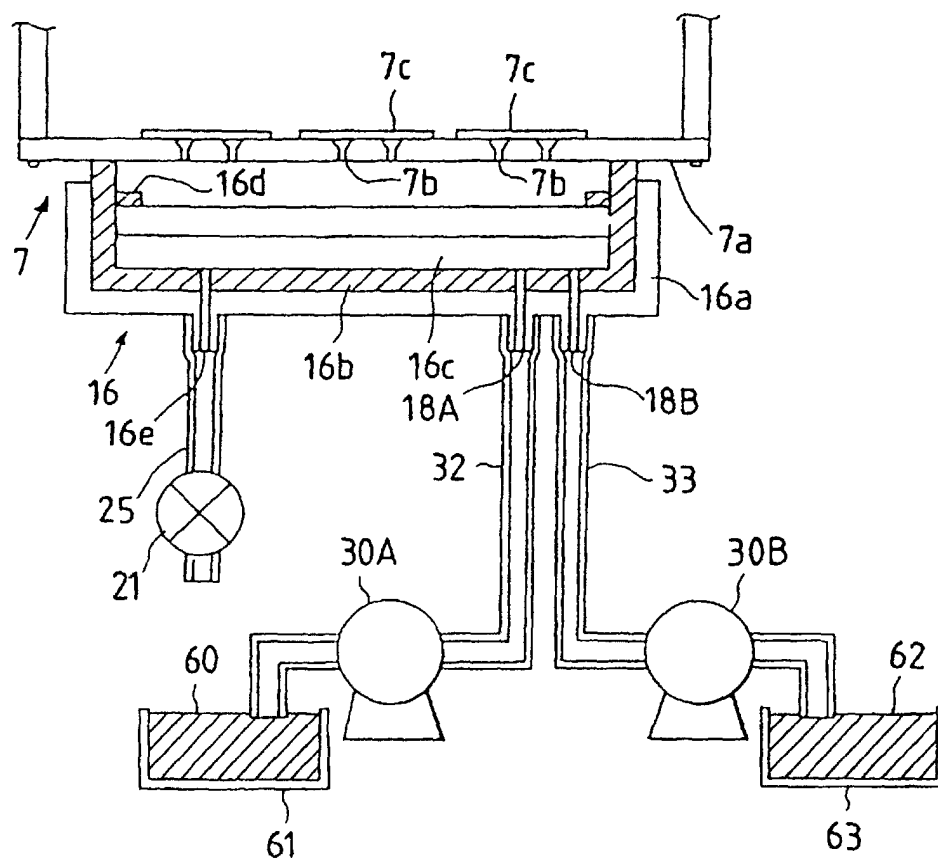


FIG. 8

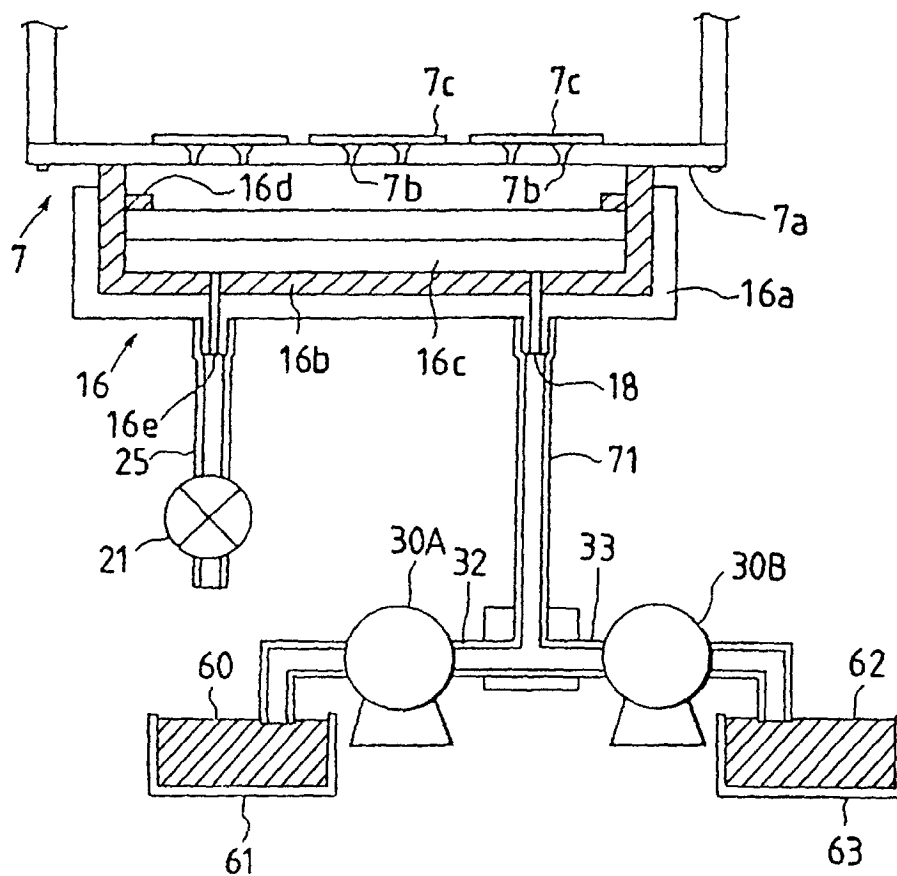


FIG. 9

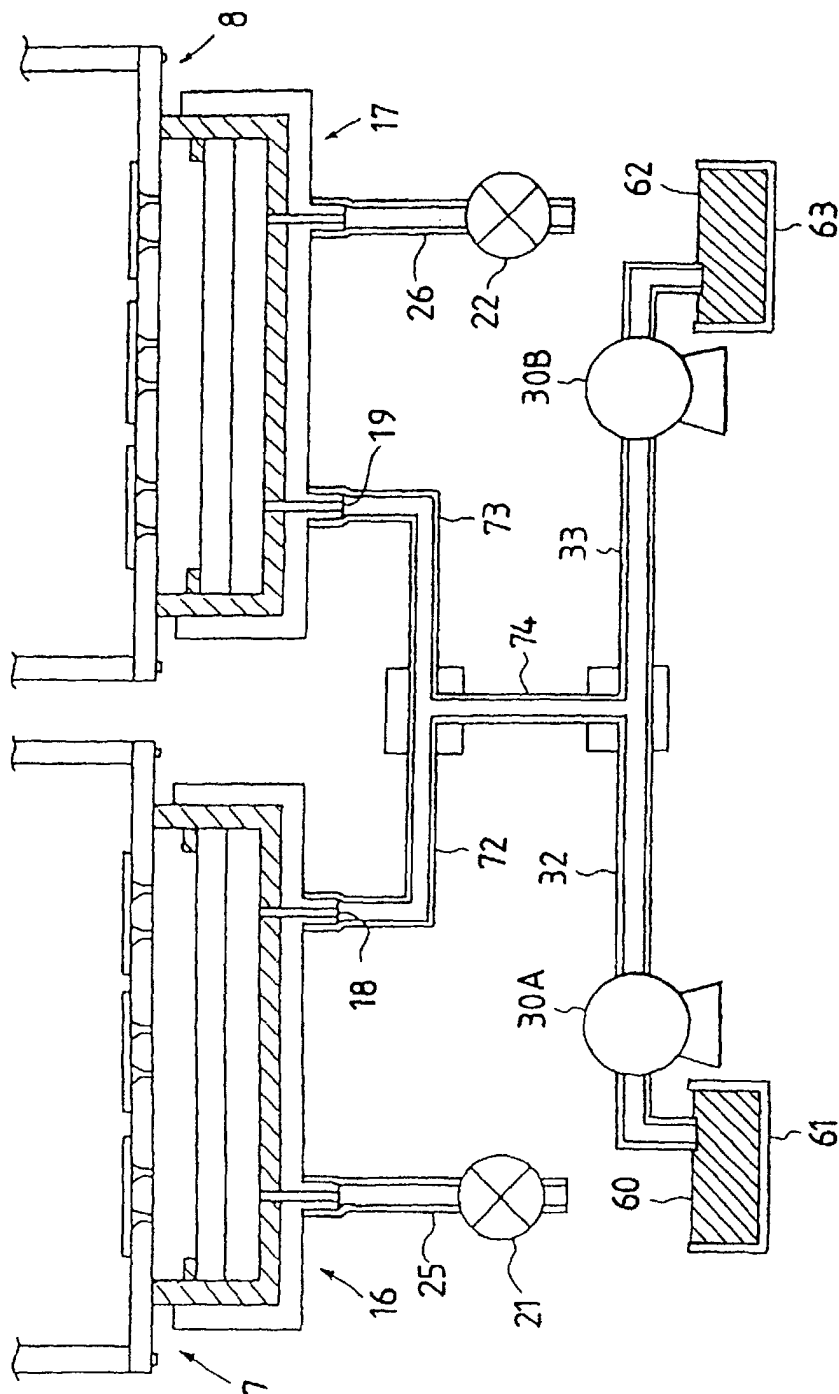


FIG. 10

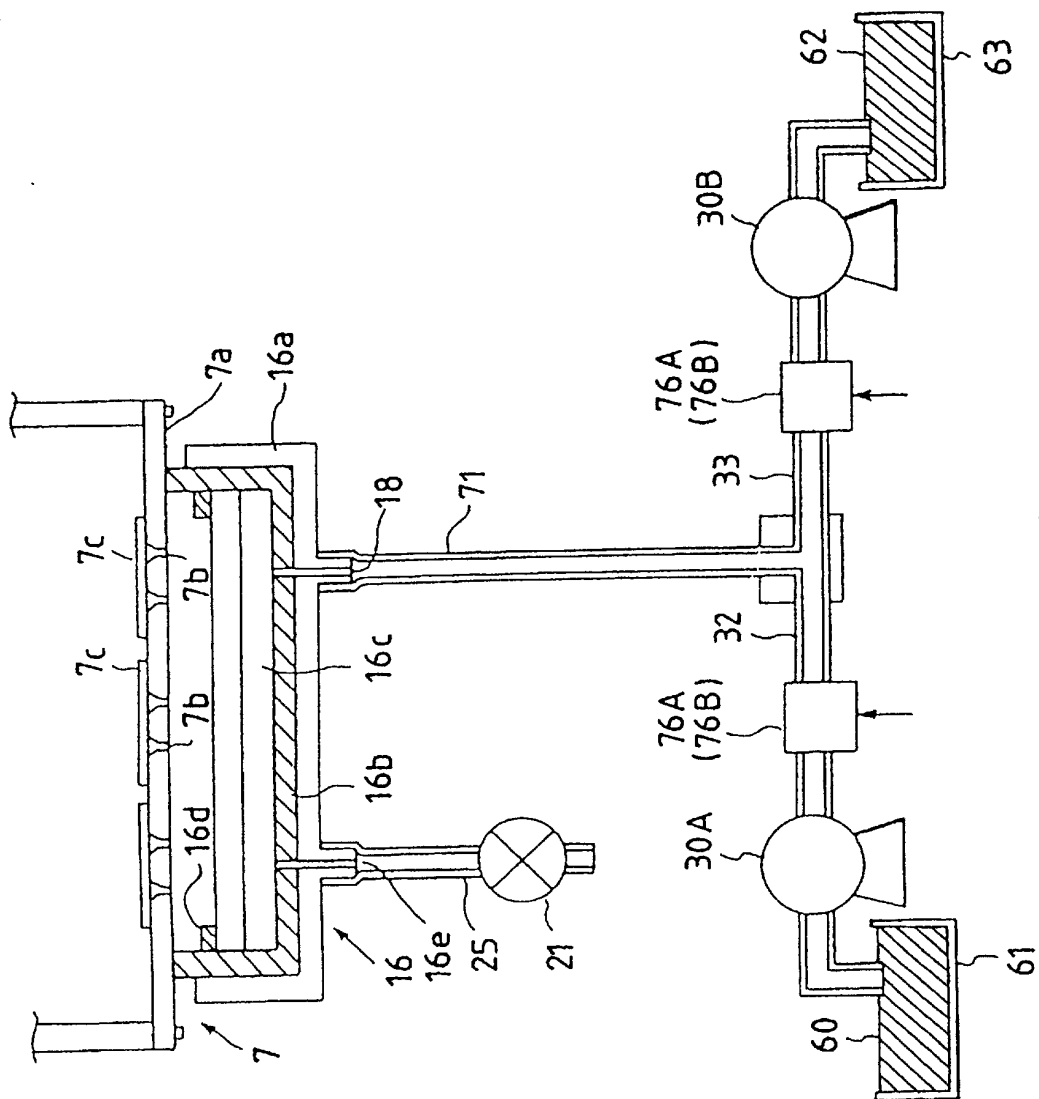


FIG. 11

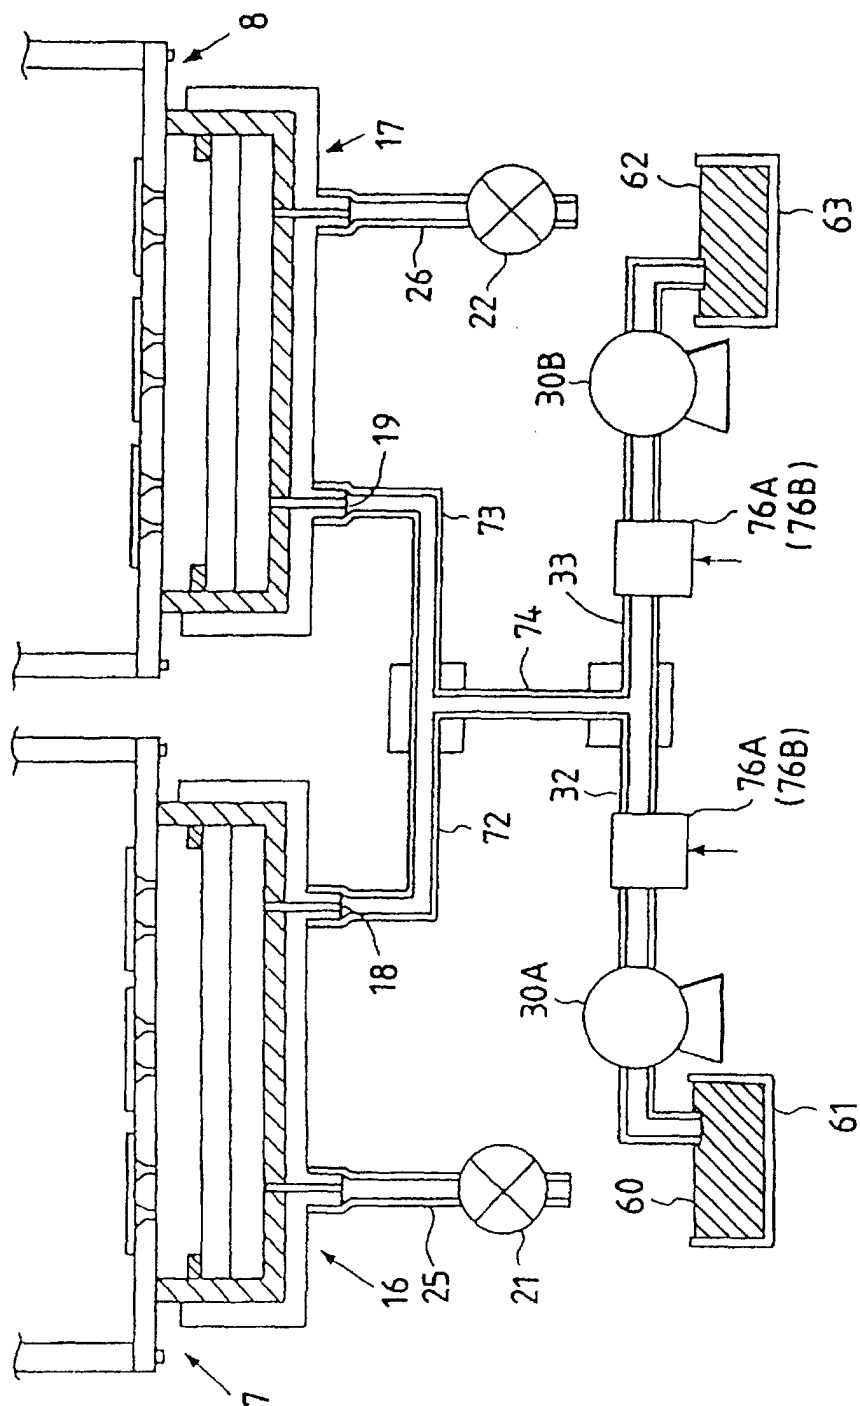


FIG. 12

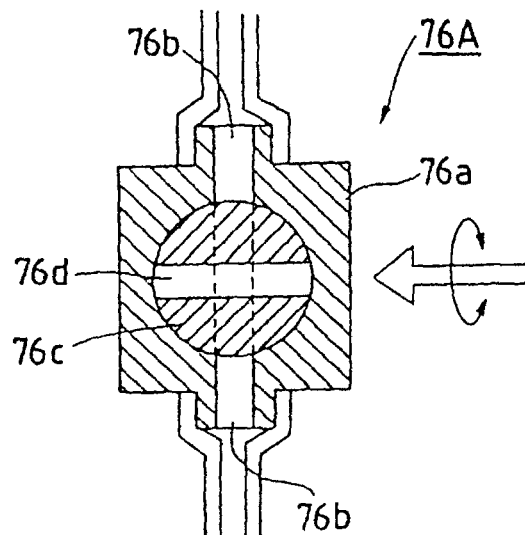


FIG. 13

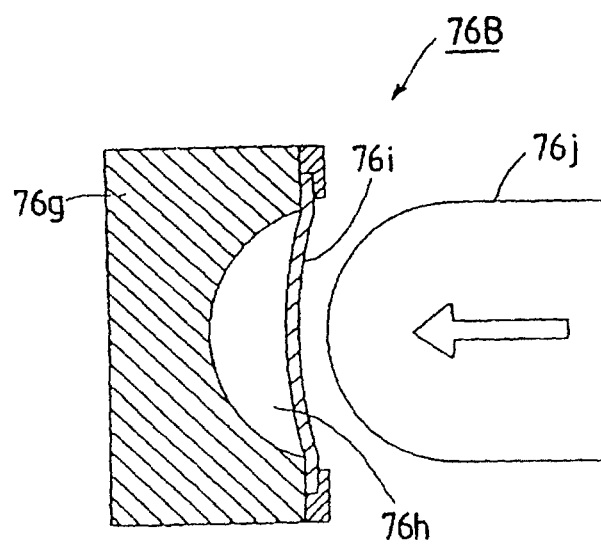


FIG. 14

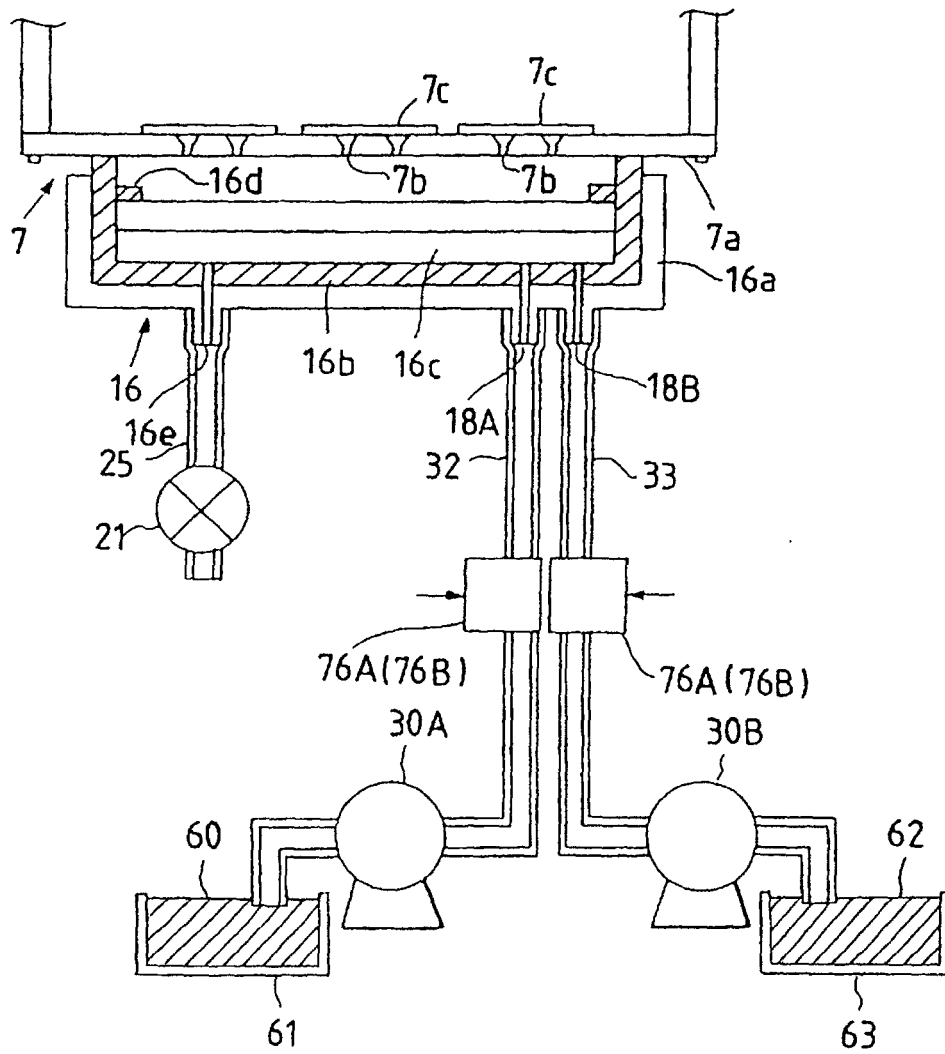


FIG. 15

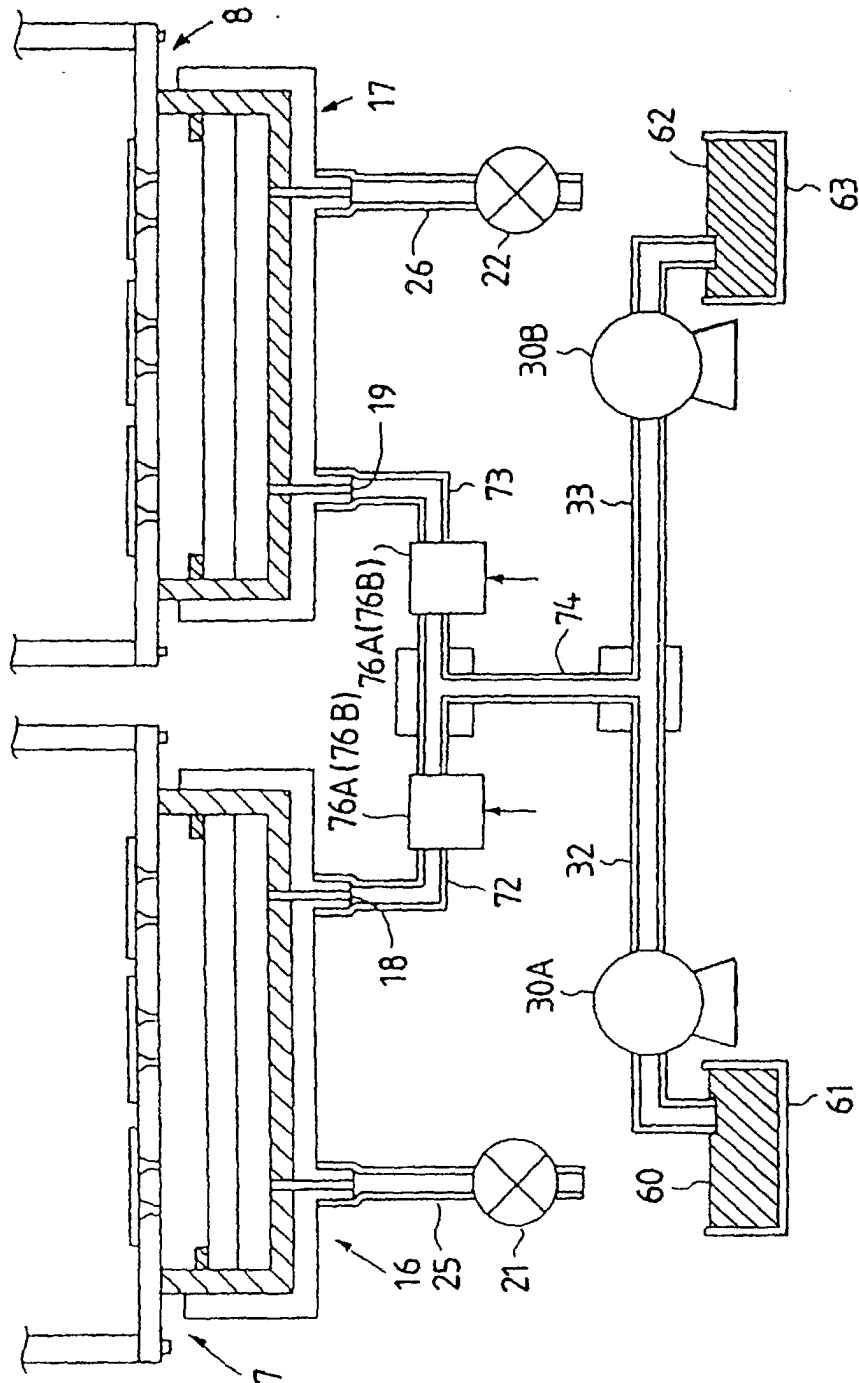


FIG. 16

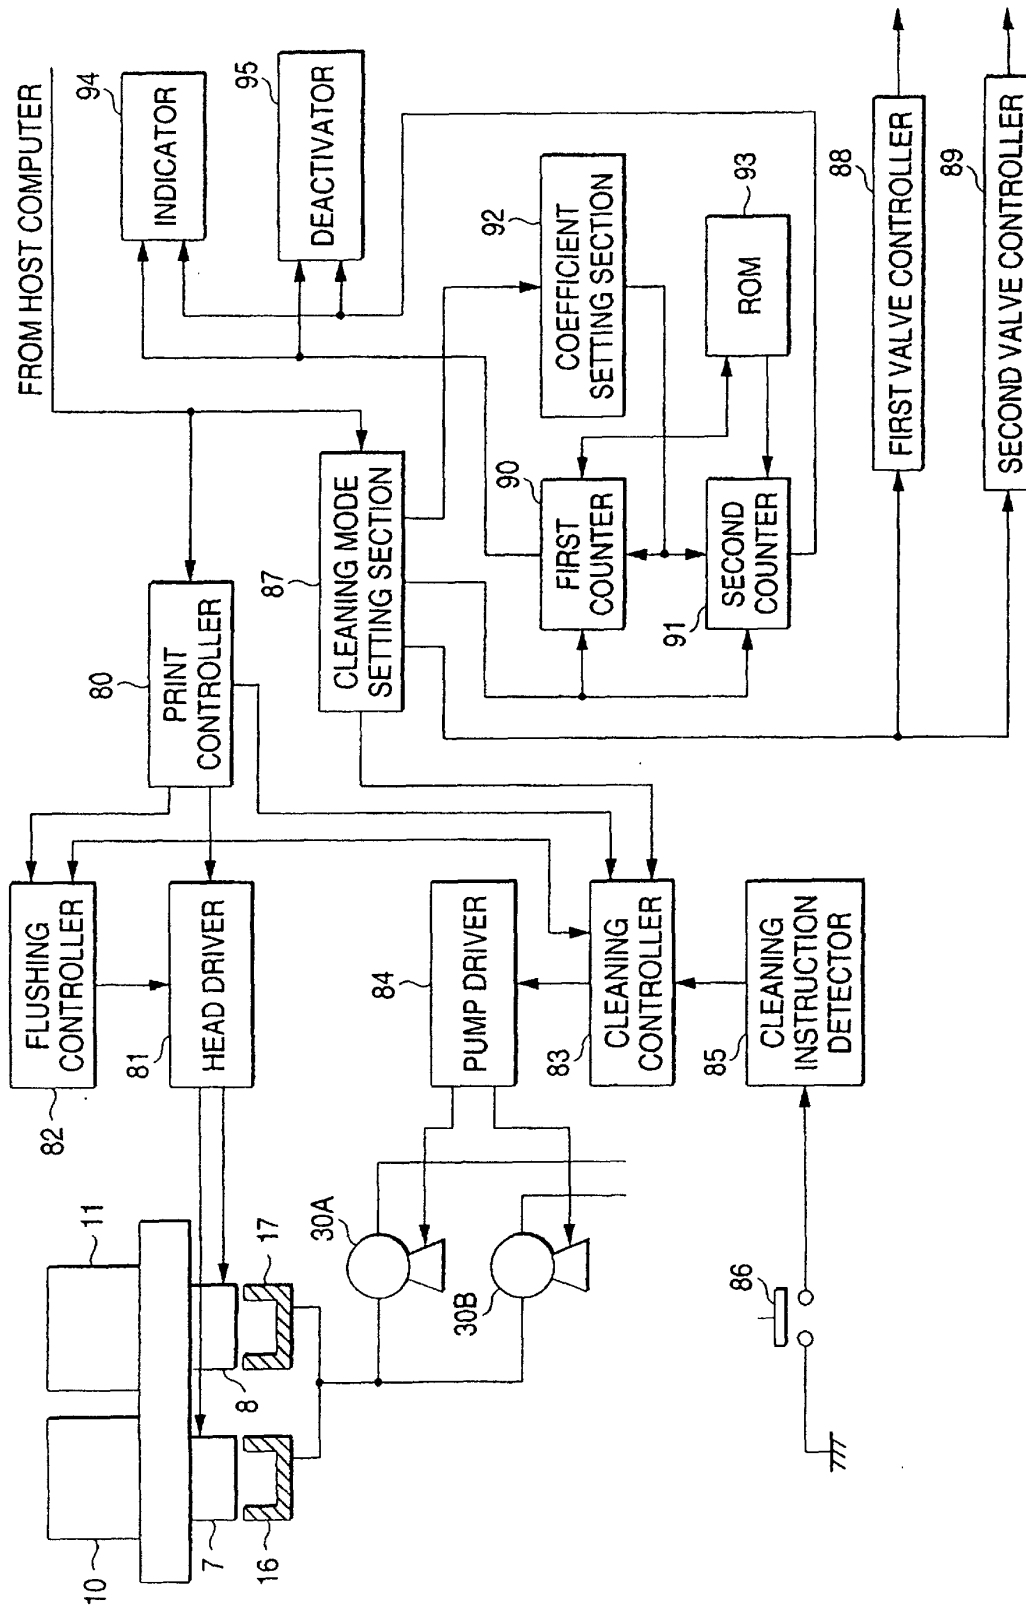


FIG. 17A

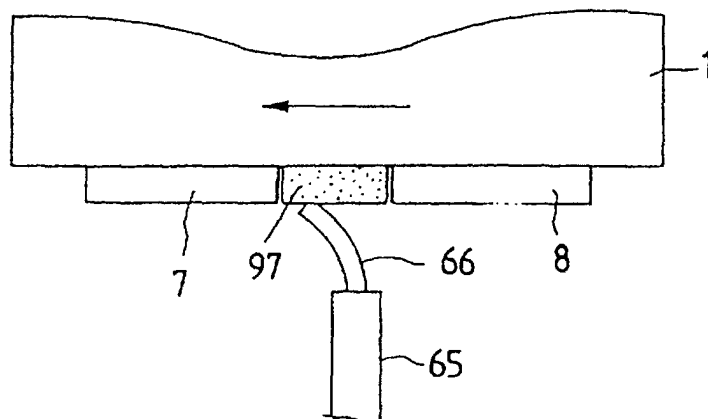


FIG. 17B

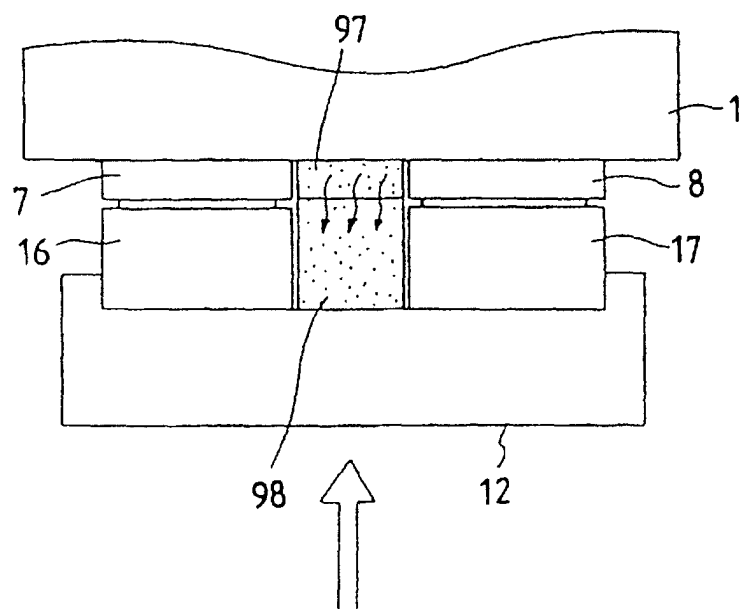


FIG. 18

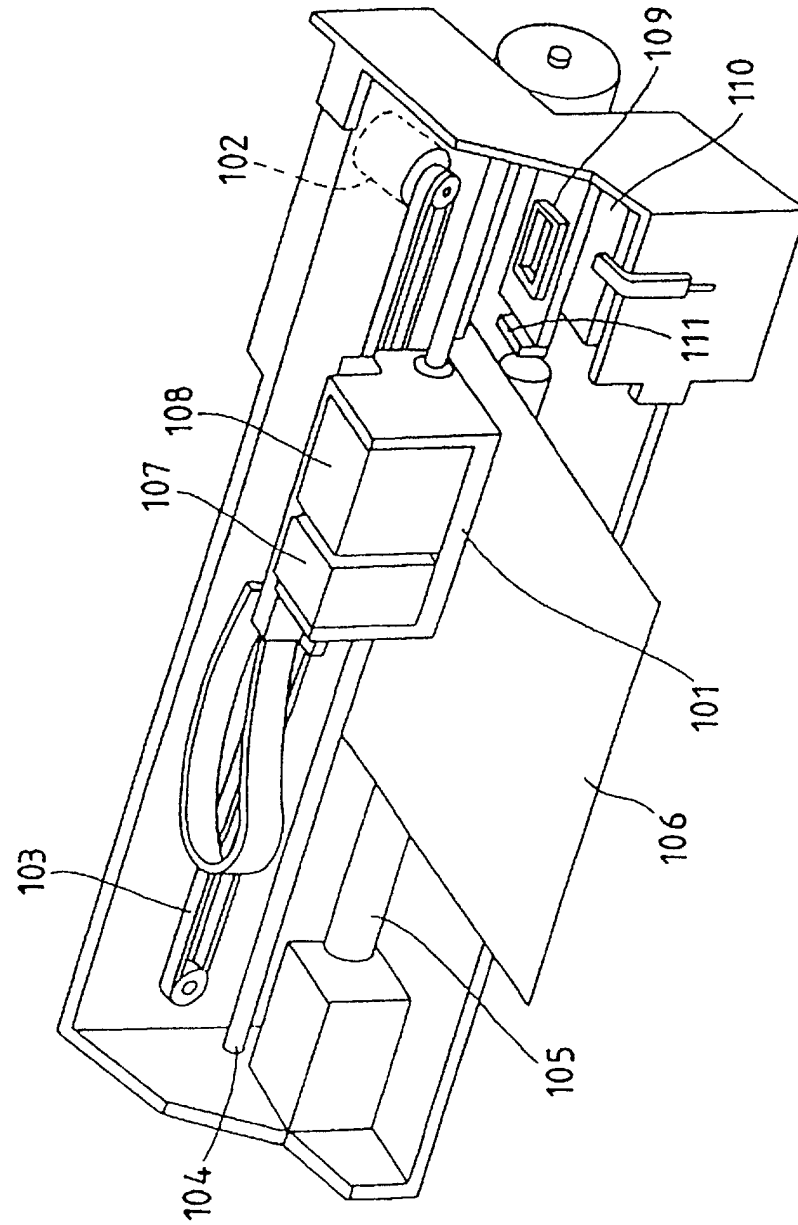


FIG. 19B

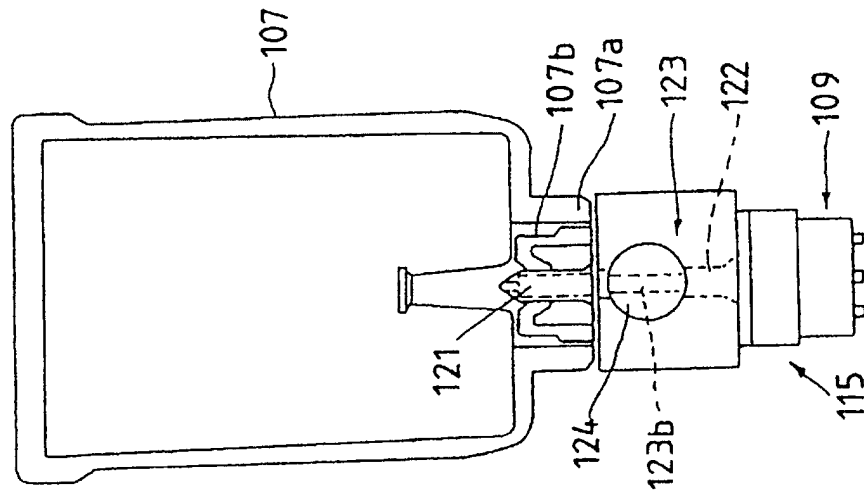


FIG. 19A

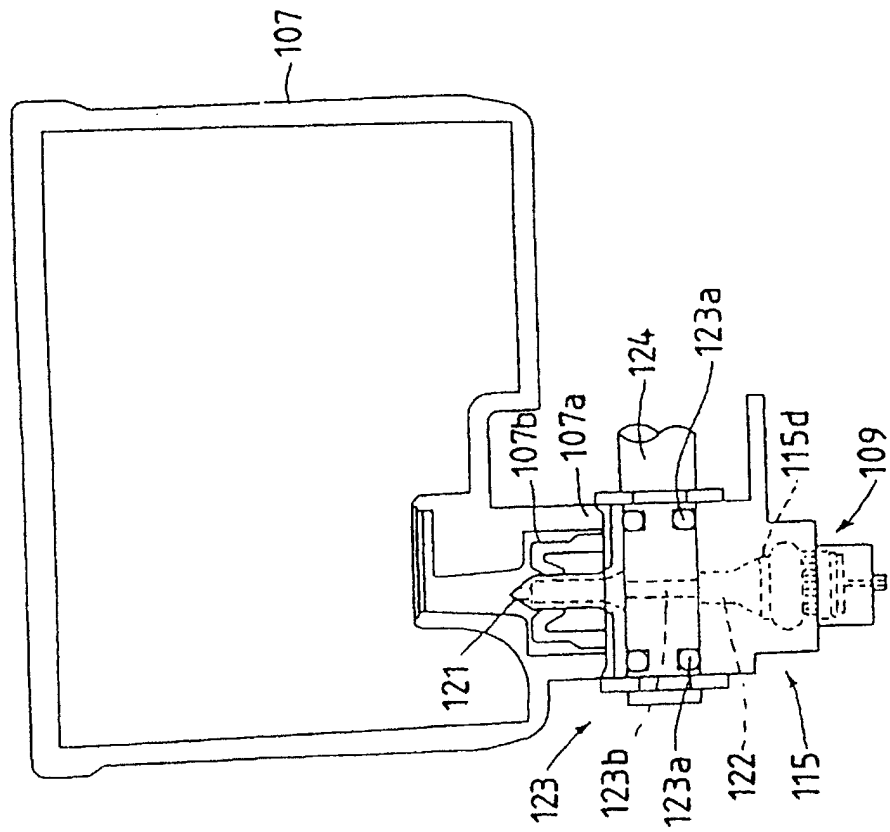


FIG. 20

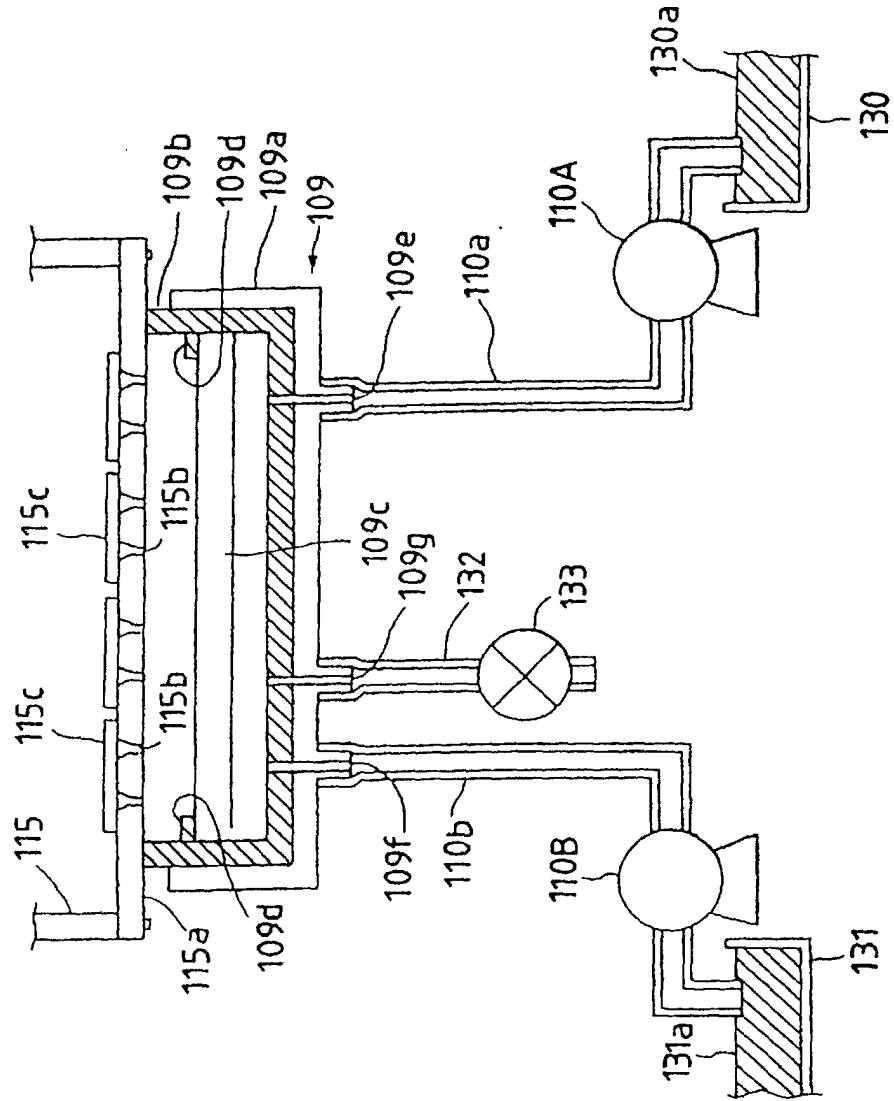


FIG. 21

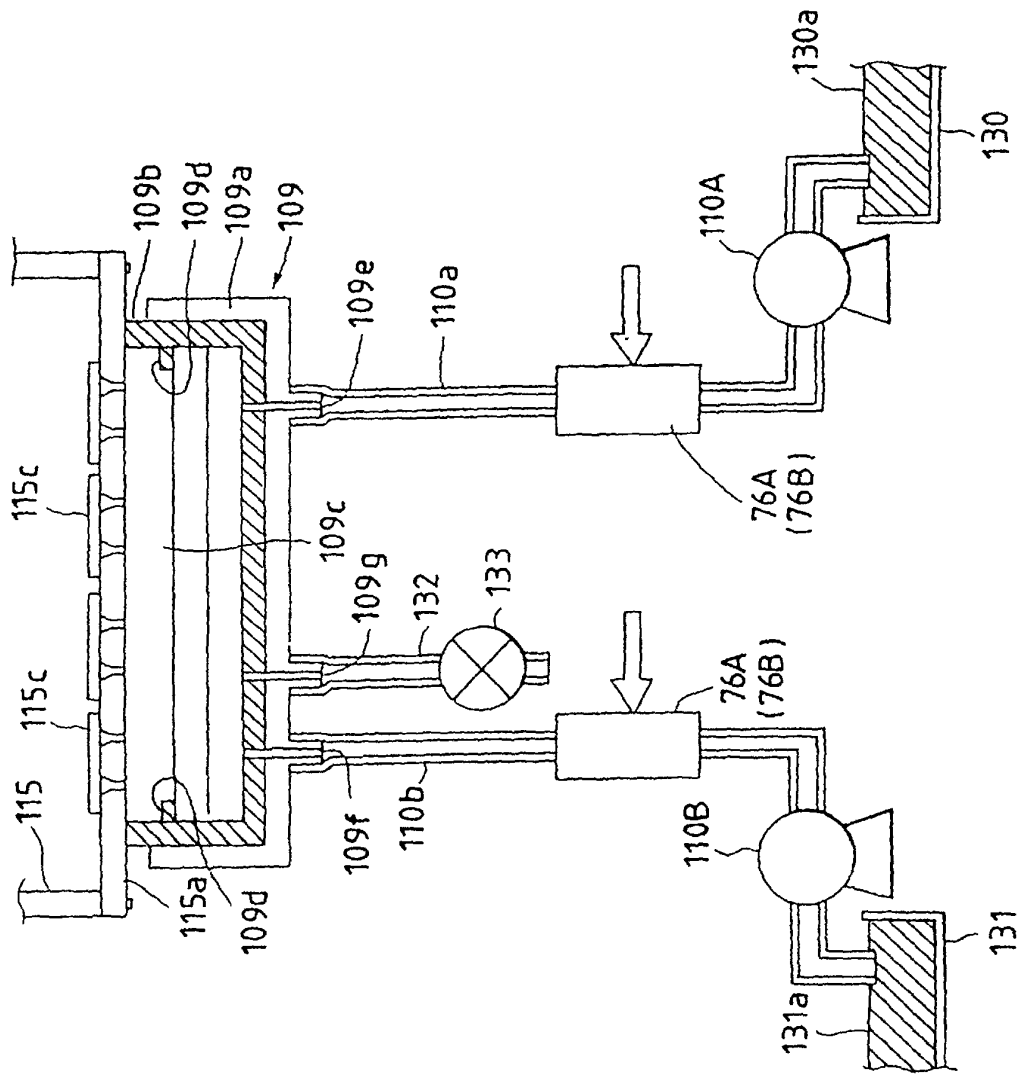


FIG. 22

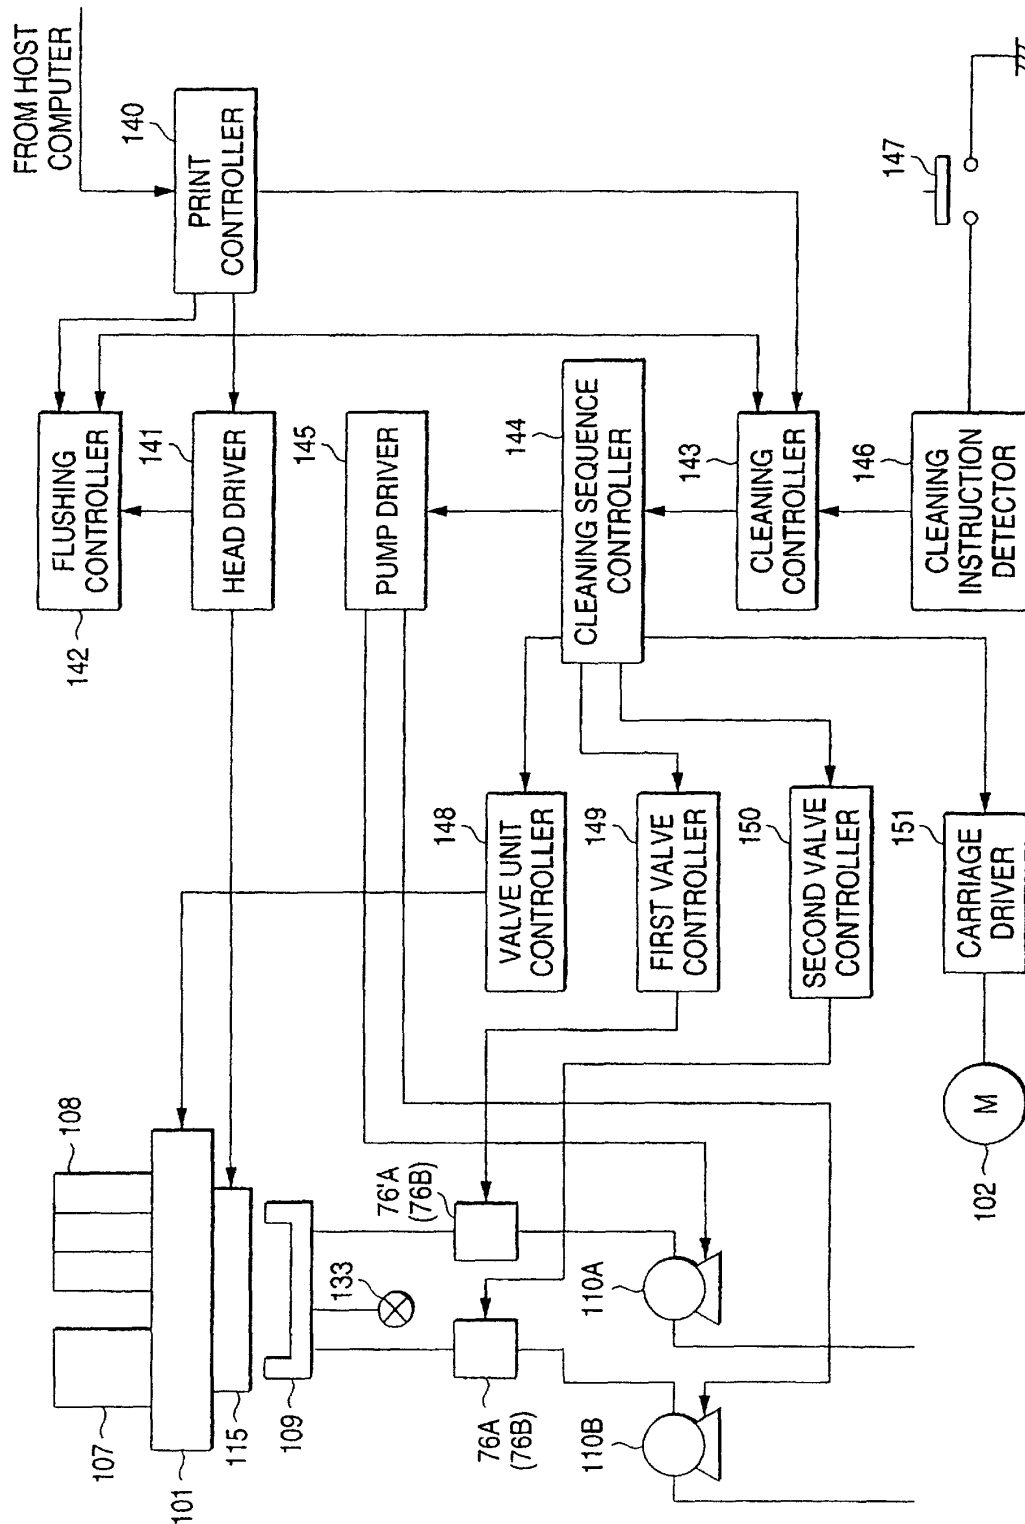


FIG. 23

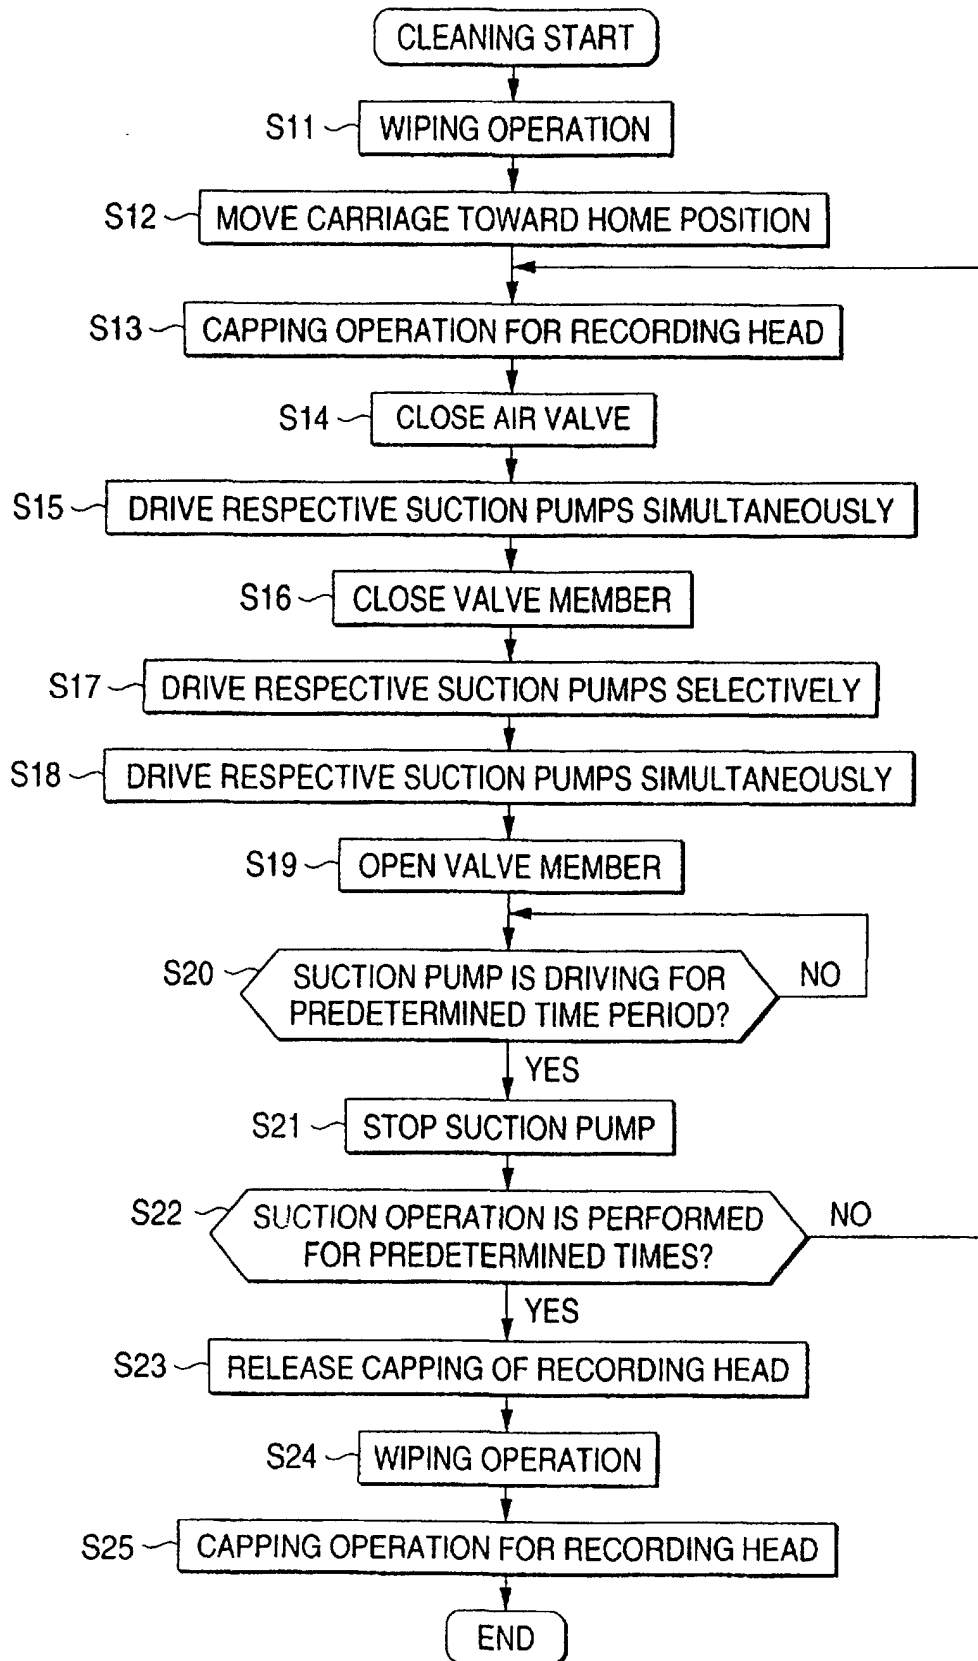


FIG. 24

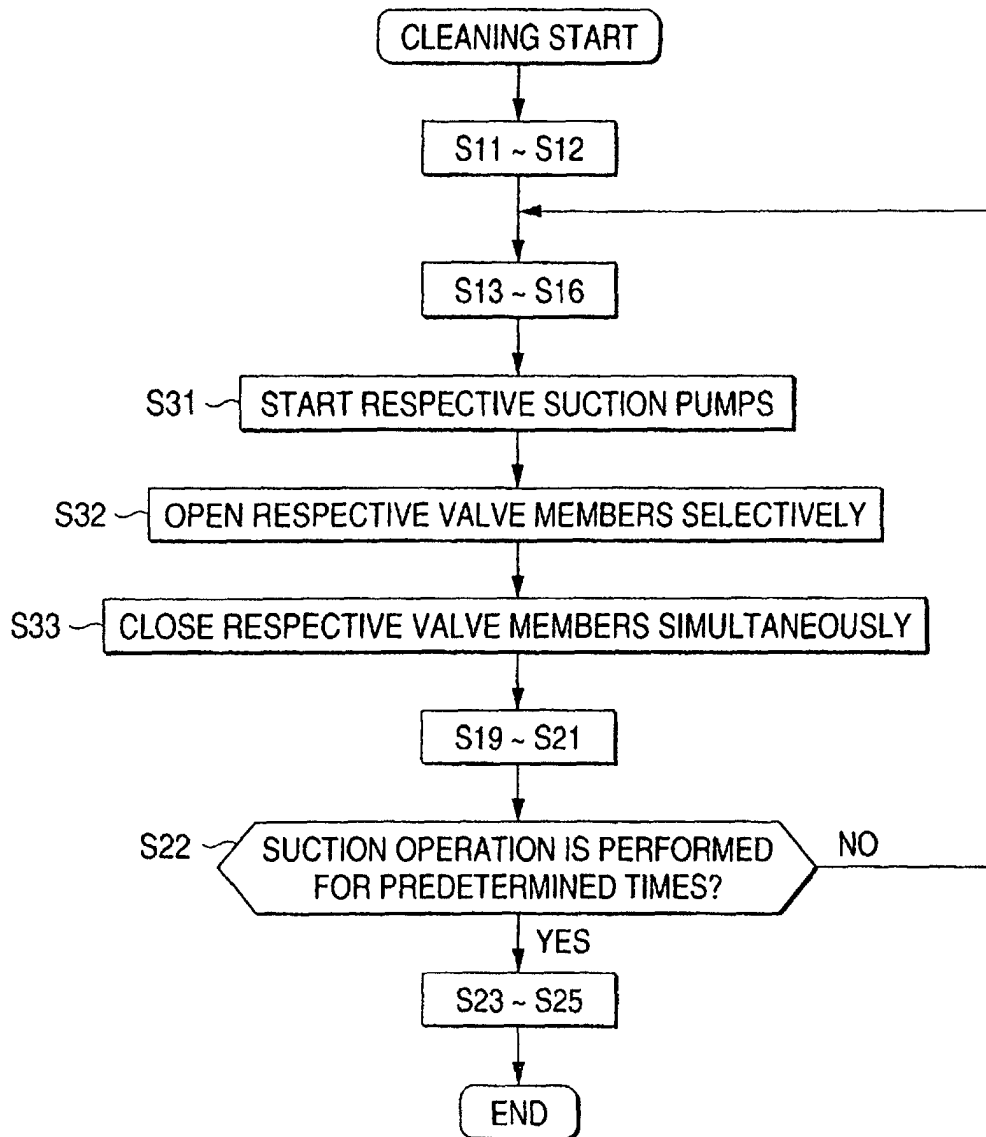


FIG. 25A

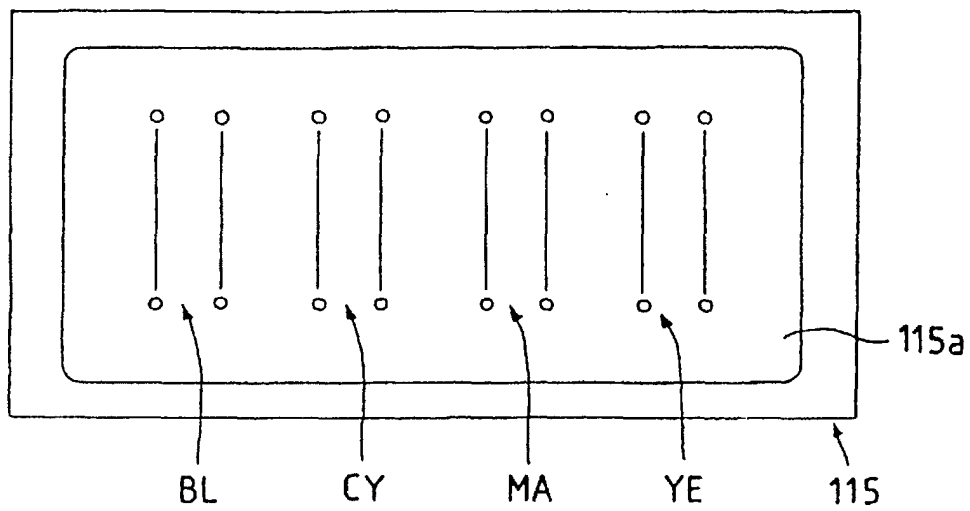


FIG. 25B

