



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 0 989 401 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**

Note: Bibliography reflects the latest situation

(15) Correction information:  
**Corrected version no 1 (W1 A2)**  
**INID code(s) 30**

(51) Int Cl.7: **G01N 30/12, G01N 31/12**

(48) Corrigendum issued on:  
**10.11.2004 Bulletin 2004/46**

(43) Date of publication:  
**29.03.2000 Bulletin 2000/13**

(21) Application number: **99830552.8**

(22) Date of filing: **06.09.1999**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**

(30) Priority: **23.09.1998 IT BS980068**


(71) Applicant: **Eurovector S.p.A.**  
**20144 Milano (IT)**

(72) Inventors:  
• **Boursier Niutta, Stefano**  
**80121 Napoli (IT)**  
• **Sisti, Leonardo**  
**27050 Redavalle (Pavia) (IT)**

(74) Representative: **Crippa, Paolo Ernesto**  
**Jacobacci & Partners S.p.A.,**  
**Piazzale Arnaldo, 2**  
**25121 Brescia (IT)**

(54) **Method and devices for improving the flash dynamic combustion reaction for the elemental analysis of C H N S O**

(57) A method and device are provided for flash dynamic combustion reaction connected with gas chromatography for the elemental analysis of C H N S O in an automatic elemental analyzer. A combustion reactor (11) is provided with a sampling device (10) and an oxygen metering (14) support line. Controlled volumes of oxygen are admitted with the oxygen metering support line into the combustion reactor depending on the sample for the complete combustion thereof. A pneumatic circuit (13) is provided, in which the oxygen feed line converges and creates a continuous flow of a carrier gas that is able to carry the oxygen to the reactor and the gases of the combustion through the reactor, then through a gas chromatographic analyzer (12), and after their separation, into a heat-conductivity sensor. An electronic apparatus with a data processor (16) is provided for controlling the process systems. The difference in the pressure of the gas upstream and downstream of is restriction is determined. The electronic pressure regulator or flow regulator of the reference carrier gas and at least one carrier gas outlet valve, which is also used as washing, is inserted on is carrier gas reference line.

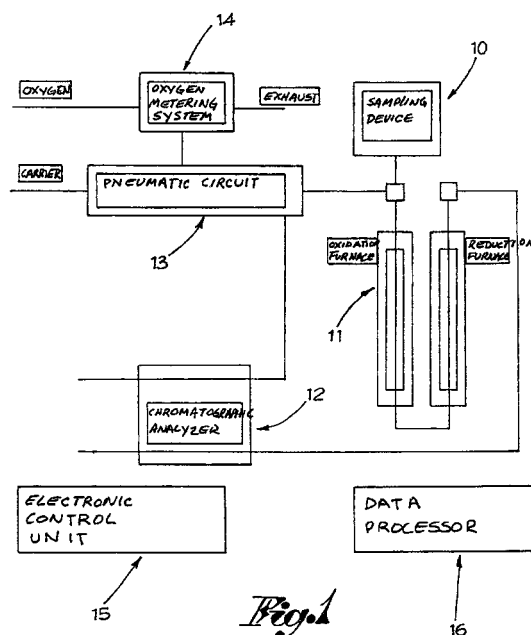

EP 0 989 401 A8