



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 994 369 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
19.04.2000 Bulletin 2000/16

(51) Int. Cl.⁷: **G02B 5/00**

(21) Application number: **99203107.0**

(22) Date of filing: **22.09.1999**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **16.10.1998 US 173604**

(71) Applicant:
**Boeing North American, Inc.
Seal Beach, California 90740-1515 (US)**


(72) Inventor: **Lundgren, Mark A.
Corona, California 91720 (US)**

(74) Representative:
**Land, Addick Adrianus Gosling et al
Arnold & Siedsma,
Advocaten en Octrooigemachtigden,
Sweelinckplein 1
2517 GK Den Haag (NL)**

(54) **Optical shield with graduated conical baffles**

(57) An optical shield for preventing stray light from reaching the focal plane of an optical device includes a tubular housing defining an aperture at one end for admitting light to pass through the housing to the focal plane, and a plurality of annular conical baffles attached to the housing wall and axially spaced along the housing between the aperture and the focal plane. In one embodiment, the housing wall is conical and the baffles are all aimed at a location on the housing wall which is

between the aperture and a forwardmost one of the baffles adjacent the aperture, such that the rearward-facing surfaces of the baffles are shielded from direct and reflected light. The baffles are spaced sufficiently closely and are long enough that the baffles shield the focal plane from those portions of the housing wall that are directly illuminable by light passing through the aperture.

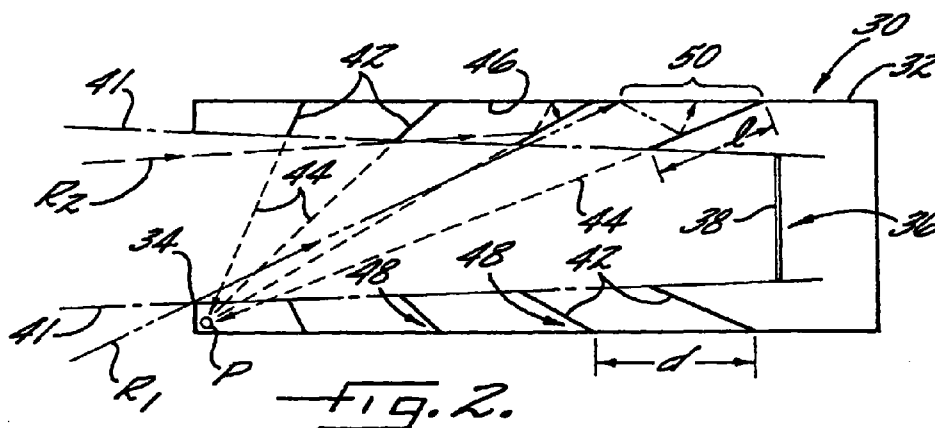

EP 0 994 369 A2

Description

Statement of Government Rights in the Invention

[0001] This invention was made with Government support under contract number DASG6O-90-C-0165 awarded by the Army. The Government has certain rights in this invention.

Field of the Invention

[0002] The present invention relates to shields for reducing unwanted light from reaching a focal plane of an optical device or sensor. More particularly, the invention relates to an optical shield of tubular form having internal baffles for intercepting unwanted out-of-field light rays so that such rays do not reach the focal plane.

Background of the Invention

[0003] In a variety of types of optical instruments, it is desired that light rays entering an instrument from a range of predetermined directions generally parallel to the axis of the instrument be allowed to reach a focal plane of an optical device or detector. However, it is undesirable for light rays entering the instrument from more extreme angles to be able to reach the focal plane because such out-of-field light rays degrade the desired in-field image. The desired image can be thought of as a signal and the out-of-field light rays reaching the focal plane can be thought of as noise. Thus, performance of an optical instrument is enhanced by increasing the signal-to-noise ratio.

[0004] One method for increasing the signal-to-noise ratio is to place an optical shield ahead of the focal plane. An optical shield is designed to deflect or block out-of-field light so that it cannot easily reach the focal plane. Commonly, an optical shield is formed as a tube having a plurality of annular baffles attached to its inner surface and spaced along the length of the tube. One end of the tube admits light through an aperture, and a focal plane is located at the other end of the tube. The baffles are located between the aperture and the focal plane. The baffles extend inwardly toward the center axis of the tube. Frequently, the baffles are coated with an absorptive material such as black paint in order to further reduce unwanted radiation of out-of-field light. Alternatively, the baffles may be reflective on one or both of their surfaces and configured so that out-of-field light is reflected in directions away from the focal plane.

[0005] In many cases, insufficient attention is given to light that is scattered in random directions by out-of-field light striking interior surfaces of an optical shield. Because no object can be perfectly absorptive or perfectly reflective, there is always some amount of light scattered in random directions when light strikes an inner surface of an optical shield. If a surface struck by

out-of-field light is in view of the focal plane, there inevitably will be some amount of light scattered from that surface to the focal plane. This factor has not been taken into account in the design of some existing optical shields. For example, in some existing optical shields, as illustrated in FIG. 1, light can be reflected off one baffle and strike a rear surface (i.e., the surface facing the focal plane) of the preceding baffle which is in view of the focal plane. Even though this reflected light may not be specularly reflected to the focal plane, some of the light will be scattered to the focal plane.

Summary of the Invention

[0006] The amount of out-of-field light reaching a focal plane of an optical device is reduced by an optical shield in accordance with the present invention, having baffles that are configured such that their rear surfaces (i.e., those facing the focal plane) are not directly illuminated by light entering the shield, and are not illuminated by light reflected from adjacent baffles. Instead, light striking the forward surface of a baffle (i.e., the surface facing away from the focal plane) is trapped in a corner between the baffle and the tubular wall to which the baffle is attached so that it cannot be reflected back to the preceding baffle. Additionally, the baffles are configured so that each baffle shields the focal plane from light reflected or scattered by the portion of the tubular wall that is forward of the baffle and directly illuminated by light passing through the aperture in the shield. Thus, the baffles substantially prevent light from being reflected or scattered from the tubular wall or the surfaces of the baffles to the focal plane.

[0007] In accordance with a preferred embodiment of the invention, the optical shield comprises a housing defined by a generally tubular wall having opposite forward and rear ends, the forward end defining an aperture for admitting light into the housing, the rear end defining a focal plane which receives light entering through the aperture along directions generally parallel to a longitudinal axis of the housing. A plurality of conical baffles are axially spaced apart within the housing and include a forwardmost baffle adjacent the aperture, each baffle being formed by a conical wall attached to the wall of the housing and extending generally inwardly and forwardly therefrom and having a forward-facing surface and a rearward-facing surface. The conical wall of each baffle is aimed toward a location between the aperture and the forwardmost baffle. Thus, the baffles are "graduated" in that the cone angle of each succeeding baffle in the rearward direction toward the focal plane is smaller than the cone angle of the preceding baffle. The conical wall of each baffle and the housing wall form an acute corner for trapping light and preventing reflection of light from the forward-facing surface of the baffle to the rearward-facing surface of a forwardly adjacent baffle. Accordingly, the rearward-facing surfaces of all of the baffles are shielded from direct and

reflected light.

[0008] Advantageously, the conical wall of each baffle has a length sufficient to shield the focal plane from light that is reflected or scattered by the portion of the housing wall which is forwardly adjacent to the baffle and which is directly illuminable by light passing through the aperture.

[0009] To facilitate trapping light rays in the corners between the baffles and the housing wall, the housing preferably has a diameter which increases in the rearward direction. In a preferred embodiment of the invention, the housing wall is conical and has a maximum diameter at the rear end that contains the focal plane. The conical shape of the housing wall enhances the acuteness of the angles between the baffles and the housing wall so that light rays striking the baffles and reflecting onto the housing wall, or vice versa, are less apt to escape the corners.

[0010] In a preferred embodiment of the invention, the housing is closed at the rear end by a cup-shaped end cap joined to the conical housing wall at the maximum-diameter location and extending rearwardly therefrom. The end cap is formed of a conical section joined to an end wall. The end wall is preferably parallel to the focal plane. The end cap prevents light from entering the shield through the rear end, and also serves as a mounting structure to which an optical device can be attached.

[0011] By virtue of the configuration of the optical shield with graduated baffles aimed at a location inside the housing, high signal-to-noise ratios are realizable even without any special optical coatings for increasing the absorption of out-of-field light. Additionally, relatively few baffles are required in comparison to optical shields having conventional straight or conical baffles, and therefore the optical shield can be made with reduced weight and at lower cost than such conventional optical shields.

Brief Description of the Drawings

[0012] The above and other objects, features, and advantages of the invention will become more apparent from the following description of certain preferred embodiments thereof, when taken in conjunction with the accompanying drawings in which:

FIG. 1 is a sectioned side elevational view of a conventional optical shield having straight baffles, showing out-of-field light rays reflecting from one baffle onto a portion of an adjacent baffle that is in view of the focal plane;

FIG. 2 is a sectioned side elevational view of an optical shield in accordance with one preferred embodiment of the invention, showing out-of-field rays reflecting off one of the baffles and the housing wall and being directed through multiple reflections into the corners between the baffles and the hous-

ing wall;

FIG. 3 is a view similar to FIG. 2, depicting another preferred embodiment of the invention having a conical housing;

FIG. 4 is a graph comparing the predicted performance of an optical shield having three graduated baffles substantially as shown in FIG. 3, with the predicted performance of an optical shield having straight baffles substantially as shown in FIG. 1; and

FIG. 5 is a sectioned side elevational view of yet another preferred embodiment of the invention.

Detailed Description of the Drawings

[0013] The invention is now explained by reference to certain preferred embodiments thereof. It is to be understood, however, that the invention is not limited to these embodiments.

[0014] With reference to FIG. 1, a conventional optical shield **10** is shown in sectioned side elevational view. The shield **10** includes a tubular housing **12** which has an aperture **14** at one end for admitting light into the housing. An optical device **16** is mounted at the other end of the housing **12**. The optical device **16** defines a focal plane **18** for receiving light passing through the aperture **14**. The shield **10** also includes a plurality of annular baffles **22** affixed to the inner surface of the housing **12** and spaced apart between the aperture **14** and the focal plane **18**. The baffles **22** are intended to reduce the amount of out-of-field light which reaches the focal plane **18** after entering the aperture **14**. Without the baffles **22**, out-of-field light rays would be free to specularly reflect off the wall of the housing **12** onto the focal plane **18**. The baffles **22** block many of these out-of-field rays before they reach the wall of the housing and/or after they have reflected off the housing wall.

[0015] However, unwanted out-of-field light is still capable of reaching the focal plane **18** by being scattered from rearward-facing surfaces of the baffles **22** which are in view of the focal plane. As shown in FIG. 1, for example, an out-of-field light ray **R_o**, striking the forward-facing surface **24** of the rearwardmost baffle **22** is reflected onto the rearward-facing surface **26** of the preceding baffle **22**. This rearward-facing surface **26** is in view of the focal plane **18** as indicated by the broken lines and, accordingly, some light will be scattered from the surface **26** onto the focal plane.

[0016] Among the objects of the present invention are to substantially prevent specular reflection of out-of-field light onto the focal plane, and also to significantly reduce the amount of out-of-field light scattered onto the focal plane by inner surfaces of an optical shield. FIG. 2 depicts one preferred embodiment of an optical shield **30** in accordance with the invention. The shield **30** includes a tubular housing **32** having an aperture **34** at a forward end of the housing for admitting light into the housing. The opposite rear end of the housing **32**

mounts an optical device **36**, such as an optical detector, which has a focal plane **38**. Thus, light passing through the aperture **34** in directions generally parallel to the longitudinal axis of the housing **32** (i.e., in-field light) passes through the shield unobstructed and strikes the focal plane **38**. The outer boundaries of the field are denoted by broken lines **41**.

[0017] To prevent light which enters the aperture **34** at more-extreme angles from reflecting or being scattered onto the focal plane **38**, the shield **30** includes a plurality of generally conical baffles **42** affixed to the wall of the housing **32** and axially spaced apart between the aperture **34** and the focal plane **38**. The baffles **42** are all aimed at a location **P** that is between the aperture **34** and the forwardmost baffle closest to the aperture, as indicated by the dashed lines **44**. Accordingly, the baffles **42** are "graduated" in that the cone angle of each succeeding baffle in the rearward direction toward the focal plane **38** is smaller than the cone angle of the preceding baffle. Because the baffles **42** are aimed at the location **P**, the rearward-facing surfaces (i.e., the surfaces facing the focal plane **38**) of the baffles **42** cannot be directly illuminated by light passing through the aperture **34**, as illustrated for example by the extreme ray **R₁** for the third baffle (counting from the aperture rearward) which misses the rearward-facing surface of the third baffle and strikes the tubular wall **46** of the housing **32** from which it is reflected onto the forward-facing surface of the fourth baffle.

[0018] Additionally, because the baffles **42** are aimed at the location **P** just inside the housing **32**, each baffle is angled forwardly at an angle sufficiently large to prevent light from being reflected off a forward-facing surface of one baffle onto the rearward-facing surface of the preceding baffle. For example, the only slightly out-of-field light ray **R₂** striking the forward-facing surface of the third baffle is reflected onto the tubular wall **46** of the housing **32**, and from there is reflected back onto the forward-facing surface of the third baffle, and so on. Similarly, light from the extreme ray **R₁**, after being reflected off the housing wall **46**, strikes the forward-facing surface of the fourth baffle at a less-acute angle but is still reflected back onto the tubular wall **46**, then back onto the baffle, and so on toward the corner **48** between the baffle **42** and the housing wall **46**. The acute angular junctions or corners **48** between the baffles **42** and the housing wall **46** thus tend to "trap" light and prevent the light from reaching the focal plane **38**.

[0019] It will also be noted that the axial spacings between adjacent baffles **42** and the lengths of the baffles **42** are such that each baffle shields the focal plane **38** from the portion of the housing wall **46** that is just forward of the baffle and is directly illuminable by light passing through the aperture **34**. This is illustrated in FIG. 2 by the extreme ray **R₁** for the third baffle which strikes the housing wall **46** just rearward of the third baffle. The fourth baffle is spaced rearward from the third baffle by a distance **d** and has a length **l**. The distance

d and length **l** are chosen such that the portion **50** of the housing wall **46** that is directly illuminable by light is not in view of the focal plane **38**. The lengths of the other baffles **42** and their spacings from the preceding baffles are likewise selected so that the directly illuminable portions of the wall **46** are shielded from the focal plane.

[0020] Because the baffles **42** shield the focal plane from the housing wall **46**, and the baffles are aimed at the location **P** just inside the housing so that their rearward-facing surfaces are in the shade, the optical shield **30** substantially prevents light from being reflected or scattered onto the focal plane **38** from the housing wall **46** or from the baffles **42**. It will also be appreciated that the number of baffles can be reduced relative to a conventional straight-baffle shield such as the shield **10** of FIG. 1, thus potentially yielding benefits in terms of lower manufacturing cost and reduced weight for the optical shield **30**.

[0021] FIG. 3 depicts another preferred embodiment of the invention. The optical shield **60** of FIG. 3 differs from the shield **30** primarily in the configuration of the housing. The tubular housing **62** of the shield **60** is generally conical such that the diameter increases in the rearward direction from a minimum diameter at the aperture **64** to a maximum diameter at the rear end which defines the focal plane **68**. Preferably, the rearwardmost baffle **80** is located relative to the focal plane **68** such that the portion of the housing wall **82** between the rearwardmost baffle and the focal plane cannot be directly illuminated by light passing through the aperture **64**. The rear end of the housing **62** is closed by a cup-shaped end cap **70** comprising a conical portion **72** and an end wall **74** which is generally parallel to the focal plane **68**. The end cap **70** prevents light from entering the housing through the rear end, and also serves as a mounting structure to which an optical device can be attached.

[0022] As with the shield **30**, the shield **60** has the baffles **80** all directed toward a point **P** between the aperture **64** and the forwardmost baffle, such that the baffles **80** and the housing wall **82** define smaller and smaller acute angles in the direction from the forward end to the rear end. The conical shape of the housing **62** yields more-acute corners **78** between the baffles **80** and the tubular housing wall **82**, thus further facilitating the trapping of rays in the corners **78**. Additionally, the conical housing shape enables the axial spacing between adjacent baffles to be increased relative to a cylindrical shield. As a result, the shield **60** requires only three baffles **80** rather than four baffles for the shield **30** of FIG. 2.

[0023] It will be noted that, for both of the shields **30** and **60**, the axial spacings between the baffles need not be constant, but rather can be increased in the rearward direction toward the focal plane, as long as the lengths of the baffles are correspondingly increased toward the rear end to shield the focal plane from the directly illuminable portion of the tubular housing wall ahead of each

baffle.

[0024] Mathematical modeling of optical shields in accordance with the invention predicts significantly improved efficiency relative to conventional optical shields having straight baffles or conical baffles with equal cone angles. For example, FIG. 4 depicts the predicted efficiency for an optical shield substantially as shown in FIG. 3, and the predicted efficiency for a conventional shield substantially as shown in FIG. 1, as a function of the incidence angle of light passing through the aperture. Both of the optical shields were modeled to have absorptive coatings such as black paint on their interior surfaces. The plotted parameter "PST" is the "point source transmittance" defined as the energy reaching the focal plane divided by the total energy available out-of-field. It can be seen that for a wide range of out-of-field incidence angles, for example from 15° to 70°, the optical shield with graduated baffles in accordance with the invention passes a substantially smaller fraction of stray light to the focal plane than the conventional baseline shield. Integrated over the entire range of incidence angle, the shield with graduated baffles passes about one-fifth the amount of out-of-field light to the focal plane as the conventional shield.

[0025] The mathematical models further predict that even when the shield with graduated baffles has a specular coating, such as Ebanol C, applied to its baffles and housing wall and the conventional shield has a diffuse coating, such as Nextel, applied to its baffles and housing wall, the shield with graduated baffles still has a significantly better efficiency than the conventional shield. Thus, optical shields of high efficiency can be made in accordance with the invention, without the necessity of providing special optical coatings on inner surfaces of the shields. Accordingly, the shields can be made more simply and potentially at lower cost than conventional shields employing special optical coatings, and maintenance costs associated with repainting the coated surfaces of shields are avoided.

[0026] FIG. 5 shows yet another preferred embodiment of the invention. The optical shield **90** of FIG. 5 includes a conical housing **92** having a minimum diameter at the forward end which defines the aperture **94** and a maximum diameter at the rear end which defines the focal plane **98**, and a plurality of conical baffles **100** which are aimed or graduated at various locations inside the housing **92** such that the rearward-facing surfaces of the baffles **100** are shielded from direct illumination. Unlike the shields **30** and **60** which have their baffles all aimed at a single point just inside the housing, the shield **90** has its baffles **100** aimed at different points within the housing, most of which are not between the aperture **94** and the forwardmost baffle. The conical shape of the housing wall **96** facilitates shielding of the focal plane **98** from the wall **96** by the baffles **100**. Thus, although a portion **102** of the conical wall between the first and second baffles **100** can be directly illuminated by light, as illustrated for example by the ray **R₃**, the sec-

ond baffle is spaced sufficiently close to the first baffle and is long enough such that the focal plane **98** is shielded from the illuminated portion **102**. The baffles **100** are angled forwardly at sufficiently steep angles that light cannot be reflected from one baffle to the rearward-facing surface of the preceding baffle, as illustrated by the extreme rays **R₄** and **R₅** for the second and third baffles, respectively. It will be appreciated that the embodiments of FIGS. 2 and 3 facilitate making the overall size of the shield smaller than the shield of FIG. 5, and thus may be preferred in certain applications where size of the shield must be minimized. However, the shield of FIG. 5 may enable improved efficiency relative to the shields of FIGS. 2 and 3, and hence may be preferred if size is not an important consideration.

[0027] The invention has been described by reference to certain preferred embodiments of the invention, and these embodiments have been described in considerable detail. Nevertheless, the invention is not limited to these embodiments, and various modifications and substitutions of equivalents will readily be comprehended by persons of ordinary skill in the art. It is intended that such modifications and substitutions be encompassed within the scope of the invention as set forth in the following claims.

Claims

1. A shield for an optical device, comprising:

a housing defined by a generally tubular wall having opposite forward and rear ends, the forward end defining an aperture for admitting light into the housing, the rear end defining a focal plane for receiving in-field light; and a plurality of conical baffles axially spaced apart within the housing and including a forwardmost baffle adjacent the aperture, each baffle being formed by a conical wall attached to the wall of the housing and extending generally inwardly and forwardly therefrom and having a forward-facing surface and a rearward-facing surface, the conical walls of the baffles being aimed toward a location on the housing wall between the aperture and the forwardmost baffle such that the conical walls of the baffles and the housing wall form acute corners for trapping light and preventing reflection of light from the forward-facing surface of each baffle to the rearward-facing surface of a forwardly adjacent baffle, whereby the rearward-facing surfaces of all of the baffles are shielded from direct and reflected light.

2. The optical shield of claim 1, wherein a portion of the housing wall forwardly adjacent to each baffle is directly illuminable by light passing through the aperture, and wherein the conical wall of each baf-

fle has a length sufficient to shield the focal plane from light reflected or scattered by said directly illuminable portion of the housing wall.

3. The optical shield of claim 2, wherein the housing has a diameter which increases in the rearward direction. 5
4. The optical shield of claim 3, wherein the housing wall is conical and the focal plane is located at a maximum diameter of the housing wall. 10
5. The optical shield of claim 4, wherein the housing is closed at the rear end by a cup-shaped end cap joined to the conical housing wall at the maximum-diameter location and extending rearwardly therefrom. 15
6. The optical shield of claim 1, wherein the baffles increase in length in the rearward direction. 20
7. A shield for an optical device, comprising:

a housing defined by a generally tubular wall having opposite forward and rear ends, the forward end defining an aperture for admitting light into the housing, the rear end defining a focal plane for receiving in-field light passing through the aperture and along a rearward direction generally parallel to a longitudinal axis of the housing, the tubular wall being conical and having a minimum diameter adjacent the forward end and a maximum diameter adjacent the rear end; and 25

a plurality of conical baffles axially spaced apart within the housing, each baffle being formed by a conical wall attached to the wall of the housing and extending generally inwardly and forwardly therefrom and having a forward-facing surface and a rearward-facing surface, the conical walls of the baffles being angled forwardly such that light from any direction passing through the aperture and striking the forward-facing surface of the baffle is reflected onto the housing wall, and such that the rearward-facing surfaces of the baffles cannot be directly illuminated by light passing through the aperture. 30 35 40 45

8. The optical shield of claim 7, wherein the conical walls of the baffles are substantially parallel to one another. 50
9. The optical shield of claim 7, wherein the conical walls of the baffles are oriented at different angles. 55
10. The optical shield of claim 7, wherein the conical walls of the baffles are all aimed at a location on the

housing wall between the aperture and a forwardmost one of the baffles.

11. The optical shield of claim 7, wherein a portion of the housing wall forwardly adjacent to at least one baffle is directly illuminable by light passing through the aperture, and wherein the conical wall of said at least one baffle has a length sufficient to shield the focal plane from said forwardly adjacent portion of the housing wall.

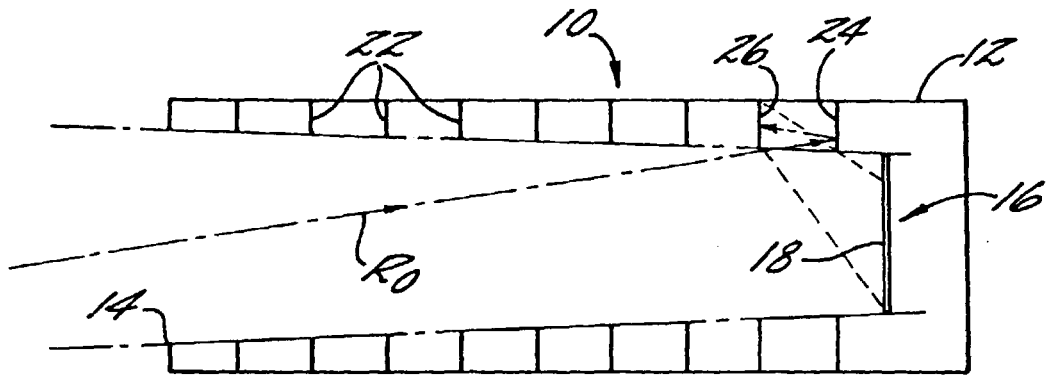
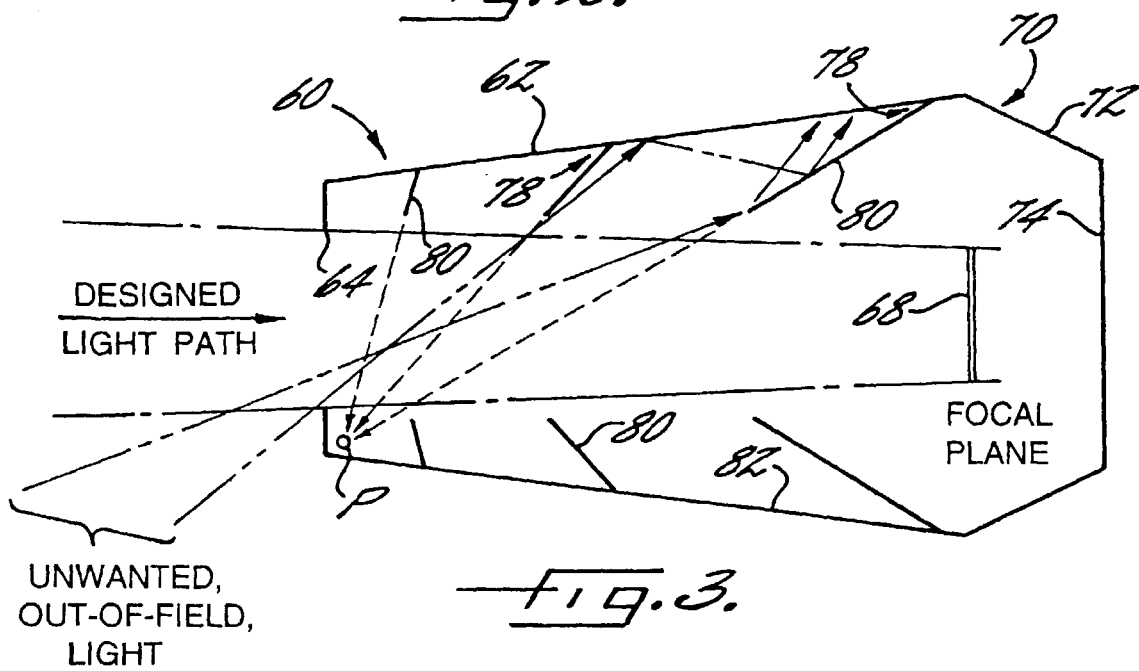
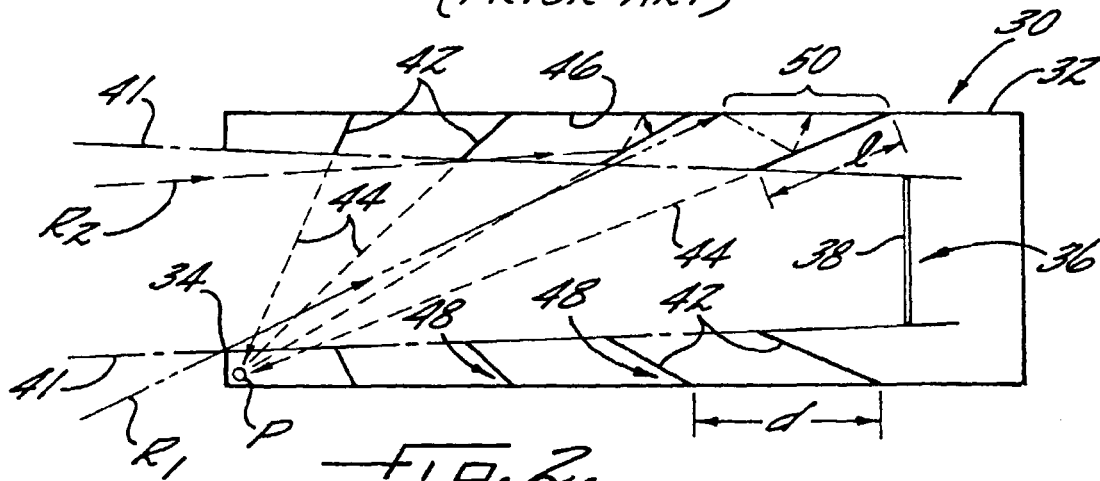


Fig. 1.
(PRIOR ART)



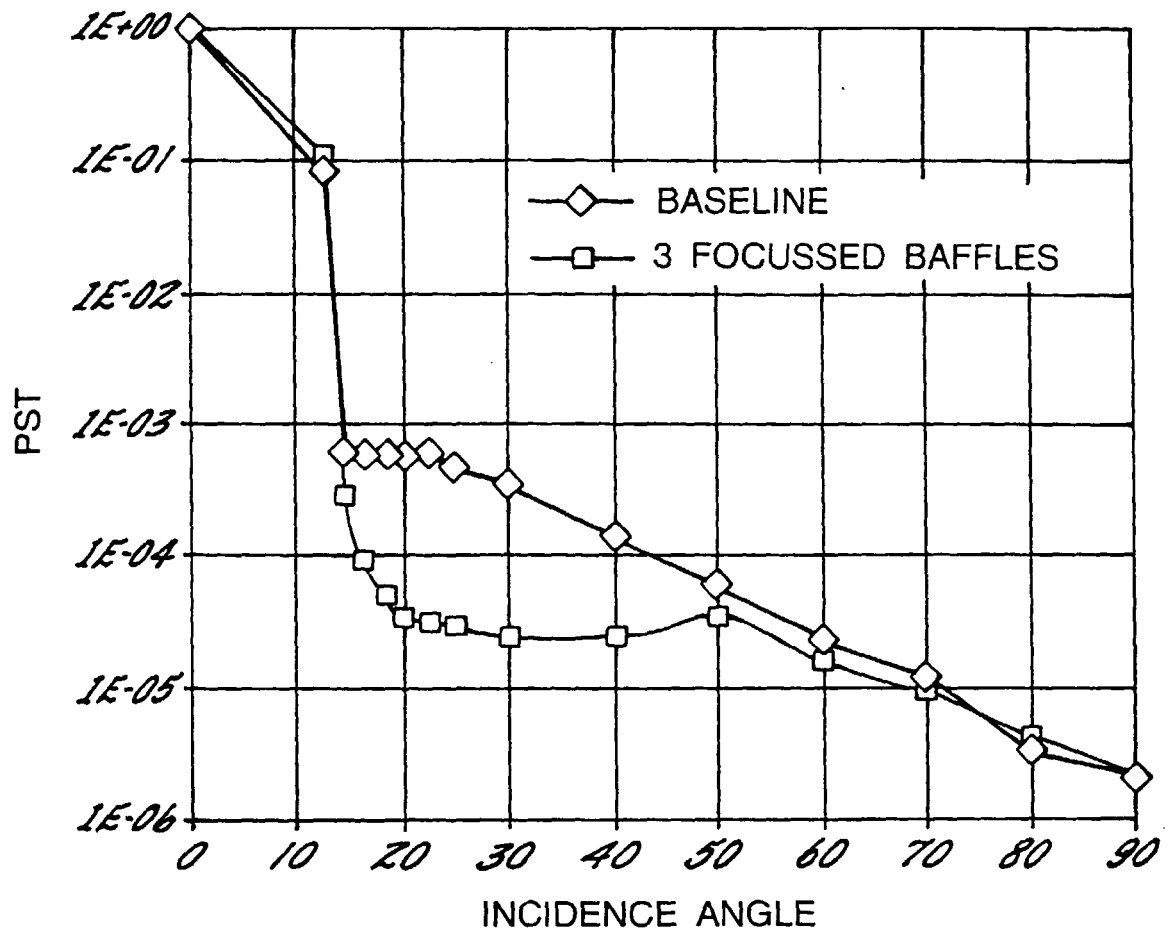


Fig. 4.

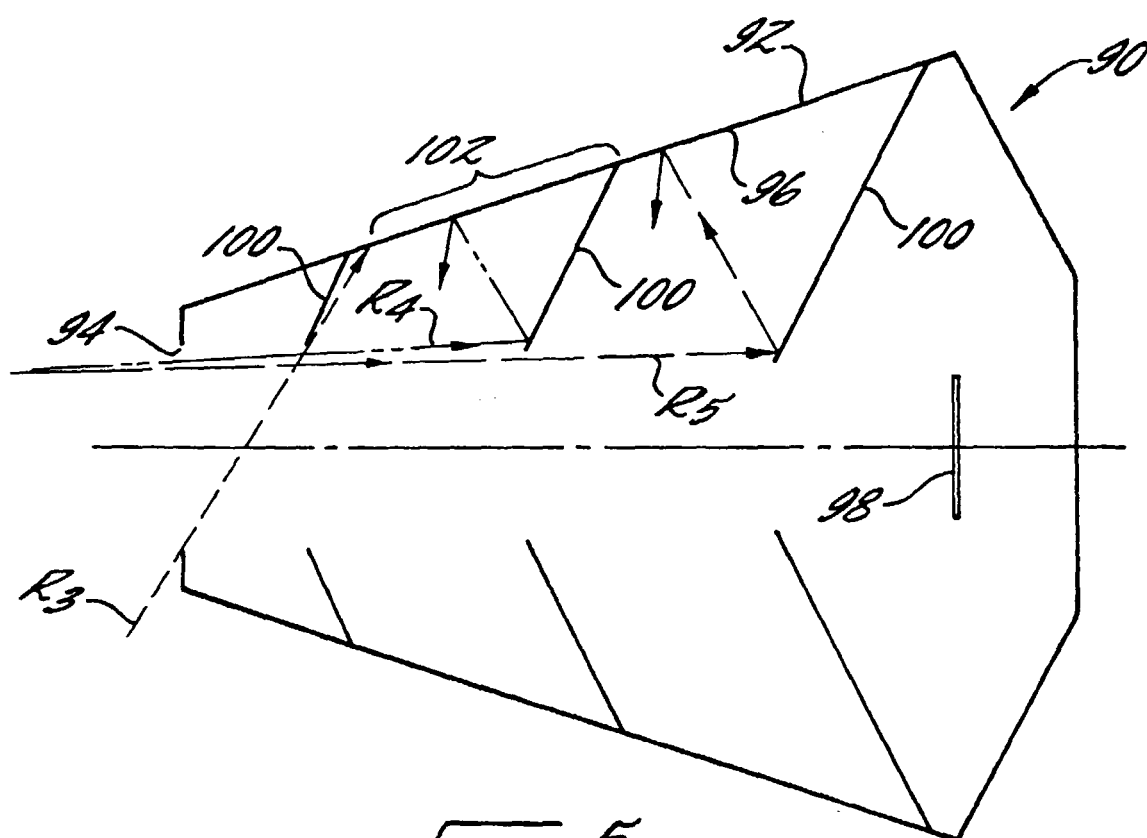


FIG. 5.