



(11) **EP 1 001 011 B2**

(12) **NEW EUROPEAN PATENT SPECIFICATION**
After opposition procedure

(45) Date of publication and mention
of the opposition decision:
23.06.2010 Bulletin 2010/25

(51) Int Cl.:
C11D 3/39 (2006.01) **C11D 3/20** (2006.01)
C11D 11/00 (2006.01) **D06L 3/02** (2006.01)

(45) Mention of the grant of the patent:
02.08.2006 Bulletin 2006/31

(21) Application number: **99870211.2**

(22) Date of filing: **14.10.1999**

(54) **Bleaching composition comprising an alkoxyated benzoic acid**
Bleichmittelzusammensetzung enthaltende Alkoxyliertenbenzoesäure
Composition de blanchiment comprenant acide benzoïque alcoxylé

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
NL PT SE**

(30) Priority: **10.11.1998 EP 98870247**
02.12.1998 EP 98870263

(43) Date of publication of application:
17.05.2000 Bulletin 2000/20

(73) Proprietor: **THE PROCTER & GAMBLE COMPANY**
Cincinnati, Ohio 45202 (US)

(72) Inventors:
• **Del Duca, Valerio**
80064 Massalubrense,
Napoli (IT)
• **Ricci, Carlo**
00151 Rome (IT)
• **Giunti, Stefano**
61033 Fermignano,
Pesaro (IT)
• **Sarcinelli, Luca**
90142 (IT)

• **Leone, Milena**
21013 Gallarate, VA (IT)

(74) Representative: **Morelle, Evelyne Charlotte
Isabelle et al**
N.V. Procter & Gamble Services Company S.A.
Temselaan 100
1853 Strombeek-Bever (BE)

(56) References cited:
EP- - 0 751 214 EP- - 0 776 966
EP- - 0 794 245 EP- - 0 903 403
EP-A- 0 668 345 EP-A- 0 668 345
EP-A- 0 905 224 EP-A- 0 931 829
WO- -99/28427 WO-A-99/28427
JP-A- 62 195 100 US- - 5 759 439
US-A- 5 510 047 US-A- 5 545 349

Remarks:

The file contains technical information submitted after
the application was filed and not included in this
specification

EP 1 001 011 B2

DescriptionTechnical field

5 **[0001]** The present invention relates to bleaching compositions, which can be used to treat various surfaces including, but not limited to, fabrics, clothes, and carpets as well as hard-surfaces like walls, tiles, floors, glass, bathrooms surfaces, kitchen surfaces, toilet bowls and dishes.

Background of the invention

10 **[0002]** Bleach-containing compositions for treating various surfaces, e.g., fabrics and carpets are well known in the art.

[0003] Peroxygen bleach-containing compositions have been extensively described in the art, especially in laundry applications as laundry detergents, laundry additives or laundry pretreaters, and in carpet treatment applications.

15 **[0004]** Indeed, it is known to use such peroxygen bleach-containing compositions in laundry and/or carpet treatment applications to boost the removal of dried on (encrusted) stains/soils and "problem" stains, such as grease, coffee, tea, grass, mud/clay-containing soils, which are otherwise particularly difficult to remove. In addition, peroxygen bleaches are considered as being safer to fabrics/carpets, specifically to coloured fabrics/carpets, compared to other bleaches, as for example hypohalite bleaches. However, peroxygen bleach-containing bleaching compositions have the inconvenience of being less stable compared to bleaching compositions based on other bleaches.

20 **[0005]** Indeed, a major problem associated with such peroxygen bleach-containing compositions, is their tendency to be unstable, especially upon storage, and more especially under conditions of elevated temperature. More particularly, it is believed that the peroxygen bleach ("oxidising agent") present in such bleaching composition can decompose resulting in a reduction of the concentration of oxidising agent over time ("loss of available oxygen"). Loss of available oxygen in such compositions consequently leads to the reduction of the cleaning and whitening performance of the compositions.

25 **[0006]** Bleaching compositions can be formulated comprising a radical scavenger in addition to the peroxygen bleach. It is believed that radical scavengers act as a bleach stabilizer in such bleaching compositions. Examples of such compositions known in the art, include bleaching compositions used to treat fabrics and/or hard-surfaces and comprising a peroxygen bleach and a radical scavenger, as e.g., butyl hydroxy toluene (BHT) and the like (EP-A-0 791 362, EP-A-0 842 604, EP-A-0 842 606 and EP-A-0 843 001) or carpet treatment compositions comprising a peroxygen bleach and a radical scavenger, e.g., n-propyl gallate or butyl hydroxy toluene (BHT) (EP-A-0 906 950).

30 **[0007]** However, the stability of the peroxygen bleach in said bleaching compositions immediately after the manufacture of said bleaching composition ("immediate chemical stability") and the stability of the peroxygen bleach in said bleaching compositions upon prolonged periods of storage ("upon storage") may still be further improved.

35 **[0008]** It is therefore an objective of the present invention to provide a peroxygen bleach-containing composition, said composition being not only immediately chemically stable but also chemically stable upon storage, especially at higher temperatures.

[0009] It has now been found that this objective can be met by a bleaching composition comprising a peroxygen bleach and a di- or tri-alkoxylated benzoic acid, as defined in claim 1.

40 **[0010]** Advantageously, the bleaching compositions as described herein also provide excellent bleaching performance.

[0011] More particularly, the compositions of the present invention provide excellent bleaching performance when used in any laundry application ("fabric treatment applications"), e.g., as a laundry detergent, a laundry additive and/or a laundry pretreater, and in carpet treatment applications.

45 **[0012]** A further advantage of the bleaching compositions according to the present invention is that they are able to perform in a variety of conditions, i.e., in hard and soft water as well as when used neat or diluted.

50 **[0013]** Yet another advantage of the bleaching compositions of the present invention is that said bleaching compositions are also suitable for the bleaching of different types of surfaces including hard-surfaces like floors, walls, tiles, glass, kitchen surfaces, bathrooms surfaces, toilet bowls and/or dishes, in addition to the above mentioned fabric and carpet treatment applications. Furthermore, the bleaching compositions of the present invention are suitable for bleaching any type of fabrics/carpets including natural fabrics/carpets (e.g., fabrics/carpets made of cotton, viscose, linen, silk and wool), synthetic fabrics/carpets, such as those made of polymeric fibers of synthetic origin, as well as those made of both natural and synthetic fibers.

Summary of the invention

55 **[0014]** The present invention encompasses a bleaching composition comprising a peroxygen bleach and a di- or tri-alkoxylated benzoic acid or a salt thereof, as defined in claim 1.

[0015] The present invention further encompasses processes of treating a surface, e.g., a fabric or a carpet, with a

bleaching composition as defined herein.

Detailed description of the invention

The bleaching composition

[0016] The bleaching compositions according to the present invention may be formulated either as solids or liquids. By "liquids" it is meant to include conventional liquids, gels and pastes. By "solids" it is meant herein granules, tablets and/or powders.

[0017] Solids are preferably applied onto the fabrics/carpets to be treated in combination with, preferably dissolved in, an appropriate solvent, typically water.

[0018] In the case where the bleaching compositions are formulated as liquids, the bleaching compositions are preferably, but not necessarily formulated as aqueous compositions. Liquid bleaching compositions are preferred herein for convenience of use. Preferred liquid bleaching compositions of the present invention are aqueous and therefore, preferably may comprise water, more preferably may comprise water in an amount of from 60% to 98%, even more preferably of from 80% to 97% and most preferably 85% to 97% by weight of the total composition.

[0019] The pH of the liquid bleaching compositions herein, as is measured at 25°C, preferably is at least, with increasing preference in the order given, 0.1, 0.5, 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5 or 5. Independently, the pH of the liquid bleaching compositions herein, as is measured at 25°C, preferably is no more than, with increasing preference in the order given, 9, 8.5, 8, 7.5, 7, 6.5, 6 or 5.5.

[0020] Solid bleaching compositions or liquid bleaching compositions herein have a pH measured at 25°C, preferably of at least, with increasing preference in the order given, 0.1, 0.5, 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, when diluted into 1 to 500 times its weight of water. Independently, solid bleaching compositions or liquid bleaching compositions herein have a pH measured at 25°C, preferably of no more than, with increasing preference in the order given, 12, 11.5, 11, 10.5, 10, 9.5, 9, 8.5 or 8, when diluted into 1 to 500 times its weight of water.

[0021] In a preferred embodiment the liquid compositions according to the present invention are formulated in the neutral to the acidic pH range. It is within this neutral to acidic pH range that the optimum chemical stability and bleaching and/or cleaning performance of the peroxygen bleach as well as fabric/carpet yellowing-prevention and/or safety are obtained.

[0022] Accordingly, the compositions herein may further comprise an acid or a base to adjust the pH as appropriate.

[0023] Preferred acids herein are organic or inorganic acids or mixtures thereof. Preferred organic acids are acetic acid, citric acid or a mixture thereof. Preferred inorganic acids are sulfuric acid, phosphoric acid or a mixture thereof. A particularly preferred acid to be used herein is an inorganic acid and most preferred is sulfuric acid.

[0024] Typical levels of such acids, when present, are of from 0.01 % to 3.0%, preferably from 0.05% to 2.0% and more preferably from 0.1% to 1.0% by weight of the total composition.

[0025] The bases to be used herein can be organic or inorganic bases. Suitable bases for use herein are the caustic alkalis, such as sodium hydroxide, potassium hydroxide and/or lithium hydroxide, and/or the alkali metal oxides such, as sodium and/or potassium oxide or mixtures thereof. A preferred base is a caustic alkali, more preferably sodium hydroxide and/or potassium hydroxide.

[0026] Other suitable bases include ammonia, ammonium carbonate and hydrogen carbonate.

[0027] Typical levels of such bases, when present, are of from 0.01% to 1.0%, preferably from 0.05% to 0.8% and more preferably from 0.1% to 0.5% by weight of the total composition.

Peroxygen bleach

[0028] As a first essential element the bleaching compositions according to the present invention comprise a peroxygen bleach.

[0029] Suitable peroxygen bleaches to be used herein are selected from the group consisting of: hydrogen peroxide; water soluble sources of hydrogen peroxide; organic or inorganic peracids; hydroperoxides; diacyl peroxides; and mixtures thereof.

[0030] As used herein a hydrogen peroxide source refers to any compound that produces perhydroxyl ions on contact with water. Suitable water-soluble sources of hydrogen peroxide for use herein include percarbonates, perborates and persulfates and mixtures thereof.

[0031] Suitable diacyl peroxides for use herein include aliphatic, aromatic and aliphatic-aromatic diacyl peroxides, and mixtures thereof.

[0032] Suitable aliphatic diacyl peroxides for use herein are dilauroyl peroxide, didecanoyl peroxide, dimyristoyl peroxide, or mixtures thereof. A suitable aromatic diacyl peroxide for use herein is for example benzoyl peroxide. A suitable aliphatic-aromatic diacyl peroxide for use herein is for example lauroyl benzoyl peroxide.

[0033] Suitable organic or inorganic peracids for use herein include : persulphates such as monopersulfate; peroxy-acids such as diperoxydodecandioic acid (DPDA); magnesium perphthalic acid; perlauric acid; phthaloyl amidoperoxy caproic acid (PAP); perbenzoic and alkylperbenzoic acids; and mixtures thereof.

[0034] Suitable hydroperoxides for use herein are tert-butyl hydroperoxide, cumyl hydroperoxide, 2,4,4-trimethylpentyl-2-hydroperoxide, di-isopropylbenzene-monohydroperoxide, tert-amyl hydroperoxide and 2,5-dimethyl-hexane-2,5-dihydroperoxide and mixtures thereof. Such hydroperoxides have the advantage of being particularly safe to fabrics and color while delivering excellent bleaching performance when used in any laundry application. Furthermore, such hydroperoxides have the advantage of being particularly safe to carpets and carpet dyes whilst delivering excellent bleaching performance when used in carpet treatment applications.

[0035] A preferred peroxygen bleach herein is selected from the group consisting of : hydrogen peroxide; water soluble sources of hydrogen peroxide; organic or inorganic peracids; hydroperoxides; and diacyl peroxides; and mixtures thereof. A more preferred peroxygen bleach herein is selected from the group consisting of hydrogen peroxide, water soluble sources of hydrogen peroxide and diacyl peroxides and mixtures thereof. An even more preferred peroxygen bleach herein is selected from the group consisting of hydrogen peroxide, water soluble sources of hydrogen peroxide, aliphatic diacyl peroxides, aromatic diacyl peroxides and aliphatic-aromatic diacyl peroxides and mixtures thereof. The most preferred peroxygen bleach herein is hydrogen peroxide, water soluble sources of hydrogen peroxide or mixtures thereof.

[0036] Preferably, the bleaching composition herein may comprise from 0.01% to 30%, preferably from 0.05% to 20%, more preferably from 0.1% to 15%, even more preferably from 0.15% to 10%, and most preferably from 0.2% to 10% by weight of the total composition of said peroxygen bleach.


[0037] The presence of a peroxygen bleach in bleaching compositions according to the present invention contributes to the excellent bleaching and/or cleaning performance on various types of soils including on spot stains like bleachable stains (e.g., coffee, beverage, food) of the compositions of the present invention. Furthermore, peroxygen bleaches are chosen herein as oxidising agents over other oxidising agents, as for example hypochlorite bleaches, as they are considered as being safer to fabrics/carpets, specifically to coloured fabrics/carpets.

[0038] By "bleachable stains" it is meant herein any soils or stains containing ingredients sensitive to bleach that can be found on any carpet, e.g., coffee or tea.

Alkoxyated benzoic acid

[0039] As a second essential ingredient the compositions according to the present invention comprise an alkoxyated benzoic acid or a salt thereof.

[0040] Generally, the alkoxyated benzoic acid or the salt thereof has the general formula :



wherein : M is hydrogen, a cation or a cationic moiety. Preferably, M is selected from the group consisting of hydrogen, alkali metal ions and alkaline earth metal ions. More preferably, M is selected from the group consisting of hydrogen, sodium and potassium. Even more preferably, M is hydrogen.

[0041] In one embodiment of the present invention, the alkoxyated benzoic acid or the salt thereof is a dialkoxy benzoic acid or a salt thereof, wherein in the above general formula : the substituent of the benzene ring X is selected from -H; the substituent of the benzene ring Y is -OR'; R' is independently selected from C₁ to C₂₀ linear or branched alkyl chains, preferably R' is independently selected from C₁ to C₅ linear or branched alkyl chains, more preferably R' is -CH₃.

[0042] In another embodiment of the present invention, said alkoxyated benzoic acid or the salt thereof is a trialkoxy benzoic acid or a salt thereof, wherein in the above general formula : the substituents of the benzene ring Y and X are -OR'; R' is independently selected from C₁ to C₂₀ linear or branched alkyl chains, preferably R' is independently selected from C₁ to C₅ linear or branched alkyl chains, more preferably R' is -CH₃.

[0043] Said alkoxyated benzoic acid or a salt thereof, is selected from the group consisting of : a dialkoxy benzoic acid, or a salt thereof; a trialkoxy benzoic acid, or a salt thereof; and a mixture thereof. Even more preferably, said alkoxyated benzoic acid or a salt thereof, is a trimethoxy benzoic acid or a salt thereof.

[0044] In a highly preferred embodiment of the present invention, said alkoxyated benzoic acid or the salt thereof is a trimethoxy benzoic acid or a salt thereof (TMBA), wherein in the above general formula : the substituents of the benzene ring Y and X are -OR'; R' is -CH₃ and; M is hydrogen, a cation or a cationic moiety.

[0045] Preferably, said alkoxyated benzoic acid or the salt thereof is selected from the group consisting of 3,4,5,- trimethoxy benzoic acid, a salt thereof, 2,3,4-trimethoxy benzoic acid, a salt thereof, 2,4,5- trimethoxy benzoic acid, a salt thereof and a mixture thereof. More preferably, said alkoxyated benzoic acid or the salt thereof is 3,4,5,- trimethoxy benzoic acid or a salt thereof. Even more preferably, said alkoxyated benzoic acid or the salt thereof is 3,4,5,- trimethoxy benzoic acid.

[0046] Suitable trimethoxy benzoic acids or salts thereof are commercially available from Aldrich and Merck.

[0047] Typically, the bleaching composition according to the present invention may comprise from 0.001 % to 5%, preferably from 0.005% to 2.5% and more preferably from 0.01% to 1.0% by weight of the total composition of said alkoxyated benzoic acid or a salt thereof.

[0048] It has now been found that a di- or tri-alkoxyated benzoic acid or a salt thereof, preferably a trialkoxy benzoic acid or a salt thereof, more preferably trimethoxy benzoic acid or a salt thereof (TMBA), acts as a radical scavenger in the bleaching composition according to the present invention, thereby not only stabilizing the peroxygen bleach in said bleaching composition immediately after the manufacture of said bleaching composition ("immediate chemical stability benefit") but also stabilizing the peroxygen bleach in said bleaching composition upon storage ("chemical stability upon storage benefit"). Indeed, the presence of a di- or tri-alkoxyated benzoic acid or a salt thereof, preferably a trialkoxy benzoic acid or a salt thereof, more preferably trimethoxy benzoic acid or a salt thereof (TMBA), in said bleaching composition significantly increases the immediate chemical stability and particularly the chemical stability upon storage of the peroxygen bleach in said bleaching composition. Although not wishing to be bound by theory, it is believed that decomposition of the peroxygen bleach ("parent peroxygen bleach") and the interaction or reaction of the bleach with the other ingredients of the composition, as e.g., brighteners, surfactants and thickeners, when present, proceeds via one electron chemistry. One electron chemistry reactions are initiated by the formation of free radicals from the parent peroxygen bleach. Generally, the radicals formed are more reactive and better oxidising species than the parent, accelerating the decomposition kinetics of the peroxygen bleach and its reaction or interaction with the other ingredients, when present in the composition. The result of such reactions is the decomposition of the peroxygen bleach and the other ingredients, when present. For example, where thickeners are components of the composition, decomposition thereof can be initiated by one electron processes, resulting in the loss or decrease of viscosity upon storage. To improve the immediate and/or storage stability of bleaching compositions and the compatibility of the peroxygen bleach with the other ingredients, when present, it is therefore important to reduce, slow down or preferably completely suppress one electron oxidation chemistry reactions. Di- or tri-alkoxyated benzoic acids or salts thereof, preferably trialkoxy benzoic acids or salts thereof, more preferably trimethoxy benzoic acid or a salt thereof (TMBA), have been found to exhibit an excellent performance in reduction, slowing down or complete suppression of said one electron oxidation chemistry reactions, particularly in peroxygen bleach-containing compositions.

[0049] Furthermore, it has been found that the "immediate chemical stability" and/or "the chemical stability upon storage" of the peroxygen bleach in the bleaching composition according to the present invention and/or the other actives ingredients therein (where present), is improved when a di- or tri-alkoxyated benzoic acid or a salt thereof, preferably a trialkoxy benzoic acid or a salt thereof, more preferably trimethoxy benzoic acid or a salt thereof (TMBA), is present versus when it is not or when another radical scavenger, as e.g., butyl hydroxy toluene (BHT) and n-propyl gallate is present.

[0050] By "immediate chemical stability" it is meant herein, that the peroxygen bleach in bleaching compositions is stable immediately after the manufacture of said bleaching composition. By "chemical stability upon storage" it is meant herein, that the peroxygen bleach in bleaching compositions remains stable over a period of storage of 3 months at 25 °C. Thus, in practice this means that a bleaching composition remains sufficiently stable throughout the use by the consumer.

[0051] Generally, the immediate chemical stability and chemical stability upon storage of the peroxygen bleach in a bleaching composition may be evaluated by measuring the concentration of available oxygen (often abbreviated to AvO₂) immediately after and at given storage times after having manufactured the composition. The % loss of available oxygen and/or the concentration of remaining available oxygen can be measured by chemical titration methods known in the art, such as the iodometric method, thiosulphatimetric method, the permanganometric method and the cerimetric method. Said methods and the criteria for the choice of the appropriate method are described for example in "Hydrogen Peroxide", W. C. Schumb, C. N. Satterfield and R. L. Wentworth, Reinhold Publishing Corporation, New York, 1955 and "Organic Peroxides", Daniel Swern, Editor Wiley Int. Science, 1970.

Test method for chemical stability upon storage

[0052] The chemical stability upon storage of the compositions according to the present invention may alternatively

be assessed in the laboratory using a rapid ageing test ("RAT"). The RAT involves measuring the level of available oxygen in the fresh bleaching composition just after it is made and in the same composition after 7 days at 50°C. Under laboratory conditions, by "chemically stable upon storage", it is therefore to be understood that the compositions of the present invention typically do not undergo more than 25% loss of available oxygen (AvO₂) at 50°C ± 0.5°C after 7 days of storage as compared to the level of available oxygen of the fresh compositions. More preferably not more than 20% loss of available oxygen at 50°C ± 0.5°C after 7 days of storage.

[0053] Furthermore, it has been found that certain radical scavengers other than a di- or tri-alkoxylated benzoic acids or salts thereof, preferably other than trialkoxy benzoic acids or salts thereof, more preferably other than trimethoxy benzoic acid or a salt thereof (TMBA), as for example BHT, are themselves not completely chemically stable in bleaching compositions. Indeed, BHT can be present in a dimeric form in bleaching composition comprising a peroxygen bleach. Although not wishing to be bound by theory, it is believed that this dimeric form of BHT is formed by the interaction or reaction of BHT with radicals originating from the decomposition pathway of the peroxygen bleach and/or metal ions present in said bleaching compositions, especially when said BHT-containing bleaching composition is exposed to UV radiation (e.g., sunlight). The BHT dimer has a yellow color and therefore can lead to fabric and/or carpet yellowing when a bleaching composition comprising BHT is used to treat said fabric and/or carpet. It is believed that the fabric and/or carpet yellowing effect is due to the deposition of said BHT dimer formed during the storage of said bleaching composition and/or formed in-situ (on the fabric/carpet) during the treatment of said fabric and/or carpet with said bleaching composition. Moreover, the bleaching composition itself may turn yellow or at least get a yellowish color tone due to the presence of said yellow colored BHT dimer in said bleaching composition. In particular, the fabric/carpet yellowing and/or the bleaching composition yellowing may be observed when said fabric/carpet treated with a bleaching composition comprising BHT and/or said bleaching composition comprising BHT is exposed to light, for example direct sunlight, a UV lamp or the like, for a prolonged time, e.g., three to four hours.

[0054] It has now been found that di- or tri-alkoxylated benzoic acids or salts thereof, preferably trialkoxy benzoic acids or salts thereof, more preferably trimethoxy benzoic acid or a salt thereof (TMBA), itself are "substantially color stable", in bleaching composition as described herein.

[0055] By "substantially color stable" it is meant herein that substantially no coloured derivatives of di- or tri-alkoxylated benzoic acids or salts thereof, preferably trialkoxy benzoic acids or salts thereof, more preferably trimethoxy benzoic acid or a salt thereof (TMBA), are formed in the bleaching composition according to the present invention. Thus, preventing the yellowing of a fabric and/or a carpet when a bleaching composition comprising an alkoxylated benzoic acid or a salt thereof, preferably a trialkoxy benzoic acid or a salt thereof, more preferably trimethoxy benzoic acid or a salt thereof (TMBA), is used to treat said fabric and/or carpet ("fabric and/or carpet yellowing prevention benefit") and/or preventing the yellowing of the bleaching composition itself ("bleaching composition yellowing prevention benefit").

[0056] Therefore, the present invention encompasses the use of a di- or tri-alkoxylated benzoic acid or a salt thereof, preferably a trialkoxy benzoic acid or a salt thereof, more preferably trimethoxy benzoic acid or a salt thereof (TMBA), in a bleaching composition comprising a peroxygen bleach whereby a fabric and/or carpet yellowing prevention benefit and/or a bleaching composition yellowing prevention benefit is provided.

Test method for colour stability

[0057] The yellowing of a fabric and/or a carpet when a bleaching composition is used to treat said fabric and/or carpet ("fabric and/or carpet yellowing") and/or the yellowing of the bleaching composition itself ("bleaching composition yellowing") can be assessed by visual grading. The visual grading may be performed by a group of expert panelists using panel score units (PSU). To assess the fabric and/or carpet yellowing prevention benefit of a given bleaching composition a PSU-scale ranging from 0, meaning no noticeable difference in yellowing of a treated fabric/carpet versus an untreated fabric/carpet, to 4, meaning a clearly noticeable difference in yellowing of a treated fabric/carpet versus an untreated fabric/carpet, can be applied. To assess the bleaching composition yellowing prevention benefit of a given bleaching composition a PSU-scale ranging from 0, meaning no noticeable difference in yellowing of a bleaching composition, to 4, meaning a clearly noticeable difference in yellowing of a bleaching composition, can be applied.

Optional ingredients

Thickener

[0058] The compositions according to the present invention, preferably the compositions according to the present invention used in a process of treating a fabric, as described herein, may comprise as a highly preferred, but optional ingredient a thickener.

[0059] Preferred compositions of the present invention may have a viscosity of 1 cps or greater, more preferably of from 5 to 5000 cps, and still more preferably of from 10 to 2500 cps when measured with a CSL² 100® Rheometer at

20°C with a 4 cm spindle (linear increment from 10 to 100 dyne/cm² in 2 minutes).

[0060] Typically, the bleaching compositions according to the present invention may comprise from 0.001% to 10%, preferably from 0.05% to 5% and more preferably from 0.1 % to 1.0 % by weight of the total composition of a thickener.

[0061] Any thickener known to those skilled in the art are suitable for use herein. In a preferred embodiment the thickener is selected from the group consisting of : any suitable natural polymers and derivatives thereof, preferably polysaccharide polymers; vinyl-, carboxyvinyl-, crosslinked and non-crosslinked carboxylic-, preferably acrylic-, methacrylic- maleic-, and acryloamido-polymers; fatty acid esters; silicates; idantoinic resins; pyrogenic oxides; and mixtures thereof. More preferably, the thickener is a polysaccharide polymer, acrylic- or acryloamido-polymer or a mixture thereof. Even more preferably, the thickener is a polysaccharide polymer or a mixture thereof. Most preferably, the thickener is xanthan gum.

[0062] Suitable polysaccharide polymers for use herein include cellulose, substituted cellulose materials like carboxymethylcellulose, ethyl cellulose, hydroxyethyl cellulose, hydroxypropyl cellulose, hydroxymethyl cellulose, succinoglycan gum and naturally occurring polysaccharide polymers like xanthan gum, guar gum, locust bean gum, tragacanth gum or derivatives thereof, or mixtures thereof.

[0063] Particularly suitable thickeners for use herein are xanthan gum and derivatives thereof. Xanthan gum and derivatives thereof may be commercially available for instance from Kelco under the trade name Keltrol RD®, Kelzan S®, Kelzan ASX® or Kelzan T®. Other suitable Xanthan gum are commercially available by Rhone Poulenc under the trade name Rhodopol T® and Rhodigel X747®. Succinoglycan gum for use herein is commercially available by Rhone Poulenc under the trade name Rheozan ®.

[0064] It has now been found, that di- or tri-alkoxylated benzoic acids or salts thereof, preferably trialkoxy benzoic acids or salts thereof, more preferably trimethoxy benzoic acid or a salt thereof (TMBA), reduce, slow down or preferably prevent the decomposition of a thickener, when present in the bleaching compositions according to the present invention ("rheological stability benefit"). Therefore, in the preferred embodiment wherein the compositions herein are thickened, meaning that the compositions have an increased viscosity, the presence of a di- or tri-alkoxylated benzoic acid or a salt thereof, preferably a trialkoxy benzoic acid or a salt thereof, more preferably trimethoxy benzoic acid or a salt thereof (TMBA), increases the rheological stability of the bleaching compositions according to the present invention upon storage.

Test method for rheological stability upon storage

[0065] The rheological stability upon storage of the compositions according to the present invention may be assessed in the laboratory using a rapid ageing test ("RAT"). The RAT involves measuring the % loss of viscosity by comparing the viscosity of the fresh thickened bleaching composition ("initial viscosity") after it is made with the viscosity of the same compositions after 2 days at 50°C. Under laboratory conditions, by "rheological stability upon storage", it is therefore to be understood that the compositions of the present invention typically do not undergo more than 60% loss of viscosity at 50°C $\pm$ 0.5°C after 2 days of storage as compared to the initial viscosity of the fresh compositions. More preferably not more than 50% loss of viscosity at 50°C $\pm$ 0.5°C after 2 days of storage.

Surfactants

[0066] The compositions according to the present invention may comprise as a highly preferred but optional ingredient a surfactant.

[0067] The compositions of the present invention may further comprise a surfactant including nonionic surfactants, zwitterionic surfactants, anionic surfactants, cationic surfactants and/or amphoteric surfactants.

[0068] Typically, the compositions according to the present invention may comprise from 0.01% to 30%, preferably from 0.1% to 25 % and more preferably from 0.5% to 20% by weight of the total composition of a surfactant.

[0069] Suitable nonionic surfactants include alkoxylated nonionic surfactants. Preferred alkoxylated nonionic surfactants herein are ethoxylated nonionic surfactants according to the formula RO-(C₂H₄O)_nH, wherein R is a C₆ to C₂₂ alkyl chain or a C₆ to C₂₈ alkyl benzene chain, and wherein n is from 0 to 20, preferably from 1 to 15 and, more preferably from 2 to 15 and most preferably from 2 to 12. The preferred R chains for use herein are the C₈ to C₂₂ alkyl chains. Propoxylated nonionic surfactants and ethoxy/propoxylated ones may also be used herein instead of the ethoxylated nonionic surfactants as defined herein above or together with said surfactants

[0070] Preferred ethoxylated nonionic surfactants are substantially linear ethoxylated nonionic surfactants according to the above formula. By "linear it is meant herein that the fatty alcohols used as a basis of the nonionic surfactant (raw material) at least 90%, preferably at least 95%, more preferably at least 97%, and most preferably 100% by weight of the total amount of fatty alcohols of linear (i.e., straight chain) fatty alcohols.

[0071] Suitable substantially linear ethoxylated nonionic surfactants for use herein are Marlipal® 24-7 (R is a mixture of linear C₁₂ and C₁₄ alkyl chains, n is 7), Marlipal® 24-4 (R is a mixture of linear C₁₂ and C₁₄ alkyl chains, n is 4), Marlipal® 24-3 (R is a mixture of linear C₁₂ and C₁₄ alkyl chains, n is 3), Marlipal® 24-2 (R is a mixture of linear C₁₂ and

C₁₄ alkyl chains, n is 2), or mixtures thereof. Preferred herein are Marlipal® 24-7, Marlipal® 24-4, or mixtures thereof. These Marlipal® surfactants are commercially available from Condea.


[0072] Preferred ethoxylated nonionic surfactants are according to the formula above and have an HLB (hydrophilic-lipophilic balance) below 16, preferably below 15, and more preferably below 14. Those ethoxylated nonionic surfactants have been found to provide good grease cutting properties.

[0073] Accordingly suitable ethoxylated nonionic surfactants for use herein are Dobanol® 91-2.5 (HLB = 8.1; R is a mixture of C₉ and C₁₁ alkyl chains, n is 2.5), or Lutensol® TO3 (HLB = 8; R is a C₁₃ alkyl chains, n is 3), or Lutensol® AO3 (HLB = 8; R is a mixture of C₁₃ and C₁₅ alkyl chains, n is 3), or Tergitol® 25L3 (HLB = 7.7; R is in the range of C₁₂ to C₁₅ alkyl chain length, n is 3), or Dobanol® 23-3 (HLB = 8.1; R is a mixture of C₁₂ and C₁₃ alkyl chains, n is 3), or Dobanol® 23-2 (HLB = 6.2; R is a mixture of C₁₂ and C₁₃ alkyl chains, n is 2), or Dobanol® 45-7 (HLB = 11.6; R is a mixture of C₁₄ and C₁₅ alkyl chains, n is 7) Dobanol® 23-6.5 (HLB = 11.9; R is a mixture of C₁₂ and C₁₃ alkyl chains, n is 6.5), or Dobanol® 25-7 (HLB = 12; R is a mixture of C₁₂ and C₁₅ alkyl chains, n is 7), or Dobanol® 91-5 (HLB = 11.6; R is a mixture of C₉ and C₁₁ alkyl chains, n is 5), or Dobanol® 91-6 (HLB = 12.5; R is a mixture of C₉ and C₁₁ alkyl chains, n is 6), or Dobanol® 91-8 (HLB = 13.7; R is a mixture of C₉ and C₁₁ alkyl chains, n is 8), Dobanol® 91-10 (HLB = 14.2; R is a mixture of C₉ to C₁₁ alkyl chains, n is 10), Dobanol® 91-12 (HLB = 14.5; R is a mixture of C₉ to C₁₁ alkyl chains, n is 12), or mixtures thereof. Preferred herein are Dobanol® 91-2.5, or Lutensol® TO3, or Lutensol® AO3, or Tergitol® 25L3, or Dobanol® 23-3, or Dobanol® 23-2, or Dobanol® 45-7, Dobanol® 91-8, or Dobanol® 91-10, or Dobanol® 91-12, or mixtures thereof. These Dobanol® surfactants are commercially available from SHELL. These Lutensol® surfactants are commercially available from BASF and these Tergitol® surfactants are commercially available from UNION CARBIDE.

[0074] Suitable chemical processes for preparing the alkoxyated nonionic surfactants for use herein include condensation of corresponding alcohols with alkylene oxide, in the desired proportions. Such processes are well known to the man skilled in the art and have been extensively described in the art.

[0075] The compositions herein may desirably comprise one of those ethoxylated nonionic surfactants or a mixture of those ethoxylated nonionic surfactants having different HLBs (hydrophilic-lipophilic balance). In a preferred embodiment the compositions herein comprise an ethoxylated nonionic surfactant according to the above formula and having an HLB up to 10 (i.e., a so called hydrophobic ethoxylated nonionic surfactant), preferably below 10, more preferably below 9, and an ethoxylated nonionic surfactant according to the above formula and having an HLB above 10 to 16 (i.e., a so called hydrophilic ethoxylated nonionic surfactant), preferably from 11 to 14. Indeed, in this preferred embodiment the compositions of the present invention typically comprise from 0.01% to 15% by weight of the total composition of said hydrophobic ethoxylated nonionic surfactant, preferably from 0.5% to 10% and from 0.01% to 15% by weight of said hydrophilic ethoxylated nonionic surfactant, preferably from 0.5% to 10%. Such mixtures of ethoxylated nonionic surfactants with different HLBs may be desired as they allow optimum grease cleaning removal performance on a broader range of greasy soils having different hydrophobic/hydrophilic characters.

[0076] Other suitable nonionic surfactants to be used herein include polyhydroxy fatty acid amide surfactants, or mixtures thereof, according to the formula:



wherein R¹ is H, or C₁-C₄ alkyl, C₁-C₄ hydrocarbyl, 2-hydroxy ethyl, 2-hydroxy propyl or a mixture thereof, R² is C₅-C₃₁ hydrocarbyl, and Z is a polyhydroxyhydrocarbyl having a linear hydrocarbyl chain with at least 3 hydroxyls directly connected to the chain, or an alkoxyated derivative thereof.

[0077] Preferably, R¹ is C₁-C₄ alkyl, more preferably C₁ or C₂ alkyl and most preferably methyl, R² is a straight chain C₇-C₁₉ alkyl or alkenyl, preferably a straight chain C₉-C₁₈ alkyl or alkenyl, more preferably a straight chain C₁₁-C₁₈ alkyl or alkenyl, and most preferably a straight chain C₁₁-C₁₄ alkyl or alkenyl, or mixtures thereof. Z preferably will be derived from a reducing sugar in a reductive amination reaction; more preferably Z is a glycityl. Suitable reducing sugars include glucose, fructose, maltose, lactose, galactose, mannose and xylose. As raw materials, high dextrose corn syrup, high fructose corn syrup, and high maltose corn syrup can be utilized as well as the individual sugars listed above. These corn syrups may yield a mix of sugar components for Z. It should be understood that it is by no means intended to exclude other suitable raw materials. Z preferably will be selected from the group consisting of -CH₂-(CHOH)_n-CH₂OH, -CH(CH₂OH)-(CHOH)_{n-1}-CH₂OH, -CH₂-(CHOH)₂-(CHOR')(CHOH)-CH₂OH, where n is an integer from 3 to 5, inclusive, and R' is H or a cyclic or aliphatic monosaccharide, and alkoxyated derivatives thereof. Most preferred are glycityls wherein n is 4, particularly CH₂-(CHOH)₄-CH₂OH.


[0078] In formula R² - C(O) - N(R¹) - Z, R¹ can be, for example, N-methyl, N-ethyl, N-propyl, N-isopropyl, N-butyl, N-2-hydroxy ethyl, or N-2-hydroxy propyl. R² - C(O) - N< can be, for example, cocamide, stearamide, oleamide, lauramide, myristamide, capricamide, palmitamide, tallowamide and the like. Z can be 1-deoxyglucityl, 2-deoxyfructityl, 1-deoxymaltityl, 1-deoxylactityl, 1-deoxygalactityl, 1-deoxymannityl and 1-deoxymaltotriosityl.

[0079] Suitable polyhydroxy fatty acid amide surfactants to be used herein may be commercially available under the

trade name HOE® from Hoechst.

[0080] Methods for making polyhydroxy fatty acid amide surfactants are known in the art. In general, they can be made by reacting an alkyl amine with a reducing sugar in a reductive amination reaction to form a corresponding N-alkyl polyhydroxyamine, and then reacting the N-alkyl polyhydroxyamine with a fatty aliphatic ester or triglyceride in a condensation/amidation step to form the N-alkyl, N-polyhydroxy fatty acid amide product. Processes for making compositions containing polyhydroxy fatty acid amides are disclosed for example in GB patent specification 809,060, published February 18, 1959, by Thomas Hedley & Co., Ltd., US patent 2,965,576, issued December 20, 1960 to E.R. Wilson, US patent 2,703,798, Anthony M. Schwartz, issued March 8, 1955, US patent 1,985,424, issued December 25, 1934 to Piggott and WO92/06070.

[0081] Suitable zwitterionic betaine surfactants for use herein contain both a cationic hydrophilic group, i.e., a quaternary ammonium group, and anionic hydrophilic group on the same molecule at a relatively wide range of pH's. The typical anionic hydrophilic groups are carboxylates and sulphonates, although other groups like sulfates, phosphonates, and the like can be used. A generic formula for the zwitterionic betaine surfactant to be used herein is :



wherein R_1 is a hydrophobic group; R_2 is hydrogen, C_1 - C_6 alkyl, hydroxy alkyl or other substituted C_1 - C_6 alkyl group; R_3 is C_1 - C_6 alkyl, hydroxy alkyl or other substituted C_1 - C_6 alkyl group which can also be joined to R_2 to form ring structures with the N, or a C_1 - C_6 sulphonate group; R_4 is a moiety joining the cationic nitrogen atom to the hydrophilic group and is typically an alkylene, hydroxy alkylene, or polyalkoxy group containing from 1 to 10 carbon atoms; and X is the hydrophilic group, which is a carboxylate or sulphonate group.

[0082] Preferred hydrophobic groups R_1 are aliphatic or aromatic, saturated or unsaturated, substituted or unsubstituted hydrocarbon chains that can contain linking groups such as amido groups, ester groups. More preferred R_1 is an alkyl group containing from 1 to 24 carbon atoms, preferably from 8 to 18, and more preferably from 10 to 16. These simple alkyl groups are preferred for cost and stability reasons. However, the hydrophobic group R_1 can also be an amido radical of the formula $R_a-C(O)-NH-(C(R_b)_2)_m$, wherein R_a is an aliphatic or aromatic, saturated or unsaturated, substituted or unsubstituted hydrocarbon chain, preferably an alkyl group containing from 8 up to 20 carbon atoms, preferably up to 18, more preferably up to 16, R_b is selected from the group consisting of hydrogen and hydroxy groups, and m is from 1 to 4, preferably from 2 to 3, more preferably 3, with no more than one hydroxy group in any $(C(R_b)_2)$ moiety.

[0083] Preferred R_2 is hydrogen, or a C_1 - C_3 alkyl and more preferably methyl. Preferred R_3 is C_1 - C_4 sulphonate group, or a C_1 - C_3 alkyl and more preferably methyl. Preferred R_4 is $(CH_2)_n$ wherein n is an integer from 1 to 10, preferably from 1 to 6, more preferably is from 1 to 3.

[0084] Some common examples of betaine/sulphobetaine are described in U.S. Pat. Nos. 2,082,275, 2,702,279 and 2,255,082.

[0085] Examples of particularly suitable alkyldimethyl betaines include coconut-dimethyl betaine, lauryl dimethyl betaine, decyl dimethyl betaine, 2-(N-decyl-N, N-dimethyl-ammonia)acetate, 2-(N-coco N, N-dimethylammonio) acetate, myristyl dimethyl betaine, palmityl dimethyl betaine, cetyl dimethyl betaine, stearyl dimethyl betaine. For example Coconut dimethyl betaine is commercially available from Seppic under the trade name of Amonyl 265®. Lauryl betaine is commercially available from Albright & Wilson under the trade name Empigen BB/L®.

[0086] Examples of amidobetaines include cocoamidoehtylbetaine, cocoamidopropyl betaine or C_{10} - C_{14} fatty acylamidopropylene(hydropropylene)sulfobetaine. For example C_{10} - C_{14} fatty acylamidopropylene(hydropropylene)sulfobetaine is commercially available from Sherex Company under the trade name "Varion CAS® sulfobetaine".

[0087] A further example of betaine is Lauryl-immuno-dipropionate commercially available from Rhone-Poulenc under the trade name Mirataine H₂C-HA®.

[0088] Suitable anionic surfactants to be used in the compositions herein include water-soluble salts or acids of the formula $ROSO_3M$ wherein R preferably is a C_{10} - C_{24} hydrocarbonyl, preferably an alkyl or hydroxyalkyl having a C_{10} - C_{20} alkyl component, more preferably a C_{12} - C_{18} alkyl or hydroxyalkyl, and M is H or a cation, e.g., an alkali metal cation (e.g., sodium, potassium, lithium), or ammonium or substituted ammonium (e.g., methyl-, dimethyl-, and trimethyl ammonium cations and quaternary ammonium cations, such as tetramethyl-ammonium and dimethyl piperdinium cations and quaternary ammonium cations derived from alkylamines such as ethylamine, diethylamine, triethylamine, and mixtures thereof). Typically, alkyl chains of C_{12} -16 are preferred for lower wash temperatures (e.g., below 50°C) and C_{16} -18 alkyl chains are preferred for higher wash temperatures (e.g., above 50°C).

[0089] Other suitable anionic surfactants for use herein are water-soluble salts or acids of the formula $RO(A)_mSO_3M$ wherein R is an unsubstituted C_{10} - C_{24} alkyl or hydroxyalkyl group having a C_{10} - C_{24} alkyl component, preferably a C_{12} - C_{20} alkyl or hydroxyalkyl, more preferably C_{12} - C_{18} alkyl or hydroxyalkyl, A is an ethoxy or propoxy unit, m is greater than zero, typically between 0.5 and 6, more preferably between 0.5 and 3, and M is H or a cation which can be, for example, a metal cation (e.g., sodium, potassium, lithium, calcium, magnesium, ammonium or substituted-ammonium cation. Alkyl ethoxylated sulfates as well as alkyl propoxylated sulfates are contemplated herein. Specific examples of

substituted ammonium cations include methyl-, dimethyl-, trimethyl-ammonium and quaternary ammonium cations, such as tetramethyl-ammonium, dimethyl piperdinium and cations derived from alkanolamines such as ethylamine, diethylamine, triethylamine, mixtures thereof Exemplary surfactants are C₁₂-C₁₈ alkyl polyethoxylate (1.0) sulfate (C₁₂-C₁₈E (1.0)SM), C₁₂-C₁₈ alkyl polyethoxylate (2.25) sulfate (C₁₂-C₁₈E(2.25)SM), C₁₂-C₁₈ alkyl polyethoxylate (3.0) sulfate (C₁₂-C₁₈E(3.0)SM), and C₁₂-C₁₈ alkyl polyethoxylate (4.0) sulfate (C₁₂-C₁₈E(4.0)SM), wherein M is conveniently selected from sodium and potassium.

[0090] Other suitable anionic surfactants for use herein are sulphonated anionic surfactants Suitable sulphonated anionic surfactants for use herein include alkyl sulphonates, alkyl aryl sulphonates, naphthalene sulphonates, alkyl alkoxyated sulphonates, C₆-C₂₀ alkyl alkoxyated linear or branched diphenyl oxide disulphonates, or mixtures thereof.

[0091] Suitable alkyl sulphonates for use herein include water-soluble salts or acids of the formula RSO₃M wherein R is a C₆-C₂₀ linear or branched, saturated or unsaturated alkyl group, preferably a C₈-C₁₈ alkyl group and more preferably a C₁₄-C₁₇ alkyl group, and M is H or a cation, e.g., an alkali metal cation (e.g., sodium, potassium, lithium), or ammonium or substituted ammonium (e.g., methyl-, dimethyl-, and trimethyl ammonium cations and quaternary ammonium cations, such as tetramethyl-ammonium and dimethyl piperdinium cations and quaternary ammonium cations derived from alkylamines such as ethylamine, diethylamine, triethylamine, and mixtures thereof.


[0092] Suitable alkyl aryl sulphonates for use herein include water-soluble salts or acids of the formula RSO₃M wherein R is an aryl, preferably a benzyl, substituted by a C₆-C₂₀ linear or branched saturated or unsaturated alkyl group, preferably a C₈-C₁₈ alkyl group and more preferably a C₁₀-C₁₆ alkyl group, and M is H or a cation, e.g., an alkali metal cation (e.g., sodium, potassium, lithium, calcium, magnesium or ammonium or substituted ammonium (e.g., methyl-, dimethyl-, and trimethyl ammonium cations and quaternary ammonium cations, such as tetramethyl-ammonium and dimethyl piperdinium cations and quaternary ammonium cations derived from alkylamines such as ethylamine, diethylamine, triethylamine, and mixtures thereof.

[0093] Particularly suitable linear alkyl sulphonates include C₁₄-C₁₇ paraffin sulphonate like Hostapur® SAS commercially available from Hoechst. An example of commercially available alkyl aryl sulphonate is Lauryl aryl sulphonate from Su.Ma.. Particularly preferred alkyl aryl sulphonates are alkyl benzene sulphonates commercially available under trade name Nansa® available from Albright&Wilson.

[0094] By "linear alkyl sulphonate" it is meant herein a non-substituted alkyl sulphonate wherein the alkyl chain comprises from 6 to 20 carbon atoms, preferably from 8 to 18 carbon atoms, and more preferably from 14 to 17 carbon atoms, and wherein this alkyl chain is sulphonated at one terminus.

[0095] Suitable alkoxyated sulphonate surfactants for use herein are according to the formula R(A)_mSO₃M wherein R is an unsubstituted C₆-C₂₀ alkyl, hydroxyalkyl or alkyl aryl group, having a linear or branched C₆-C₂₀ alkyl component, preferably a C₁₂-C₂₀ alkyl or hydroxyalkyl, more preferably C₁₂-C₁₈ alkyl or hydroxyalkyl, A is an ethoxy or propoxy or butoxy unit, m is greater than zero, typically between 0.5 and 6, more preferably between 0.5 and 3, and M is H or a cation which can be, for example, a metal cation (e.g., sodium, potassium, lithium, calcium, magnesium), ammonium or substituted-ammonium cation. Alkyl ethoxyated sulphonates, alkyl butoxyated sulphonates as well as alkyl propoxyated sulphonates are contemplated herein. Specific examples of substituted ammonium cations include methyl-, dimethyl-, trimethyl-ammonium and quaternary ammonium cations, such as tetramethyl-ammonium, dimethyl piperdinium and cations derived from alkanolamines such as ethylamine, diethylamine, triethylamine, mixtures thereof. Exemplary surfactants are C₁₂-C₁₈ alkyl polyethoxylate (1.0) sulphonate (C₁₂-C₁₈E(1.0) SO₃M), C₁₂-C₁₈ alkyl polyethoxylate (2.25) sulphonate (C₁₂-C₁₈E(2.25) SO₃M), C₁₂-C₁₈ alkyl polyethoxylate (3.0) sulphonate (C₁₂-C₁₈E(3.0) SO₃M), and C₁₂-C₁₈ alkyl polyethoxylate (4.0) sulphonate (C₁₂-C₁₈E(4.0) SO₃M), wherein M is conveniently selected from sodium and potassium. Particularly suitable alkoxyated sulphonates include alkyl aryl polyether sulphonate like Triton X-200® commercially available from Union Carbide.

[0096] Suitable C₆-C₂₀ alkyl alkoxyated linear or branched diphenyl oxide disulphonate surfactants for use herein are according to the following formula:

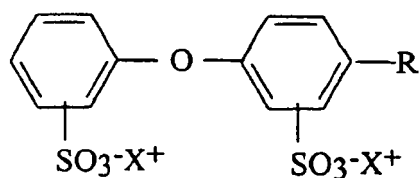


wherein R is a C₆-C₂₀ linear or branched, saturated or unsaturated alkyl group, preferably a C₁₂-C₁₈ alkyl group and more preferably a C₁₄-C₁₆ alkyl group, and X⁺ is H or a cation, e.g., an alkali metal cation (e.g., sodium, potassium,

lithium, calcium, magnesium. Particularly suitable C₆-C₂₀ alkyl alkoxyated linear or branched diphenyl oxide disulphonate surfactants to be used herein are the C₁₂ branched di phenyl oxide disulphonic acid and C₁₆ linear di phenyl oxide disulphonate sodium salt respectively commercially available by DOW under the trade name Dowfax 2A1® and Dowfax 8390®.

[0097] Other anionic surfactants suitable herein include sulfosuccinate surfactants, alkyl carboxylate surfactants, sulfosuccinamate surfactants and sulfosuccinamide surfactants.


[0098] Suitable sulfosuccinate surfactants are according to the formula :

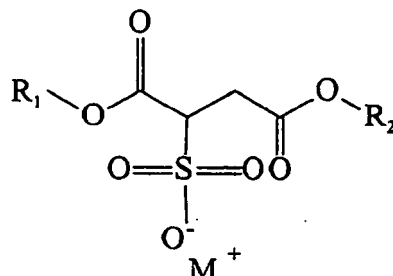

wherein : R₁ is hydrogen or a hydrocarbon group selected from the group consisting of straight or branched alkyl radicals containing from 6 to 20 carbon atoms, preferably 8 to 18 carbon atoms, more preferably 10 to 16 carbon atoms, and alkyl phenyl radicals containing from 6 to 18 carbon atoms in the alkyl group; R₂ is a hydrocarbon group selected from the group consisting of straight or branched alkyl radicals containing from 6 to 20 carbon atoms, preferably 8 to 18 carbon atoms, more preferably 10 to 16 carbon atoms, and alkyl phenyl radicals containing from 6 to 18 carbon atoms in the alkyl group; and M is hydrogen or a cationic moiety, e.g., an alkali metal cation (e.g., sodium, potassium, lithium, calcium, magnesium or ammonium or substituted ammonium (e.g., methyl-, dimethyl-, and trimethyl ammonium cations and quaternary ammonium cations, such as tetramethyl-ammonium and dimethyl piperdinium cations and quaternary ammonium cations derived from alkylamines such as ethylamine, diethylamine, triethylamine, and mixtures thereof.


[0099] Such sulfosuccinate surfactants are commercially available under the tradenames Aerosol® from Cytec, Anionyx® from Stepan, Arylene® from Hart, Setacin® from Zschimmer & Schwarz, Mackanate® from McIntyre and Monawet® from Mona Industries.

[0100] Suitable sulfosuccinamate surfactants for use herein are according to the formula

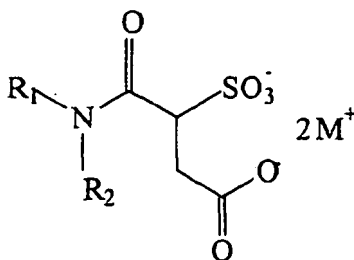

wherein R₁ and R₂ each independently represent a hydrocarbon group selected from the group consisting of straight or branched alkyl radicals containing from 6 to 20, preferably 8 to 18, more preferably 10 to 16, carbon atoms and alkyl phenyl radicals containing from 6 to 18 carbon atoms in the alkyl group. M is H or a cation, e.g., an alkali metal cation (e.g., sodium, potassium, lithium, calcium, magnesium or ammonium or substituted ammonium (e.g., methyl-, dimethyl-, and trimethyl ammonium cations and quaternary ammonium cations, such as tetramethyl-ammonium and dimethyl piperdinium cations and quaternary ammonium cations derived from alkylamines such as ethylamine, diethylamine, triethylamine, and mixtures thereof.

[0101] Suitable sulfosuccinamide surfactants for use herein are according to the formula




wherein R_1 and R_2 each independently represent a hydrocarbon group selected from the group consisting of straight or branched alkyl radicals containing from 6 to 20, preferably 8 to 18, more preferably 10 to 16, carbon atoms and alkyl phenyl radicals containing from 6 to 18 carbon atoms in the alkyl group. M is H or a cation, e.g., an alkali metal cation (e.g., sodium, potassium, lithium, calcium, magnesium and the like) or ammonium or substituted ammonium (e.g., methyl-, dimethyl-, and trimethyl ammonium cations and quaternary ammonium cations, such as tetramethyl-ammonium and dimethyl piperdinium cations and quaternary ammonium cations derived from alkylamines such as ethylamine, diethylamine, triethylamine, and mixtures thereof.

[0102] Suitable alkyl carboxylate surfactants for use herein are according to the formula RCO_2M wherein : R represents a hydrocarbon group selected from the group consisting of straight or branched alkyl radicals containing from 6 to 20, preferably 8 to 18, more preferably 10 to 16, carbon atoms and alkyl phenyl radicals containing from 6 to 18 carbon atoms in the alkyl group. M is H or a cation, e.g., an alkali metal cation (e.g., sodium, potassium, lithium, calcium, magnesium or ammonium or substituted ammonium (e.g., methyl-, dimethyl-, and trimethyl ammonium cations and quaternary ammonium cations, such as tetramethyl-ammonium and dimethyl piperdinium cations and quaternary ammonium cations derived from alkylamines such as ethylamine, diethylamine, triethylamine, and mixtures thereof.

[0103] Other anionic surfactants useful for deterative purposes can also be used herein. These can include salts (including, for example, sodium, potassium, ammonium, and substituted ammonium salts such as mono-, di- and triethanolamine salts) of soap, sulphonated polycarboxylic acids prepared by sulphonation of the pyrolyzed product of alkaline earth metal citrates, e.g., as described in British patent specification No. 1,082,179, C_8 - C_{24} alkylpolyglycoethersulfates (containing up to 10 moles of ethylene oxide); alkyl ester sulphonates such as C_{14-16} methyl ester sulphonates; acyl glycerol sulphonates, fatty oleyl glycerol sulfates, alkyl phenol ethylene oxide ether sulfates, alkyl phosphates, isethionates such as the acyl isethionates, N -acyl taurates, sulfates of alkylpolysaccharides such as the sulfates of alkylpolyglucoside (the nonionic nonsulfated compounds being described below), branched primary alkyl sulfates, alkyl polyethoxy carboxylates such as those of the formula $RO(CH_2CH_2O)_kCH_2COO-M^+$ wherein R is a C_8 - C_{22} alkyl, k is an integer from 0 to 10, and M is a soluble salt-forming cation. Resin acids and hydrogenated resin acids are also suitable, such as rosin, hydrogenated rosin, and resin acids and hydrogenated resin acids present in or derived from tall oil. Further examples are given in "Surface Active Agents and Detergents" (Vol. I and II by Schwartz, Perry and Berch). A variety of such surfactants are also generally disclosed in U.S. Patent 3,929,678, issued December 30, 1975, to Laughlin, et al. at Column 23, line 58 through Column 29, line 23.

[0104] Other suitable anionic surfactants to be used herein also include acyl sarcosinate, in its acid and/or salt form, preferably long chain acyl sarcosinates having the following formula:



wherein M is hydrogen or a cationic moiety and wherein R is an alkyl group of from 11 to 15 carbon atoms, preferably of from 11 to 13 carbon atoms. Preferred M are hydrogen and alkali metal salts, especially sodium and potassium. Said acyl sarcosinate surfactants are derived from natural fatty acids and the amino-acid sarcosine (N -methyl glycine). They are suitable to be used as aqueous solution of their salt or in their acidic form as powder. Being derivatives of natural fatty acids, said acyl sarcosinates are rapidly and completely biodegradable and have good skin compatibility.

[0105] Accordingly, suitable long chain acyl sarcosinates to be used herein include C_{12} acyl sarcosinate (i.e., an acyl sarcosinate according to the above formula wherein M is hydrogen and R is an alkyl group of 11 carbon atoms) and C_{14}

acyl sarcosinate (i.e., an acyl sarcosinate according to the above formula wherein M is hydrogen and R is an alkyl group of 13 carbon atoms). C₁₂ acyl sarcosinate is commercially available, for example, as Hamposyl L-30® supplied by Hampshire. C₁₄ acyl sarcosinate is commercially available, for example, as Hamposyl M-30® supplied by Hampshire.

[0106] Suitable amphoteric surfactants to be used herein include amine oxides having the following formula R₁R₂R₃NO wherein each of R₁, R₂ and R₃ is independently a saturated substituted or unsubstituted, linear or branched hydrocarbon chains of from 1 to 30 carbon atoms. Preferred amine oxide surfactants to be used according to the present invention are amine oxides having the following formula R₁R₂R₃NO wherein R₁ is an hydrocarbon chain comprising from 1 to 30 carbon atoms, preferably from 6 to 20, more preferably from 8 to 16, most preferably from 8 to 12, and wherein R₂ and R₃ are independently substituted or unsubstituted, linear or branched hydrocarbon chains comprising from 1 to 4 carbon atoms, preferably from 1 to 3 carbon atoms, and more preferably are methyl groups. R₁ may be a saturated substituted or unsubstituted linear or branched hydrocarbon chain. Suitable amine oxides for use herein are for instance natural blend C₈-C₁₀ amine oxides as well as C₁₂-C₁₆ amine oxides commercially available from Hoechst.

[0107] In a preferred embodiment of the present invention, more preferably in a preferred embodiment wherein the bleaching compositions according to the present invention are used in a process of treating a fabric as described herein, said compositions comprise a nonionic surfactant or a zwitterionic betaine surfactant or a mixture thereof.

[0108] In another preferred embodiment of the present invention, more preferably in a preferred embodiment wherein the bleaching compositions according to the present invention are used in a process of treating a fabric as described herein, said compositions comprise a sulphonated anionic surfactant. More preferably said composition further comprises a second surfactant selected from the group consisting of nonionic surfactants, amphoteric surfactants, zwitterionic surfactants and mixtures thereof.

[0109] In yet another preferred embodiment of the present invention, more preferably in a preferred embodiment wherein the bleaching compositions according to the present invention are used in a process of treating a carpet as described herein, said compositions comprise a sarcosinate surfactant, an alkyl sulphonate surfactant, an alkyl sulphate surfactant, or a zwitterionic betaine surfactant and mixtures thereof, and more preferably an alkyl sarcosinate surfactant.

[0110] In still another preferred embodiment of the present invention, more preferably in a preferred embodiment wherein the bleaching compositions according to the present invention are used in a process of treating a carpet as described herein, said compositions comprise a sulfosuccinate surfactant. More preferably, said compositions comprise a mixture of a sulfosuccinate surfactant and a second anionic surfactant. Most preferably, said compositions comprise a mixture of a sulfosuccinate surfactant and a sulphate surfactant.

Other optional ingredients

[0111] The bleaching compositions herein may further comprise a variety of other optional ingredients such as builders, chelating agents, stabilisers, bleach activators, soil suspenders, soil suspending polyamine polymers, polymeric soil release agents, foam reducing systems or agents, catalysts, dye transfer agents, brighteners, perfumes, hydrotropes, solvents, pigments and dyes.

Builder

[0112] The bleaching compositions of the present invention may further comprise one or more builders and/or a modified polycarboxylate co-builder.

[0113] Suitable builders are selected from the group consisting of : organic acids and salts thereof; polycarboxylates; and mixtures thereof. Typically said builders have a calcium chelating constant (pKCa) of at least 3. Herein the pKCa the value of a builder or a mixture thereof is measured using an 0.1M NH₄Cl-NH₄OH buffer (pH 10 at 25°C) and a 0.1% solution of said builder or mixture thereof with a standard calcium ion electrode.

[0114] Examples of builders are organic acids like citric acid, lactic acid, tartaric acid, oxalic acid, malic acid, mono-succinic acid, disuccinic acid, oxydisuccinic acid, carboxymethyl oxysuccinic acid, diglycolic acid, carboxymethyl tartrate, ditartrate and other organic acid or mixtures thereof.

[0115] Suitable salts of organic acids include alkaline, preferably sodium or potassium, alkaline earth metal, ammonium or alkanolamine salts.

[0116] Such organic acids and the salts thereof are commercially available from Jungbunzlaur, Haarman & Reimen, Sigma-Aldrich or Fluka.

[0117] Other suitable builders include a wide variety of polycarboxylate compounds. As used herein, "polycarboxylate" refers to compounds having a plurality of carboxylate groups, preferably at least 3 carboxylates. Polycarboxylate builder can generally be added to the composition in acid form, but can also be added in the form of a neutralized salt or "overbased". When utilized in salt form, alkali metals, such as sodium, potassium, and lithium, or alkanolammonium salts are preferred.

[0118] Useful polycarboxylates include homopolymers of acrylic acid and copolymers of acrylic acid and maleic acid.

[0119] Other useful polycarboxylate builders include the ether hydroxypolycarboxylates, copolymers of maleic anhydride with ethylene or vinyl methyl ether, 1,3,5-trihydroxy benzene-2,4,6-trisulfonic acid, and carboxymethyloxysuccinic acid, the various alkali metal, ammonium and substituted ammonium salts of polyacetic acids such as nitrilotriacetic acid, as well as polycarboxylates such as mellitic acid, succinic acid, oxydisuccinic acid, polymaleic acid, benzene 1,3,5-tricarboxylic acid, carboxymethyloxysuccinic acid, and soluble salts thereof.

[0120] Suitable polycarboxylates are commercially available from Rohm & Haas under the trade name Norasol® or Acusol®.

[0121] Preferred builders herein are selected from the group consisting of : citric acid; tartaric acid; tartrate monosuccinate; tartrate disuccinate; lactic acid; oxalic acid; and malic acid; and mixtures thereof. Even more preferred builders herein are selected from the group consisting of : citric acid; tartaric acid; tartrate monosuccinate; tartrate disuccinate; and malic acid; and mixtures thereof. The most preferred builders herein are selected from the group consisting of : citric acid; tartaric acid; tartrate monosuccinate; and tartrate disuccinate; and mixtures thereof.

[0122] Typically the bleaching compositions herein may comprise up to 40%, preferably from 0.01% to 25%, more preferably from 0.1% to 15%, and most preferably from 0.5% to 10% by weight of the total composition of said builder.


[0123] The compositions of the present invention may further comprise a modified polycarboxylate co-builder.

[0124] The term "polycarboxylate" refers to compounds having a plurality of carboxylate groups, preferably at least 3 carboxylates.

[0125] By "modified polycarboxylate" it is meant herein that at least at one end of the polycarboxylate compound, i.e., the polycarboxylate chain, said compound is modified by a functional group, e.g., a phosphono group.

[0126] Preferred modified polycarboxylate co-builders are polycarboxylates with phosphono end groups.


[0127] By "phosphono end group" it is meant herein a phosphono functional group according to the formula :



wherein each M is independently H or a cation, preferably both M are H.


[0128] Examples of suitable polycarboxylates with phosphono end groups are copolymers of acrylic acid and maleic acid having a phosphono end group and homopolymers of acrylic acid having a phosphono end group.

[0129] A preferred modified polycarboxylate is a copolymer of acrylic acid and maleic acid with a phosphonic/phosphono end group according to the general formula :

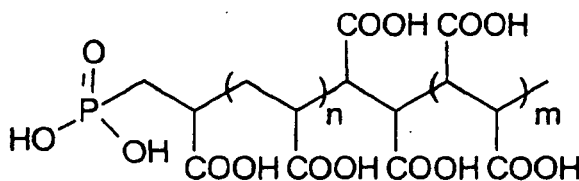

having an average molecular weight of from 1000 to 100000, preferably an average molecular weight of from 1000 to 20000, more preferably an average molecular weight of from 1000 to 10000, and most preferably an average molecular weight of from 1500 to 5000; wherein n is from 10 mol% to 90 mol%, preferably 80 mol% and m is from 10 mol% to 90 mol%, preferably 20 mol%.

[0130] Accordingly, an example of a suitable modified polycarboxylate is a copolymer of acrylic acid and maleic acid (80/20) with a phosphonic/phosphono end group according to the formula :

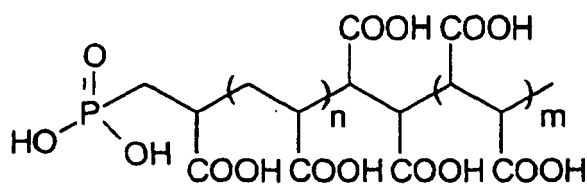

wherein n is 80 mol% and m is 20 mol%; having an average molecular weight of 2000.

[0131] Such modified polycarboxylate are available from Rohm & Haas under the trade name Acusol 425®, Acusol 420® or Acusol 470®.

[0132] Typically the bleaching compositions herein may comprise up to 40%, preferably from 0.01% to 25%, more preferably from 0.1% to 15%, and most preferably from 0.5% to 5% by weight of the total composition of said modified polycarboxylate co-builder.

Chelating agents

[0133] The bleaching compositions of the present invention may comprise a chelating agent as a preferred optional ingredient. Suitable chelating agents may be any of those known to those skilled in the art, such as the ones selected from the group comprising phosphonate chelating agents, amino carboxylate chelating agents, other carboxylate chelating agents, polyfunctionally-substituted aromatic chelating agents, ethylenediamine N,N'-disuccinic acids, or mixtures thereof.

[0134] A chelating agent may be desired in the compositions of the present invention as it allows to increase the ionic strength of the compositions herein and thus their stain removal and bleaching performance on various surfaces. The presence of chelating agents may also contribute to reduce the tensile strength loss of fabrics and/or color damage, especially in a laundry through the wash application. Indeed, the chelating agents inactivate the metal ions present on the surface of the fabrics and/or in the cleaning compositions (neat or diluted) that otherwise would contribute to the radical decomposition of the peroxygen bleach.

[0135] Suitable phosphonate chelating agents to be used herein may include alkali metal ethane 1-hydroxy diphosphonates (HEDP), alkylene poly (alkylene phosphonate), as well as amino phosphonate compounds, including amino aminotri(methylene phosphonic acid) (ATMP), nitrilo trimethylene phosphonates (NTP), ethylene diamine tetra methylene phosphonates, and diethylene triamine penta methylene phosphonates (DTPMP). The phosphonate compounds may be present either in their acid form or as salts of different cations on some or all of their acid functionalities. Preferred phosphonate chelating agents to be used herein are diethylene triamine penta methylene phosphonate (DTPMP) and ethane 1-hydroxy diphosphonate (HEDP). Such phosphonate chelating agents are commercially available from Monsanto under the trade name DEQUEST®.


[0136] Polyfunctionally-substituted aromatic chelating agents may also be useful in the compositions herein. See U.S. patent 3,812,044, issued May 21, 1974, to Connor et al. Preferred compounds of this type in acid form are dihydroxy-disulfobenzenes such as 1,2-dihydroxy -3,5-disulfobenzene.

[0137] A preferred biodegradable chelating agent for use herein is ethylene diamine N,N'-disuccinic acid, or alkali metal, or alkaline earth, ammonium or substitutes ammonium salts thereof or mixtures thereof. Ethylenediamine N,N'-disuccinic acids, especially the (S,S) isomer, have been extensively described in US patent 4,704,233, November 3, 1987, to Hartman and Perkins. Ethylenediamine N,N'-disuccinic acid is, for instance, commercially available under the tradename ssEDDS® from Palmer Research Laboratories.

[0138] Suitable amino carboxylates to be used herein include ethylene diamine tetra acetates, diethylene triamine pentaacetates, diethylene triamine pentaacetate (DTPA), N-hydroxyethylethylenediamine triacetates, nitrilotri-acetates, ethylenediamine tetrapropionates, triethylenetetraaminehexa-acetates, ethanol-diglycines, propylene diamine tetracetic acid (PDTA) and methyl glycine di-acetic acid (MGDA), both in their acid form, or in their alkali metal, ammonium, and substituted ammonium salt forms. Particularly suitable amino carboxylates to be used herein are diethylene triamine penta acetic acid, propylene diamine tetracetic acid (PDTA) which is, for instance, commercially available from BASF under the trade name Trilon FS® and methyl glycine di-acetic acid (MGDA).

[0139] Further carboxylate chelating agents to be used herein include salicylic acid, aspartic acid, glutamic acid, glycine, malonic acid or mixtures thereof.

[0140] Another chelating agent for use herein is of the formula:

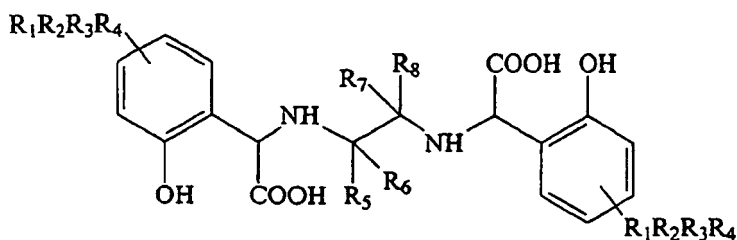

wherein R_1 , R_2 , R_3 , and R_4 are independently selected from the group consisting of -H, alkyl, alkoxy, aryl, aryloxy, -Cl, -Br, -NO₂, -C(O)R', and -SO₂R''; wherein R' is selected from the group consisting of -H, -OH, alkyl, alkoxy, aryl, and aryloxy; R'' is selected from the group consisting of alkyl, alkoxy, aryl, and aryloxy; and R_5 , R_6 , R_7 , and R_8 are independently selected from the group consisting of -H and alkyl.

[0141] Particularly preferred chelating agents to be used herein are amino aminotri(methylene phosphonic acid), diethylene-triamino-pentaacetic acid, diethylene triamine penta methylene phosphonate, 1-hydroxy ethane diphosphonate, ethylenediamine N, N'-disuccinic acid, and mixtures thereof.

[0142] Typically, the bleaching compositions according to the present invention may comprise up to 5%, preferably from 0.01% to 1.5% by weight and more preferably from 0.01% to 0.5% by weight of the total composition of a chelating agent.

Solvents

[0143] The bleaching compositions according to the present invention may further comprise a solvent.

[0144] Preferred solvents herein include hydrophobic solvents, hydrophilic solvents and mixtures hereof.

[0145] To define the hydrophilic or hydrophobic character of a solvent herein, the following hydrophilic index (HI) is used:

molecular weight of the hydrophilic part of the solvent

* 100

total molecular weight of the solvent

[0146] By "hydrophilic part" of a given solvent it is meant herein all the groups O, CO, OH, of a given solvent.

[0147] By "molecular weight of the hydrophilic part of a solvent" it is meant herein the total molecular weight of all the hydrophilic parts of a given solvent.

[0148] The hydrophilic solvents to be used herein have a hydrophilic index of more than 18, preferably more than 25, and more preferably more than 30, and the hydrophobic solvents to be used herein have a hydrophilic index of less than 18, preferably less than 17 and more preferably 16 or less.

[0149] Suitable hydrophobic solvents to be used herein include paraffins, terpenes or terpene derivatives, as well as alkoxylated aliphatic or aromatic alcohols, aliphatic or aromatic alcohols, glycols or alkoxylated glycols, and mixtures thereof, all these solvents have a hydrophilic index of less than 18.

[0150] Suitable terpenes (hydrophilic index of 0) are mono- and bicyclic monoterpenes, especially those of the hydrocarbon class, which include the terpinenes, terpinolenes, limonenes and pinenes and mixtures thereof. Highly preferred materials of this type are d-limonene, dipentene, alpha-pinene and/or beta-pinene. For example, pinene is commercially available from SCM Glidco (Jacksonville) under the name Alpha Pinene P&F®.

[0151] Terpene derivatives such as alcohols, aldehydes, esters, and ketones which have a hydrophilic index of less than 18 can also be used herein. Such materials are commercially available as, for example, the α and β isomers of terpineol and linalool.

[0152] All type of paraffins (hydrophilic index of 0) can be used herein, both linear and branched, containing from 2 to 20, preferably from 4 to 10, more preferably from 6 to 8 carbon atoms. Preferred herein is octane. Octane is commercially available for example from BASF.

[0153] Suitable hydrophobic alkoxylated aliphatic or aromatic alcohols to be used herein are according to the formula R-(A)_n-OH wherein R is a linear or branched saturated or unsaturated alkyl group, or alkyl substituted or non-alkyl

substituted aryl group of from 1 to 20, preferably from 2 to 15 and more preferably from 2 to 10 carbon atoms, wherein A is an alkoxy group preferably an butoxy, propoxy and/or ethoxy group, and n is an integer of from 1 to 5, preferably 1 to 2. Suitable hydrophobic alkoxyated alcohol to be used herein is 1-methoxy-11-dodecanol (HI = 15).

[0154] Suitable hydrophobic aliphatic or aromatic alcohols to be used herein are according to the formula R-OH wherein R is a linear or branched saturated or unsaturated alkyl group, or alkyl substituted or non-alkyl substituted aryl group of from 1 to 20, preferably from 2 to 15 and more preferably from 2 to 10 carbon atoms. Suitable aliphatic alcohols to be use herein include linear alcohols like decanol (HI = 7). Suitable aromatic alcohol to be used herein is benzyl alcohol (HI = 16).

[0155] Suitable hydrophobic glycols to be used herein are according to the formula HO-CR₁R₂-OH wherein R₁ and R₂ are independently H or a C₂-C₁₀ saturated or unsaturated aliphatic hydrocarbon chain and/or cyclic hydrocarbon chain. Suitable glycol to be used herein is dodecaneglycol (HI = 16).

[0156] Suitable hydrophobic alkoxyated glycols to be used herein are according to the formula R-(A)_n-R₁-OH wherein R is H, OH, a linear saturated or unsaturated alkyl of from 1 to 20, preferably from 2 to 15 and more preferably from 2 to 10 carbon atoms, wherein R₁ is H or a linear saturated or unsaturated alkyl of from 1 to 20, preferably from 2 to 15 and more preferably from 2 to 10 carbon atoms, and A is an alkoxy group preferably an ethoxy, methoxy, and/or propoxy group and n is from 1 to 5, preferably 1 to 2. Suitable alkoxyated glycol to be used herein is methoxy octadecanol (HI = 11).

[0157] Particularly preferred hydrophobic solvents to be used herein include d-limonene, dipentene, alpha-pinene, beta-pinene, octane, benzyl alcohol, or mixtures thereof.

[0158] Suitable hydrophilic solvents to be used herein include alkoxyated aliphatic or aromatic alcohols, aliphatic or aromatic alcohols, glycols or alkoxyated glycols, and mixtures thereof, all these solvents having a hydrophilic index of more than 18.

[0159] Suitable hydrophilic alkoxyated aliphatic or aromatic alcohols to be used herein are according to the formula R-(A)_n-OH wherein R is a linear or branched saturated or unsaturated alkyl group, or alkyl substituted or non-alkyl substituted aryl group of from 1 to 20, preferably from 2 to 15 and more preferably from 2 to 10 carbon atoms, wherein A is an alkoxy group preferably a butoxy, propoxy and/or ethoxy group, and n is an integer of from 1 to 5, preferably 1 to 2. Particularly suitable alkoxyated alcohols to be used herein include methoxy propanol (HI = 37), ethoxy propanol (HI = 32), propoxy propanol (HI = 28) and/or butoxy propanol (HI = 27).

[0160] Suitable hydrophilic aliphatic or aromatic alcohols to be used herein are according to the formula R-OH wherein R is a linear or branched saturated or unsaturated alkyl group, or alkyl substituted or non-alkyl substituted aryl group of from 1 to 20, preferably from 2 to 15 and more preferably from 2 to 10 carbon atoms. Particularly suitable aliphatic alcohols to be used herein include linear alcohols like ethanol (HI = 37) and/or propanol (HI = 28).

[0161] Suitable hydrophilic glycols to be used herein are according to the formula HO-CR₁R₂-OH wherein R₁ and R₂ are independently H or a C₂-C₁₀ saturated or unsaturated aliphatic hydrocarbon chain and/or cyclic hydrocarbon chain. Particularly suitable glycol to be used herein is propanediol (HI = 45).

[0162] Suitable hydrophilic alkoxyated glycols to be used herein are according to the formula R-(A)_n-R₁-OH wherein R is H, OH, a linear saturated or unsaturated alkyl group of from 1 to 20, preferably from 2 to 15 and more preferably from 2 to 10 carbon atoms, wherein R₁ is H or a linear saturated or unsaturated alkyl group of from 1 to 20, preferably from 2 to 15 and more preferably from 2 to 10 carbon atoms, and A is an alkoxy group preferably an ethoxy, methoxy, and/or propoxy group and n is from 1 to 5, preferably 1 to 2. Particularly suitable alkoxyated glycols to be used herein is ethoxyethoxyethanol (HI = 37).

[0163] Typically, the bleaching compositions according to the present invention may comprise up to 30%, preferably from 0.01% to 15%, more preferably from 0.1 % to 10%, and most preferably from 0.5% to 5% by weight of the total composition of a solvent.

[0164] In a preferred embodiment wherein the compositions herein comprise a mixture of a hydrophobic solvent and a hydrophilic solvent the weight ratio of said hydrophobic solvent to said hydrophilic is from 1:20 to 1:1, more preferably from 1: 14 to 1: 2.

[0165] Solvents, when present, contribute to the excellent stain removal performance of the bleaching compositions as described herein.

Foam reducing agent or system

[0166] The bleaching compositions according to the present invention may further comprise a foam reducing agent or a foam reducing system. Any foam reducing agents known to those skilled in the art are suitable for use herein. In a preferred embodiment a foam reducing system comprising a fatty acid together with a capped alkoxyated nonionic surfactant as defined herein after and/or silicone is used.

[0167] Typically, the bleaching compositions herein may comprise from 1·10⁻⁴ % to 10%, preferably from 1·10⁻³% to 5% and more preferably from 1·10⁻²% to 5% by weight of the total composition of a fatty acid.

[0168] Typically, the bleaching compositions herein may comprise from 1·10⁻³ % to 20%, preferably from 1·10⁻² % to

10% and more preferably from 5·10⁻²% to 5% by weight of the total composition of a capped alkoxyated nonionic surfactant as defined herein.


[0169] Typically, the bleaching compositions herein may comprise from 1·10⁻⁵% to 5%, preferably from 1·10⁻⁵ % to 1% and more preferably from 1·10⁻⁴% to 0.5% by weight of the total composition of a silicone.

[0170] Suitable fatty acids for use herein are the alkali salts of a C₈-C₂₄ fatty acid. Such alkali salts include the metal fully saturated salts like sodium, potassium and/or lithium salts as well as the ammonium and/or alkylammonium salts of fatty acids, preferably the sodium salt. Preferred fatty acids for use herein contain from 8 to 22, preferably from 8 to 20 and more preferably from 8 to 18 carbon atoms.

[0171] Suitable fatty acids may be selected from caprylic acid, capric acid, lauric acid, myristic acid, palmitic acid, stearic acid, and mixtures of fatty acids suitably hardened, derived from natural sources such as plant or animal esters (e.g., palm oil, coconut oil, soybean oil, castor oil, tallow, ground oil, whale and fish oils and/or babassu oil).

[0172] For example Coconut Fatty Acid is commercially available from UNICHEMA under the name PRIFAC 5900®.

[0173] Suitable capped alkoxyated nonionic surfactants for use herein are according to the formula:



wherein R₁ is a C₈-C₂₄ linear or branched alkyl or alkenyl group, aryl group, alkaryl group, preferably R₁ is a C₈-C₁₈ alkyl or alkenyl group, more preferably a C₁₀-C₁₅ alkyl or alkenyl group, even more preferably a C₁₀-C₁₅ alkyl group;

wherein R₂ is a C₁-C₁₀ linear or branched alkyl group, preferably a C₂-C₁₀ linear or branched alkyl group, preferably a C₃ group;


wherein R₃ is a C₁-C₁₀ alkyl or alkenyl group, preferably a C₁-C₅ alkyl group, more preferably methyl;

and wherein n and m are integers independently ranging in the range of from 1 to 20, preferably from 1 to 10, more preferably from 1 to 5; or mixtures thereof.

[0174] These surfactants are commercially available from BASF under the trade name Plurafac®, from HOECHST under the trade name Genapol® or from ICI under the trade name Symperonic®. Preferred capped nonionic alkoxyated surfactants of the above formula are those commercially available under the tradename Genapol® L 2.5 NR from Hoechst, and Plurafac® from BASF.

[0175] Suitable silicones for use herein include any silicone and silica-silicone mixtures. Silicones can be generally represented by alkylated polysiloxane materials while silica is normally used in finely divided forms exemplified by silica aerogels and xerogels and hydrophobic silicas of various types. These materials can be incorporated as particulates in which the silicone is advantageously releasably incorporated in a water-soluble or water-dispersible, substantially non-surface-active detergent impermeable carrier. Alternatively, the silicone can be dissolved or dispersed in a liquid carrier and applied by spraying on to one or more of the other components.

[0176] Actually in industrial practice, the term "silicone" has become a generic term which encompasses a variety of relatively high-molecular-weight polymers containing siloxane units and hydrocarbyl groups of various types. Indeed, silicone compounds have been extensively described in the art, see for instance US 4 076 648, US 4 021 365, US 4 749 740, US 4 983 316, EP 150 872, EP 217 501 and EP 499 364. The silicone compounds disclosed therein are suitable in the context of the present invention. Generally, the silicone compounds can be described as siloxanes having the general structure :



wherein n is from 20 to 2000, and where each R independently can be an alkyl or an aryl radical. Examples of such substituents are methyl, ethyl, propyl, isobutyl, and phenyl. Preferred polydiorganosiloxanes are polydimethylsiloxanes having trimethylsilyl end blocking units and having a viscosity at 25°C of from 5 x 10⁻⁵ m²/s to 0.1 m²/s, i.e., a value of n in the range 40 to 1500. These are preferred because of their ready availability and their relatively low cost.

[0177] A preferred type of silicone compounds useful in the compositions herein comprises a mixture of an alkylated siloxane of the type herein above disclosed and solid silica.

[0178] The solid silica can be a fumed silica, a precipitated silica or a silica made by the gel formation technique. The silica particles can be rendered hydrophobic by treating them with dialkylsilyl groups and/or trialkylsilane groups either bonded directly onto the silica or by means of silicone resin. A preferred silicone compound comprises a hydrophobic silanated, most preferably trimethylsilanated silica having a particle size in the range from 10 nm to 20 nm and a specific surface area above 50 m²/g. Silicone compounds employed in the compositions according to the present invention suitably have an amount of silica in the range of 1 to 30% (more preferably 2.0 to 15%) by weight of the total weight of the silicone compounds resulting in silicone compounds having an average viscosity in the range of from 2 x 10⁻⁴ m²/s to 1 m²/s. Preferred silicone compounds may have a viscosity in the range of from 5 x 10⁻³ m²/s to 0.1 m²/s. Particularly suitable are silicone compounds with a viscosity of 2 x 10⁻² m²/s or 4.5 x 10⁻² m²/s.

[0179] Suitable silicone compounds for use herein are commercially available from various companies including Rhone Poulenc, Fueller and Dow Corning. Examples of silicone compounds for use herein are Silicone DB® 100 and Silicone Emulsion 2-3597® both commercially available from Dow Corning.

[0180] Another silicone compound is disclosed in Bartollota et al. U.S. Patent 3 933 672. Other particularly useful silicone compounds are the self-emulsifying silicone compounds, described in German Patent Application DTOS 2 646 126 published April 28, 1977. An example of such a compound is DC-544®, commercially available from Dow Corning, which is a siloxane-glycol copolymer.

[0181] Typically preferred silicone compounds are described in European Patent application EP-A-573699. Said compositions can comprise a silicone/silica mixture in combination with fumed nonporous silica such as Aerosil®.

Antioxidant

[0182] The bleaching compositions according to the present invention may further comprise an antioxidant.

[0183] Typically, the bleaching compositions herein may comprise up to 10%, preferably from 0.002% to 5%, more preferably from 0.005% to 2%, and most preferably from 0.01% to 1% by weight of the total composition of an antioxidant.

[0184] Suitable antioxidants to be used herein include organic acids like citric acid, ascorbic acid, tartaric acid, adipic acid and sorbic acid, or amines like lecithin, or aminoacids like glutamine, methionine and cysteine, or esters like ascorbil palmitate, ascorbil stearate and triethylcitrate, or mixtures thereof. Preferred antioxidants for use herein are citric acid, ascorbic acid, ascorbil palmitate, lecithin or mixtures thereof.

Bleach activator

[0185] As an optional ingredient, the compositions of the present invention may comprise a bleach activator. By "bleach activator", it is meant herein a compound which reacts with hydrogen peroxide to form a peracid. The peracid thus formed constitutes the activated bleach. Suitable bleach activators to be used herein include those belonging to the class of esters, amides, imides, or anhydrides. Examples of suitable compounds of this type are disclosed in British Patent GB 1 586 769 and GB 2 143 231 and a method for their formation into a prilled form is described in European Published Patent Application EP-A-62 523. Suitable examples of such compounds to be used herein are tetracetyl ethylene diamine (TAED), sodium 3,5,5 trimethyl hexanoyloxybenzene sulphonate, diperoxy dodecanoic acid as described for instance in US 4 818 425 and nonylamide of peroxyadipic acid as described for instance in US 4 259 201 and n-nonanoyloxy-benzenesulphonate (NOBS). Also suitable are N-acyl caprolactams selected from the group consisting of substituted or unsubstituted benzoyl caprolactam, octanoyl caprolactam, nonanoyl caprolactam, hexanoyl caprolactam, decanoyl caprolactam, undecenoyl caprolactam, formyl caprolactam, acetyl caprolactam, propanoyl caprolactam, butanoyl caprolactam, pentanoyl caprolactam or mixtures thereof. A particular family of bleach activators of interest was disclosed in EP 624 154, and particularly preferred in that family is acetyl triethyl citrate (ATC). Acetyl triethyl citrate has the advantage that it is environmental-friendly as it eventually degrades into citric acid and alcohol. Furthermore, acetyl triethyl citrate has a good hydrolytical stability in the product upon storage and it is an efficient bleach activator. Finally, it provides good building capacity to the composition.

[0186] The bleaching compositions according to the present invention may comprise from 0.01% to 20%, preferably from 1% to 10%, and more preferably from 3% to 7% by weight of the total composition of said bleach activator.

Sulphonated hydrotrope

[0187] The bleaching compositions according to the present invention may further comprise a sulphonated hydrotrope.

[0188] Any sulphonated hydrotropes known to those skilled in the art are suitable for use herein. In a preferred embodiment alkyl aryl sulphonates or alkyl aryl sulphonic acids are used. Preferred alkyl aryl sulphonates include sodium, potassium, calcium and ammonium xylene sulphonates, sodium, potassium, calcium and ammonium toluene sulphonates, sodium, potassium, calcium and ammonium cumene sulphonates, sodium, potassium, calcium and ammonium substituted or unsubstituted naphthalene sulphonates and mixtures thereof. Preferred alkyl aryl sulphonic acids include

xylenesulphonic acid, toluenesulphonic acid, cumenesulphonic acid, substituted or unsubstituted naphthalenesulphonic acid and mixtures thereof. More preferably, xylenesulphonic acid or p-toluene sulphonate or mixtures thereof are used.

[0189] Typically, the bleaching compositions herein comprise from 0.01 % to 20% by weight of the total composition of a sulphonated hydrotrope, preferably from 0.05% to 10% and more preferably from 0.1% to 5%.

Process of treating fabrics (laundry applications)

[0190] In the present invention, the bleaching composition of the present invention is used by applying the bleaching composition, preferably in a liquid form, to the fabric to be treated. By "in a liquid form" it is meant herein, the liquid compositions according to the present invention per se in neat or diluted form, as well as the granular or powder compositions or tablets according to the present invention that have been diluted with an appropriate solvent, typically water, before use, i.e., before being contacted to said fabrics.

[0191] The compositions according to the present invention are typically used in diluted form in a laundry operation. By "in diluted form" it is meant herein that the compositions for the bleaching of fabrics according to the present invention may be diluted by the user, preferably with water. Such dilution may occur for instance in hand laundry applications as well as by other means such as in a washing machine. Said compositions may be used at a dilution level of up to 1500:1 (solvent:composition), preferably from 5:1 to 1000:1 and more preferably from 10:1 to 700:1 (solvent:composition).

[0192] By "in its neat form", it is to be understood that the liquid bleaching compositions are applied directly onto the fabrics to be treated without undergoing any dilution, i.e., the liquid compositions herein are applied onto the fabrics as described herein.

[0193] Fabrics to be treated herein include, but are not limited to, clothes, curtains, drapes, bed linens, bath linens, table cloths, sleeping bags and/or tents.

[0194] By "treating a fabric", it is meant herein cleaning said and/or bleaching/disinfecting said fabric.

[0195] In the process of treating (e.g., cleaning and/or bleaching) a fabric, a bleaching composition according to the present invention is contacted with the fabrics to be treated.

[0196] This can be done either in a so-called "pretreatment mode", where a liquid bleaching composition, as defined herein, is applied neat onto said fabrics before the fabrics are rinsed, or washed, then rinsed, or in a "soaking mode" where a liquid or solid bleaching composition, as defined herein, is first diluted in an aqueous bath and the fabrics are immersed and soaked in the bath, before they are rinsed, or in a "through-the-wash mode", where a liquid or solid bleaching composition, as defined herein, is added in addition to a wash liquor formed by dissolution or dispersion of a typical laundry detergent, preferably in a washing machine. It is also essential in both cases, that the fabrics be rinsed after they have been contacted with said composition, before said composition has completely dried off.

[0197] More specifically, the process of bleaching fabrics according to the present invention preferably comprises the steps of first contacting said fabrics with a bleaching composition according to the present invention, then allowing said fabrics to remain in contact with said composition, for a period of time sufficient to bleach said fabrics, then rinsing said fabrics with water. If said fabrics are to be washed, i.e., with a conventional composition comprising at least one surface active agent, the washing of said fabrics with a detergent composition comprising at least one surface active agent may be conducted before the step of contacting said fabrics with said bleaching composition and/or in the step where said fabrics are contacted with said bleaching composition and/or after the step where said fabrics are contacted with the bleaching composition and before the rinsing step and/or after the rinsing step.

[0198] The bleaching composition may be used in dilute or neat form. Where it is used diluted, the bleaching composition should remain in contact with the fabric for typically 1 to 60 minutes, preferably 5 to 30 minutes. Whereas, when the bleaching composition is used in its neat form, it should remain in contact with the fabric for a much shorter time, typically 5 seconds to 30 minutes, preferably 1 minute to 10 minutes.

[0199] It is preferred to perform the bleaching process herein before said fabrics are washed. Indeed, it has been observed that bleaching said fabrics with the compositions according to the present invention (diluted and/or neat bleaching processes) prior to washing them with a detergent composition provides superior whiteness and stain removal with less energy and detergent than if said fabrics are washed first, then bleached.

[0200] Alternatively instead of following the neat bleaching process as described above (pretreatment application) with a rinsing step and/or a conventional washing step with a liquid or powder conventional detergent, the bleaching pretreatment operation may also be followed by the diluted bleaching process as described above either in bucket (hand operation) or in a washing machine.

Process of treating hard-surfaces

[0201] In another embodiment the present invention also encompasses a process of treating a hard-surface. In such a process the hard-surfaces to be treated is contacted with a composition, as defined herein. Thus, the present invention also encompasses a process of treating a hard-surface with a composition, as defined herein, wherein said process

comprises the step of applying said composition to said hard-surface, preferably only soiled portions thereof, and optionally rinsing said hard-surface.

[0202] In the process of treating hard-surfaces according to the present invention the composition, as defined herein, may be applied to the surface to be treated in its neat form or in its diluted form. In the diluted form, the composition is preferably diluted with up to 200 times its weight of water, preferably 80 to 2 times its weight of water, and more preferably 60 to 2 times its weight of water.

[0203] When used as hard surfaces cleaners the compositions of the present invention are easy to rinse and provide good shine characteristics on the treated surfaces.

[0204] Depending on the end-use envisioned, the compositions herein can be packaged in a variety of containers including conventional bottles, bottles equipped with roll-on, sponge, brusher, sprayers, pouches, sachets, boxes,

Process of treating a carpet

[0205] The present invention encompasses a process of treating a carpet comprising the application of a bleaching composition according to the present invention onto said carpet. Preferably, said bleaching composition is applied in its liquid form onto said carpet using a spraying device.

[0206] In a highly preferred embodiment of the present invention said composition is applied onto said carpet using an electrical spraying device.

[0207] In a preferred embodiment of the present application, said process comprises the steps of applying a liquid bleaching composition according to the present invention to the surface of the carpet and leaving said composition to substantially dry on the carpet. More preferably, said process of treating a carpet further comprises the step of removing said composition, even more preferably, said process of treating a carpet further comprises the step of removing said composition in combination with soil particles.

[0208] In another embodiment of the present application, said process comprises the steps of applying a liquid bleaching composition according to the present invention to parts, preferably heavily soiled parts, of the carpet, mechanically agitating the composition with an implement into the soiled parts of the carpet layer and leaving said composition to substantially dry on the carpet. More preferably said process of treating a carpet further comprises the step of removing said composition, even more preferably said process of treating a carpet further comprises the step of removing said composition in combination with soil particles. Any number of implements may be used to provide said mechanical agitation, including brushes, paper towels, a cleaning glove and a human finger. Said mechanical agitation allows the liquid composition to better penetrate into the carpet fibers and thus improves the chemical cleaning action of said composition. In addition, said contact loosens the dirt particles forming the stain.

[0209] In a preferred process according to the present invention, a liquid bleaching composition according to the present invention is applied onto the carpet using a spraying device. Said spraying device is preferably a container that has at least one aperture through which the composition is dispensed to produce a spray of droplets.

[0210] Such a spraying device may comprise a means for delivering the composition by a pump ("pump spray dispenser") or may be operated by any source of pressurised gas such as an aerosol-can or a pressurizer. Pump spray dispensers may be manually or electrically, preferably electrically, operated. Said pump spray dispensers are particularly preferable if a large area is to be treated and/or if a high amount of product has to be applied onto a heavily stained area ("spot") of the carpet as they facilitate the ease of use by the consumer. Said pump spray dispensers ensure uniform coverage of the area to be treated.

[0211] Preferred spraying devices herein are manually or electrically operated pump spray dispensers. More preferred spraying devices herein are electrically operated pump spray dispensers.

[0212] Typical manually operated pump spray dispensers include push button operated or trigger operated pump spray dispenser.

[0213] A preferred electrically operated pump spray dispensers ("electrical spraying device") herein is a container wherein the means for delivering the composition comprises an electrically driven pump and a spray arm. Said spray arm is either extended or extendible and has at least one aperture so that in operation, the composition is pumped by said electrically driven pump from the container, through the spray arm to the aperture from which it is dispensed. It is preferred that the spray arm communicates with the container by means of a flexible connector. The spray arm may have at least one aperture located along its length. The spray arm makes it easier to control where the composition is sprayed, thereby increasing the accuracy with which the composition is applied. The electrically driven pump may be, for example, a gear pump, an impeller pump, a piston pump, a screw pump, a peristaltic pump, a diaphragm pump, or any other miniature pump. In a highly preferred embodiment the electrically driven pump for use herein is a gear pump with a typical speed between 6000 rpm and 12000 rpm. The electrically driven pump is driven by a means which typically produces a torque of between 1 and 20 mN.m such as an electric motor. The electric motor must in turn be provided with a power source. The power source may be either mains electricity (optionally via transformer), or it may be a throw-away battery or rechargeable battery. The spray arm may be rigidly extended. However such a spray arm can be difficult

to store, and the spray arm is preferably extensible either by means of telescopic or foldable configuration.

[0214] In a highly preferred embodiment, the composition is applied onto the carpet in the form of a spray of droplets having a particle size distribution with a mean diameter $D(v,0.9)$ of less than 1500 microns, preferably less than 1000 microns, more preferably of less than 750 microns, even more preferably less than 500 microns, and most preferably from 350 microns to 10 microns.

[0215] By "mean diameter $D(v,0.9)$ of less than 1500 microns" for a droplet size distribution it is meant that 90% of the spray of droplets dispensed (expressed in volume unit) has a droplet diameter of less than 1500 microns. For instance, a $D(v,0.9)$ of less than 1500 microns indicates that 90% of the total sprayed volume is dispensed with droplets whose diameter is less than 1500 microns.

[0216] The particle size distribution of a spray of droplets can be determined by following the procedure detailed herebelow:

[0217] A suitable test equipment is the Malvern Mastersizer S LongBed® with 1000 mm lens and a maximum particle size range of 3475 microns. The Malvern Mastersizer S LongBed® provides a 21 cm opening (between its lenses) to accommodate spray flow. In all readings at the Malvern®, the lens surface must remain free of spray contamination. In the present setup procedure, the distance from the aperture of the spray dispenser to the laser was fixed at 8 cm, this to minimize lens contamination. At 8 cm distance, the spray was directed to the laser beam to place the laser center to the spray cone. At least three readings have to be made for each composition sprayed to determine the particle size distribution of the spray of droplets. The electrically operated spraying devices to be used in the test according to the present invention is preferably a battery-operated system. If such a battery-operated system is used, a "Full charge test" is being performed. By "Full charge test" it is meant herein, that the current was held consistent by connecting the battery-operated spray dispenser to a 3.9 voltage direct current (vdc) from an external power supply, this ensures a constant spray force.

[0218] Any container adapted to deliver a spray of droplets as defined herein is suitable for use herein. Several modifications can be made to the conventional, single aperture, spray head to ensure that a spray of such droplets as required herein is formed.

[0219] The amount of the compositions for the treating of carpets according to the present invention applied will depend on the severity of the stain or soil. In the case of stubborn stains more than one application may be required to ensure complete removal of the stain.

[0220] The area to be treated by applying the compositions according to the present invention may be of any size. Indeed, parts of the carpets, a complete section and/or the whole carpet may be treated with the composition for treating of a carpet according to the present invention.

[0221] In a preferred embodiment, the liquid bleaching composition according to the present invention applied to the carpet is left to substantially dry. Typically, the composition is left to dry on the carpet for less than 2 hours, preferably less than 1 hour, more preferably less than 40 minutes, even more preferably from 1 to 30 minutes and most preferably from 1 to 20 minutes.

[0222] Preferably the step of leaving said composition to dry onto the carpet (drying step) can either be an "active drying step" or a "passive drying step". By "active drying step" it is meant herein, performing an additional action to facilitate the evaporation of the volatile ingredients of the liquid composition as disclosed herein, preferably by heating the carpet and/or the liquid composition applied thereon, preferably heating by means of application of hot air, infrared radiation and the like. By "passive drying step" it is meant herein, evaporation of the volatile ingredients of the liquid composition as disclosed herein without performing further action.

[0223] By "substantially dry" it is meant herein the stage where at least 40%, preferably at least 60% of the initial amount of composition dispensed onto the carpet is lost due to evaporation.

[0224] The step of leaving the composition to dry on the carpet is of course performed under "normal temperature" and "normal humidity conditions". By "normal temperature conditions" it is meant herein, from 15° C to 25° C, preferably from 20° C to 25° C. By "normal humidity conditions" it is meant herein, from 40 %RH (%-relative humidity) to 80 %RH, preferably from 50 %RH to 65 %RH.

[0225] Indeed, said composition may be left to substantially dry until said composition combined with dirt forms substantially dry residues. Preferably, said composition, more preferably said substantially dry residues, are then removed from the carpet. Even more preferably said substantially dry residues are removed mechanically, as e.g., by brushing, sweeping beating, and/or by vacuum cleaning. This may be carried out with the help of any commercially available vacuum cleaner like for instance a standard Hoover® 1300W vacuuming machine.

[0226] According to the present invention the bleaching compositions herein may be used for the removal of stains and soils as well as of odors from carpets or hard wearing textiles and fabrics, e.g., upholstery. In addition, the compositions according to the present invention may be used to hygienise, disinfect and/or exterminate microinsects from carpets or hard wearing textiles and fabrics, e.g., upholstery, rugs, curtains.

[0227] The invention is further illustrated by the following examples.

Examples

[0228] The following examples will further illustrate the present invention. The compositions are made by combining the listed ingredients in the listed proportions (weight % unless otherwise specified). The following Examples are meant to exemplify compositions used in a process according to the present invention but are not necessarily used to limit or otherwise define the scope of the present invention. Furthermore, the compositions VI, VII and X to XVI are comparative example compositions.

10	Compositions	I	II	III	IV	V	VI	VII	VIII
	Dobanol® 23-3	2.0	1.0	1.0	2.0	1.5	-	-	-
	Dobanol® 91-10	2.0	3.0	-	-	-	2.0	2.0	-
	Marlipal® 24-7	-	-	3.0	2.0	2.0	2.0	-	1.0
	Marlipal® 24-4	-	-	-	-	1.0	1.0	1.5	1.0
15	Alkyl betaine	-	-	-	1.0	2.0	1.0	2.0	1.5
	3,4,5-TMBA	0.1	0.3	0.5	0.1	0.05	-	-	0.1
	m-MBA	-	-	-	-	-	0.3	0.1	-
	BHT	-	-	-	-	-	-	-	-
20	Hydrogen Peroxide	6.0	7.0	8.0	6.0	7.0	8.0	6.0	7.0
	Citric acid	-	1.0	2.0	1.0	2.0	-	2.0	-
	Norasol SP02N®	2.0	3.0	2.0	2.0	-	2.0	2.0	2.0
	Acusol 425®	2.0	2.0	2.0	2.0	2.0	2.0	-	2.0
	Xanthan Gum	-	-	0.2	0.5	0.2	0.1	-	0.2
25	Water and minors	-----up to 100%-----							
	All examples have a pH of below 9								

Compositions	IX	X	XI	XII	XIII	XIV	XV	XVI
Dobanol® 23-3	-	0.5	1.0	-	-	-	-	-
Dobanol® 91-10	-	-	-	-	-	3.0	2.0	5.0
Marlipal® 24-7	2.0	2.5	1.0	4.0	7.0	3.0	2.0	5.0
Marlipal® 24-4	1.0	0.5	1.0	1.0	-	-	-	-
Alkyl betaine	1.5	2.5	2.5	2.0	2.0	2.0	2.0	2.0
3,4,5-TMBA	0.1	-	-	-	-	-	-	-
BHT	-	0.2	0.1	0.1	0.2	0.1	-	-
Hydrogen Peroxide	8.0	6.0	7.0	8.0	6.0	7.0	8.0	7.0

(continued)

	Compositions	IX	X	XI	XII	XIII	XIV	XV	XVI
45	Citric acid	1.0	-	1.0	2.0	2.0	1.0	-	-
	Norasol SP02N®	2.0	2.0	-	2.0	2.0	2.0	2.0	2.0
	Acusol 425®	2.0	2.0	3.0	3.0	-	2.0	2.0	2.0
	Xanthan Gum	0.1	-	0.5	0.2	0.1	0.5	0.5	-
	Water and minors	-----up to 100%-----							
50	All examples have a pH of below 9								

Dobanol® 23-3 is a C₁₂-C₁₃ EO3 nonionic surfactant commercially available from SHELL.

Dobanol® 45-7 is a C₁₄-C₁₅ EO7 nonionic surfactant commercially available from SHELL.

Dobanol® 91-8 is a C₉-C₁₁ EO8 nonionic surfactant commercially available from SHELL.

Dobanol® 91-10 is a C₉-C₁₁ EO10 nonionic surfactant commercially available from SHELL.

Marlipal® 24-4 is a linear C₁₂-C₁₄ EO4 nonionic surfactant commercially available from Condea

Marlipal® 24-7 is a linear C₁₂-C₁₄ EO7 nonionic surfactant commercially available from Condea

Alkyl betaine is Lauryl di-methyl betaine commercially available by Hoechst under the trade name GENAGEN.LAB®

Hydrogen Peroxide is commercially available from Ausimont.

Norasol SP02N® is a polycarboxylate builder commercially available from Rohm & Haas.

Acusol 425® is a modified polycarboxylate co-builder commercially available from Rohm & Haas.


5 Capped Alcohol is PLURAFAC LF231® commercially available from BASF 3,4,5-TMBA is 3,4,5-trimethoxy benzoic acid commercially available from Aldrich.

m-MBA is m-methoxy benzoic acid commercially available from Aldrich.

10 Claims

1. A bleaching composition comprising a peroxygen bleach and an alkoxyated benzoic acid or a salt thereof, wherein said alkoxyated benzoic acid or salt thereof has the general formula :

15



20

25 wherein said alkoxyated benzoic acid is a dialkoxybenzoic acid or a salt thereof, wherein : the substituents of the benzene ring X is -H, the substituent of the benzene ring Y is -OR'; R' is independently selected from C₁ to C₂₀ linear or branched alkyl chains; and M is hydrogen, a cationic moiety or a cation.

or, wherein said alkoxyated benzoic acid is a trialkoxybenzoic acid or a salt thereof; wherein the substituents of the benzene ring Y and X are -OR'; R' is independently selected from C₁ to C₂₀ linear or branched alkyl chains; and M is hydrogen, a cationic moiety or a cation.

30

2. A bleaching composition according to claim 1, wherein said peroxygen bleach is selected from the group consisting of : hydrogen peroxide; water soluble sources of hydrogen peroxide; organic or inorganic peracids; hydroperoxides; and diacyl peroxides; and mixtures thereof.

35

3. A bleaching composition according to claim 1, wherein in the general formula : the substituents of the benzene ring X and Y are -OR'; R' is -CH₃; and M is hydrogen, a cationic moiety or a cation.

4. A bleaching composition according to any of the preceding claims, wherein said alkoxyated benzoic acid or a salt thereof is 3,4,5,- trimethoxy benzoic acid or a salt thereof.

40

5. A bleaching composition according to any of the preceding claims in its liquid form, wherein said liquid bleaching composition as is has a pH, measured at 25°C, of no more than 9.

6. A bleaching composition according to any of the preceding claims in its liquid or solid form, wherein said liquid and/or solid bleaching composition, when diluted into 1 to 500 times its weight of water, has a pH, measured at 25°C, of no more than 12.

45

7. A bleaching composition according to any of the preceding claims, wherein said bleaching composition further comprises a thickener.

50

8. A bleaching composition according to claim 7, wherein said thickener is selected from the group consisting of : polysaccharide polymers; vinyl-, carboxyvinyl-, crosslinked and non-crosslinked carboxylic-, and acryloamido-polymers; fatty acid esters; silicates; idantoinic resins; pyrogenic oxides; and mixtures thereof.

55

9. A bleaching composition according to any of the claims 7 or 8, wherein said thickener is xanthan gum.

10. A bleaching composition according to any of the preceding claims in its liquid form, wherein said bleaching compo-

sition has a viscosity of 1 cps or greater, more preferably of from 5 to 5000 cps, and still more preferably of from 10 to 2500 cps when measured with a CSL² 100® Rheometer at 20°C with a 4 cm spindle (linear increment from 10 to 100 dyne/cm² in 2 minutes).

11. A bleaching composition according to any of the preceding claims, wherein said bleaching composition further comprises a surfactant, preferably a surfactant selected from the group consisting of nonionic surfactants, zwitterionic betaine surfactants, sulphonated anionic surfactants, sarcosinate surfactants, alkyl sulphate surfactants, sulfosuccinate surfactants and mixtures thereof.

12. A process of treating fabrics which comprises the step of contacting said fabrics with a bleaching composition according to any of the preceding claims, in its diluted form at a dilution level with water up to 1500 times.

13. A process of treating fabrics according to claim 12 which further comprises the additional steps of:

- allowing said fabrics to remain in contact with said bleaching composition for a period of time sufficient to bleach said fabrics,
- then rinsing said fabrics in water to remove said bleaching composition.

14. A process according to any of the claims 12 or 13, wherein said fabrics are washed with a detergent composition comprising at least one surface active agent before and/or during the contacting with the bleaching composition and/or after the rinsing when said bleaching composition has been removed.

15. A process of treating a fabric which comprises the step of contacting said fabric with a bleaching composition in its liquid form according to any of claims 1 to 11, in its neat form, allowing said fabric to remain in contact with said bleaching composition for a period of time sufficient to bleach said fabric, and then rinsing said fabric in water to remove said bleaching composition.

16. A process according to claim 15, wherein said fabric is washed with a detergent composition comprising at least one surface active agent before the step of contacting said fabric with said bleaching composition and/or during the step of contacting said fabric with said bleaching composition and/or after the step of rinsing wherein said bleaching composition has been removed.

17. A process of treating a carpet comprising the application of a bleaching composition according to any of claims 1 to 11 onto said carpet.


18. A process of treating a carpet according to claim 17, wherein said bleaching composition is applied in its liquid form onto said carpet using a spraying device.

19. The use of an alkoxyated benzoic acid as defined in claim 1 or a salt thereof in a bleaching composition comprising a peroxygen bleach whereby an immediate chemical stability benefit and/or a chemical stability upon storage benefit is provided.

20. The use of an alkoxyated benzoic acid as defined in claim 1 or a salt thereof in a bleaching composition comprising a peroxygen bleach and a thickener whereby a rheological stability upon storage benefit is provided.

Patentansprüche

1. Bleichmittel-Zusammensetzung, ein Persauerstoff-Bleichmittel und eine alkoxylierte Benzoesäure oder ein Salz davon umfassend, wobei die alkoxylierte Benzoesäure oder das Salz davon die allgemeine Formel:



aufweist, wobei die alkoxylierte Benzoessäure eine Dialkoxybenzoessäure oder ein Salz davon ist, wobei: der Substituent des Benzolrings X -H ist, der Substituent des Benzolrings Y -OR' ist; R' unabhängig ausgewählt ist aus linearen oder verzweigten C₁-C₂₀-Alkylketten; und M Wasserstoff, eine kationische Einheit oder ein Kation ist, oder wobei die alkoxylierte Benzoessäure eine Trialkoxybenzoessäure oder ein Salz davon ist, wobei: die Substituenten des Benzolrings Y und X -OR' sind; R' unabhängig ausgewählt ist aus linearen oder verzweigten C₁-C₂₀-Alkylketten; und M Wasserstoff, eine kationische Einheit oder ein Kation ist.

2. Bleichmittel-Zusammensetzung nach Anspruch 1, wobei das Persauerstoff-Bleichmittel ausgewählt ist aus der Gruppe bestehend aus: Wasserstoffperoxid; wasserlöslichen Quellen von Wasserstoffperoxid; organischen oder anorganischen Persäuren; Hydroperoxiden; und Diacylperoxiden; und Mischungen davon.

3. Bleichmittelzusammensetzung nach Anspruch 1, wobei in der allgemeinen Formel: die Substituenten des Benzolrings X und Y -OR' sind; R' für -CH₃ steht; und M Wasserstoff, eine kationische Einheit oder ein Kation ist.

4. Bleichmittelzusammensetzung nach einem der vorstehenden Ansprüche, wobei die alkoxylierte Benzoessäure oder ein Salz davon 3,4,5,-Trimethoxybenzoessäure oder ein Salz davon ist.

5. Bleichmittelzusammensetzung nach einem der vorstehenden Ansprüche in ihrer flüssigen Form, wobei die flüssige Bleichmittelzusammensetzung, wie sie vorliegt, einen pH-Wert, gemessen bei 25°C, von nicht mehr als 9 aufweist.

6. Bleichmittelzusammensetzung nach einem der vorstehenden Ansprüche in ihrer flüssigen oder festen Form, wobei die flüssige und/oder feste Bleichmittelzusammensetzung, wenn sie mit dem 1- bis 500-Fachen ihres Gewichts mit Wasser verdünnt wird, einen pH-Wert, gemessen bei 25°C, von nicht mehr als 12 aufweist.

7. Bleichmittelzusammensetzung nach einem der vorstehenden Ansprüche, wobei die Bleichmittelzusammensetzung ferner ein Verdickungsmittel umfasst.

8. Bleichmittel-Zusammensetzung nach Anspruch 7, wobei das Verdickungsmittel ausgewählt ist aus der Gruppe bestehend aus: Polysaccharid-Polymeren; Vinyl-, Carboxyvinyl-, verzweigten und nicht-verzweigten Carbonsäure- und Acrylamid-Polymeren; Fettsäureestern; Silicaten; Idantoinharzen, pyrogenen Oxiden und Mischungen davon.

9. Bleichmittelzusammensetzung nach einem der Ansprüche 7 oder 8, wobei das Verdickungsmittel Xanthangummi ist.

10. Bleichmittel-Zusammensetzung nach einem der vorangehenden Ansprüche in ihrer flüssigen Form, wobei die Bleichmittel-Zusammensetzung eine Viskosität von 1cps oder mehr, stärker bevorzugt von 5 bis 5000 cps, und noch stärker bevorzugt von 10 bis 2500 cps aufweist, wenn mit einem CSL² 100® Rheometer bei 20°C mit einer 4-cm-Spindel gemessen (lineares Inkrement von 1 bis 10 Pa (10 bis 100 Dyn/cm²) in 2 Minuten).

11. Bleichmittelzusammensetzung nach einem der vorstehenden Ansprüche, wobei die Bleichmittelzusammensetzung ferner ein Tensid umfasst, vorzugsweise ein Tensid, das ausgewählt ist aus der Gruppe bestehend aus nichtionischen Tensiden, zwitterionischen Betaintensiden, sulfonierten anionischen Tensiden, Sarcosinattensiden, Alkylsulfattensiden, Sulfosuccinattensiden und Mischungen davon.

12. Verfahren zum Behandeln von textilen Stoffen, welches den Schritt des Kontaktierens der textilen Stoffe mit einer Bleichmittelzusammensetzung nach einem der vorstehenden Ansprüche in ihrer verdünnten Form bei einem Verdünnungsgrad mit Wasser von bis zu dem 1500-Fachen umfasst.

13. Verfahren zum Behandeln von textilen Stoffen nach Anspruch 12, welches ferner die folgenden zusätzlichen Schritte umfasst:


- In-Kontakt-Lassen der textilen Stoffe für einen zum Bleichen der textilen Stoffe ausreichenden Zeitraum mit der Bleichmittelzusammensetzung,
- anschließendes Ausspülen der textilen Stoffe in Wasser, um die Bleichmittelzusammensetzung zu entfernen.

14. Verfahren nach einem der Ansprüche 12 oder 13, wobei die textilen Stoffe mit einer Waschmittelzusammensetzung, die mindestens ein oberflächenaktives Mittel umfasst, vor und/oder während des Kontaktierens mit der Bleichmittelzusammensetzung und/oder nach dem Spülen gewaschen werden, wenn die Bleichmittelzusammensetzung entfernt wurde.

15. Verfahren zum Behandeln eines textilen Stoffes, welches den Schritt des Kontaktierens des textilen Stoffes mit einer Bleichmittelzusammensetzung in ihrer flüssigen Form nach einem der Ansprüche 1 bis 11 in ihrer unverdünnten Form umfasst, wobei der textile Stoff über einen Zeitraum in Kontakt mit der Bleichmittelzusammensetzung gelassen wird, der ausreicht, um den textilen Stoff zu bleichen, und wobei der textile Stoff dann in Wasser gespült wird, um die Bleichmittelzusammensetzung zu entfernen.
16. Verfahren nach Anspruch 15, wobei der textile Stoff vor dem Schritt des Kontaktierens des textilen Stoffes mit einer Bleichmittelzusammensetzung und/oder während des Schritts des Kontaktierens des textilen Stoffes mit der Bleichmittelzusammensetzung und/oder nach dem Schritt des Spülens, in dem die Bleichmittelzusammensetzung entfernt wurde, mit einer Waschmittelzusammensetzung, die mindestens ein oberflächenaktives Mittel umfasst, gewaschen wird.
17. Verfahren zum Behandeln eines Teppichs, umfassend das Auftragen einer Bleichmittelzusammensetzung nach einem der Ansprüche 1 bis 11 auf den Teppich.
18. Verfahren zum Behandeln eines Teppichs nach Anspruch 17, wobei die Bleichmittelzusammensetzung in ihrer flüssigen Form mit einem Sprühgerät auf den Teppich aufgetragen wird.
19. Verwendung einer alkoxylierten Benzoesäure nach Anspruch 1 oder eines Salzes davon in einer Bleichmittelzusammensetzung, die ein Persauerstoff-Bleichmittel umfasst, wodurch eine unmittelbare Verbesserung der chemischen Stabilität und/oder eine Verbesserung der chemischen Stabilität bei der Lagerung bereitgestellt wird.
20. Verwendung einer alkoxylierten Benzoesäure nach Anspruch 1 oder eines Salzes davon in einer Bleichmittelzusammensetzung, umfassend ein Persauerstoff-Bleichmittel und ein Verdickungsmittel, wodurch eine Verbesserung der rheologischen Stabilität bei der Lagerung bereitgestellt wird.

Revendications

1. Composition de blanchiment comprenant un agent de blanchiment peroxygène et un acide benzoïque alcoxylé ou un sel de celui-ci, dans laquelle ledit acide benzoïque alcoxylé ou sel de celui-ci est de formule générale :



dans laquelle ledit acide benzoïque alcoxylé est un acide dialcoxybenzoïque ou un sel de celui-ci, dans laquelle : le substituant du cycle benzène X est -H, le substituant du cycle benzène Y est -OR' ; R' est indépendamment choisi parmi des chaînes alkyle linéaires ou ramifiées en C₁ à C₂₀ ; et M est un hydrogène, un fragment cationique ou un cation ou, dans laquelle ledit acide benzoïque alcoxylé est un acide trialcoxybenzoïque ou un sel de celui-ci ; dans laquelle : les substituants du cycle benzène Y et X sont -OR' ; R' est indépendamment choisi parmi des chaînes alkyle linéaires ou ramifiées en C₁ à C₂₀ ; et M est un hydrogène, un fragment cationique ou un cation.

2. Composition de blanchiment selon la revendication 1, dans laquelle ledit agent de blanchiment peroxygène est choisi dans le groupe constitué de : peroxyde d'hydrogène ; sources hydrosolubles de peroxyde d'hydrogène ; peracides organiques ou inorganiques ; hydroperoxydes ; et peroxydes de diacycle ; et leurs mélanges.
3. Composition de blanchiment selon la revendication 1, dans laquelle dans la formule générale : les substituants du cycle benzène X et Y sont -OR' ; R' est -CH₃ ; et M est un hydrogène, un fragment cationique ou un cation.
4. Composition de blanchiment selon l'une quelconque des revendications précédentes, dans laquelle ledit acide benzoïque alcoxylé ou un sel de celui-ci est de l'acide 3,4,5,- triméthoxy benzoïque ou un sel de celui-ci.
5. Composition de blanchiment selon l'une quelconque des revendications précédentes, sous sa forme liquide, où ladite composition de blanchiment liquide ainsi a un pH, mesuré à 25 °C, de pas plus de 9.

EP 1 001 011 B2

6. Composition de blanchiment selon l'une quelconque des revendications précédentes, sous sa forme liquide ou solide, où ladite composition de blanchiment liquide et/ou solide, lorsqu'elle est diluée dans 1 à 500 fois son poids d'eau, a un pH, mesuré à 25 °C, de pas plus de 12.
- 5 7. Composition de blanchiment selon l'une quelconque des revendications précédentes, où ladite composition de blanchiment comprend, en outre, un épaississant.
8. Composition de blanchiment selon la revendication 7, dans laquelle ledit épaississant est choisi dans le groupe constitué de : polymères polysaccharidiques ; polymères vinyl-, carboxyvinyl-, carboxylique- réticulés et non-réticulés, et acryloamido- ; esters d'acide gras ; silicates ; résines idantoiniques ; oxydes pyrogéniques ; et leurs mélanges.
- 10 9. Composition de blanchiment selon l'une quelconque des revendications 7 ou 8, dans laquelle ledit épaississant est de la gomme de xanthane.
- 15 10. Composition de blanchiment selon l'une quelconque des revendications précédentes, sous sa forme liquide, où ladite composition de blanchiment a une viscosité de 1 cP ou plus, plus préférablement allant de 5 à 5000 cP, et encore plus préférablement allant de 10 à 2500cP lorsqu'on mesure avec un rhéomètre CSL² 100® à 20 °C avec un mobile cylindrique de 4 cm (incrément linéaire de 1 à 10 Pa (10 à 100 dyne/cm²) en 2 minutes).
- 20 11. Composition de blanchiment selon l'une quelconque des revendications précédentes, où ladite composition de blanchiment comprend, en outre, un agent tensioactif, de préférence un agent tensioactif choisi parmi le groupe constitué d'agents tensioactifs non ioniques, d'agents tensioactifs zwitterioniques de bétaine, d'agents tensioactifs anioniques sulfonés, d'agents tensioactifs sarcosinate, d'agents tensioactifs alkyl sulfate, d'agents tensioactifs sulfosuccinate et leurs mélanges.
- 25 12. Procédé de traitement des tissus qui comprend l'étape de mise en contact desdits tissus avec une composition de blanchiment selon l'une quelconque des revendications précédentes, sous sa forme diluée à un taux de dilution avec de l'eau jusqu'à 1500 fois.
- 30 13. Procédé de traitement des tissus selon la revendication 12, qui comprend, en outre, les étapes supplémentaires consistant à :
- 35 - laisser lesdits tissus en contact avec ladite composition de blanchiment pendant un laps de temps suffisant pour blanchir lesdits tissus,
- puis rincer lesdits tissus dans l'eau pour éliminer ladite composition de blanchiment.
14. Procédé selon l'une quelconque des revendications 12 ou 13, dans lequel lesdits tissus sont lavés avec une composition détergente comprenant au moins un agent tensioactif avant et/ou pendant la mise en contact avec la composition de blanchiment et/ou après le rinçage lorsque ladite composition de blanchiment a été éliminée.
- 40 15. Procédé de traitement d'un tissu, qui comprend l'étape consistant à mettre en contact ledit tissu avec une composition de blanchiment sous sa forme liquide selon l'une quelconque des revendications 1 à 11, sous sa forme pure, à laisser ledit tissu en contact avec ladite composition de blanchiment pendant un laps de temps suffisant pour blanchir ledit tissu, puis à rincer ledit tissu dans l'eau pour éliminer ladite composition de blanchiment.
- 45 16. Procédé selon la revendication 15, dans lequel ledit tissu est lavé avec une composition détergente comprenant au moins un agent tensioactif avant l'étape de mise en contact dudit tissu avec ladite composition de blanchiment et/ou pendant l'étape de mise en contact dudit tissu avec ladite composition de blanchiment et/ou après l'étape de rinçage dans laquelle ladite composition de blanchiment a été éliminée.
- 50 17. Procédé de traitement d'un tapis, comprenant l'application d'une composition de blanchiment selon l'une quelconque des revendications 1 à 11 sur ledit tapis.
- 55 18. Procédé de traitement d'un tapis selon la revendication 17, dans lequel ladite composition de blanchiment est appliquée sous sa forme liquide sur ledit tapis en utilisant un dispositif de pulvérisation.
19. Utilisation d'un acide benzoïque alcoylé selon la revendication 1 ou un sel de celui-ci dans une composition de

EP 1 001 011 B2

blanchiment comprenant un agent de blanchiment peroxygène, selon laquelle un effet bénéfique de stabilité chimique immédiate et/ou un effet bénéfique de stabilité chimique lors du stockage sont fournis.

- 5 **20.** Utilisation d'un acide benzoïque alcoylé selon la revendication 1 ou un sel de celui-ci dans une composition de blanchiment comprenant un agent de blanchiment peroxygène et un épaississant, selon laquelle un effet bénéfique de stabilité rhéologique lors du stockage est fourni.

10

15

20

25

30

35

40

45

50

55

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 0791362 A [0006]
- EP 0842604 A [0006]
- EP 0842606 A [0006]
- EP 0843001 A [0006]
- EP 0906950 A [0006]
- GB 809060 A [0080]
- US 2965576 A [0080]
- US 2703798 A [0080]
- US 1985424 A [0080]
- WO 9206070 A [0080]
- US 2082275 A [0084]
- US 2702279 A [0084]
- US 2255082 A [0084]
- GB 1082179 A [0103]
- US 3929678 A [0103]
- US 3812044 A [0136]
- US 4704233 A [0137]
- US 4076648 A [0176]
- US 4021365 A [0176]
- US 4749740 A [0176]
- US 4983316 A [0176]
- EP 150872 A [0176]
- EP 217501 A [0176]
- EP 499364 A [0176]
- US 3933672 A [0180]
- DE 2646126 [0180]
- EP 573699 A [0181]
- GB 1586769 A [0185]
- GB 2143231 A [0185]
- EP 62523 A [0185]
- US 4818425 A [0185]
- US 4259201 A [0185]
- EP 624154 A [0185]