

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 004 928 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
31.05.2000 Bulletin 2000/22

(51) Int. Cl.⁷: **G03C 1/035**, G03C 1/795,
B60T 8/32

(21) Application number: **98203952.1**

(22) Date of filing: **23.11.1998**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(71) Applicant: **AGFA-GEVAERT N.V.**
2640 Mortsel (BE)

(72) Inventors:
• **Janssens, Eric**
Agfa-Gevaert N.V.
2640 Mortsel (BE)
• **Peeters, Gustaaf**
Agfa-Gevaert N.V.
2640 Mortsel (BE)

(54) **Photographic material for industrial applications**

(57) A photographic material comprising a Lippmann emulsion coated on a polycarbonate support is disclosed. The product is suited for new industrial applications under severe conditions of temperature and humidity.

EP 1 004 928 A1

Description

FIELD OF THE INVENTION

- 5 **[0001]** The present invention relates to an improved photographic material of the Lippmann emulsion type for industrial applications.

BACKGROUND OF THE INVENTION

- 10 **[0002]** So-called Lippmann emulsions having an average grain size of less than 0.1 μm (100 nm) are of particular importance for the preparation of photographic plates or films with high resolution for use in microphotography, for recording nucleophysical phenomena, for the preparation of masks in the production of microelectronic integrated circuits, for use in holography, for high density storage, etc..

- 15 **[0003]** In the production of microelectronic integrated circuits drawings are made, optionally on a highly enlarged scale, of the various successive masks necessary to produce one integrated circuit whereupon the drawings are reduced, if necessary in successive steps, and reproduced on a photographic plate or film material forming thereby the mask ready for use. By various photographic and chemical steps (photo-etching of laquered plates) the images of the masks thus produced are transferred to the surface on which the integrated circuit is to be made, in order to produce the required circuit elements. In recent times several of the preliminary steps are reproduced digitally.

- 20 **[0004]** The photographic materials for use in the production of masks as described above should have a high resolving power and acutance and allow a correct reproduction of the dimensions of the image. Unless the dimensional reproduction is kept within the accepted tolerances the masks will be useless because it will not enable electronic components to be formed in the circuitry with the required degree of accuracy. Developments in the field of computer and telecommunication systems create the need for ever increasing packing densities on the circuit elements and therefore it has become common practice to reproduce image details e.g. lines and slits having widths even smaller than the emulsion thickness e.g. smaller than 5 μm . These image details should be reproduced within the accepted width tolerances of at most 10 % respective to the original width.

[0005] Old patents dealing with the type of material described above are e.g. US 3,652,280, US 4,148,647, US 4,108,661, and DE 2002062.

- 30 **[0006]** Materials and corresponding processing chemicals usable in the applications as explained above are marketed by Agfa-Gevaert N.V. under the trade name MILLIMASK.

- [0007]** Now recently new applications for this type of material have been invented by us that pose high requirements to the material concerning resistance to mechanical and thermal deformation. This is the case when the material is used under so-called "heavy duty" circumstances such as high temperature, extreme humidity, fast changes in temperature or humidity, or high mechanical stress. Under these circumstances the conventional supports for this type of material such as glass or polyethylene terephthalate and acrylic plates behave unsatisfactory.

OBJECTS OF THE INVENTION

- 40 **[0008]** It is an object of the present invention to provide a Lippman-type photographic material with improved dimensional stability under heavy duty circumstances such as high temperature, extreme humidity, fast changes in temperature or humidity, or high mechanical stress.

[0009] It is a further object of the present invention to provide new applications for this type of material.

50 SUMMARY OF THE INVENTION

[0010] The objects of the present invention are realized by providing a photographic material comprising a transparent polycarbonate support and at least one silver halide emulsion layer comprising a Lippmann emulsion having an average grain size smaller than 0.1 μm .

DETAILED DESCRIPTION OF THE INVENTION

- [0011]** In a most preferred embodiment the polycarbonate film used as support is the aromatic polycarbonate based on bisphenol A as recurring unit. This is the world-wide most used polycarbonate film for industrial applications. This type of polycarbonate film shows following excellent physical and mechanical characteristics which make it most suitable as support for the photographic materials of the present invention:

- good machinability : cutting (band or circular sawing, drilling, turning, routing, tapping, threading,..

- excellent optical transmission properties:

light transmission : 90 %

haze : 0.5 %

refractive index 1.586

- temperature behaviour :

coefficient of thermal expansion $70 \mu\text{m/m } ^\circ\text{C}$

heat conductivity : $0.20 \text{ W/m } ^\circ\text{C}$

i.e. polycarbonate adapts fast (in minutes) to temperature changes;

- humidity behaviour :

coefficient of relative humidity expansion : about $0 \mu\text{m/m } \% \text{ RH}$;

water absorption after 24 h : 0.035 %

water absorption after 7 days : 0.35 %

polycarbonate adapts slowly (several days) to relative humidity changes;

- specific gravity : $1.20 \times 10^3 \text{ kg/m}^3$;
- tensile heat distortion at 50psi : $134 ^\circ\text{C}$ or higher for particular types;
i.e. PC can be used in heavy duty circumstances;
- printing possible;
- cementing possible;
- image protection : waxing or lamination.

[0012] Polycarbonate film can be manufactured in several thicknesses. For use in connection with the present invention thicknesses of $400 \mu\text{m}$ or of 1.5 mm are preferred depending on the particular application.

[0013] For use in the present invention the polycarbonate film is preferably provided with a subbing layer. An example of a suitable subbing layer is based on a combination of colloidal silica, gelatin and resorcinol.

[0014] The halide composition of the silver halide Lippmann emulsions used in accordance with the present invention is not specifically limited and may be any composition selected from e.g. silver chloride, silver bromide, silver iodide, silver chlorobromide, silver bromiodide, and silver chlorobromiodide. In a preferred embodiment however the Lippmann emulsion is a iodobromo emulsion containing at least 90 % of bromide. In the most preferred embodiment the emulsion consists of 97 % of bromide and 3 % of iodide.

[0015] The photographic emulsion(s) can be prepared from soluble silver salts and soluble halides according to different methods as described e.g. by P. Glafkides in "Chimie et Physique Photographique", Paul Montel, Paris (1967), by G.F. Duffin in "Photographic Emulsion Chemistry", The Focal Press, London (1966), and by V.L. Zelikman et al in "Making and Coating Photographic Emulsion", The Focal Press, London (1966). They can be prepared by mixing the halide and silver solutions in partially or fully controlled conditions of temperature, concentrations, sequence of addition, and rates of addition. The silver halide can be precipitated according to the single-jet method, the double-jet method, the conversion method or an alternation of these different methods.

[0016] The emulsion can be desalted in the usual ways e.g. by dialysis, by flocculation and re-dispersing, or by ultrafiltration.

[0017] The light-sensitive silver halide emulsions are preferably chemically sensitized as described e.g. in the above-mentioned "Chimie et Physique Photographique" by P. Glafkides, in the above-mentioned "Photographic Emulsion Chemistry" by G.F. Duffin, in the above-mentioned "Making and Coating Photographic Emulsion" by V.L. Zelikman et al, and in "Die Grundlagen der Photographischen Prozesse mit Silberhalogeniden" edited by H. Frieser and published by Akademische Verlagsgesellschaft (1968). As described in said literature chemical sensitization can be carried out by effecting the ripening in the presence of small amounts of compounds containing sulphur e.g. thiosulphate, thiocyanate, thioureas, sulphites, mercapto compounds, and rhodamines. The emulsions can be sensitized also by means of gold-sulphur ripeners, gold-selenium ripeners or by means of reductors e.g. tin compounds as described in GB 789,823, amines, hydrazine derivatives, formamidine-sulphinic acids, and silane compounds. Chemical sensitization can also be performed with small amounts of Ir, Rh, Ru, Pb, Cd, Hg, Tl, Pd, Pt, or Au. One of these chemical sensitization methods or a combination thereof can be used.

[0018] The light-sensitive silver halide emulsions can be spectrally sensitized with proper dyes such as those described by F.M. Hamer in "The Cyanine Dyes and Related Compounds", 1964, John Wiley & Sons. Dyes that can be used for the purpose of spectral sensitization include cyanine dyes, merocyanine dyes, complex cyanine dyes, complex

merocyanine dyes, hemicyanine dyes, styryl dyes and hemioxonol dyes. Particularly valuable dyes are those belonging to the cyanine dyes, merocyanine dyes and complex merocyanine dyes. In the preferred embodiment of the present invention the emulsion is orthochromatically sensitized.

[0019] The silver halide emulsion(s) for use in accordance with the present invention may comprise compounds preventing the formation of fog or stabilizing the photographic characteristics during the production or storage of photographic elements or during the photographic treatment thereof. Many known compounds can be added as fog-inhibiting agent or stabilizer to the silver halide emulsion. Suitable examples are e.g. the heterocyclic nitrogen-containing compounds such as benzothiazolium salts, nitroimidazoles, nitrobenzimidazoles, chlorobenzimidazoles, bromobenzimidazoles, mercaptothiazoles, mercaptobenzothiazoles, mercaptobenzimidazoles, mercaptothiadiazoles, aminotriazoles, benzotriazoles, nitrobenzotriazoles, mercaptotetrazoles, mercaptopyrimidines, mercaptotriazines, benzothiazoline-2-thione, oxazoline-thione, triazaindenes, tetrazaindenes and pentazaindenes, especially those described by Birr in Z. Wiss. Phot. 47 (1952), pages 2-58, triazolopyrimidines such as those described in GB 1,203,757, GB 1,209,146, JA-Apl. 75-39537, and GB 1,500,278, and 7-hydroxy-s-triazolo-[1,5-a]-pyrimidines as described in Us 4,727,017, and other compounds such as benzenethiosulphonic acid, benzenethiosulphinic acid and benzenethiosulphonic acid amide. Other compounds that can be used as fog-inhibiting compounds are metal salts such as e.g. mercury or cadmium salts and the compounds described in Research Disclosure N° 17643 (1978), Chapter VI.

[0020] The fog-inhibiting agents or stabilizers can be added to the silver halide emulsion prior to, during, or after the ripening thereof and mixtures of two or more of these compounds can be used.

[0021] Besides the silver halide another essential component of a light-sensitive emulsion layer is the binder. The binder is a hydrophilic colloid, preferably gelatin. Gelatin can, however, be replaced in part or integrally by synthetic, semi-synthetic, or natural polymers. Synthetic substitutes for gelatin are e.g. polyvinyl alcohol, poly-N-vinyl pyrrolidone, polyvinyl imidazole, polyvinyl pyrazole, polyacrylamide, polyacrylic acid, and derivatives thereof, in particular copolymers thereof. Natural substitutes for gelatin are e.g. other proteins such as zein, albumin and casein, cellulose, saccharides, starch, and alginates. In general, the semi-synthetic substitutes for gelatin are modified natural products e.g. gelatin derivatives obtained by conversion of gelatin with alkylating or acylating agents or by grafting of polymerizable monomers on gelatin, and cellulose derivatives such as hydroxyalkyl cellulose, carboxymethyl cellulose, phthaloyl cellulose, and cellulose sulphates.

[0022] The binders of the photographic element, especially when the binder used is gelatin, can be hardened with appropriate hardening agents such as those of the epoxide type, those of the ethylenimine type, those of the vinylsulfone type e.g. 1,3-vinylsulphonyl-2-propanol, chromium salts e.g. chromium acetate and chromium alum, aldehydes e.g. formaldehyde, glyoxal, and glutaraldehyde, N-methylol compounds e.g. dimethylolurea and methyloldimethylhydantoin, dioxan derivatives e.g. 2,3-dihydroxy-dioxan, active vinyl compounds e.g. 1,3,5-triacryloyl-hexahydro-s-triazine, active halogen compounds e.g. 2,4-dichloro-6-hydroxy-s-triazine, and mucohalogenic acids e.g. mucochloric acid and mucophenoxychloric acid. These hardeners can be used alone or in combination. The binders can also be hardened with fast-reacting hardeners such as carbamoylpyridinium salts as disclosed in US 4,063,952.

[0023] The photographic material of the present invention may further comprise various kinds of surface-active agents in the photographic emulsion layer or in another hydrophilic colloid layer. Suitable surface-active agents include non-ionic agents such as saponins, alkylene oxides e.g. polyethylene glycol, polyethylene glycol/polypropylene glycol condensation products, polyethylene glycol alkyl ethers or polyethylene glycol alkylaryl ethers, polyethylene glycol esters, polyethylene glycol sorbitan esters, polyalkylene glycol alkylamines or alkylamides, silicone-polyethylene oxide adducts, glycidol derivatives, fatty acid esters of polyhydric alcohols and alkyl esters of saccharides; anionic agents comprising an acid group such as a carboxy, sulfo, phospho, sulphuric or phosphoric ester group; ampholytic agents such as aminoacids, aminoalkyl sulphonic acids, aminoalkyl sulphates or phosphates, alkyl betaines, and amine-N-oxides; and cationic agents such as alkylamine salts, aliphatic, aromatic, or heterocyclic quaternary ammonium salts, aliphatic or heterocyclic ring-containing phosphonium or sulphonium salts. Other suitable surfactants include perfluorinated compounds.

[0024] Beside the light sensitive emulsion layer(s) the photographic material can contain several non light sensitive layers, e.g. an anti-stress top layer, one or more backing layers, and one or more intermediate layers optionally containing filter- or antihalation dyes that absorb scattering light and thus promote the image sharpness. Suitable light-absorbing dyes of the oxonol type are disclosed e.g. in GB 506385 - 515998 - 646123 - 646125 - 619544 - 933466. Suitable light absorbing dyes of the arylidene type are described in e.g. GB 396646, FR 1570870, and BE 716661. Light-absorbing dyes of the triarylmethane type are described e.g. in GB 446583 and GB 790023. Other suitable light-absorbing dyes are described in US 4,092,168, US 4,311,787 and DE 2,453,217.

[0025] One or more backing layers can be provided at the non-light sensitive side of the support. However, in the preferred embodiment of the present invention the photographic material contains no extra antihalation layer and the light-absorbing dye(s) is (are) incorporated in the emulsion layer itself.

[0026] The photographic material in connection with the present invention may further comprise various other additives such as e.g. compounds improving the dimensional stability of the photographic element, UV-absorbers, and plas-

ticizers.

[0027] Suitable additives for improving the dimensional stability of the photographic elements are e.g. dispersions of a water-soluble or hardly soluble synthetic polymer e.g. polymers of alkyl (meth) acrylates, alkoxy (meth) acrylates, glycidyl (meth)acrylates, (meth)acrylamides, vinyl esters, acrylonitriles, olefins, and styrenes, or copolymers of the above with acrylic acids, methacrylic acids, α - β -unsaturated dicarboxylic acids, hydroxyalkyl (meth)acrylates, sul-

[0028] The photographic materials of the present invention can be exposed in contact, in optical systems, in a pattern generator or in a step and repeat camera.

[0029] The described Lippmann-type materials can be processed by the negative type of processing and by the reversal type of processing. The developing solutions are conventionally based on hydroquinone as main developing agent. An auxiliary second developer such as N-methyl-aminophenol (Metol) or a 3-pyrazolidone derivative may be present. Derivatives of 3-pyrazolidone for use as second developing agent include 1-phenyl-3-pyrazolidone (commonly designated as "Phenidone"), 1-phenyl-4-monomethyl-3-pyrazolidone, 1-phenyl-4, 4'-dimethyl-3-pyrazolidone and 1-phenyl-4-hydroxymethyl-4'-methyl-3-pyrazolidone.

[0030] The developing and replenishing solutions preferably further contain an anti-fogging agent. Many known compounds can be added as fog-inhibiting agent or stabilizer to a processing solution. Suitable examples are e.g. the heterocyclic nitrogen-containing compounds such as benzothiazolium salts, nitroimidazoles, nitrobenzimidazoles, chlorobenzimidazoles, bromobenzimidazoles, mercaptothiazoles, mercaptobenzothiazoles, mercaptobenzimidazoles, mercaptotriazoles, aminotriazoles, benzotriazoles (preferably 5-methyl-benzotriazole), nitrobenzotriazoles, mercaptopyrimidines, mercaptotriazines, benzothiazoline-2-thione and oxazoline-thione. Other classes include triazolopyrimidines such as those described in GB 1,203,757, GB 1,209,146, JA-Appl. 75-39537, and GB 1,500,278 and other compounds such as benzenethiosulphonic acid, benzenethiosulphinic acid and benzenethiosulphonic acid amide compounds. A preferred compound for use in accordance with the present invention is 1-phenyl-5-mercaptotetrazole.

[0031] The developing and replenishing solutions for use in accordance with the present invention preferably further contain a compound providing halide ions as development rate regulator, most preferably sodium or potassium bromide in a concentration between 0.01 and 0.2 mole/liter. Further sulphite ions, preferably provided as an alkali sulphite, are preferably present as antioxidant in a concentration between 0.1 and 0.5 mole/liter.

[0032] The alkali agent is preferably sodium or potassium hydroxide.

[0033] The developing and replenishing solutions for use in accordance with the present invention further contain buffering agents. Suitable buffer systems include carbonate buffer, phosphate buffer, metaborate buffer, etc. The concentration of these buffering agents is preferably about 0.4 mole/liter.

[0034] Other adjuvants well known to those skilled in the art can be incorporated into the developer solution. A survey of conventional developer addenda is given by Grant Haist in "Modern Photographic Processing" - John Wiley and Sons - New York (1979) p. 220-224. Examples of such addenda include complexing agents for calcium and magnesium ions, present in hard water, e.g. ethylene diamine tetraacetic acid and analogous compounds. Further can be present anti-foaming agents, surface-active agents, biocides, thickening agents like polystyrene sulphonate and antioxidants like benzoate and cyclodextrine. The developing liquid can contain so-called anti-sludge agents in order to reduce dirt streaks on developed photographic material. Finally the solution can contain development accelerating agents like polyalkyleneoxides and alkonolamines and hardening agents including latent hardeners.

[0035] Negative processing involves development, washing, fixing, washing and drying. Reversal processing typically involves following steps :first development, washing, bleaching, washing, clearing, washing, second overall exposure, second development, washing, fixing, washing and drying.

[0036] Finished images, obtained after exposure and processing of the Lippmann type material of the present invention, and carrying specific predefined image patterns are used in a number of old and new applications. Some of the new applications require high dimensional stability under heavy duty circumstances. Examples of these applications include :

- pulse disk for the precise measurement of rotational velocities. A new application of this principle is e.g. in the ABS brake systems of automobiles. This is a typical example of a "heavy duty" circumstance;
- in other types of velocity and position control systems;
- in code wheels and rulers;
- in so-called optical targets, e.g. in balances in grocery stores;
- in liquid crystal displays;
- as master image for optical ganging and instrumentation;
- all types of illuminated instruments, panels and control boards, e.g. in transport means;
- light attenuation in instrumentation;
- edge lighted ad displays;
- name plated, templates and lay-outs;

- computer code disks


[0037] The present invention will now be illustrated by the following examples without however being limited thereto.

5 Examples


Example 1

[0038] The emulsion grains were prepared as follows. A solution of silver nitrate on the one hand and a solution of a mixture of 97 % of potassium bromide and 3 % of potassium iodide on the other hand were added simultaneously according to the double jet principle to an aqueous gelatin solution. The resulting emulsion was washed by means of ultrafiltration. The average grain size was about 0.08 μm . The emulsion was chemically sensitized by means of conventional S-Au ripening agents. After completing the chemical sensitization following ingredients were added to the liquid emulsion :


- a green spectral sensitizer according to following formula:

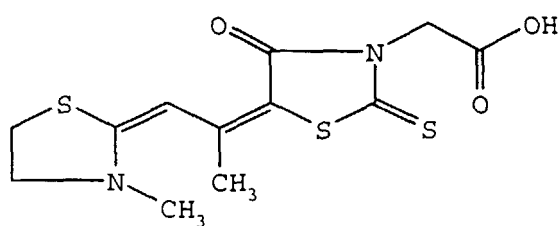


- a light-absorbing dye for acutance and antihalation according to following formula :

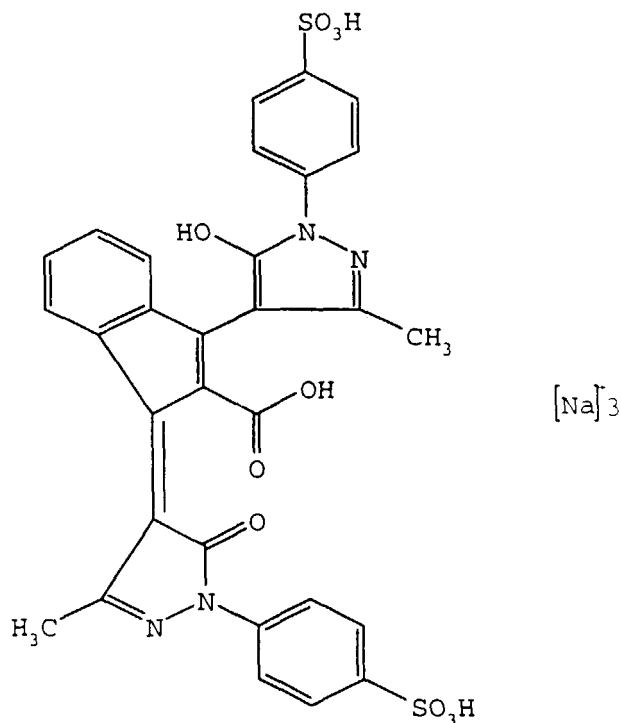


- a second light-absorbing dye according to following formula:

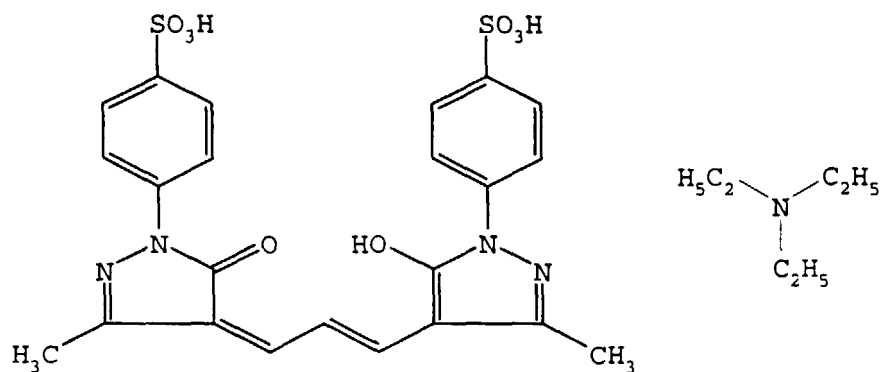

- a stabilizer according to following formula :

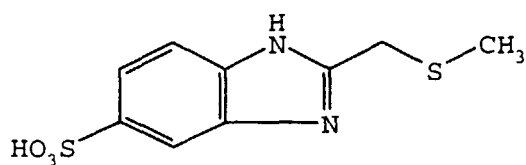

- a second stabilizer according to following formula:

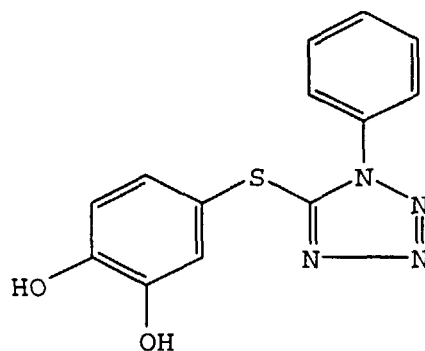

- 5-nitroindazole

[0039] The finished emulsion was coated by means of the slide hopper technique on a bisphenol A based polycarbonate film of 400 μm thickness at a silver coverage of 4.5 g/m², expressed as AgNO₃, and dried.

[0040] A sample of the obtained photographic material was exposed with a test pattern comprising line patterns, dots, and a sensitometric wedge.

[0041] The photographic sample was subjected to a negative processing according to following specifications:

- development: 4 min in a conventional developer based on hydroquinone;
- wash : 2 min in running water;
- fixing : 2 min in a conventional ammonium thiosulphate containing fixer;
- 10 min of washing in running water and drying.

[0042] An image with excellent image characteristics was obtained : high contrast, excellent line sharpness, very fine grain, exact reproduction of line width, no pinholes, resolution of 50000 dpi.

Example 2


[0043] A similar photographic sample prepared and exposed as in example 1 was subjected to a reversal processing according to following specifications :

- development : 6 min in a conventional hydroquinone based developer;
- wash : 2 min in running water;
- bleach : 2 min in a solution containing potassium bichromate and sodium bisulphate
- wash : 2 min in running water;
- clearing : 3 min in a solution containing sodium sulphite and Calgon;
- second overall exposure by means of a 500 Watt incandescent lamp at 70 cm from the sample;
- 4 mm second development in a conventional hydroquinone based second developer;
- wash : 2 min in running water
- fixing : 2 min in a conventional ammonium thiosulphate containing fixer;
- 10 min of washing in running water and drying.

[0044] Again, an image with excellent image characteristics was obtained : high contrast, excellent line sharpness, very fine grain, exact reproduction of line width, no pinholes, resolution of 50000 dpi.

Claims

1. A photographic material comprising a transparent polycarbonate support and at least one silver halide emulsion layer comprising a Lippmann emulsion having an average grain size smaller than 0.1
2. A photographic material according to claim 1 wherein said silver halide emulsion is a AgBrI emulsion having a bromide content between 90 % and 99 %, and a iodide content between 10 % and 1 %.
3. A photographic material according to claim 2 wherein said bromide content is 97 % and said iodide content is 3 %.
4. A photographic material according to any of claims 1 to 3 wherein said silver halide emulsion is orthochromatically sensitized.
5. A photographic material according to claim 4 wherein said emulsion is orthochromatically sensitized by means of a compound represented by following formula:

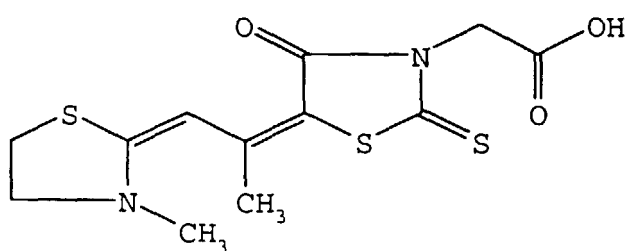

6. A photographic material according to any of claims 1 to 5 wherein said emulsion layer further comprises a non-sensitizing dye.
7. A photographic material according to any of claims 1 to 6 wherein said polycarbonate is based on bisphenol A as recurring unit.
8. A photographic material according to any of claims 1 to 7 wherein said polycarbonate has a subbing layer compris-

ing gelatin, resorcine, and colloidal silica.

9. A method for obtaining a photographic image comprising the steps of (a) exposing image-wise to a predefined pattern, and (b) subjecting to a negative processing, a photographic material according to any of claims 1 to 8.

5

10. A method for obtaining a photographic image comprising the steps of (a) exposing image-wise to a predefined pattern, and (b) subjecting to a reversal processing, a photographic material according to any of claims 1 to 8.

11. Use of a sample bearing a photographic line image obtained according to the method of claim 9 or 10 as pulse disk in the ABS brake system of automobiles.

10

15

20

25

30

35

40

45

50

55



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 20 3952

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION
X	US 4 271 246 A (SATO MASAMICHI ET AL) 2 June 1981 (1981-06-02) * column 4, line 18; claims 1,11 * ---	1-9	G03C1/035 G03C1/795 B60T8/32
X	US 4 386 143 A (SATO MASAMICHI ET AL) 31 May 1983 (1983-05-31) * claims * ---	1-9	
X	US 4 551 420 A (SUGIMOTO NAOHIKO ET AL) 5 November 1985 (1985-11-05) * claims 1,20 * -----	1-9	
			TECHNICAL FIELDS SEARCHED
			G03C B60T
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 16 July 1999	Examiner Buscha, A
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03 82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 20 3952

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

16-07-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4271246 A	02-06-1981	JP 55006342 A	17-01-1980
		DE 2926189 A	17-01-1980
		US 4386143 A	31-05-1983
US 4386143 A	31-05-1983	JP 55006342 A	17-01-1980
		JP 1265106 C	27-05-1985
		JP 56075606 A	22-06-1981
		JP 59044601 B	31-10-1984
		DE 2926189 A	17-01-1980
		US 4271246 A	02-06-1981
US 4551420 A	05-11-1985	JP 1515543 C	24-08-1989
		JP 59068731 A	18-04-1984
		JP 63065140 B	14-12-1988