

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 008 380 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
10.03.2004 Bulletin 2004/11

(51) Int Cl.7: **B01F 5/06**, B01F 5/08,
B01F 13/06, A61K 9/127,
A61K 9/107

(21) Application number: **99123878.3**

(22) Date of filing: **02.12.1999**

(54) Method and device for mixing or dispersing liquids

Verfahren und Vorrichtung zum Mischen oder Dispergieren von Flüssigkeiten

Procédé et dispositif pour mélanger et disperser des liquides

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**

(30) Priority: **07.12.1998 EP 98123237**

(43) Date of publication of application:
14.06.2000 Bulletin 2000/24

(73) Proprietor: **F. HOFFMANN-LA ROCHE AG
4070 Basel (CH)**

(72) Inventors:
• **Kolb, Gudrun**
28211 Bremen (DE)
• **Stein, Hermann**
4410 Liestal (CH)
• **Viardot, Klaus**
4125 Riehen (CH)

(74) Representative: **Heinen, Detlef et al**
c/o A.Braun Braun Héritier Eschmann AG,
Patentanwälte,
Postfach 160
4003 Basel (CH)

(56) References cited:
WO-A-94/08626 DE-A- 3 905 354
DE-A- 19 542 499 US-A- 2 125 245
US-A- 2 132 854 US-A- 2 198 614
US-A- 4 529 561 US-A- 4 621 023
US-A- 5 326 484

• **PATENT ABSTRACTS OF JAPAN vol. 012, no.**
349 (C-529), 20 September 1988 (1988-09-20) &
JP 63 107736 A (JOJI HIROSE;OTHERS: 01), 12
May 1988 (1988-05-12)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 008 380 B1

Description

[0001] The present invention is concerned with a method for mixing or dispersing liquids, as well as with a mixing device for carrying out the process.

[0002] European Patent Publication EP 0776 997 A1 describes a method for the production of a finely divided dispersion of solids in which a pre-dispersion is pumped through one or more slotted nozzles. The particle size of the dispersed phase lies in the region of 0.01 μm to 20 μm . The diameter of the nozzle bore is 0.05 mm to 1 mm. The ratio of bore length to bore diameter is 1:1 to 1:10. A preferred combination comprises a device which has two nozzle bodies with the nozzles lying opposite their outlet. Also described are devices in which the crude dispersion or pre-dispersion is pumped through two or more nozzles having an equal or decreasing bore diameter. The slotted nozzle suitably consists of a ceramic material, for example, of zirconium oxide, or of metal coated with ceramic.

[0003] In International Patent Publication WO 97/17946 there is described a method for the production of a liposome dispersion in which an aqueous pre-dispersion of one or more amphiphilic substances is pumped at 600 bar to 900 bar through at least one homogenizing nozzle having a diameter of 0.1 mm to 0.5 mm. The homogenizing nozzle has an inlet channel and an outlet channel and consists of a hard ceramic plate, in which the bore is situated, pressed in a steel body. The inlet channel and the outlet channel are also incorporated in the steel body. When several nozzles are used, these are arranged opposite and have a parallel inflow. The pre-dispersion is pumped in the circuit through the homogenizing nozzle until the average particle size of the liposome dispersion lies between about 35 nm and about 80 nm.

[0004] Further methods and/or apparatuses for producing dispersions are described, for example in US 2,125,245; US 2,132,854; US 2,198,614; Patent Abstracts of Japan vol. 012, no.349 (C-529)& JP-A-63/107736; US 4,621,023; DE 39 05 354; US-A-4,529,561; US 5,326,484; US 4,352,572; US 4,441,823; US 4,971,450; and US 3,377,139.

[0005] Also, DE-A-195 42 499 shows a method and apparatus for producing a dispersion with finely dispersed particles generally in the range of 35-80 nm with a narrow standard deviation of the particle size. The dispersion is produced using a high pressure homogenisation nozzle having a bore diameter in the range of 0.1 mm to 0.5 mm. Having passed the homogenisation nozzle the dispersion immediately exits the nozzle through an outlet channel.

[0006] The problem which forms the basis of the present invention is to provide a method for mixing or dispersing liquids which permits an improved intermixing with lower energy expenditure compared with the state of the art.

[0007] The problem is solved in accordance with the invention by a method for mixing or dispersing and by a mixing device according to the respective independent claim. Preferred variants and embodiments are the subject of the dependent claims.

[0008] The process is especially suitable for the production of finely divided dispersions having average particle sizes of about 10 nm to about 1000 nm, preferably of about 50 nm to about 400 nm.

[0009] For the production of liquid dispersions, a pre-emulsion is pumped at temperatures of about 20°C to about 250°C, preferably of about 20°C to about 200°C, and pressures of about 50 bar to about 2500 bar, preferably of about 100 bar to about 800 bar, through the aforementioned mixing device (dispersing unit).

[0010] The residence time of the liquids to be mixed or to be dispersed in the mixing device is about 10^{-6} sec to about 10^{-1} sec.

[0011] The term "pre-emulsion" denotes one of the following systems:

- a) oil-in-water emulsion (O/W emulsion),
- b) water-in-oil emulsion (W/O emulsion),
- c) oil-in-water emulsion in which a lipophilic active substance is dissolved in the oil,
- d) water-immiscible solvent-in-water emulsion in which a lipophilic active substance is dissolved in this solvent.

[0012] An oil-in-water emulsion in which the viscosity of the dispersed phase is about 0.01 mPas to about 10,000 mPas, preferably about 0.1 mPas to about 2000 mPas, is preferred.

[0013] The term "lipophilic active substance" embraces the vitamins A, D, E and K, carotenoids or food additives such as PUFAs (polyunsaturated fatty acids) and tocotrienols.

[0014] Advantageously, for the production of the pre-emulsion the liquid to be dispersed may be stirred into an aqueous emulsifier solution, optionally while warming.

[0015] Processes for the production of finely divided liquid dispersions relate not only to processes used in the food manufacturing field and in which corresponding food emulsifiers are used, but also to general industrial dispersion processes in which corresponding industrial emulsifiers are used. Processes which are used in the food manufacturing field are preferred.

[0016] Suitable emulsifiers/stabilizers for dispersions which can be added to foods are, for example, ascorbyl palmitate, lecithins, polysorbates, sugar esters, fatty acid esters, citric acid esters, sorbitol stearates; as well as colloids, for example gelatines and fish gelatines; carbohydrates, for example starches and starch derivatives such as dextrin, pectin or gum arabic; milk proteins and plant proteins. Mixtures of the aforementioned substances can also be used.

Ascorbyl palmitate, fish gelatines or starch derivatives are preferred, with ascorbyl palmitate being especially preferred.

[0017] Suitable industrial emulsifiers are, for example, lauryl ethylene oxide (LEO)-9 and (LEO)-10.

[0018] The method in accordance with the invention is especially suitable for the production of liquid dispersions from oils, such as, for example, corn oil, palm oil, sunflower oil and the like; and liquid dispersions from lipophilic active substances, such as, for example, from vitamin A, D, E and K, from carotenoids or from food additives such as PUFAs and tocotrienols.

[0019] Suitable carotenoids are, for example, beta-carotene, beta-apo-4'-carotenal, beta-apo-8'-carotenal, beta-apo-12'-carotenal, beta-apo-8'-carotenoic acid, astaxanthin, canthaxanthin, zeaxanthin, cryptoxanthin, citranaxanthin, lutein, lycopene, torularodin aldehyde, torularodin ethyl ester, neurosporaxanthin ethyl ester, zetacarotene, dehydroplectania-xanthin and the like.

[0020] The aforementioned lipophilic active substances can be used directly insofar as they are oily substances. Solid active substances, for example carotenoids, are used in dissolved form in oil or in water-immiscible solvents.

[0021] Suitable water-immiscible solvents are halogenated aliphatic hydrocarbons such as e.g. methylene chloride, water-immiscible esters such as carboxylic acid dimethyl ester (dimethyl carbonate), ethyl formate, methyl, ethyl or isopropyl acetate; or water-immiscible ethers such as e.g. methyl tert.butyl ether and the like.

[0022] The process in accordance with the invention provides a very efficient mixing or dispersing process for liquids.

[0023] The mixing or dispersing process in accordance with the invention is also suitable for performing chemical reactions having very short reaction times, in the region of seconds or fractions of seconds.

[0024] The mixing device in accordance with the invention has, in contrast to the known devices described hereinbefore, a turbulence chamber positioned between the inlet and outlet nozzles, by which the short term stability of mixtures, especially of dispersions, is increased. This results in the liquid dispersion being homogenized more strongly.

[0025] The invention will be illustrated hereinafter on the basis of the Figures.

Fig. 1 shows a flow scheme of an arrangement for performing the method in accordance with the invention,

Fig. 2 shows a cross section through a mixing device in accordance with the invention having an inlet nozzle and an outlet nozzle,

Fig. 3 shows a perspective view of the mixing device in accordance with the invention,

Fig. 4 shows a possibility of a *scale-up* arrangement,

Fig. 5 shows a further possibility of a *scale-up* arrangement.

[0026] In Fig. 1 a supply container (1) is followed by a high pressure pump (2) which is optionally connected to a heat exchanger (3). The mixing device (4) is positioned thereafter.

[0027] Fig. 2 and Fig. 3 show a mixing device (4) consisting of an inlet nozzle (6) having a bore diameter of about 0.05 mm to about 1 mm, preferably about 0.05 mm to about 0.5 mm; a turbulence chamber (7) having a diameter of about 0.5 mm to about 10 mm, preferably about 1 mm to about 10 mm, especially about 1 mm to about 5 mm; an outlet nozzle (8) having a bore diameter of about 0.05 mm to about 1.5 mm, preferably about 0.05 mm to about 0.8 mm, with the inlet nozzle (6), the turbulence chamber (7) and the outlet nozzle (8) being pressed in sequence in a cylindrical support (5). The axes of the bores of the inlet nozzle and the outlet nozzle are arranged axially to one another.

[0028] The ratio of length to diameter of the nozzle bore amounts in the case of the inlet nozzle or the outlet nozzle to about 1 to 10, preferably about 1 to 5.

[0029] The ratio of length to diameter of the turbulence chamber is about 0.5 to about 50, preferably about 0.5 to about 20, especially about 0.5 to about 10.

[0030] The diameter of the turbulence chamber must be greater than the diameter of the outlet nozzle.

[0031] The bore diameters of the inlet nozzle and the outlet nozzle can be the same or different. However, an embodiment in which the bore diameter of the inlet nozzle is smaller than the bore diameter of the outlet nozzle is preferred. For example, the bore diameter of the inlet nozzle is about 0.2 mm and the bore diameter of the outlet nozzle is about 0.25 mm.

[0032] The nozzles are suitably manufactured from wear-resistant materials such as e.g. sapphire, diamond, stainless steel, ceramic, silicon carbide, tungsten carbide, zirconium or the like.

[0033] The bores of the nozzles can be round or rectangular or can have the form of an ellipse. A bore which has a

cone in the mouth is also suitable.

[0034] The support (5) likewise consists of wear-resistant materials, suitably of stainless steel.

[0035] Fig. 4 shows one possibility for the scale-up of the mixing device (4).

[0036] Section 4a shows a plurality of nozzles in accordance with the invention with insert (11), which are screwed into a support plate (10). The support plate is positioned in a conduit (9).

[0037] Cross section 4b shows only one nozzle insert (11'). The nozzle insert (11'), the support plate (10) as well as the conduit (9) are manufactured from wear-resistant materials, preferably stainless steel.

[0038] Section 4c shows the screwable nozzle support (11'') which contains the nozzle in accordance with the invention.

[0039] Fig. 5 shows a further *scale-up* possibility. The mixing device consisting of a support disk (12), a turbulence chamber (13) and a support disk (14), which are positioned in sequence in a tubular conduit (15), with the first support disk (12) containing a plurality of inlet nozzles (16) having a bore diameter of about 0.05 mm to about 1 mm, preferably about 0.05 mm to about 0.5 mm, and the second support disk (14) containing a plurality of outlet nozzles (17) having a bore diameter of about 0.05 mm to about 1 mm, preferably about 0.05 mm to about 0.8 mm. The axes of the nozzles (16) and (17) are arranged axially to one another.

[0040] The number of nozzles determines the diameter of the turbulence chamber (13). The ratio of length to diameter of the turbulence chamber is designed such that the residence time of the liquid to be dispersed in the dispersing unit is about 10^{-6} sec to about 10^{-1} sec.

[0041] For the production of a finely divided liquid dispersion, set forth in Fig. 1, a pre-emulsion is firstly produced in the supply container (1) in a known manner and pumped through the dispersing unit (4) at temperatures of about 20°C to about 250°C, preferably about 20°C to about 200°C, and pressures of about 50 bar to about 2500 bar, preferably about 50 bar to about 800 bar, using a high pressure pump (2). Where required, the pre-emulsion can be heated for a brief period in the heat exchanger (3). The residence time of the liquid to be dispersed in the dispersing unit is about 10^{-6} sec to about 10^{-1} sec.

[0042] The following Examples illustrate the invention in more detail, but are not intended to limit its scope. In the Examples there was also used, in addition to the food emulsifier ascorbyl palmitate, the industrial emulsifiers lauryl ethylene oxide (LEO)-9 and (LEO)-10. This is a so-called "more rapid" emulsifier which very rapidly stabilizes newly formed phase boundaries.

Example 1: Corn oil and lauryl ethylene oxide

[0043] The emulsion had the following composition:

87 wt.% deionized water, 10 wt.% corn oil and 3 wt.% lauryl ethylene oxide-9.

[0044] Deionized water was placed in a kettle and warmed to 40°C. The emulsifier lauryl ethylene oxide (LEO)-9 was dissolved in the water. Subsequently, the corn oil was stirred in and comminuted with an Ultra Turrax mixer at 1000 rpm. When the content of dispersed phase was 10 wt.%, the weight ratio of corn oil to lauryl ethylene oxide was 10:3. The pre-emulsion was homogenized three times at a pressure of 600 bar using the dispersing unit according to Fig. 2 in accordance with the invention. The geometric dimensions of the dispersing units used are given in Table 1. The particle sizes were determined in a known manner by means of photon correlation spectroscopy.

Example 2: Corn oil and ascorbyl palmitate.

[0045] Here, ascorbyl palmitate was used as the emulsifier. The quantitative composition of the emulsion corresponded to that in Example 1.

[0046] Deionized water was placed in a kettle and warmed to 40°C. Ascorbyl palmitate was dissolved in the water at pH values between seven and eight. The production of the pre-emulsion and the homogenization were carried out according to Example 1.

Example 3: dl-alpha-Tocopherol and ascorbyl palmitate.

[0047] Example 3 was carried out in accordance with Example 2.

Example 4: dl-alpha-Tocopherol and ascorbyl palmitate

[0048] A pre-emulsion was produced in accordance with Example 2. The content of dispersed phase was 30 wt.%. The weight ratio of dl-alpha-tocopherol to ascorbyl palmitate was 10:1. The pre-emulsion was homogenized once at

pressures of 100 bar, 200 bar, 300 bar, 400 bar and 500 bar using the dispersing unit in accordance with the invention shown in Fig. 2.

Example 5: dl-alpha-Tocopherol, corn oil with ascorbyl palmitate and fish gelatine

[0049] An emulsion comprising 65 wt.% deionized water, 6 wt.% ascorbyl palmitate, 4 wt.% fish gelatine, 18 wt.% dl-alpha-tocopherol and 7 wt.% corn oil was produced in the manner described hereinafter.

[0050] The deionized water was placed in a kettle and warmed to 60°C. The fish gelatine was dissolved in the water. Then, the ascorbyl palmitate was dissolved in the aforementioned solution at pH values between seven and eight. Subsequently, the dispersed phase consisting of dl-alpha-tocopherol and corn oil was stirred in as described in Example 1. The pre-emulsion was homogenized in accordance with Example 4.

[0051] Examples 6-10 are comparative Examples using a single-hole nozzle.

Example 6: Corn oil and lauryl ethylene oxide

[0052] The pre-emulsion was produced in accordance with Example 1 and homogenized three times at a pressure of 600 bar in a single-hole nozzle, said single-hole nozzle referring to a nozzle having an acute angled inlet and outlet. The geometric dimensions of the single-hole nozzle are given in Table 1.

Example 7: Corn oil and ascorbyl palmitate

[0053] The pre-emulsion was produced in accordance with Example 2 and homogenized in the manner described in Example 6.

Example 8: dl-alpha-Tocopherol and ascorbyl palmitate

[0054] The pre-emulsion was produced in accordance with Example 3 and homogenized in the manner described in Example 6.

Example 9: dl-alpha-Tocopherol and ascorbyl palmitate

[0055] The pre-emulsion was produced in accordance with Example 4 and homogenized once in a single-hole nozzle as described in Example 6 at pressures of 100 bar, 200 bar, 300 bar, 400 bar and 500 bar. The particle size was determined in a known manner by means of laser diffraction spectrometry and photon correlation spectroscopy.

Example 10: dl-alpha-Tocopherol, corn oil with ascorbyl palmitate and fish gelatine

[0056] The pre-emulsion was produced in accordance with Example 5 and homogenized once in a single-hole nozzle as described in Example 6 at pressures of 100 bar, 200 bar, 300 bar, 400 bar and 500 bar.

Table 1

Geometric dimensions of the dispersing units used.				
Nozzle type	Bore diameter of the inlet nozzle [mm]	Bore diameter of the turbulence chamber [mm]	Length of the turbulence chamber [mm]	Bore diameter of the outlet nozzle [mm]
Nozzle I	0.2	2	1.5	0.25
Nozzle I long	0.2	2	3	0.28
Nozzle II	0.2	2	1.5	0.2
single-hole nozzle	0.2	-	-	-

[0057] The average particle sizes of the finely divided liquid dispersions of Examples 1-6 obtained are set forth in Tables 2 and 3.

Table 2

Average particle sizes in nm of experiments 1, 2, 3, 6, 7 and 8.				
Example	Nozzle type	Passage 1 Particle size	Passage 2 Particle size	Passage 3 Particle size
1	Nozzle I 0.2/0.25 mm	218 219	202 215	202 200
1	Nozzle II 0.2/0.2 mm	230 231	214 220	212 208
6	single-hole nozzle 0.2 mm	307 298	256 250	247 248
2	Nozzle I 0.2/0.25 mm	275	250	238
2	Nozzle II 0.2/0.2 mm	294	266	245
7	single-hole nozzle 0.2 mm	340	320	275
3	Nozzle I 0.2/0.25 mm	295	287	267
3	Nozzle II 0.2/0.2 mm	312	294	302
8	single-hole nozzle 0.2 mm	442	416	403

[0058] From Table I it will be evident that the homogenization using nozzles I and II in accordance with the invention gives a liquid dispersion with a smaller particle size compared with the homogenization using a single-hole nozzle. When nozzles I and II are used, particle sizes up to a third smaller are produced compared with the single-hole nozzle.

[0059] The best homogenization takes place in nozzle I. Here, the particle size was reduced to 200 nm after a triple homogenization. The values from Example 1 reveal that the reproducibility of the results is also good.

[0060] The average particle sizes of the finely divided liquid dispersions obtained in Examples 4,5,9 and 10 are set forth in Table 3.

Table 3

Average particle sizes in nm of experiments 4, 5, 9 and 10.						
Ex.	Nozzle type	100 bar Particle size [nm]	200 bar Particle size [nm]	300 bar Particle size [nm]	400 bar Particle size [nm]	500 bar Particle size [nm]
4	Nozzle I 0.2/0.25 mm	1800	1370	1400	1105	1080
4	Nozzle I/long 0.2/0.28 mm	1370	740	745	660	600
9	single-hole nozzle 0.2 mm	5200	3080	1520	1370	914

Table 3 (continued)

Average particle sizes in nm of experiments 4, 5, 9 and 10.						
Ex.	Nozzle type	100 bar Particle size [nm]	200 bar Particle size [nm]	300 bar Particle size [nm]	400 bar Particle size [nm]	500 bar Particle size [nm]
5	Nozzle I 0.2/0.25 mm	435	410	340	350	345
10	Nozzle I/long 0.2/0.28 mm	420	410	360	325	290
15	single-hole nozzle 0.2 mm	440	430	360	350	355

[0061] From Table 3 it will be evident that the homogenization using nozzle I and nozzle I/long give liquid dispersions with a smaller particle size than the homogenization using a single-hole nozzle. The best homogenization takes place using nozzle I/long.

Claims

1. A method for mixing or dispersing liquids, which method comprises pumping the liquids to be mixed or to be dispersed in the presence of an emulgator at temperatures of about 20°C to about 250°C, preferably of about 20°C to about 200°C, and pressures of about 50 bar to about 2500 bar, preferably of about 100 bar to about 800 bar, through a mixing device which consists of one or more inlet nozzles, a turbulence chamber and one or more outlet nozzles, wherein the bore diameter of the inlet nozzle(s) is smaller than the bore diameter of the outlet nozzle(s), with the inlet nozzle(s), turbulence chamber(s) and outlet nozzle(s) being pressed in sequence in a cylindrical support and the axes of the bores of the inlet nozzle(s) and the outlet nozzle(s) being arranged axially to one another, wherein the bore diameter of the inlet nozzle is about 0.05 mm to about 1 mm, wherein the ratio of length to diameter of the turbulence chamber is about 0.5 to about 50, and wherein the residence time of the liquid to be mixed or to be dispersed in the mixing device is about 10^{-6} sec to about 10^{-1} sec.
2. A method in accordance with claim 1, wherein liquids are dispersed.
3. A method in accordance with any one of claims 1 or 2, wherein a liquid dispersion having an average particle size of about 10 nm to about 1000 nm, preferably about 50 nm to about 400 nm, is produced.
4. A method in accordance with any one of claims 1 to 3, wherein a pre-emulsion is pumped through the mixing device.
5. A method in accordance with claim 4, wherein the pre-emulsion is an oil-in-water emulsion in which the viscosity of the dispersed phase is about 0.01 mPas to about 10,000 mPas, preferably about 0.1 mPas to about 2000 mPas.
6. A method in accordance with claim 4 or claim 5, wherein the pre-emulsion is produced by stirring the liquid to be dispersed into an aqueous emulsifier solution, optionally while warming.
7. A method in accordance with claim 6, wherein the emulsifier is ascorbyl palmitate.
8. A method in accordance with any one of claims 1 to 7, wherein oils or lipophilic active substances are dispersed.
9. A method in accordance with claim 8, wherein the lipophilic active substances are vitamins A, D, E and K, carotenoids or food additives such as PUFAs and tocotrienols.
10. A mixing device for performing the method according to any one of claims 1 to 9, said device consisting of an inlet nozzle (6), a turbulence chamber (7) and an outlet nozzle (8), wherein the bore diameter of the inlet nozzle is smaller than the bore diameter of the outlet nozzle, with the inlet nozzle (6), the turbulence chamber (7) and the outlet nozzle (8) being pressed in sequence in a cylindrical support (5) and the axes of the bores of the inlet nozzle

and the outlet nozzle being arranged axially to one another, wherein the bore diameter of the inlet nozzle (6) is about 0.05 mm to about 1 mm, and wherein the ratio of length to diameter of the turbulence chamber is about 0.5 to about 50.

11. A device according to claim 10, wherein the bore diameter of the inlet nozzle (6) is about 0.05 mm to about 0.5 mm, the diameter of the turbulence chamber (7) is about 0.5 mm to about 10 mm, preferably about 1 mm to about 5 mm, and the bore diameter of the outlet nozzle (8) is about 0.05 mm to about 1.5 mm, preferably about 0.05 mm to about 0.8 mm.
12. A device according to claim 10 or claim 11, wherein the nozzles are manufactured from sapphire, diamond, stainless steel, ceramic, silicon carbide, tungsten carbide or zirconium oxide.
13. A device according to any one of claims 10 to 12, wherein the ratio of length to diameter of the nozzle bores in the inlet nozzle and the outlet nozzle is about 1 to about 10, preferably about 1 to about 5.
14. A device according to any one of claims 10 to 13, wherein the ratio of length to diameter of the turbulence chamber is about 0.5 to about 20, especially about 0.5 to about 10.
15. A device according to any one of claims 10 to 14, wherein the diameter of the turbulence chamber is greater than the diameter of the outlet nozzle.
16. A mixing device for performing the method according to any one of claims 1 to 9, said device consisting of a support disk (12), a turbulence chamber (13) and a support disk (14), which are positioned in sequence in a conduit (15), the first support disk (12) containing a plurality of inlet nozzles (16) having a bore diameter of about 0.05 mm to about 1 mm, preferably about 0.05 mm to about 0.5 mm, and the second support disk (14) containing a plurality of outlet nozzles having a bore diameter of about 0.05 mm to about 1 mm, preferably about 0.05 mm to about 0.8 mm, and the axes of the nozzles (16) and (17) being arranged axially to one another, wherein the bore diameter of the inlet nozzle is smaller than the bore diameter of the outlet nozzle and wherein the ratio of length to diameter of the turbulence chamber is about 0.5 to about 50.
17. A mixing device as in claim 16, wherein the ratio of length to diameter of the turbulence chamber is about 0.5 to about 20, especially about 0.5 to about 10.
18. The use of a mixing device in accordance with any one of claims 10-17 for mixing or dispersing liquids.
19. The use of a mixing device in accordance with any one of claims 10-17 for the performance of chemical reactions with very short reaction times in the region of seconds or fractions of seconds.

Patentansprüche

1. Verfahren zum Mischen oder Dispergieren von Flüssigkeiten, welches Verfahren das Pumpen der zu mischenden oder zu dispergierenden Flüssigkeiten bei Temperaturen von etwa 20°C bis etwa 250°C, vorzugsweise von etwa 20°C bis etwa 200°C, und Drücken von etwa 50 bar bis etwa 2500 bar, vorzugsweise von etwa 100 bar bis etwa 800 bar, durch eine Mischvorrichtung umfasst, welche aus einer oder mehreren Eintrittsdüsen, einer Turbulenzkammer und einer oder mehreren Austrittsdüsen besteht, wobei der Bohrungsdurchmesser der Eintrittsdüse(n) kleiner ist als der Bohrungsdurchmesser der Austrittsdüse(n), die Eintrittsdüse(n), Turbulenzkammer und Austrittsdüse(n) aufeinanderfolgend in eine zylindrische Halterung eingepresst und die Achsen der Bohrungen von Eintritts- und Austrittsdüse(n) axial zueinander angeordnet sind, wobei der Bohrungsdurchmesser der Eintrittsdüse etwa 0.05 mm bis etwa 1 mm beträgt, wobei das Verhältnis von Länge zu Durchmesser der Turbulenzkammer etwa 0.5 bis 50 beträgt, und wobei die Verweilzeit der zu mischenden oder zu dispergierenden Flüssigkeit in der Mischvorrichtung etwa 10^{-6} sec bis etwa 10^{-1} sec beträgt.
2. Verfahren gemäss Anspruch 1, bei welchem Flüssigkeiten dispergiert werden.
3. Verfahren gemäss einem der Ansprüche 1 oder 2, bei welchem eine flüssige Dispersion hergestellt wird mit einer Durchschnittsgrösse der Partikel von etwa 10 nm bis etwa 1000 nm, vorzugsweise etwa 50 nm bis etwa 40 nm.

4. Verfahren gemäss einem der Ansprüche 1 bis 3, **dadurch gekennzeichnet, dass** eine Voremulsion durch eine Mischvorrichtung gepumpt wird.
5. Verfahren gemäss Anspruch 4, bei welchem die Voremulsion eine Öl-in-Wasser-Emulsion ist, bei der die Viskosität der dispersen Phase etwa 0.01 mPas bis etwa 10000 mPas, vorzugsweise etwa 0.1 mPas bis etwa 2000 mPas, beträgt.
6. Verfahren gemäss Anspruch 4 oder Anspruch 5, bei welchem die Voremulsion durch Einrühren der zu dispergierenden Flüssigkeit in eine wässrige Emulgatorlösung hergestellt wird, gegebenenfalls unter Erwärmung.
7. Verfahren gemäss Anspruch 6, **dadurch gekennzeichnet, dass** der Emulgator Ascorbylpalmitat ist.
8. Verfahren gemäss einem der Ansprüche 1 bis 7, bei welchem Öle oder lipophile Wirkstoffe dispergiert werden.
9. Verfahren gemäss Anspruch 8, bei welchem die lipophilen Wirkstoffe Vitamine A, D, E und K, Carotinoide oder Lebensmittelzusatzstoffe wie PUFAs und Tocotrienole bedeuten.
10. Mischvorrichtung zur Durchführung des Verfahrens nach einem der Ansprüche 1 bis 9, welche Vorrichtung aus einer Eintrittsdüse (6), einer Turbulenzkammer (7), und einer Austrittsdüse (8) besteht, der Bohrungsdurchmesser der Eintrittsdüse kleiner ist als der Bohrungsdurchmesser der Austrittsdüse, die Eintrittsdüse (6), die Turbulenzkammer (7) und die Austrittsdüse (8) aufeinanderfolgend in eine zylindrische Halterung (5) eingepresst sind, und die Achsen der Bohrungen von Eintritts- und Austrittsdüse axial zueinander angeordnet sind, wobei der Bohrungsdurchmesser der Eintrittsdüse (6) etwa 0.05 mm bis etwa 1 mm beträgt, und wobei das Verhältnis von Länge zu Durchmesser der Turbulenzkammer etwa 0.5 bis etwa 50 beträgt.
11. Vorrichtung gemäss Anspruch 10, bei welcher der Bohrungsdurchmesser der Eintrittsdüse (6) etwa 0.05 mm bis etwa 1 mm beträgt, vorzugsweise etwa 0.05 mm bis etwa 0.5mm, der Durchmesser der Turbulenzkammer (7) etwa 0.5 mm bis etwa 10 mm beträgt, vorzugsweise etwa 1 mm bis etwa 10 mm, und der Bohrungsdurchmesser der Austrittsdüse (8) etwa 0.05 mm bis etwa 1.5 mm beträgt, vorzugsweise etwa 0.05 mm bis etwa 0.8 mm.
12. Vorrichtung gemäss Anspruch 10 oder Anspruch 11, bei welchem die Düsen aus Saphir, Diamant, Edelstahl, Keramik, Siliciumkarbid, Wolframkarbid oder Zirkonoxid gefertigt sind.
13. Vorrichtung gemäss einem der Ansprüche 10 bis 12, bei welcher das Verhältnis von Länge zu Durchmesser der Düsenbohrungen bei der Eintritts- und der Austrittsdüse etwa 1 bis etwa 10, vorzugsweise etwa 1 bis etwa 5, beträgt.
14. Vorrichtung gemäss einem der Ansprüche 10 bis 13, bei welcher das Verhältnis von Länge zu Durchmesser der Turbulenzkammer etwa 0.5 bis etwa 20, insbesondere etwa 0.5 bis etwa 10, beträgt.
15. Vorrichtung gemäss einem der Ansprüche 10 bis 14, bei welcher der Durchmesser der Turbulenzkammer grösser als der Durchmesser der Austrittsdüse ist.
16. Mischvorrichtung zur Durchführung des Verfahrens nach einem der Ansprüche 1 bis 9, welche Vorrichtung aus einer Halterscheibe (12), einer Turbulenzkammer (13) und einer Halterscheibe (14) besteht, welche aufeinanderfolgend in einer Leitung (15) positioniert sind, wobei die erste Halterscheibe (12) eine Vielzahl von Eintrittsdüsen (16) enthält mit einem Bohrungsdurchmesser von etwa 0.05 mm bis etwa 1 mm, vorzugsweise etwa 0.05 mm bis etwa 0.5 mm, und die zweite Halterscheibe (14) eine Vielzahl von Austrittsdüsen (17) enthält mit einem Bohrungsdurchmesser von etwa 0.05 mm bis etwa 1 mm, vorzugsweise etwa 0.05 mm bis etwa 0.8 mm, und wobei die Achsen der Düsen (16) und (17) axial zueinander angeordnet sind, wobei der Bohrungsdurchmesser der Eintrittsdüse kleiner ist als der Bohrungsdurchmesser der Austrittsdüse und wobei das Verhältnis von Länge zu Durchmesser der Turbulenzkammer etwa 0.5 bis etwa 50 beträgt.
17. Mischvorrichtung gemäss Anspruch 16, bei welcher das Verhältnis von Länge zu Durchmesser der Turbulenzkammer etwa 0.5 bis etwa 20, insbesondere etwa 0.5 bis etwa 10, beträgt.
18. Verwendung einer Mischvorrichtung gemäss einem der Ansprüche 10-17 zum Mischen oder Dispergieren von Flüssigkeiten.

19. Verwendung einer Mischvorrichtung gemäss einem der Ansprüche 10-17 zur Durchführung von chemischen Reaktionen mit sehr kurzen Reaktionszeiten im Bereich von Sekunden oder Bruchteilen von Sekunden.

Revendications

1. Méthode de mélange ou de dispersion de liquides, laquelle méthode comprend le pompage des liquides à mélanger ou à disperser en présence d'un agent émulsif à des températures d'environ 20 °C à environ 250 °C, préféralement d'environ 20°C à environ 200°C, et à des pressions d'environ 50 bars à environ 2500 bars, préféralement d'environ 100 bars à environ 800 bars, par l'intermédiaire d'un dispositif de mélange constitué d'une ou de plusieurs buses d'entrée, d'une chambre de turbulence et d'une ou de plusieurs buses de sortie, dans laquelle le diamètre d'alésage de la ou des buse(s) d'entrée est inférieur au diamètre d'alésage de la ou des buse(s) de sortie, la ou les buse(s) d'entrée, la chambre de turbulence et la ou les buse(s) de sortie étant pressées les unes après les autres dans un support cylindrique et les axes des alésages de la ou des buse(s) d'entrée et de la ou des buse(s) de sortie étant disposés axialement les uns par rapport aux autres, dans laquelle le diamètre d'alésage de la ou des buse(s) d'entrée est d'environ 0.05 mm à environ 1 mm, dans laquelle le rapport entre la longueur et le diamètre de la chambre de turbulence est d'environ 0.5 à environ 50, et dans laquelle le temps de séjour du liquide à mélanger ou à disperser dans le dispositif de mélange est d'environ 10^{-6} sec à environ 10^{-1} sec.
2. Méthode selon la revendication 1, dans laquelle les liquides sont dispersés.
3. Méthode selon l'une quelconque des revendications 1 ou 2, dans laquelle une dispersion liquide ayant une granulométrie moyenne d'environ 10 nm à environ 1000 nm, préféralement d'environ 50 nm à environ 400 nm, est produite.
4. Méthode selon l'une quelconque des revendications 1 à 3, dans laquelle une pré-émulsion est pompée par l'intermédiaire du dispositif de mélange.
5. Méthode selon la revendication 4, dans laquelle la pré-émulsion est une émulsion huile dans eau dans laquelle la viscosité de la phase dispersée est d'environ 0.01 mPas à environ 10000 mPas, préféralement d'environ 0.1 mPas à environ 2000 mPas.
6. Méthode selon la revendication 4 ou la revendication 5, dans laquelle la pré-émulsion est produite par délayer du liquide à disperser dans une solution aqueuse émulsifiante, facultativement avec chauffage simultané.
7. Méthode selon la revendication 6, dans laquelle l'émulsifiant est le palmitate d'ascorbyle.
8. Méthode selon l'une quelconque des revendications 1 à 7, dans laquelle des huiles ou des principes actifs lipophiles sont dispersé(e)s.
9. Méthode selon la revendication 8, dans laquelle les principes actifs lipophiles sont les vitamines A,D,E et K, des caroténoïdes ou des additifs alimentaires comme les AGPI et les tocotriénols.
10. Dispositif de mélange pour la mise en oeuvre de la méthode selon l'une quelconque des revendications 1 à 9, ledit dispositif étant constitué d'une buse d'entrée (6), d'une chambre de turbulence (7) et d'une buse de sortie (8), dans lequel le diamètre d'alésage de la buse d'entrée est inférieur au diamètre d'alésage de la buse de sortie, la buse d'entrée (6), la chambre de turbulence (7) et la buse de sortie (8) étant pressées les unes après les autres dans un support cylindrique (5) et les axes des alésages de la buse d'entrée et de la buse de sortie étant disposés axialement les uns par rapport aux autres, dans lequel le diamètre d'alésage de la buse d'entrée (6) est d'environ 0.05 mm à environ 1 mm, et dans lequel le rapport entre la longueur et le diamètre de la chambre de turbulence est d'environ 0.5 à environ 50.
11. Dispositif selon la revendication 10, dans lequel le diamètre d'alésage de la buse d'entrée (6) est d'environ 0.05 mm à environ 0.5 mm, le diamètre de la chambre de turbulence (7) est d'environ 0.5 mm à environ 10 mm, préféralement d'environ 1 mm à environ 5 mm, et le diamètre d'alésage de la buse de sortie (8) est d'environ 0.05 mm à environ 1.5 mm, préféralement d'environ 0.05 mm à environ 0.8 mm.
12. Dispositif selon la revendication 10 ou la revendication 11, dans lequel les buses sont fabriquées en saphir, en

diamant, en acier inoxydable, en céramique, en carbure de silicium, en carbure de tungstène ou en oxyde de zirconium.

5 **13.** Dispositif selon l'une quelconque des revendications 10 à 12, dans lequel le rapport entre la longueur et le diamètre des alésages des buses, dans la buse d'entrée et dans la buse de sortie, est d'environ 1 à environ 10, préféra-

10 **14.** Dispositif selon l'une quelconque des revendications 10 à 13, dans lequel le rapport entre la longueur et le diamètre de la chambre de turbulence est d'environ 0.5 à environ 20, en particulier d'environ 0.5 à environ 10.

15. Dispositif selon l'une quelconque des revendications 10 à 14, dans lequel le diamètre de la chambre de turbulence est supérieur au diamètre de la buse de sortie.

15 **16.** Dispositif de mélange pour la mise en oeuvre de la méthode selon l'une quelconque des revendications 1 à 9, ledit dispositif étant constitué d'un disque de support (12), d'une chambre de turbulence (13) et d'un disque de support (14), qui sont positionnés les uns après les autres dans une conduite (15), le premier disque de support (12) contenant une pluralité de buses d'entrée (16) ayant un diamètre d'alésage d'environ 0.05 mm à environ 1 mm, préféra-

20 blement d'environ 0.05 mm à environ 0.5 mm, et le deuxième disque de support (14) contenant une pluralité de buses de sortie ayant un diamètre d'alésage d'environ 0.05 mm à environ 1 mm, préféra-

blement d'environ 0.05 mm à environ 0.8 mm, et les axes des buses (16) et (17) étant disposés axialement les uns par rapport aux autres, dans lequel le diamètre d'alésage de la buse d'entrée est inférieur au diamètre d'alésage de la buse de sortie et dans lequel le rapport entre la longueur et le diamètre de la chambre de turbulence est d'environ 0.5 à environ 50.

25 **17.** Dispositif de mélange selon la revendication 16, dans lequel le rapport entre la longueur et le diamètre de la chambre de turbulence est d'environ 0.5 à environ 20, en particulier d'environ 0.5 à environ 10.

18. Emploi d'un dispositif de mélange selon l'une quelconque des revendications 10 à 17 pour le mélange ou la dispersion de liquides.

30 **19.** Emploi d'un dispositif de mélange selon l'une quelconque des revendications 10 à 17 pour l'obtention de réactions chimiques ayant des temps de réaction très courts, de l'ordre de quelques secondes ou fractions de seconde.

Fig. 1:


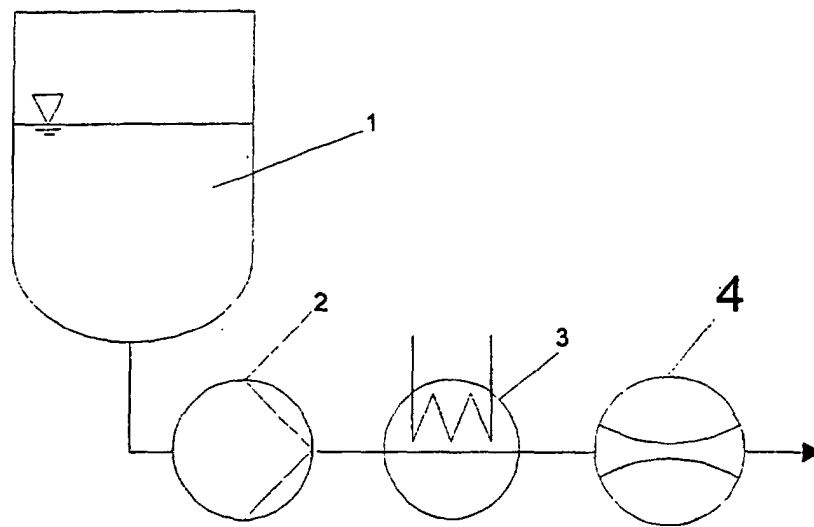


Fig. 2:

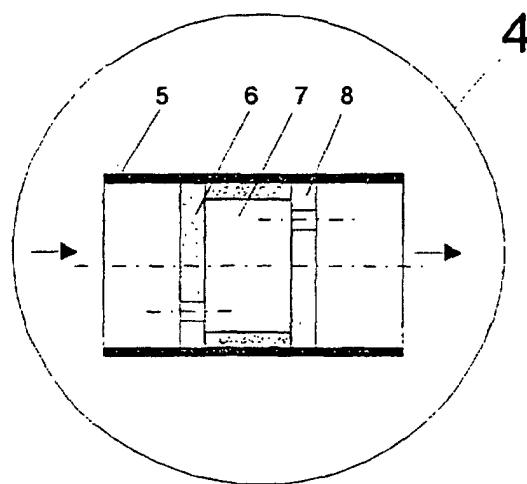

5 Fig. 3:


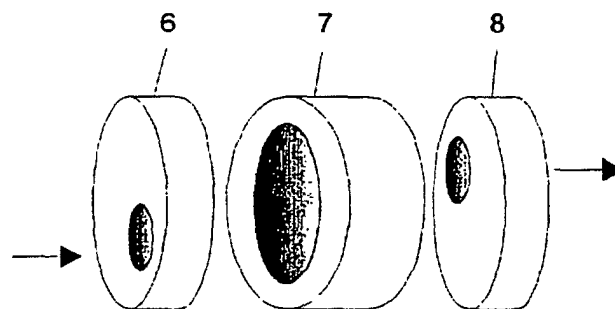


Fig. 4:



5 Fig. 5:

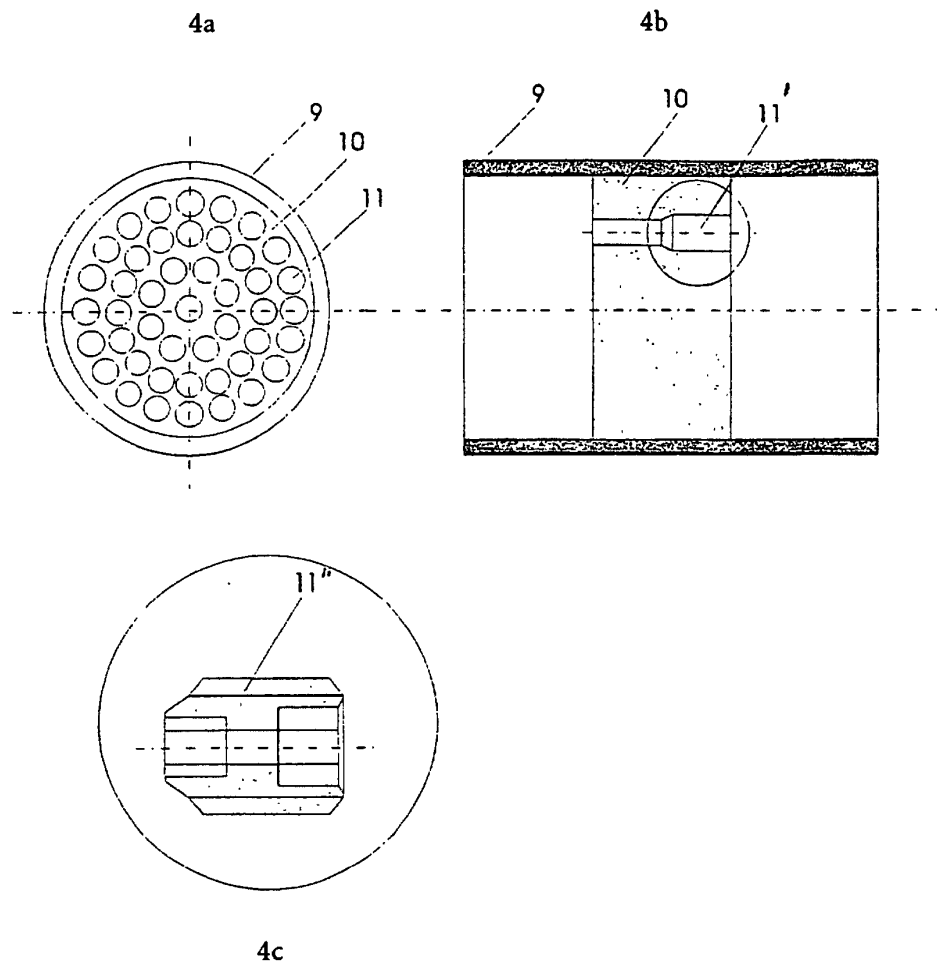