



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 010 169 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
21.06.2006 Bulletin 2006/25

(21) Application number: **97945400.6**

(22) Date of filing: **30.09.1997**

(51) Int Cl.:
G10L 11/02 (2006.01)

(86) International application number:
PCT/US1997/017656

(87) International publication number:
WO 1999/012155 (11.03.1999 Gazette 1999/10)

(54) **CHANNEL GAIN MODIFICATION SYSTEM AND METHOD FOR NOISE REDUCTION IN VOICE COMMUNICATION**

SYSTEM UND VERFAHREN ZUR REGELUNG DER KANALVERSTÄRKUNG FÜR
GERÄUSCHUNTERDRÜCKUNG IN DER SPRACHKOMMUNIKATION

SYSTEME DE MODIFICATION DU GAIN PAR CANAL ET PROCEDE DE REDUCTION DU BRUIT
DANS LES COMMUNICATIONS VOCALES

(84) Designated Contracting States:
DE FR GB

(30) Priority: **02.09.1997 US 921492**

(43) Date of publication of application:
21.06.2000 Bulletin 2000/25

(73) Proprietor: **QUALCOMM INCORPORATED**
San Diego, CA 92121-1714 (US)

(72) Inventor: **MAURO, Anthony, P.**
San Diego, CA 92129 (US)

(74) Representative: **Walsh, Michael Joseph et al**
TOMKINS & CO.
5, Dartmouth Road
Dublin 6 (IE)

(56) References cited:
WO-A-92/22891 US-A- 4 630 305
US-A- 4 811 404

- **SWAMINATHAN K ET AL: "SPEECH AND CHANNEL CODEC CANDIDATE FOR THE HALF RATE DIGITAL CELLULAR CHANNEL" PROCEEDINGS OF THE INTERNATIONAL CONFERENCE ON ACOUSTICS, SPEECH, SIGNAL PROCESSING (ICASSP), SPEECH PROCESSING 1. ADELAIDE, APR. 19 - 22, 1994, vol. VOL. 1, 19 April 1994, INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS, pages 265-268, XP002045415**
- **LAURENT P A ET AL: "A ROBUST 2400 BPS SUBBAND LPC VOCODER" PROCEEDINGS OF THE INTERNATIONAL CONFERENCE ON ACOUSTICS, SPEECH, AND SIGNAL PROCESSING (ICASSP), DETROIT, MAY 9 - 12, 1995 SPEECH, vol. VOL. 1, 9 May 1995, INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS, pages 500-503, XP000658040**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 010 169 B1

Description**BACKGROUND OF THE INVENTION****I. Field of the Invention**

[0001] The present invention relates to speech processing. More particularly, the present invention relates to a noise suppression system and method for use in speech processing.

II. Description of the Related Art

[0002] Transmission of voice by digital techniques has become widespread, particularly in cellular telephone and personal communication system (PCS) applications. This, in turn, has created an interest in improving speech processing techniques. One area in which improvements are being developed is that of noise suppression techniques.

[0003] Noise suppression in a speech communication system generally serves the purpose of improving the overall quality of the desired audio signal by filtering environmental background noise from the desired speech signal. This speech enhancement process is particularly necessary in environments having abnormally high levels of ambient background noise, such as an aircraft, a moving vehicle, or a noisy factory.

[0004] One noise suppression technique is the spectral subtraction, or spectral gain modification, technique. Using this approach, the input audio signal is divided into frequency channels, and particular frequency channels are attenuated according to their noise energy content. A background noise estimate for each frequency channel is utilized to generate a signal-to-noise ratio (SNR) of the speech in the channel, and the SNR is used to compute a gain factor for each channel. The gain factor then determines the attenuation for the particular channel. The attenuated channels are recombined to produce the noise-suppressed output signal.

[0005] In specialized applications involving relatively high background noise environments, most noise suppression techniques exhibit significant performance limitations. One example of such an application is the vehicle speakerphone option to a cellular mobile communication system. The speakerphone option provides hands-free operation for the automobile driver. The hands-free microphone is typically located at a greater distance from the user, such as being mounted overhead on the visor. The distant microphone delivers a poor SNR to the land-end party due to road and wind noise conditions. Although the received speech at the land-end is usually intelligible, continuous exposure to such background noise levels often increases listener fatigue.

[0006] For a noise suppression system to function properly, it is important to accurately determine the SNR of speech. However, it is difficult to accurately determine the SNR for the speech signal because of the limitations of currently available noise detectors. Spectral subtraction techniques update the background noise estimate during periods when speech is absent. When speech is absent, the measured spectral energy is attributed to noise, and the noise estimate is updated based on the measured spectral energy. Therefore, it is important to distinguish between periods of speech and absence of speech in order to obtain an accurate noise energy estimate for computation of the SNR.

[0007] An exemplary technique for speech detection uses a voice metric calculator to perform the noise update decision. A voice metric is a measurement of the overall voice-like characteristics of the channel energy. First, raw SNR estimates are used to index a voice metric table to obtain voice metric values for each channel. The individual channel voice metric values are summed to create an energy parameter, which is compared with a background noise update threshold. If the voice metric sum meets or exceeds the threshold, then the signal is said to contain speech. If the voice metric sum does not meet the threshold, the input frame is deemed to be noise, and a background noise update is performed. However, for the case of a high background noise condition, a sudden background noise, or an increasing noise source, SNR measurements will be large, resulting in a high voice metric, which negates a noise estimate update.

[0008] A refinement to the voice metric calculator technique measures the channel energy deviation. This method assumes that noise exhibits constant spectral energy over time, while speech exhibits variable spectral energy over time. Thus, the channel energy is integrated over time, and speech is detected if there is substantial channel energy deviation, while noise is detected if there is little channel energy deviation. A speech detector which measures channel energy deviation will detect a sudden increase in the level of noise. However, the channel energy deviation method provides an inaccurate result when the input speech signal is of constant energy. Furthermore, for the case of an increasing noise source, changes in the input energy will cause the energy deviation to be large, negating a noise estimate update even though an update is necessary.

[0009] In addition to an accurate speech detector, the noise suppression system must appropriately adjust channel gains. Channel gains should be adjusted so that noise suppression is achieved without sacrificing the voice quality. One method of channel gain adjustment computes the gain as a function of the total noise estimate and the SNR of the speech signal. In general, an increase in the total noise estimate results in a lower gain factor for a given SNR. A lower gain factor is indicative of a greater attenuation factor. This technique imposes a minimum gain value to prevent excess

attenuation of the channel gain when the total noise estimate is very high. By using a hard clamped minimum gain value, a tradeoff between noise suppression and voice quality is introduced. When the clamp is relatively low, noise suppression is improved but voice quality is degraded. When the clamp is relatively high, noise suppression is degraded but the voice quality is improved.

[0010] US Patent No. 4, 811, 404 "Motorola Inc.", discloses a method and apparatus for suppressing background noise in high background noise environments. This US Patent includes the addition of a signal to noise ratio (SNR) threshold mechanism to reduce background noise flutter by off-setting the gain rise of a gain table until a certain SNR threshold is reached.

[0011] In order to provide an improved noise suppression system, the limitations of the current techniques for speech detection and channel gain computation need to be addressed. These problems and deficiencies are solved by the present invention in the manner described below.

SUMMARY OF THE INVENTION

[0012] The present invention as set out in the appended claims is a noise suppression system and method for use in speech processing systems. An objective of the present invention is to provide a speech detector which determines the presence of speech in an input signal. A reliable speech detector is needed for an accurate determination of the signal-to-noise ratio (SNR) of speech. When speech is determined to be absent, the input signal is assumed to be entirely a noise signal, and the noise energy may be measured. The noise energy is then used for determination of the SNR. Another objective of the present invention is to provide an improved gain determination element for realization of noise suppression.

[0013] In accordance with the present invention, the noise suppression system comprises a speech detector which determines if speech is present in a frame of the input signal. The speech decision may be based on the SNR measure of speech in an input signal. A SNR estimator estimates the SNR based on the signal energy estimate generated by an energy estimator and the noise energy estimate generated by a noise energy estimator. The speech decision may also be based on the encoding rate of the input signal. In a variable rate communication system, each input frame is assigned an encoding rate selected from a predetermined set of rates based on the content of the input frame. Generally, the rate is dependent on the level of speech activity, so that a frame containing speech would be assigned a high rate, whereas a frame not containing speech would be assigned a low rate. Further, the speech decision may be based on one or more mode measures which are descriptive of the characteristics of the input signal. If it is determined that speech is not present in the input frame, then the noise energy estimator updates the noise energy estimate.

[0014] A channel gain estimator determines the gain for the frame of input signal. If speech is not present in the frame, then the gain is set to be a predetermined minimum. Otherwise, the gain is determined based on the frequency content of the frame. In a preferred embodiment, a gain factor is determined for each of a set of predefined frequency channels. For each channel, the gain is determined in accordance with the SNR of the speech in the channel. For each channel, the gain is defined using a function that is suitable for the characteristics of the frequency band within which the channel is located. Typically, for a predefined frequency band, the gain is set to increase linearly with increasing SNR. Additionally, the minimum gain for each frequency band may be adjustable based on the environmental characteristics. For example, a user-selectable minimum gain may be implemented. The channel SNRs are based on channel energy estimates generated by an energy estimator and channel noise energy estimates generated by a noise energy estimator. The gain factors are used to adjust the gain of the signal in the different channels, and the gain adjusted channels are combined to produce the noise suppressed output signal.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] The features, objects, and advantages of the present invention will become more apparent from the detailed description set forth below when taken in conjunction with the drawings in which like reference characters identify correspondingly throughout and wherein:

FIG. 1 is a block diagram of a communications system in which a noise suppressor is utilized;
 FIG. 2 is a block diagram illustrating a noise suppressor in accordance with the present invention;
 FIG. 3 is a graph of gain factors based on frequency, for realization of noise suppression in accordance with the present invention; and
 FIG. 4 is a flow chart illustrating an exemplary embodiment of the processing steps involved in noise suppression as implemented by the processing elements of FIG. 2.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0016] In speech communication systems, noise suppressors are commonly used to suppress undesirable environmental background noise. Most noise suppressors operate by estimating the background noise characteristics of the input data signal in one or more frequency bands and subtracting an average of the estimate(s) from the input signal. The estimate of the average background noise is updated during periods of the absence of speech. Noise suppressors require an accurate determination of the background noise level for proper operation. In addition, the level of noise suppression must be properly adjusted based on the speech and noise characteristics of the input signal. These requirements are addressed by the noise suppression system of the present invention.

[0017] An exemplary speech processing system **100** in which the present invention may be embodied is illustrated in FIG. 1. System **100** comprises microphone **102**, A/D converter **104**, speech processor **106**, transmitter **110**, and antenna **112**. Microphone **102** may be located in a cellular telephone together with the other elements illustrated in FIG. 1. Alternatively, microphone **102** may be the hands-free microphone of the vehicle speakerphone option to a cellular communication system. The vehicle speakerphone assembly is sometimes referred to as a carkit. Where microphone **102** is part of a carkit, the noise suppression function is particularly important. Because the hands-free microphone is generally positioned at some distance from the user, the received acoustic signal tends to have a poor speech SNR due to road and wind noise conditions.

[0018] Referring still to FIG. 1, the input audio signal, comprising speech and/or background noise, is received by microphone **102**. The input audio signal is transformed by microphone **102** into an electro-acoustic signal represented by the term $s(t)$. The electro-acoustic signal may be converted from an analog signal to pulse code modulated (PCM) samples by Analog-to-Digital converter **104**. In an exemplary embodiment, PCM samples are output by A/D converter **104** at 64 kbps and are represented by signal $s(n)$ as shown in FIG. 1. Digital signal $s(n)$ is received by speech processor **106**, which comprises, among other elements, noise suppressor **108**. Noise suppressor **108** suppresses noise in signal $s(n)$ in accordance with the present invention. In a carkit application, noise suppressor **108** determines the level of background environmental noise and adjusts the gain of the signal to mitigate the effects of such environmental noise. In addition to noise suppressor **108**, speech processor **106** generally comprises a voice coder, or a vocoder (not shown), which compresses speech by extracting parameters that relate to a model of human speech generation. Speech processor **106** may also comprise an echo canceller (not shown), which eliminates acoustic echo resulting from the feedback between a speaker (not shown) and microphone **102**.

[0019] Following processing by speech processor **106**, the signal is provided to transmitter **110**, which performs modulation in accordance with a predetermined format such as Code Division Multiple Access (CDMA), Time Division Multiple Access (TDMA), or Frequency Division Multiple Access (FDMA). In the exemplary embodiment, transmitter **110** modulates the signal in accordance with a CDMA modulation format as described in U.S. Pat. No. 4,901,307, entitled "SPREAD SPECTRUM MULTIPLE ACCESS COMMUNICATION SYSTEM USING SATELLITE OR TERRESTRIAL REPEATERS," which is assigned to the assignee of the present invention. Transmitter **110** then upconverts and amplifies the modulated signal, and the modulated signal is transmitted through antenna **112**.

[0020] It should be recognized that noise suppressor **108** may be embodied in speech processing systems that are not identical to system **100** of FIG. 1. For example, noise suppressor **108** may be utilized within an electronic mail application having a voice mail option. For such an application, transmitter **110** and antenna **112** of FIG. 1 will not be necessary. Instead, the noise suppressed signal will be formatted by speech processor **106** for transmission through the electronic mail network.

[0021] An exemplary embodiment of noise suppressor **108** is illustrated in FIG. 2. The input audio signal is received by preprocessor **202**, as shown in FIG. 2. Preprocessor **202** prepares the input signal for noise suppression by performing preemphasis and frame generation. Preemphasis redistributes the power spectral density of the speech signal by emphasizing the high frequency speech components of the signal. Essentially performing a high pass filtering function, preemphasis emphasizes the important speech components to enhance the SNR of these components in the frequency domain. Preprocessor **202** may also generate frames from the samples of the input signal. In a preferred embodiment, 10 ms frames of 80 samples/frame are generated. The frames may have overlapped samples for better processing accuracy. The frames may be generated by windowing and zero padding of the samples of the input signal. The preprocessed signal is presented to transform element **204**. In a preferred embodiment, transform element **204** generates a 128 point Fast Fourier Transform (FFT) for each frame of input signal. It should be understood, however, that alternative schemes may be used to analyze the frequency components of the input signal.

[0022] The transformed components are provided to channel energy estimator **206a**, which generates an energy estimate for each of N channels of the transformed signal. For each channel, one technique for updating the channel energy estimates the update to be the current channel energy smoothed over channel energies of previous frames as follows:

$$E_u(t) = \alpha E_{ch} + (1 - \alpha) E_u(t-1), \quad (1)$$

where the updated estimate, $E_u(t)$, is defined as a function of the current channel energy, E_{ch} , and the previous estimated channel noise energy, $E_u(t-1)$. An exemplary embodiment sets $\alpha = 0.55$.

[0023] A preferred embodiment determines an energy estimate for a low frequency channel and an energy estimate for a high frequency channel, so that $N=2$. The low frequency channel corresponds to frequency range from 250 to 2250 Hz, while the high frequency channel corresponds to frequency range from 2250 to 3500 Hz. The current channel energy of the low frequency channel may be determined by summing the energy of the FFT points corresponding to 250-2250 Hz, and the current channel energy of the high frequency channel may be determined by summing the energy of the FFT points corresponding to 2250-3500 Hz.

[0024] The energy estimates are provided to speech detector **208**, which determines whether or not speech is present in the received audio signal. SNR estimator **210a** of speech detector **208** receives the energy estimates. SNR estimator **210a** determines the signal-to-noise ratio (SNR) of the speech in each of the N channels based on the channel energy estimates and the channel noise energy estimates. The channel noise energy estimates are provided by noise energy estimator **214a**, and generally correspond to the estimated noise energy smoothed over the previous frames which do not contain speech.

[0025] Speech detector **208** also comprises rate decision element **212**, which selects the data rate of the input signal from a predetermined set of data rates. In certain communication systems, data is encoded so that the data rate may be varied from one frame to another. This is known as a variable rate communication system. The voice coder which encodes data based on a variable rate scheme is typically called a variable rate vocoder. An exemplary embodiment of a variable rate vocoder is described in U.S. Pat. No. 5,414,796, entitled "VARIABLE RATE VOCODER," assigned to the assignee of the present invention. The use of a variable rate communications channel eliminates unnecessary transmissions when there is no useful speech to be transmitted. Algorithms are utilized within the vocoder for generating a varying number of information bits in each frame in accordance with variations in speech activity. For example, a vocoder with a set of four rates may produce 20 millisecond data frames containing 16, 40, 80, or 171 information bits, depending on the activity of the speaker. It is desired to transmit each data frame in a fixed amount of time by varying the transmission rate of communications.

[0026] Because the rate of a frame is dependent on the speech activity during a time frame, determining the rate will provide information on whether speech is present or not. In a system utilizing variable rates, a determination that a frame should be encoded at the highest rate generally indicates the presence of speech, while a determination that a frame should be encoded at the lowest rate generally indicates the absence of speech. Intermediate rates typically indicate transitions between the presence and the absence of speech.

[0027] Rate decision element **212** may implement any of a number of rate decision algorithms. One such rate decision algorithm is disclosed in copending U.S. patent application Serial No. 08/286,842, entitled "METHOD AND APPARATUS FOR PERFORMING REDUCED RATE VARIABLE RATE VOCODING," assigned to the assignee of the present invention. This technique provides a set of rate decision criteria referred to as mode measures. A first mode measure is the target matching signal to noise ratio (TMSNR) from the previous encoding frame, which provides information on how well the encoding model is performing by comparing a synthesized speech signal with the input speech signal. A second mode measure is the normalized autocorrelation function (NACF), which measures periodicity in the speech frame. A third mode measure is the zero crossings (ZC) parameter, which measures high frequency content in an input speech frame. A fourth measure, the prediction gain differential (PGD), determines if the encoder is maintaining its prediction efficiency. A fifth measure is the energy differential (ED), which compares the energy in the current frame to an average frame energy. Using these mode measures, a rate determination logic selects an encoding rate for the frame of input.

[0028] It should be understood that although rate decision element **212** is shown in FIG. 2 as an included element of noise suppressor **108**, the rate information may instead be provided to noise suppressor **108** by another component of speech processor **106** (FIG. 1). For example, speech processor **106** may comprise a variable rate vocoder (not shown) which determines the encoding rate for each frame of input signal. Instead of having noise suppressor **108** independently perform rate determination, the rate information may be provided to noise suppressor **108** by the variable rate vocoder.

[0029] It should also be understood that instead of using the rate decision to determine the presence of speech, speech detector **208** may use a subset of the mode measures that contribute to the rate decision. For instance, rate decision element **212** may be substituted by a NACF element (not shown), which, as explained earlier, measures periodicity in the speech frame. The NACF is evaluated in accordance with the relationship below:

$$\text{NACF} = \frac{\max_{T \in [t_1, t_2]} \left\{ \sum_{n=0}^{N-1} e(n) \cdot e(n - T) \right\}}{0.5 \cdot \sum_{n=0}^{N-1} \left\{ e^2(n) + e^2(n - T) \right\}} \quad (2)$$

where N refers to the numbers of samples of the speech frame, t1 and t2 refer to the boundaries within the T samples for which the NACF is evaluated. The NACF is evaluated based on the formant residual signal, e(n). Formant frequencies are the resonance frequencies of speech. A short term filter is used to filter the speech signal to obtain the formant frequencies. The residual signal obtained after filtering by the short term filter is the formant residual signal, and contains the long term speech information, such as the pitch, of the signal.

[0030] The NACF mode measure is suitable for determining the presence of speech because the periodicity of a signal containing voiced speech is different from a signal which does not contain voiced speech. A voiced speech signal tends to be characterized by periodic components. When voiced speech is not present, the signal generally will not have periodic components. Thus, the NACF measure is a good indicator which may be used by speech detector **208**.

[0031] Speech detector **208** may use measures such as the NACF instead of the rate decision in situations where it is not practicable to generate the rate decision. For example, if the rate decision is not available from the variable rate vocoder, and noise processor **108** does not have the processing power to generate its own rate decision, then mode measures like the NACF offer a desirable alternative. This may be the case in a carkit application where processing power is generally limited.

[0032] Additionally, it should be understood that speech detector **208** may make a determination regarding the presence of speech based on the rate decision, the mode measure(s), or the SNR estimate alone. Although additional measures should improve the accuracy of the determination, any one of the measures alone may provide an adequate result.

[0033] The rate decision (or the mode measure(s)) and the SNR estimate generated by SNR estimator **210a** are provided to speech decision element **216**. Speech decision element **216** generates a decision on whether or not speech is present in the input signal based on its inputs. The decision on the presence of speech will determine if a noise energy estimate update should be performed. The noise energy estimate is used by SNR estimator **210a** to determine the SNR of the speech in the input signal. The SNR will in turn be used to compute the level of attenuation of the input signal for noise suppression. If it is determined that speech is present, then speech decision element **216** opens switch **218a**, preventing noise energy estimator **214a** from updating the noise energy estimate. If it is determined that speech is not present, then the input signal is assumed to be noise, and speech decision element **216** closes switch **218a**, causing noise energy estimator **214a** to update the noise estimate. Although shown in FIG. 2 as switch **218a**, it should be understood that an enable signal provided by speech decision element **216** to noise energy estimator **214a** may perform the same function.

[0034] In a preferred embodiment in which two channel SNRs are evaluated, speech decision element **216** generates the noise update decision based on the procedure below:

```

    if (rate == min)
        if ( (chsnr1 > T1) OR (chsnr2 > T2) )
            if (ratecount > T3)
                update noise estimate
            else
                ratecount ++
        else
            update noise estimate
            ratecount = 0
    else
        ratecount = 0

```

The channel SNR estimates provided by SNR estimator **210a** are denoted by chsnr1 and chsnr2. The rate of the input signal, provided by rate decision element **212**, is denoted by rate. A counter, ratecount, keeps track of the number of frames based on certain conditions as described below.

[0035] Speech decision element **216** determines that speech is not present, and that the noise estimate should be updated, if the rate is the minimum rate of the variable rates, either chsnr1 is greater than threshold T1 or chsnr2 is greater than threshold T2, and ratecount is greater than threshold T3. If the rate is minimum, and either chsnr1 is greater than T1 or chsnr2 is greater than T2, but ratecount is less than T3, then the ratecount is increased by one but no noise estimate update is performed. The counter, ratecount, detects the case of a sudden increased level of noise or an increasing noise source by counting the number of frames having minimum rate but also having high energy in at least one of the channels. The counter, which provides an indicator that the high SNR signal contains no speech, is set to count until speech is detected in the signal. A preferred embodiment sets $T1 = T2 = 5$ dB, and $T3 = 100$ frames where 10 ms frames are evaluated.

[0036] If the rate is minimum, chsnr1 is less than T1, and chsnr2 is less than T2, then speech decision element **216** will determine that speech is not present and that a noise estimate update should be performed. In addition, ratecount is reset to zero.

[0037] If the rate is not minimum, then speech decision element **216** will determine that the frame contains speech, and no noise estimate update is performed, but ratecount is reset to zero.

[0038] Instead of using the rate measure to determine the presence of speech, recall that mode measures such as a NACF measure may be utilized instead. Speech decision element **216** may make use of the NACF measure to determine the presence of speech; and thus the noise update decision, in accordance with the procedure below:

```

5         if (pitchPresent == FALSE)
            if ( (chsnr1 > TH1) OR (chsnr2 > TH2) )
                if (pitchCount > TH3)
                    update noise estimate
                else
10                 pitchCount ++
            else
                update noise estimate
15                 pitchCount = 0
        else
            pitchCount = 0

```

20 where pitchPresent is defined as follows:

```

25         if (NACF > TT1)
            pitchPresent = TRUE
            NACFcount = 0
        elseif (TT2 ≤ NACF ≤ TT1)
30             if (NACFcount > TT3)
                pitchPresent = TRUE
            else
                pitchPresent = FALSE
35                 NACFcount ++
        else
40             pitchPresent = FALSE
            NACFcount = 0

```

45 Again, channel SNR estimates provided by SNR estimator **210a** are denoted by chsnr1 and chsnr2. A NACF element (not shown) generates a measure indicative of the presence of pitch, pitchPresent, as defined above. A counter, pitchCount, keeps track of the number of frames based on certain conditions as described below.

50 **[0039]** The measure pitchPresent determines that pitch is present if NACF is above threshold TT1. If NACF falls within a mid range ($TT2 \leq NACF \leq TT1$) for a number of frames greater than threshold TT3, then pitch is also determined to be present. A counter, NACFcount, keeps track of the number of frames for which $TT2 \leq NACF \leq TT1$. In a preferred embodiment, $TT1 = 0.6$, $TT2 = 0.4$, and $TT3 = 8$ frames where 10 ms frames are evaluated.

55 **[0040]** Speech decision element **216** determines that speech is not present, and that the noise estimate should be updated, if the pitchPresent measure indicates that pitch is not present (pitchPresent = FALSE), either chsnr1 is greater than threshold TH1 or chsnr2 is greater than threshold TH2, and pitchCount is greater than threshold TH3. If pitchPresent = FALSE, and either chsnr1 is greater than TH1 or chsnr2 is greater than TH2, but pitchCount is less than TH3, then pitchCount is increased by one but no noise estimate update is performed. The counter, pitchCount, is used to detect the case of a sudden increased level of noise or an increasing noise source. A preferred embodiment sets $T1 = T2 = 5$ dB, and $T2 = 100$ frames where 10 ms frames are evaluated.

[0041] If pitchPresent indicates that pitch is not present, and chsnr1 is less than TH1 and chsnr2 is less than TH2, then speech decision element **216** will determine that speech is not present and that a noise estimate update should be performed. In addition, pitchCount is reset to zero.

[0042] If pitchPresent indicates that pitch is present (pitchPresent = TRUE), then speech decision element **216** will determine that the frame contains speech, and no noise estimate update is performed. However, pitchCount is reset to zero.

[0043] Upon determination that speech is not present, switch **218a** is closed, causing noise energy estimator **214a** to update the noise estimate. Noise energy estimator **214a** generally generates a noise energy estimate for each of the N channels of the input signal. Since speech is not present, the energy is presumed to be wholly contributed by noise. For each channel, the noise energy update is estimated to be the current channel energy smoothed over channel energies of previous frames which do not contain speech. For example, the updated estimate may be obtained based on the relationship below:

$$E_n(t) = \beta E_{ch} + (1 - \beta) E_n(t-1), \quad (3)$$

where the updated estimate, $E_n(t)$, is defined as a function of the current channel energy, E_{ch} , and the previous estimated channel noise energy, $E_n(t-1)$. An exemplary embodiment sets $\beta = 0.1$. The updated channel noise energy estimates are presented to SNR estimator **210a**. These channel noise energy estimates will be used to obtain channel SNR estimate updates for the next frame of input signal.

[0044] The determination regarding the presence of speech is also provided to channel gain estimator **220**. Channel gain estimator **220** determines the gain, and thus the level of noise suppression, for the frame of input signal. If speech decision element **216** has determined that speech is not present, then the gain for the frame is set at a predetermined minimum gain level. Otherwise, the gain is determined as a function of frequency. In a preferred embodiment, the gain is computed based on the graph shown in FIG. 3. Although shown in graphical form in FIG. 3, it should be understood that the function illustrated in FIG. 3 may be implemented as a look-up table in channel gain estimator **220**.

[0045] Referring to FIG. 3, it can be seen that a preferred embodiment of the present invention defines a separate gain curve for each of L frequency bands. In FIG. 3, three bands ($L = 3$) are represented, although L may be any number greater than or equal to one. Thus, the gain factor for a channel in the low band may be determined using the low band curve, the gain factor for a channel in the mid band may be determined using the mid band curve, and the gain factor for a channel in the high band may be determined using the high band curve.

[0046] Although noise suppression may be performed by utilizing just one gain curve for the input signal ($L = 1$), the use of multiple bands has been found to provide less voice quality degradation. In the case of environmental noise, such as road and wind noise, the energy of the noise signal is greater at the lower frequencies, and the energy generally decreases with increasing frequency.

[0047] In FIG. 3, a line equation with a fixed slope and a y-intercept is used to determine the gain factor for each band. Determination of the gain factors may be described by the following relationships:

$$\text{gain[low band]} \text{ (dB)} = \text{slope1} * \text{SNR} + \text{lowBandYintercept}; \quad (4)$$

$$\text{gain[mid band]} \text{ (dB)} = \text{slope2} * \text{SNR} + \text{midBandYintercept}; \quad (5)$$

$$\text{gain[high band]} \text{ (dB)} = \text{slope3} * \text{SNR} + \text{highBandYintercept}. \quad (6)$$

[0048] The preferred embodiment assigns the low band as 125 - 375 Hz, the mid band as 375 - 2625 Hz, and the high band as 2625 - 4000 Hz. The slopes and the y intercepts are experimentally determined. The preferred embodiment uses the same slope, 0.39, for each of the three bands, although a different slope may be used for each frequency band. Also, lowBandYintercept is set at -17 dB, midBandYintercept is set at -13 dB, and highBandYintercept is set at -13 dB.

[0049] An optional feature would provide the user of the device comprising the noise suppressor to select the desired y-intercepts. Thus, more noise suppression (a lower y-intercept) may be chosen at the expense of some voice degradation. Alternatively, the y-intercepts may be variable as a function of some measure determined by noise suppressor

108. For example, more noise suppression (a lower y-intercept) may be desired when an excessive noise energy is detected for a predetermined period of time. Alternatively, less noise suppression (a high y-intercept) may be desired when a condition such as babble is detected. During a babble condition, background speakers are present, and less noise suppression may be warranted to prevent cut out of the main speaker. Another optional feature would provide for selectable slopes of the gain curves. Further, it should be understood that a curve other than the lines described by equations (4)-(6) may be found to be more suitable for determining the gain factor under certain circumstances.

[0050] For each frame containing speech, a gain factor is determined for each of M frequency channels of the input signal, where M is the predetermined number of channels to be evaluated. A preferred embodiment evaluates sixteen channels (M=16). Referring again to FIG. 3, the gain factors for the channels having frequency components in the range of the low band are determined using the low band curve. The gain factors for the channels having frequency components in the range of the mid band are determined using the mid band curve. The gain factors for the channels having frequency components in the range of the high band are determined using the high band curve.

[0051] For each channel evaluated, the channel SNR is used to derive the gain factor based on the appropriate curve. The channel SNRs are shown, in FIG. 2, to be evaluated by channel energy estimator **206b**, noise energy estimator **214b**, and SNR estimator **210b**. For each frame of input signal, channel energy estimator **206b** generates energy estimates for each of M channels of the transformed input signal, and provides the energy estimates to SNR estimator **210b**. The channel energy estimates may be updated using the relationship of Equation (1) above. If it is determined by speech decision element **216** that no speech is present in the input signal, then switch **218b** is closed, and noise energy estimator **214b** updates the estimates of the channel noise energy. For each of the M channels, the updated noise energy estimate is based on the channel energy estimate determined by channel energy estimator **206b**. The updated estimate may be evaluated using the relationship of Equation (3) above. The channel noise estimates are provided to SNR estimator **210b**. Thus, SNR estimator **210b** determines channel SNR estimates for each frame of speech based on the channel energy estimates for the particular frame of speech and the channel noise energy estimates provided by noise energy estimator **214b**.

[0052] An artisan skilled in the art would recognize that channel energy estimator **206a**, noise energy estimator **214a**, switch **218a**, and SNR estimator **210a** perform functions similar to channel energy estimator **206b**, noise energy estimator **214b**, switch **218b**, and SNR estimator **210b**, respectively. Thus, although shown as separate processing elements in FIG. 2, channel energy estimators **206a** and **206b** may be combined as one processing element, noise energy estimators **214a** and **214b** may be combined as one processing element, switches **218a** and **218b** may be combined as one processing element, and SNR estimators **210a** and **210b** may be combined as one processing element. As combined elements, the channel energy estimator would determine channel energy estimates for both the N channels used for speech detection and the M channels used for determining channel gain factors. Note that it is possible for N = M. Likewise, the noise energy estimator and the SNR estimator would operate on both the N channels and the M channels. The SNR estimator then provides the N SNR estimates to speech decision element **216**, and provides the M SNR estimates to channel gain estimator **220**.

[0053] The channel gain factors are provided by channel gain estimator **220** to gain adjuster **224**. Gain adjuster **224** also receives the FFT transformed input signal from transform element **204**. The gain of the transformed signal is appropriately adjusted according to the channel gain factors. For example, in the embodiment described above wherein M = 16, the transformed (FFT) points belonging to the particular one of the sixteen channels are adjusted based on the appropriate channel gain factor.

[0054] The gain adjusted signal generated by gain adjuster **224** is then provided to inverse transform element **226**, which in a preferred embodiment generates the Inverse Fast Fourier Transform (IFFT) of the signal. The inverse transformed signal is provided to post processing element **228**. If the frames of input had been formed with overlapped samples, then post processing element **228** adjusts the output signal for the overlap. Post processing element **228** also performs deemphasis if the signal had undergone preemphasis. Deemphasis attenuates the frequency components that were emphasized during preemphasis. The preemphasis/deemphasis process effectively contributes to noise suppression by reducing the noise components lying outside of the range of the processed frequency components.

[0055] It should be understood that the various processing blocks of the noise suppressor shown in FIG. 2 may be configured in a digital signal processor (DSP) or an application specific integrated circuit (ASIC). The description of the functionality of the present invention would enable one of ordinary skill to implement the present invention in a DSP or an ASIC without undue experimentation.

[0056] Referring now to FIG. 4, a flow chart is shown illustrating some of the steps involved in the processing as discussed with reference to FIGS. 2 and 3. Although shown as consecutive steps, one skilled in the art would recognize that ordering of some of the steps are interchangeable.

[0057] The process begins at step **402**. At step **404**, transform element **204** transforms the input audio signal into a transformed signal, generally a FFT signal. At step **406**, SNR estimator **210b** determines the speech SNR for M channels of the input signal based on the channel energy estimates provided by channel energy estimator **206b** and the channel noise energy estimates provided by noise energy estimator **214b**. At step **408**, channel gain estimator **220** determines

gain factors for the M channels of the input signal based on the frequency of the channels. Channel gain estimator **220** sets the gain at a minimum level if speech has been found to be absent in the frame of input signal. Otherwise, a gain factor is determined, for each of the M channels, based on a predetermined function. For example, referring to FIG. 3, a function defined by line equations having fixed slopes and y-intercepts, wherein each line equation defines the gain for a predetermined frequency band, may be used. At step **410**, gain adjuster **224** adjusts the gain of the M channels of the transformed signal using the M gain factors. At step **412**, inverse transform element **226** inverse transforms the gain adjusted transformed signal, producing the noise suppressed audio signal.

[0058] At step **414**, SNR estimator **210a** determines the speech SNR for N channels of the input signal based on the channel energy estimates provided by channel energy estimator **206a** and the channel noise energy estimates provided by noise energy estimator **214a**. At step **416**, rate decision element **212** determines the encoding rate for the input signal through analysis of the input signal. Alternatively, one or more mode measures, such as the NACF, may be determined. At step **418**, speech decision element **216** determines if speech is present in the input signal based on the SNR provided by SNR estimator **210a**, the rate provided by rate decision element **212**, and/or the mode measure(s). If it is determined, at decision block **420**, that speech is not present, then the input signal is assumed to be entirely noise, and a noise estimate update is performed by noise energy estimator **214a** at step **422**. Noise energy estimator **214a** updates the noise estimate based on the channel energy determined by channel energy estimator **206a**. Whether or not speech is detected, the procedure continues to process the next frame of the input signal.

[0059] The previous description of the preferred embodiments is provided to enable any person skilled in the art to make or use the present invention. The scope of the invention is defined by the appended claims.

Claims

1. A noise suppressor (108) for suppressing the background noise of an audio signal, comprising:

a signal to noise ratio (SNR) estimator (210b) for generating channel SNR estimates for a first predefined set of frequency channels of said audio signal;
a gain estimator (220) for generating a gain factor for each of said frequency channels based on a corresponding one of said channel SNR estimates, wherein said gain factor is derived using a gain function which defines gain factor as an increasing function of SNR;
a gain adjuster (224) for adjusting the gain level of each of said frequency channels based on said corresponding gain factor; and
a speech detector (208) for determining the presence of speech in said audio signal,

characterised in that

said speech detector (208) comprises a speech decision element (216) for determining the presence of speech in accordance with SNR estimates for a second predefined set of frequency channels of said audio signal, and in accordance with either

- a) an encoding rate of a set of encoding rates for the audio signal, or
- b) at least one mode measure characterizing the audio signal.

2. The noise suppressor (108) of claim 1 wherein the speech detector (208) further comprises a further signal to noise ratio (SNR) estimator (210a) for generating said SNR estimates for a second predefined set of frequency channels of said audio signal.

3. The noise suppressor (108) of claim 2 wherein the speech detector (208) further comprises a rate decision element (212) for determining said encoding rate of a set of encoding rates for the audio signal.

4. The noise suppressor (108) of claim 2 wherein the speech detector (208) further comprises a mode measurement element for determining said at least one mode measure.

5. The noise suppressor (108) of any preceding claim wherein said mode measures comprise a normalized autocorrelation function (NACF) measure.

6. The noise suppressor (108) of any preceding claim wherein said gain function is frequency dependent.

7. The noise suppressor (108) of any preceding claim wherein said gain function is implemented as a look-up table.

8. The noise suppressor (108) of any preceding claim wherein said gain function is a linear function having a slope and a y-intercept.

9. The noise suppressor (108) of claim 8, wherein said y-intercept is user selectable.

10. The noise suppressor (108) of claim 8, wherein said y-intercept is adjustable based on the measured characteristics of noise in said audio signal.

11. The noise suppressor (108) of claim 8, wherein said slope is user selectable.

12. The noise suppressor (108) of claim 8 wherein said slope is adjustable based on the measured characteristics of noise in said audio signal.

13. The noise suppressor (108) of any preceding claim, further comprising:

a noise energy estimator (214b) for generating an updated channel noise energy estimate for each of said frequency channels when said speech detector (208) determines that speech is not present in said audio signal, said updated channel noise energy estimates provided to said SNR estimator (210b) for generating said channel SNR estimates.

14. The noise suppressor (108) of any preceding claim wherein said gain estimator (220) determines a minimum gain factor for each of said frequency channels if said speech detector determines that speech is not present.

15. The noise suppressor (108) of any preceding claim wherein said gain estimator (220) comprises:

means for determining a gain factor for each of said frequency channels if said means for determining the presence of speech determines that speech is present, wherein a gain function is defined for each of a set of frequency bands, and for each said frequency band, gain factor is defined to increase with increasing SNR, so that for each of said frequency channels, a channel gain factor is determined based on the gain function for the frequency band whose range contains the frequency channel.

16. The noise suppressor (108) of any preceding claim further comprising:

means for transforming said audio signal into a frequency representation of said audio signal; and means for inverse transforming said gain adjusted frequency representation to generate a noise suppressed audio signal.

17. A method for suppressing the background noise of an audio signal, comprising the steps of:

generating channel SNR estimates for a first predefined set of frequency channels of said audio signal; generating a gain factor for each of said frequency channels based on a corresponding one of said channel SNR estimates, wherein said gain factor is derived using a gain function which defines gain factor as an increasing function of SNR:

adjusting the gain level of each of said frequency channels based on said corresponding gain factor; and determining the presence of speech in said audio signal,

characterised in that

the presence of speech is determined in accordance with SNR estimates for a second predefined set of frequency channels of said audio signal and in accordance with either

- a) an encoding rate of a set of encoding rates for the audio signal, or
- b) at least one mode measure characterizing the audio signal.

18. The method of claim 17 further comprising the step of generating said SNR estimates for a second predefined set of frequency channels of said audio signal.

19. The method of claim 18 further comprising the step of determining said encoding rate of a set of encoding rates for

the audio signal.

20. The method of claim 18 further comprising the step of determining said at least one mode measure.

21. The method of any of claims 17 to 20, wherein said gain function is frequency dependent.

22. The method of any of claims 17 to 21 wherein said gain function is implemented as a look-up table.

23. The method of any of claims 17 to 22 wherein each of said gain functions is a linear function having a slope and a y-intercept.

24. The method claim 23, wherein said y-intercept is user selectable.

25. The method of claim 23, wherein said y-intercept is adjustable based on the measured characteristics of noise in said audio signal.

26. The method of claim 23, wherein said slope is user selectable.

27. The method of claim 23, wherein said slope is adjustable based on the measured characteristics of noise in said audio signal.

28. The method of any of claims 17 to 27 further comprising the step of:

generating an updated channel noise energy estimate for each of said frequency channels when said step of determining the presence of speech determines that speech is absent in said audio signal, said updated channel noise energy estimates to be used for generating said channel SNR estimates.

29. The method of any of claims 17 to 28 further comprising the steps of:

transforming said audio signal into a frequency representation of said audio signal; and
inverse transforming said gain adjusted frequency representation to generate a noise suppressed audio signal.

30. The method of any of claims 17 to 29 wherein said step of generating a gain factor comprising the step of:

determining a gain factor for each of said frequency channels if speech is determined to be present in said audio signal, wherein a gain function is defined for each of a set of frequency bands, and for each said frequency band, gain is defined to increase with increasing SNR, so that for each of said frequency channels, a channel gain factor is determined based on the gain function for the frequency band whose range contains the frequency channel.

31. The method of any of claims 17 to 30 wherein said mode measures comprise a normalized autocorrelation function (NACF) measure.

32. The method of any of claims 17 to 31 further comprising the step of:

determining a minimum gain factor for each of said frequency channels if speech is determined to be absent in said audio signal.

Patentansprüche

1. Ein Rauschunterdrücker (108) zum Unterdrücken des Hintergrundrauschens eines Audiosignals, der folgendes aufweist:

Ein Signal-zu-Rausch-Verhältnis bzw. SNR-Schätzelement (SNR = signal to noise ratio) (210b) zum Generieren von Kanal-SNR-Schätzungen für einen ersten vordefinierten Satz von Frequenzkanälen des Audiosignals;
ein Verstärkungsschätzungselement (220) zum Generieren eines Verstärkungsfaktors für jeden der Frequenzkanäle basierend auf einer entsprechenden Schätzung der Kanal-SNR-Schätzungen, wobei der Verstärkungs-

faktor hergeleitet wird unter Verwendung einer Verstärkungsfunktion, die den Verstärkungsfaktor als eine ansteigende Funktion von SNR definiert;
 ein Verstärkungsanpassungselement (224) zum Anpassen des Verstärkungspegels eines jeden Kanals der Frequenzkanäle basierend auf den entsprechenden Verstärkungsfaktor;
 ein Sprachdetektor (208) zum Bestimmen des Vorliegens von Sprache in dem Audiosignal, **dadurch gekennzeichnet, dass**
 der Sprachdetektor (208) ein Sprachentscheidungselement (216) zum Bestimmen des Vorliegens von Sprache, gemäß der SNR-Schätzungen, für einen zweiten vordefinierten Satz von Frequenzkanälen des Audiosignals aufweist, und zwar gemäß entweder

- a) einer Codierungsrate aus einem Satz von Codierungsraten für das Audiosignal, oder
- b) zumindest einer Modusmessung, die das Audiosignal charakterisiert.

2. Rauschunterdrücker (108) nach Anspruch 1, wobei der Sprachdetektor (208) weiterhin ein weiteres Signal-zu-Rausch-Verhältnis bzw. SNR-Schätzelement (210) zum Generieren der SNR-Schätzungen für einen zweiten vordefinierten Satz von Frequenzkanälen des Audiosignals aufweist.
3. Rauschunterdrücker (108) nach Anspruch 2, wobei der Sprachdetektor (208) weiterhin ein Ratenentscheidungselement (212) aufweist zum Bestimmen der Codierrate aus einem Satz von Codierraten für das Audiosignal.
4. Rauschunterdrücker (108) nach Anspruch 2, wobei der Sprachdetektor (208) weiterhin ein Modus-Messelement aufweist zum Bestimmen der erwähnten mindestens einen Modusmessung.
5. Rauschunterdrücker (108) nach einem der vorhergehenden Ansprüche, wobei die Modusmessungen eine Messung einer normalisierten Autokorrelationsfunktion (NACF = normalized autocorrelation function) aufweist.
6. Rauschunterdrücker (108) nach einem der vorhergehenden Ansprüche, wobei die Verstärkungsfunktion frequenzabhängig ist.
7. Rauschunterdrücker (108) nach einem der vorhergehenden Ansprüche, wobei die Verstärkungsfunktion als eine Nachschlagetabelle implementiert ist.
8. Rauschunterdrücker (108) nach einem der vorhergehenden Ansprüche, wobei die Verstärkungsfunktion eine lineare Funktion mit einer Steigung und einem y-Schnittpunkt bzw. Achsenabschnitt (intercept).
9. Rauschunterdrücker (108) nach Anspruch 8, wobei der y-Achsenabschnitt vom Benutzer auswählbar ist.
10. Rauschunterdrücker (108) nach Anspruch 8, wobei der y-Achsenabschnitt anpassbar ist basierend auf den gemessenen Charakteristiken des Rauschens in dem Audiosignal.
11. Rauschunterdrücker (108) nach Anspruch 8, wobei die Steigung vom Benutzer auswählbar ist.
12. Rauschunterdrücker (108) nach Anspruch 8, wobei die Steigung anpassbar ist basierend auf den gemessenen Charakteristiken des Rauschens in dem Audiosignal.
13. Rauschunterdrücker (108) nach einem der vorhergehenden Ansprüche, der weiterhin folgendes aufweist:
 ein Rauschenenergieschätzelement (214b) zum Generieren einer aktualisierten Kanalrauschenenergieschätzung für jeden der Frequenzkanäle, wenn der Sprachdetektor (208) bestimmt, dass Sprache nicht in dem Audiosignal vorliegt, wobei die aktualisierten Kanalrauschenenergieschätzungen an das SNR-Schätzelement (210b) vorgesehen wird zum Generieren der Kanal-SNR-Schätzungen.
14. Rauschunterdrücker (108) nach einem der vorhergehenden Ansprüche, wobei das Verstärkungsschätzelement (220) einen Minimalverstärkungsfaktor für jeden der Frequenzkanäle bestimmt, wenn der Sprachdetektor bestimmt, dass Sprache nicht vorliegt.
15. Rauschunterdrücker (108) nach einem der vorhergehenden Ansprüche, wobei das Verstärkungsschätzelement (220) folgendes aufweist:

Mittel zum Bestimmen eines Verstärkungsfaktors für jeden der Frequenzkanäle, wenn die Mittel zum Bestimmen des Vorliegens von Sprache bestimmen, dass Sprache vorliegt, wobei eine Verstärkungsfunktion für jedes Frequenzband aus einem Satz von Frequenzbändern definiert ist, und für jedes Frequenzband ein Verstärkungsfaktor definiert ist, und zwar für einen Anstieg mit ansteigendem SNR, so dass für jeden Frequenzkanal ein Kanalverstärkungsfaktor bestimmt wird basierend auf der Verstärkungsfunktion für das Frequenzband dessen Bereich den Frequenzkanal enthält.

16. Rauschunterdrücker (108) nach einem der vorhergehenden Ansprüche, der weiterhin folgendes aufweist:

Mittel zum Transformieren des Audiosignals in eine Frequenzdarstellung des Audiosignals; und Mittel zum inversen Transformieren der verstärkungsangepassten Frequenzdarstellung, um ein rauschunterdrücktes Audiosignal zu generieren.

17. Ein Verfahren zum Unterdrücken des Hintergrundrauschens eines Audiosignals, das folgende Schritte aufweist:

Generieren von Kanal-SNR-Schätzungen für einen ersten vordefinierten Satz von Frequenzkanälen des Audiosignals;
Generieren eines Verstärkungsfaktors für jeden der Frequenzkanäle basierend auf einer entsprechenden Schätzung der Kanal-SNR-Schätzungen, wobei der Verstärkungsfaktor hergeleitet wird unter Verwendung einer Verstärkungsfunktion, die dem Verstärkungsfaktor als eine ansteigende Funktion von SNR definiert;
Anpassen des Verstärkungspegels eines jeden Frequenzkanals basierend auf dem entsprechenden Verstärkungsfaktor; und
Bestimmen des Vorliegens von Sprache in dem Audiosignal, **dadurch gekennzeichnet, dass** das Vorliegen von Sprache gemäß SNR-Schätzungen für einen zweiten vordefinierten Satz von Frequenzkanälen des Audiosignals bestimmt wird, und gemäß entweder

- a) einer Codierrate eines Satzes von Codierraten für das Audiosignal oder
- b) mindestens einer Modusmessung, die das Audiosignal charakterisiert.

18. Verfahren nach Anspruch 17, das weiterhin den Schritt des Generierens der SNR-Schätzungen für einen zweiten vordefinierten Satz von Frequenzkanälen des Audiosignals aufweist.

19. Verfahren nach Anspruch 18, das weiterhin den Schritt des Bestimmens der Codierrate aus einem Satz von Codierraten für das Audiosignal aufweist.

20. Verfahren nach Anspruch 18, das weiterhin den Schritt des Bestimmens der mindestens einen Modusmessung aufweist.

21. Verfahren nach einem der Ansprüche 17 bis 20, wobei die Verstärkungsfunktion frequenzabhängig ist.

22. Verfahren nach einem der Ansprüche 17 bis 21, wobei die Verstärkungsfunktion als eine Nachschlagetabelle implementiert ist.

23. Verfahren nach einem der Ansprüche 17 bis 22, wobei jedem der Verstärkungsfunktionen eine lineare Funktion mit einer Steigung und einem y-Achsenabschnitt ist.

24. Verfahren nach Anspruch 23, wobei der y-Achsenabschnitt durch einen Benutzer auswählbar ist.

25. Verfahren nach Anspruch 23, wobei der y-Achsenabschnitt anpassbar ist basierend auf den gemessenen Charakteristiken des Rauschens in dem Audiosignal.

26. Verfahren nach Anspruch 23, wobei die Steigung vom Benutzer auswählbar ist.

27. Verfahren nach Anspruch 23, wobei die Steigung anpassbar ist basierend auf den gemessenen Charakteristiken des Rauschens in dem Audiosignal.

28. Verfahren nach einem der Ansprüche 17 bis 27, das weiterhin den folgenden Schritt aufweist:

Generieren einer aktualisierten Kanalrauschenergieschätzung für einen jeden der Frequenzkanäle, wenn der Schritt des Bestimmens des Vorliegens von Sprache bestimmt, dass Sprache nicht in dem Audiosignal vorliegt, wobei die aktualisierten Kanalrauschenergieschätzungen dafür verwendet werden, die Kanal-SNR-Schätzungen zu generieren.

29. Verfahren nach einem der Ansprüche 17 bis 28, das weiterhin folgende Schritte aufweist:

Transformieren des Audiosignals in einer Frequenzdarstellung des Audiosignals; und
inverses Transformieren der verstärkungsangepassten Frequenzdarstellung um ein rauschunterdrücktes Audiosignal zu generieren.

30. Verfahren nach einem der Ansprüche 17 bis 29, wobei der Schritt des Generierens eines Verstärkungsfaktors folgenden Schritt aufweist:

Bestimmen eines Verstärkungsfaktors für jeden der Frequenzkanäle, wenn bestimmt wird, dass Sprache in dem Audiosignal vorliegt, wobei eine Verstärkungsfunktion für jedes Frequenzband aus einem Satz von Frequenzbändern definiert ist, und für jedes der Frequenzbänder die Verstärkung definiert ist, so dass sie mit ansteigendem SNR ansteigt, so dass für jeden der Frequenzkanäle ein Kanalverstärkungsfaktor bestimmt wird basierend auf der Verstärkungsfunktion für das Frequenzband, dessen Bereich den Frequenzkanal enthält.

31. Verfahren nach einem der Ansprüche 17 bis 30, wobei die Modusmessung eine Messung der normalisierten Autokorrelationsfunktionen (NACF) aufweist.

32. Verfahren nach einem der Ansprüche 17 bis 31, das weiterhin den Schritt des Bestimmens eines Minimalverstärkungsfaktors für jeden der Frequenzkanäle aufweist, und zwar wenn bestimmt wird, dass Sprache nicht in den Audiosignal vorliegt.

Revendications

1. Suppresseur de bruit (108) pour supprimer le bruit de fond d'un signal audio comprenant :

un estimateur (210b) de rapport signal-sur-bruit (SNR) pour produire des estimations de SNR de canal pour un premier ensemble prédéterminé de canaux de fréquence du signal audio ;

un estimateur de gain (220) pour produire un facteur de gain pour chacun des canaux de fréquence sur la base de l'une correspondante des estimations de SNR de canal, dans lequel le facteur de gain est obtenu en utilisant une fonction de gain qui définit un facteur de gain sous forme d'une fonction croissante du SNR ;

un moyen de réglage de gain (224) pour régler le niveau de gain de chacun des canaux de fréquence sur la base du facteur de gain correspondant ; et

un détecteur de parole (208) pour déterminer la présence de parole dans le signal audio,
caractérisé en ce que le détecteur de parole (208) comprend un élément de décision de parole (216) pour déterminer la présence de parole en fonction des estimations de SNR pour un second ensemble prédéterminé de canaux de fréquence du signal audio et en fonction

- a) du débit de codage d'un ensemble de débits de codage pour le signal audio, ou
- b) d'au moins une mesure de mode caractérisant le signal audio.

2. Suppresseur de bruit (108) selon la revendication 1, dans lequel le détecteur de parole (208) comprend un autre estimateur (210a) de rapport signal-sur-bruit (SNR) pour produire les estimations de SNR pour un second ensemble prédéterminé de canaux de fréquence du signal audio.

3. Suppresseur de bruit (108) selon la revendication 2, dans lequel le détecteur de parole (208) comprend en outre un élément de décision de débit (212) pour déterminer le débit de codage d'ensemble de débit de codage pour le signal audio.

4. Suppresseur de bruit (108) selon la revendication 2, dans lequel le détecteur de parole (208) comprend en outre un élément de mesure de mode pour déterminer ladite au moins une mesure de mode.

5. Suppresseur de bruit (108) selon l'une quelconque des revendications précédentes, dans lequel les mesures de mode comprennent une mesure de fonction d'auto-corrélation normalisée (NACF).
- 5 6. Suppresseur de bruit (108) selon l'une quelconque des revendications précédentes dans lequel la fonction de gain dépend de la fréquence.
7. Suppresseur de bruit (108) selon l'une quelconque des revendications précédentes, dans lequel la fonction de gain est mise en oeuvre sous forme d'une table.
- 10 8. Suppresseur de bruit (108) selon l'une quelconque des revendications précédentes, dans lequel la fonction de gain est une fonction linéaire ayant une pente et un point d'intersection de l'axe y.
9. Suppresseur de bruit (108) selon la revendication 8, dans lequel l'intersection avec l'axe y est sélectionnable par l'utilisateur.
- 15 10. Suppresseur de bruit (108) selon la revendication 8, dans lequel l'intersection avec l'axe y est ajustable sur la base de la caractéristique de bruit mesurée dans le signal audio.
11. Suppresseur de bruit (108) selon la revendication 8, dans lequel la pente est sélectionnable par l'utilisateur.
- 20 12. Suppresseur de bruit (108) selon la revendication 8, dans lequel la pente est réglable sur la base de la caractéristique de bruit mesurée dans le signal audio.
- 25 13. Suppresseur de bruit (108) selon l'une quelconque des revendications précédentes, comprenant en outre un estimateur de bruit (214b) pour produire une estimation d'énergie de bruit de canal mise à jour pour chacun des canaux de fréquence quand le détecteur de parole (208) détermine que de la parole n'est pas présente dans le signal audio, les estimations d'énergie de bruit de canal mises à jour étant fournies par l'estimateur SNR (210b) pour produire les estimations du SNR du canal.
- 30 14. Suppresseur de bruit (108) selon l'une quelconque des revendications précédentes, dans lequel l'estimateur de gain (220) détermine un facteur de gain minimum pour chacun des canaux de fréquence si le détecteur de parole détermine une absence de parole.
- 35 15. Suppresseur de bruit (108) selon l'une quelconque des revendications précédentes, dans lequel l'estimateur de gain (220) comprend des moyens pour déterminer un facteur de gain pour chacun des canaux de fréquence si les moyens pour déterminer la présence de parole déterminent que de la parole est présente, une fonction de gain étant définie pour chacun d'un ensemble de bandes de fréquence et, pour chaque bande de fréquence, un facteur de gain est défini pour augmenter avec un SNR croissant de sorte que, pour chacun des canaux de fréquence, un facteur de gain de canal est déterminé sur la base de la fonction de gain pour la bande de fréquence dont la plage
40 contient le canal de fréquence.
16. Suppresseur de bruit (108) selon l'une quelconque des revendications précédentes, comprenant en outre :
des moyens pour transformer le signal audio en une représentation fréquentielle du signal audio ; et
45 des moyens de transformation inverse de la représentation fréquentielle ajustée en gain pour produire un signal audio à bruit supprimé.
17. Procédé de suppression du bruit de fond d'un signal audio comprenant les étapes suivantes:
50 produire des estimations de SNR de canal pour un premier ensemble prédéterminé de canaux de fréquence du signal audio ;
produire un facteur de gain pour chacun des canaux de fréquence sur la base de l'une correspondante des estimations de SNR de canal, le facteur de gain étant obtenu en utilisant une fonction de gain qui définit un facteur de gain sous forme d'une fonction croissante du SNR ;
55 régler le niveau de gain de chacun des canaux de fréquence sur la base du facteur de gain correspondant ; et
déterminer la présence de parole dans le signal audio,
caractérisé en ce que la présence de parole est déterminée en fonction des estimations de SNR pour un second ensemble prédéterminé de canaux de fréquence du signal audio et en fonction

- a) du débit de codage d'un ensemble de débit de codage pour le signal audio, ou
- b) d'au moins une mesure de mode caractérisant le signal audio.

5 **18.** Procédé selon la revendication 17, comprenant en outre l'étape de production des estimations de SNR pour un second ensemble prédéfini de canaux de fréquence du signal audio.

19. Procédé selon la revendication 18, comprenant en outre l'étape de détermination du débit de codage de l'ensemble de débit de codage du signal audio.

10 **20.** Procédé selon la revendication 18, comprenant en outre l'étape de détermination de ladite au moins une mesure de mode.

21. Procédé selon l'une quelconque des revendications 17 à 20, dans lequel la fonction de gain dépend de la fréquence.

15 **22.** Procédé selon l'une quelconque des revendications 17 à 21, dans lequel la fonction de gain est mise en oeuvre sous forme d'une table.

23. Procédé selon l'une quelconque des revendications 17 à 22, dans lequel chacune des fonctions de gain est une fonction linéaire ayant une pente et un point d'intersection avec l'axe y.

20 **24.** Procédé selon la revendication 23, dans lequel le l'intersection avec l'axe y est sélectionnable par l'utilisateur.

25. Procédé selon la revendication 23, dans lequel le l'intersection avec l'axe y est réglable sur la base des caractéristiques de bruit mesurées dans le signal audio.

25 **26.** Procédé selon la revendication 23, dans lequel la pente est sélectionnable par l'utilisateur.

27. Procédé selon la revendication 23, dans lequel la pente est réglable sur la base des caractéristiques de bruit mesurées dans le signal audio.

30 **28.** Procédé selon l'une quelconque des revendications 17 à 27, comprenant en outre l'étape consistant à produire une estimation d'énergie de bruit de canal mise à jour pour chacun des canaux de fréquence quand l'étape de détermination de la présence de parole détermine que de la parole est absente du signal audio, les estimations d'énergie de bruit de canal mises à jour devant être utilisées pour produire des estimations de SNR de canal.

35 **29.** Procédé selon l'une quelconque des revendications 17 à 28, comprenant en outre les étapes suivantes :

transformer le signal audio en une représentation fréquentielle du signal audio ; et
transformer en inverse la représentation fréquentielle ajustée en gain pour produire un signal audio à bruit supprimé.

40 **30.** Procédé selon l'une quelconque des revendications 17 à 29, dans lequel l'étape de génération d'un facteur de gain comprend l'étape consistant à déterminer un facteur de gain pour chacun des canaux de fréquence si on détermine la présence de parole dans le signal audio, une fonction de gain étant définie pour chacun d'un ensemble de bandes de fréquence et, pour chaque bande de fréquence, un gain est défini pour augmenter avec un SNR croissant, de sorte que, pour chacun des canaux de fréquence, un facteur de gain de canal est déterminé sur la base de la fonction de gain pour la bande de fréquence dont la plage contient le canal de fréquence.

45 **31.** Procédé selon l'une quelconque des revendications 17 à 30, dans lequel les mesures de mode comprennent une mesure de fonction d'auto-corrélation normalisée (NACF).

50 **32.** Procédé selon l'une quelconque des revendications 17 à 31, comprenant en outre l'étape consistant à déterminer un facteur de gain minimum pour chacun des canaux de fréquence si de la parole est déterminée comme étant absente du signal audio.

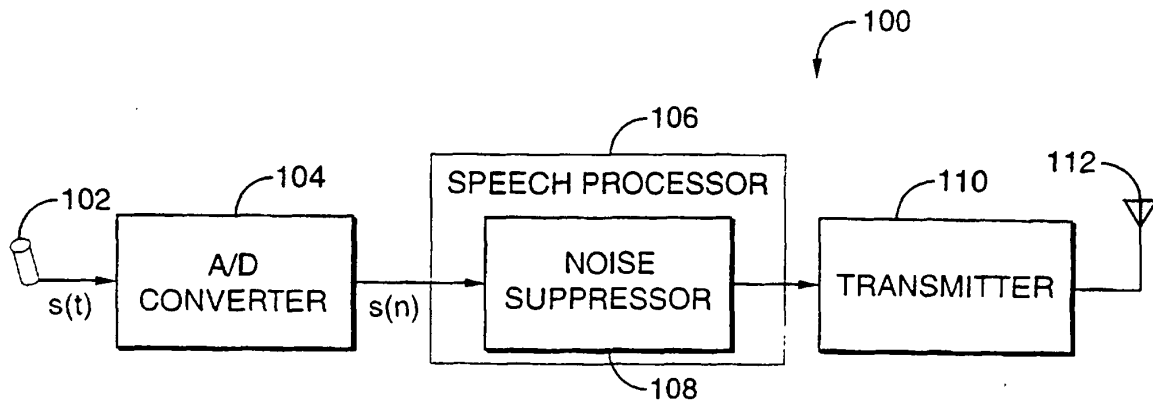


FIG. 1

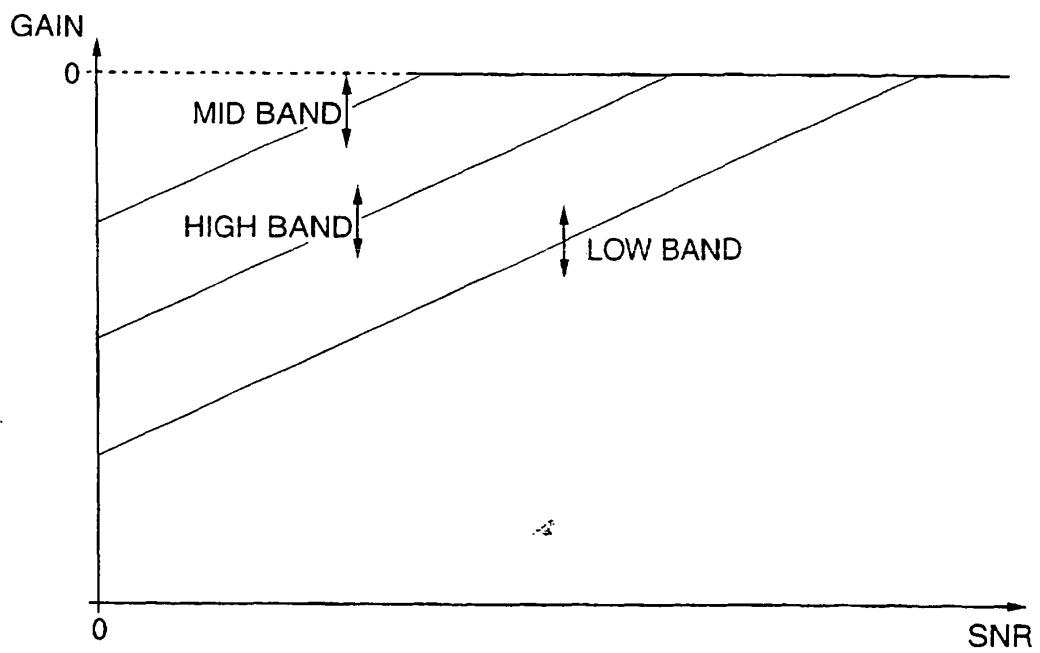


FIG. 3

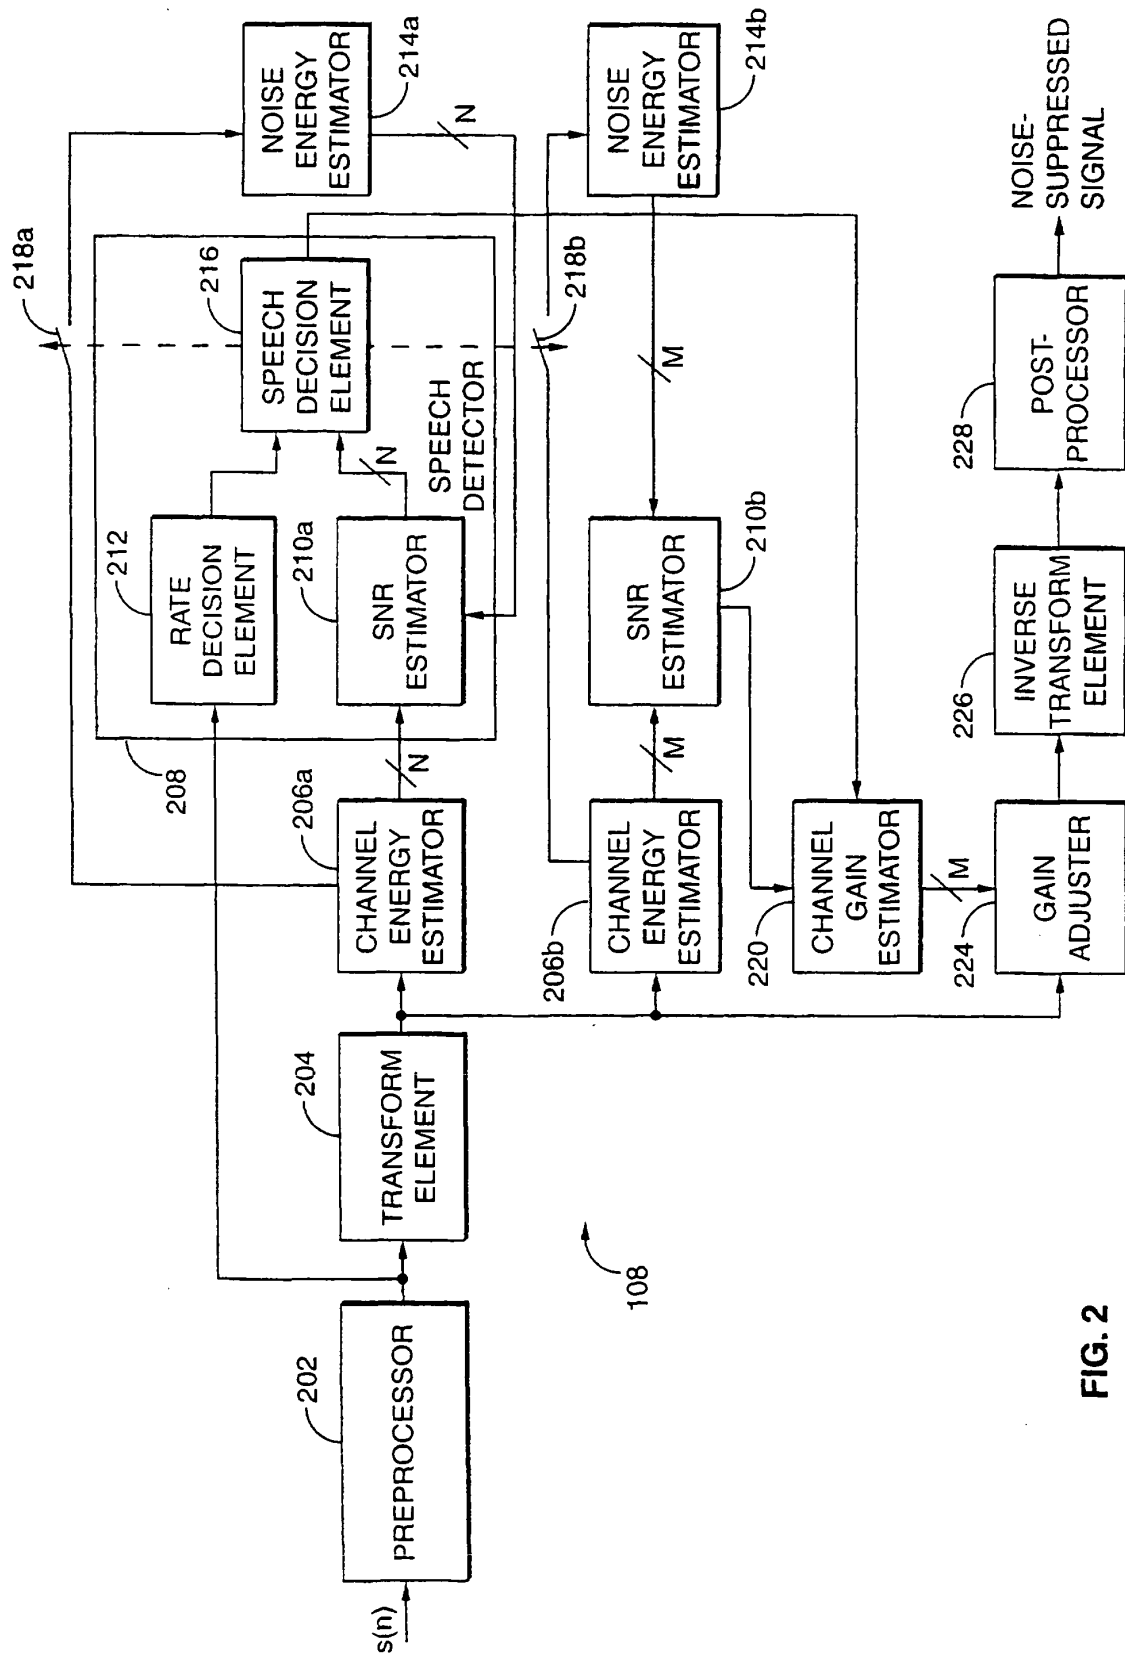


FIG. 2

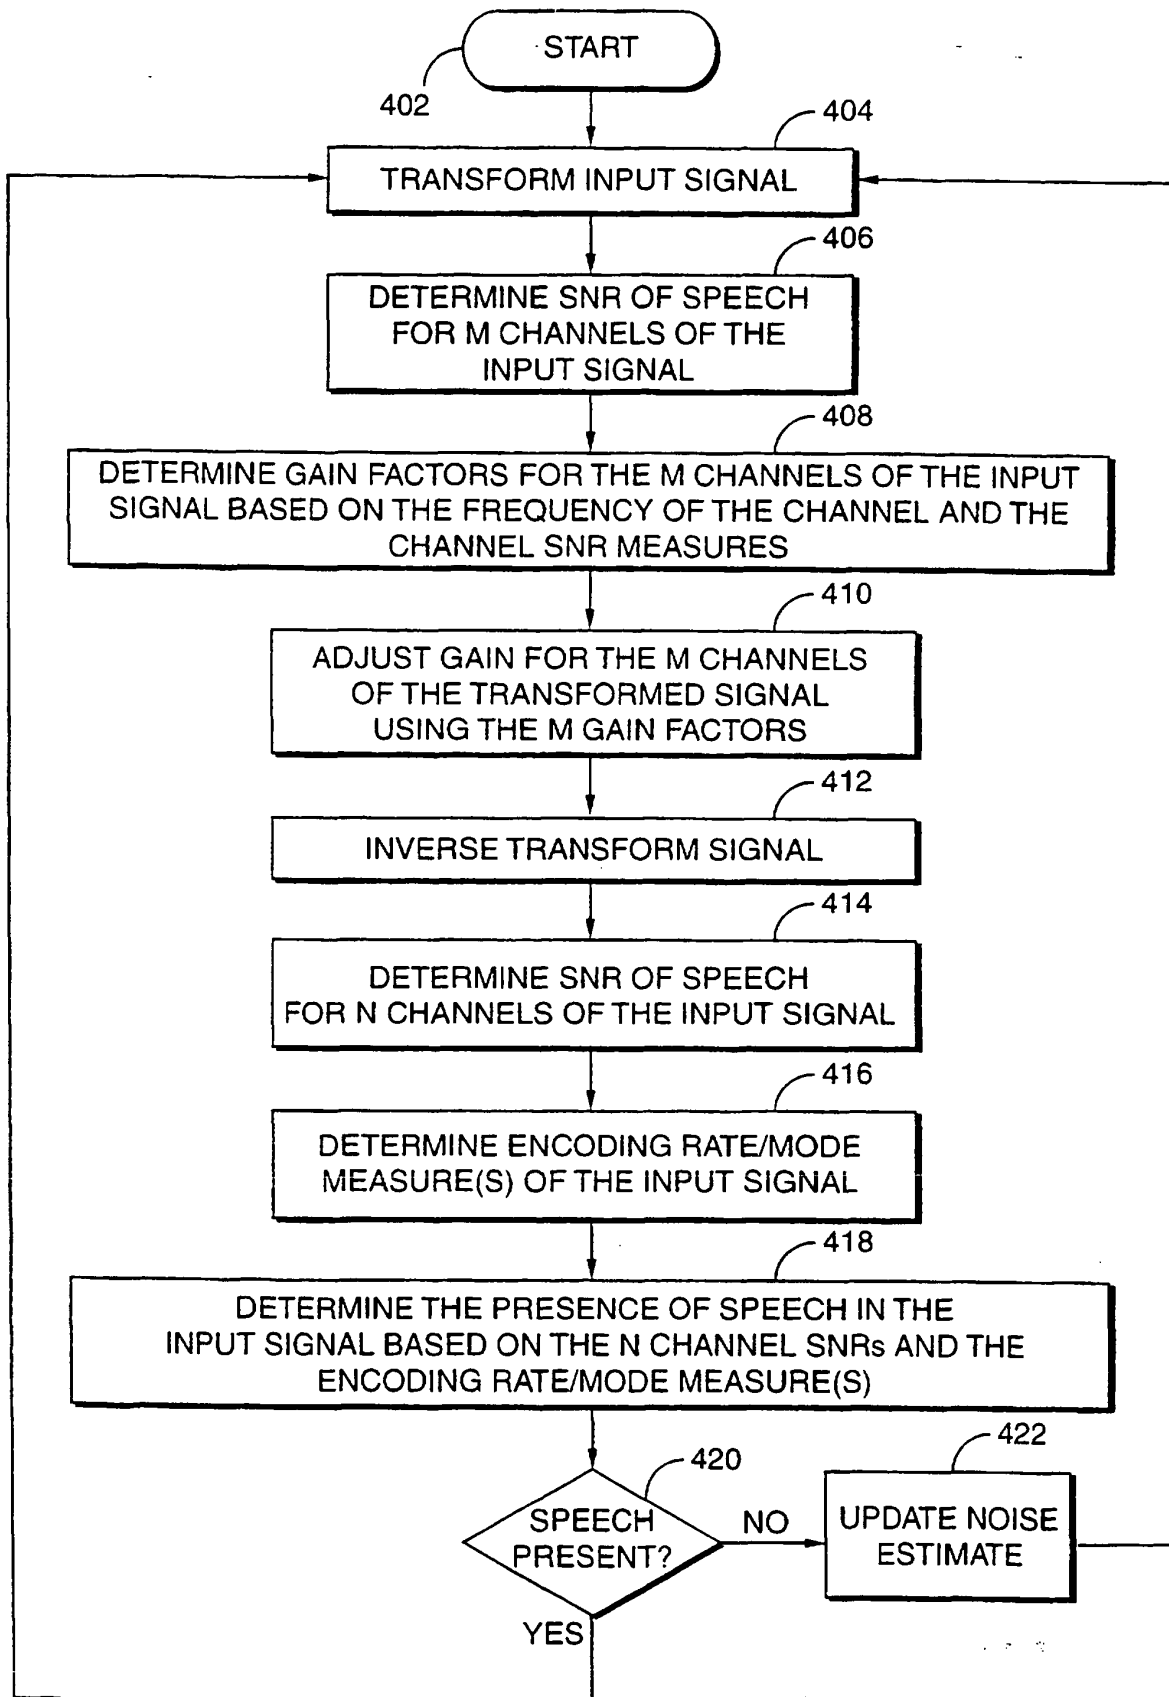


FIG. 4