



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 022 419 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
26.07.2000 Bulletin 2000/30

(51) Int Cl.7: **E05D 3/06**

(21) Application number: **00101461.2**

(22) Date of filing: **25.01.2000**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **25.01.1999 US 236805**
14.01.2000 US

(71) Applicant: **Hoffman Enclosures Inc.**
Anoka, MN 55303-7501 (US)

(72) Inventors:
• **Richard, John E.**
Minnesota 55374 (US)

- **Schinzel, Craig E.**
Minnesota 55303 (US)
- **Polzin, Wallace H.**
Minnesota 55303 (US)
- **Klinger, Clifford A.**
Minnesota 55408 (US)
- **Nephsa, William J.**
Minnesota 55434 (US)
- **Thibodeau, Marvin J.**
Minnesota 55330 (US)


(74) Representative: **Durm, Frank, Dipl.-Ing. et al**
Patentanwälte
Durm & Durm
Felix-Mottl-Strasse 1a
76185 Karlsruhe (DE)

(54) **Compound hinge**

(57) A compound hinge system includes a first link (50) and a second link (70). The first link (50) includes knuckles (54) and arcing engaging surfaces (60) next to stop portions (56) that are configured for receiving engaging lug portions (76) on the second link member (70). The second link member includes first (72) and second (74) sets of knuckles. One of the sets of knuckles (72)

cooperates with a hinged pin (28) to pivot relative to the first link (50) while the second set of knuckles (74) receives a hinge pin (28) to pivot relative to the second element (26). The lugs (76) slide relative to the engaging surface (60) and push against the stop portions (56) to flex them outward and require additional force to move between various stops in the range of motion.

FIG. 3

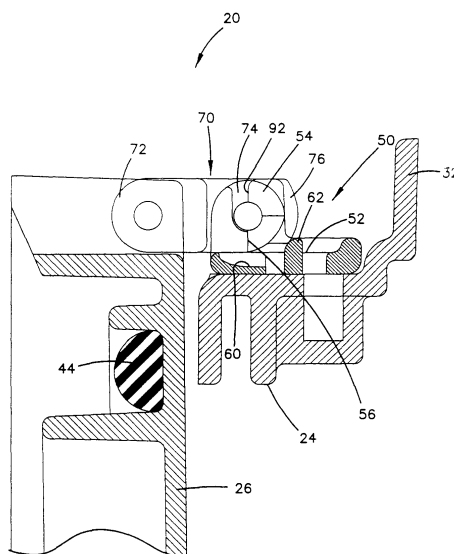

EP 1 022 419 A2

Description

Background

1. Field

[0001] The present invention is directed to a hinge, and in particular, to a hinge providing two pivot axes for two degrees of movement and greater range of motion.

2. Prior Art

[0002] Enclosures utilize hinges on covers or doors to provide access to the interior of the enclosure. Hinges often mount along the side of the enclosure so that the door does not close under its own weight. It can be appreciated that a device for preventing an enclosure door from closing and swinging freely would be advantageous to provide access to the interior of the enclosure for an extended period of time. Normal door and hinge construction often do not have closure devices and the balance and weight of the door prevent accidental closure. However, in some instances, it may be advantageous to have a door that includes a structural stop that allows opening and closing, but requires greater force to close so that the door may be held in an open position. This is especially important in outdoor conditions where wind may engage the planar surface area of the door and tend to open or close a door. Another common problem with doors and the hinges is providing sufficient mobility to the cover. In hinge and door combinations wherein the door opens only approximately 180 degrees, the door is extended away from the enclosure and as it is exposed, the door may be subject to closure from the wind or may endure forces in an opposite direction to closing that may cause damage to the hinge or even break off the hinge. This situation also occurs in enclosures having a cover on the top that opens and the door lies substantially horizontal and exposed in the open position. Although there are doors that open to a greater range of motion, workers often will place objects on the door or lean on the door in the open position, often damaging the hinge or breaking the door.

[0003] Door and hinge systems are known that provide a greater range of motion. However, such systems typically require special mounting arrangements and decrease the utility or the exterior appearance. Such systems may also limit the access to the interior of the enclosure. In addition, the systems do not provide any resistance to the door closing, so that the door may still accidentally swing shut such as when exposed to wind forces. Further disadvantages of such systems are the type of motion required often causes damage to gaskets that are wiped or rubbed by the cover during some portion of the opening and closing motion.

[0004] It can be seen then that a new and improved closure and hinge system is needed. Such a system should provide free range of motion so that the door may

open against the side of the closure to minimize wind effect. Such a system should also provide resistance to accidental closure and provide a range of motion that does not damage or wear gaskets on the enclosure cover. The present invention addresses these as well as other problems associated with enclosures and hinges.

Summary of the Invention

[0005] The present invention relates to a hinge, and in particular to a compound hinge, that provides two axes of rotation and a wide range of motion between the hinged elements.

[0006] The compound hinge includes a first base hinge link mounting to a first element. The first link includes raised knuckle portions for receiving a hinge pin therethrough. The base portion has recesses formed therein for receiving mounting devices such as screws or bolts for attachment to the first element. Intermediate the knuckles are arcing surfaces configured for receiving and aligning lug portions of a second link. The receiving portions are proximate a pair of opposed stop members that flex slightly and are flexed when pushed by the corresponding lugs. The stop portions act as a toggle to retain the hinge in position. The knuckles may also include stop portions for positioning the second link relative to the first link. A second link includes two sets of knuckles for receiving hinge pins. The first knuckle is configured for aligning with and having orifices coaxial with the knuckles of the first link. The second link is aligned so that the first set of knuckles and second set of knuckles are parallel with lugs extending substantially perpendicular to and aligned with the axes of the knuckles. The lugs are configured to extend into the receiving portions of the first link. The first knuckle is aligned with the knuckles of the first element and the second set of knuckles on the second link receive the pin for attaching to the second element. In this manner, the second link is hinged relative to the first link and the second link is also hinged relative to the second element. The first knuckle also includes complementary stop portions cooperating with the stop portions of the knuckles of the first link to limit relative rotation. The knuckles may also form a toggle device in one embodiment, providing further rotational resistance at a predetermined rotational position.

[0007] When assembled, the lugs engage the receiving surface and are held in place by the stop portions of the base on the first link member. As the cover or door is opened and rotated relative to a second link, it will reach its full range of motion, but it will be possible to open the door further relative to the first element, such as a housing. At this point, continued rotation will press the lugs against the stop elements and cause the stop elements to flex slightly until the lugs push beyond the stop elements. The second hinge member is then free to rotate relative to the first hinge member and an additional range of rotation is achieved.

[0008] To close the hinge, the second element rotates relative to the second hinge member, wherein the complementary stop portions engage and resist rotation. However, as further rotation occurs and the second element reaches its full range of motion relative to the second hinge member, further rotation of the second element causes the lugs to flex the stop elements and allow the lugs to push past the stop portions and return to the original position.

[0009] The arrangement of the present invention provides a simple, reliable hinge that provides a wide range of motion. In addition, the toggling effect from the lugs engaging the stop elements act as a retainer to hold the door in either the opened or closed position. However, with continued pressure, the door can be easily closed. The present invention is easy to assemble and can be retrofitted to other existing door and enclosures.

[0010] These features of novelty and various other advantages that characterize the invention are pointed out with particularity in the claims annexed hereto and forming a part hereof. However, for a better understanding of the invention, its advantages, and the objects obtained by its use, reference should be made to the drawings that form a further part hereof, and to the accompanying descriptive matter, in that there is illustrated and described a preferred embodiment of the invention.

Brief Description of the Drawings

[0011]

Figure 1 shows an end sectional view of a compound hinge according to the principles of the present invention in a closed position;

Figure 2 shows an end sectional view of the hinge shown in Figure 1 in a partially open position;

Figure 3 shows an end sectional view of the hinge shown in Figure 1 in a fully open position;

Figure 4 shows an end sectional view of the hinge shown in Figure 1 in a partially open position;

Figure 5 shows a perspective view of a first link for the compound hinge shown in Figure 1;

Figure 6 shows a sectional view of the first link taken along line 6-6 of Figure 5;

Figure 7 shows a perspective view of a second link for the hinge shown in Figure 1 complementary to the link shown in Figure 5;

Figure 8 shows a sectional view of the second link taken along line 8-8 of Figure 7;

Figure 9 shows a bottom plan view of a door for an

enclosure according to the principles of the present invention;

Figure 10 shows a sectional view of the door taken along line 10-10 of Figure 9;

Figure 11 shows a top plan view of an enclosure according to the principles of the present invention;

Figure 12 shows a sectional view of the enclosure taken along line 12-12 of Figure 11;

Figure 13 shows an end sectional view of a second embodiment of a compound hinge according to the principles of the present invention in a closed position;

Figure 14 shows an end sectional view of the hinge shown in Figure 13 in a partially open position;

Figure 15 shows an end sectional view of the hinge shown in Figure 13 in a fully open position;

Figure 16 shows a perspective view of a first link for the compound hinge shown in Figure 13;

Figure 17 shows a sectional view of the first link taken along line 17-17 of Figure 16;

Figure 18 shows a perspective view of a second link for the hinge shown in Figure 13 complementary to the link shown in Figure 16; and

Figure 19 shows a perspective view of the second link for the hinge shown in Figure 13 complementary to the link shown in Figure 16 with a pin element replacing a flange portion.

Detailed Description of the Preferred Embodiments

[0012] Referring now to the Figures, and in particular to Figure 1, there is shown a portion of an enclosure **20** having a compound hinge **22**. The hinge **22** pivotally connects a cover or door **26** to a housing **24**. As shown in Figures 2-4, the compound hinge **22** provides two separate axes of rotation, providing a greater range of motion and freedom of movement between the door **26** and the housing **24**.

[0013] Referring now to Figure 9, the door **26** is shown in greater detail. The door typically includes bracing around the periphery thereof, the door forms a channel **42** receiving a gasket **44**, as shown in Figure 10, for forming a seal with the housing **24**, as shown in Figure 1. As shown in Figure 9, the cover includes recesses **46** formed along one edge of the door **26** for mounting the hinge **22** and aligned bores **48** for receiving a hinge pin **28** (not shown in Figure 9) for providing pivotal movement between the hinge **22** and the door **26**. Along the

opposite edge of the door **26** is a latch **40**.

[0014] Referring now to Figures 11 and 12, the door receiving portion of the housing or enclosure **24** is shown. Although the housing **24** may be a molded monolithic element, it may include a collar **30** forming a rectangular opening fitting against upper edges of sides of the housing **24**, as shown in Figure 12. The collar **30** includes an inner ridge **32** that extends upward and engages the gasket **44** in the closed position, as shown in Figure 1.

[0015] The collar **30** also may include mounting holes **38** and alignment studs **34** that engage the base of the first link member, as explained hereinafter. The collar **30** also forms a channel **36** that inserts over the top of the wall edges of the housing **24**.

[0016] Referring now to Figures 5 and 6, a first link member **50** is shown. The first link member **50** includes a base portion **52** having a pair of mounting holes **58** formed therethrough. The mounting holes **58** are aligned even with first hinge knuckles **54** that are coaxially aligned to receive a hinge pin **28**. The first knuckles **54** include stop portions **56** of about 90 degrees. The radially extending end surfaces of the stop portions **56** cooperate with complementary surfaces on a second link member, as explained hereinafter. Intermediate the first knuckles **54** are lug receiving recesses **60** formed in the base portion **52**. The lug receiving recesses **60** are receive the corresponding lugs of the second link, as explained hereinafter. Stop fingers **62** are spaced apart from the lug receiving recesses **60**. The stop fingers **62** act as a surface engaging the lugs. With spaces on both sides of the fingers **62** and with the fingers being attached at only one end, the fingers **62** flex, allowing the lugs to toggle so that the second link may rotate, as explained hereinafter.

[0017] Referring to Figure 7, a second link member **70** is shown that is configured for pivotally mounting, as shown in Figures 1-4, to the door **26** and the first link member **50**. The second link member **70** includes a second knuckle **72**, third knuckles **74** and lug portions **76**. The second knuckle **72** includes a bore **88** formed therethrough and is configured to receive a hinge pin **28** for pivotally mounting to the cover **26**. The second knuckle **72** includes an arcing surface **78** to provide clearance during rotation relative to the cover **26**. Ends of the second knuckle **72** include stop portions **92** of approximately 90 degrees. The radial end surfaces of the stops **92** are complementary to and cooperate with the ends of the stop portions **56**. Referring again to Figure 7, third knuckles **74** include an arcing outer surface **82** providing for rotation relative to the base **52** of the first link member **50**. The third barrel **74** also includes a bore **90** receiving a hinge pin for connection to the first knuckle **54** of the first link member **50**. Extending downward from the lower portion of the third barrel **74** are the lugs **76**. The lugs **76** include a camming surface **84** forming a corner **86**. The lugs **76** are spaced and configured for inserting into the recesses **60** on the first link member **50**. The second

link member **70** is aligned relative to the first link member **50** by the corner portion **86** of the lugs **76** engaging the corresponding stop fingers **62**. The rotation can be accomplished by the lugs **76** pushing against the stop members **62** until the fingers **62** flex and allow rotation. The camming surface **84** rotates, sliding against the flexed associated stop finger **62**.

[0018] Referring again to Figure 1, with the compound hinge **22** in the closed position, the cover **26** is shut against the housing **24** so that the gasket **44** presses against the ridge **32** of the collar **30** to form a seal. The second link **70** is in a substantially vertical position with the camming surface **84** of the lug **76** resting against the lug engaging surfaces **60**. The corners **86** of the lugs **76** rest against the stop finger **62** of the first link member **50**.

[0019] The radially extending ends of the stop portions **92** of the second knuckle **72** of the second link member **70** cooperate with the corresponding stop portions **56** of the first link member **50** to prevent further rotation in the clockwise direction, as taken from the end view in Figure 1.

[0020] As the cover **26** is opened, the cover **26** rotates relative to the second link member **70**, which remains stationary from the closed position. The resistance of the fingers **62** engaging the lugs **76** prevents rotation of the second link member **70** relative to the first link member **50** while the cover **26** rotates with less resistance.

[0021] The cover **26** reaches its maximum range of motion relative to the second link member **70** at approximately 180 degrees of travel by the outer edge of the recessed portion **46** of the cover **26** engaging the outer side of the second link **70**. Further rotation of the cover **26** relative to the second link member **70** is not possible so that in normal use, the cover **26** tends to stay at the position shown in Figure 2. Further rotational force applied to the cover **26** tends to rotate the second link member **70** in a counter clockwise direction, as shown in Figure 2. This pressure causes a torque around the hinge pin **28** extending through the first and second knuckles, applying pressure against the fingers **62**. As the lugs **76** push the fingers **62** and cause the fingers **62** to flex out of the way, the hinge **20** passes through a toggle point until the cover **26** reaches the position shown in Figure 3. This provides approximately a 270 degree range of motion. At the position shown in Figure 3, the cover **26** is substantially parallel to and extending along the edge of the housing **24** so that there can be almost no effect from wind catching the door and closing it.

[0022] When the cover **26** is closed, the stop fingers **62** are again pushed by the lugs **76**, but in the opposite direction and resist clockwise rotation, as shown in Figure 4. However, the door **26** is free to rotate above the axis of rotation passing through the second knuckle **72** and rotate back to the position shown in Figure 4. The cover **26** rests against the side of the second link **70** and further rotation of the cover **26** relative to the second link member **70** is not possible. In addition, the fingers **62**

resist rotation so that the door will not close until additional pressure is applied and the fingers **62** are forced to flex by the lugs **76**. As the fingers **62** flex to the right as viewed in Figures 1-4, the lugs **76** can travel back to the position shown in Figure 1 and the cover **26** is again closed. However, the additional resistance needed to flex the fingers **62** provides slightly increased resistance so that the cover **26** stays in the open position without the additional force to overcome the resistance being applied.

[0023] Referring to Figures 13-19, there is shown a second embodiment of a compound hinge, generally designated **120**, in accordance with the principles of the present invention. The compound hinge **120** is similar to the hinge **20**, except that a toggle device **180** is added to provide more rotational resistance for holding the hinge in a predetermined position. The toggle device **180** includes a recess **182** formed in a first knuckle **154** of a first hinge member **150**, and a second knuckle **172** of a second hinge member **170**. The arcing periphery of the first knuckle **154**, or the complementary surface of the second knuckle **172**, includes a raised flange portion **184** which is configured for extending partially into a complementary recess **182** in the other of the first knuckle **154** or second knuckle **174** at the toggle position.

[0024] When the toggle device **180** is engaged, as shown in Figures 13 and 14, the first and second knuckles **154** and **172** have greater resistance to relative rotation. As the cover **26** is rotated about the second hinge member **170**, the first and second knuckles **154** and **172** have a mechanical stop which prevents the first hinge member **150** and second hinge member **170** from rotating relative to one another. Further rotation requires slightly more effort to disengage the toggle assembly **180** and allow rotation between the first hinge member **150** and the second hinge member **170**. As shown in Figure 18, the flange portion **184** may be molded into the second knuckle **172**. In addition, as shown in Figure 19, the second knuckle **172** may include a recess **186** with a pin member **188** extended into both the recess **182** and the recess **186**. As with the flange **184**, the pin member **188** also provides resistance and the same toggle effect. The toggle assembly **180** provides proper resistance so that the hinge **120** may be held in a predetermined position. Although the toggle assembly **180** is shown at the apex of the first knuckle **154**, it can be appreciated that, if a toggle position is required at a different location along the range of rotation, it may be easily moved. In addition, the recess **182** and raised portion **184** may be reversed while still achieving the desired toggle effect.

[0025] The design of the present invention provides a simple hinge mechanism that allows a 270 degree range of motion. In addition, the collar **30** and hinge **20** or **120** provide for retrofitting enclosures to accept such a system. The system also has rotation about a two different axes and fingers that act as a stop member that prevents

the door from swinging closed without force sufficient to cause flexure of the fingers **62**. Since the cover **26** rotates about an axis remote from the enclosure housing **24**, the cover does not rub the gaskets, so that a better and longer seal is maintained.

[0026] It is to be understood, however, that even though numerous characteristics and advantages of the present invention have been set forth in the foregoing description, together with details of the structure and function of the invention, the disclosure is illustrative only, and changes may be made in detail, especially in matters of shape, size and arrangement of parts within the principles of the invention to the full extent indicated by the broad general meaning of the terms in that the appended claims are expressed.

Claims

1. A hinge, pivotally connecting a second element to a first element, the hinge comprising:
 - a first link member, adapted to be pivotally mounted to the first element;
 - a second link mounted to the second element and pivotally mounted to the first link;
 - wherein the first and second links form a toggle point.
2. A hinge according to claim 1, wherein the first and second links pivot about a first axis and the second link and second element pivot about a second axis.
3. A hinge according to claim 2, wherein the hinge pivots about the first axis for a portion of a pivoting range of motion, and wherein after passing through the toggle point, the hinge pivots about the second axis.
4. A hinge according to claim 1, wherein the first link member includes a finger portion adapted to flex when engaging the second link member.
5. An enclosure, comprising:
 - a housing;
 - a cover adapted to fit over the housing;
 - a first hinge member mounted to the housing;
 - a second hinge member rotatably mounted to the cover and to the first hinge member;
 - wherein the first and second hinge members cooperate to move the cover between an open po-

sition and a closed position, wherein the first and second hinge members form a toggle point and the hinge passes through the toggle point as the cover is moved between the open and closed positions.

6. An enclosure according to claim 5, wherein the hinge rotates about a first axis, and wherein after passing through the toggle point, the hinge rotates about a second axis.

7. An enclosure according to claim 5, wherein the second hinge member and cover are a monolithic element.

8. An enclosure according to claim 5, wherein the first and second hinge members are molded.

9. An enclosure according to claim 5, wherein the enclosure includes a gasket and wherein the cover rotates about a first axis spaced apart from the gasket, so that the cover does not rub against the gasket during rotation.

10. A hinge providing relative movement between a first element and a second element, the hinge comprising:

a first hinge member mounted to the first element;

a second hinge member pivotally mounted to the first hinge member about a first axis and pivotally mounted to the second element about a second axis, wherein the second hinge member rotates about the first axis for a portion of the range of motion and the second element rotates about the second axis for a portion of the range of motion.

11. A hinge according to claim 10, wherein the first hinge member and second hinge member form a toggle point, and wherein the hinge pivots about the first axis prior to passing through the pivot point, and about the second axis after passing through the toggle point.

12. A pivoting system having a first element pivoting relative to a second element, comprising:

a first link having a first knuckle and a lug with an engaging surface;

a second link having a complementary surface receiving the lug and a stop surface, a second knuckle adapted for axial alignment with the first knuckle, and a third knuckle extending parallel to the second knuckle;

a first pin inserting through the first and second knuckles;

a mounting portion on the second element for receiving the second link;

a second pin inserting into the mounting portion and the third knuckle.

13. A system according to claim 12, wherein the first link comprises a pair of lugs and the second link comprises a pair of the complementary surfaces.

14. A system according to claim 12, wherein the first link comprises a pair of spaced apart coaxial first knuckles.

15. A system according to claim 14, wherein the second knuckle is adapted for insertion intermediate the first knuckles.

16. A system according to claim 12, wherein the second link includes a flexing portion, and wherein the lug engages the flexing portion and moves the flexing portion upon relative pivoting between the first and second link members.

17. A hinge according to claim 10, wherein one of the first and second hinge members includes a flange, and the other of the first and second hinge members defines a channel portion configured for engaging the flange in the closed position.

18. A hinge according to claim 17, wherein the flange comprises a pin, and wherein the one of the first and second hinge members defines a recess receiving the pin.

19. A hinge according to claim 18, wherein the flange comprises a raised portion.

20. A hinge according to claim 10, wherein the flange and the recess extend substantially parallel to an axis of rotation between the first and second hinge members.

FIG. 1

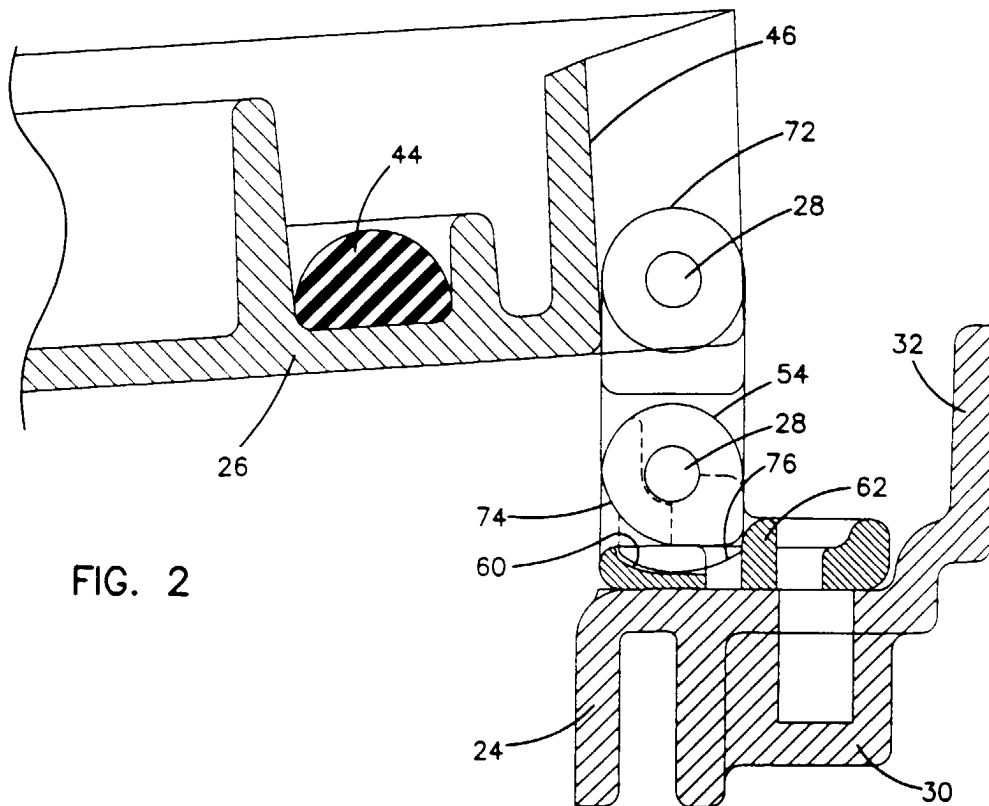
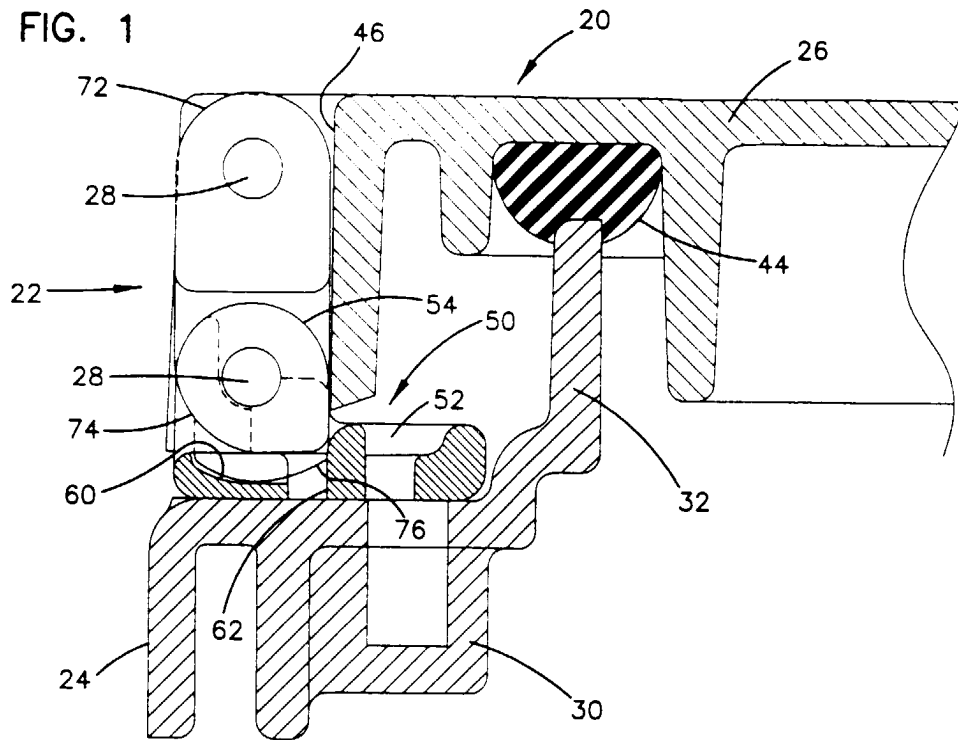


FIG. 2

FIG. 3

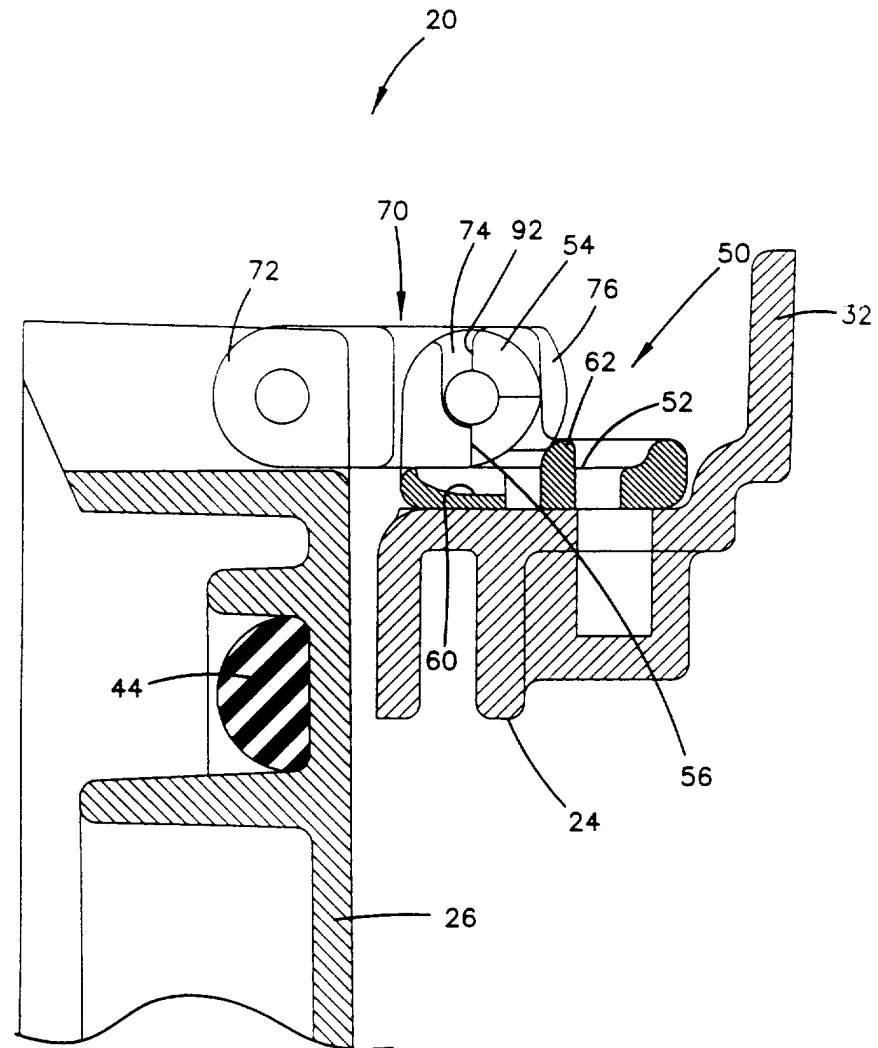


FIG. 4

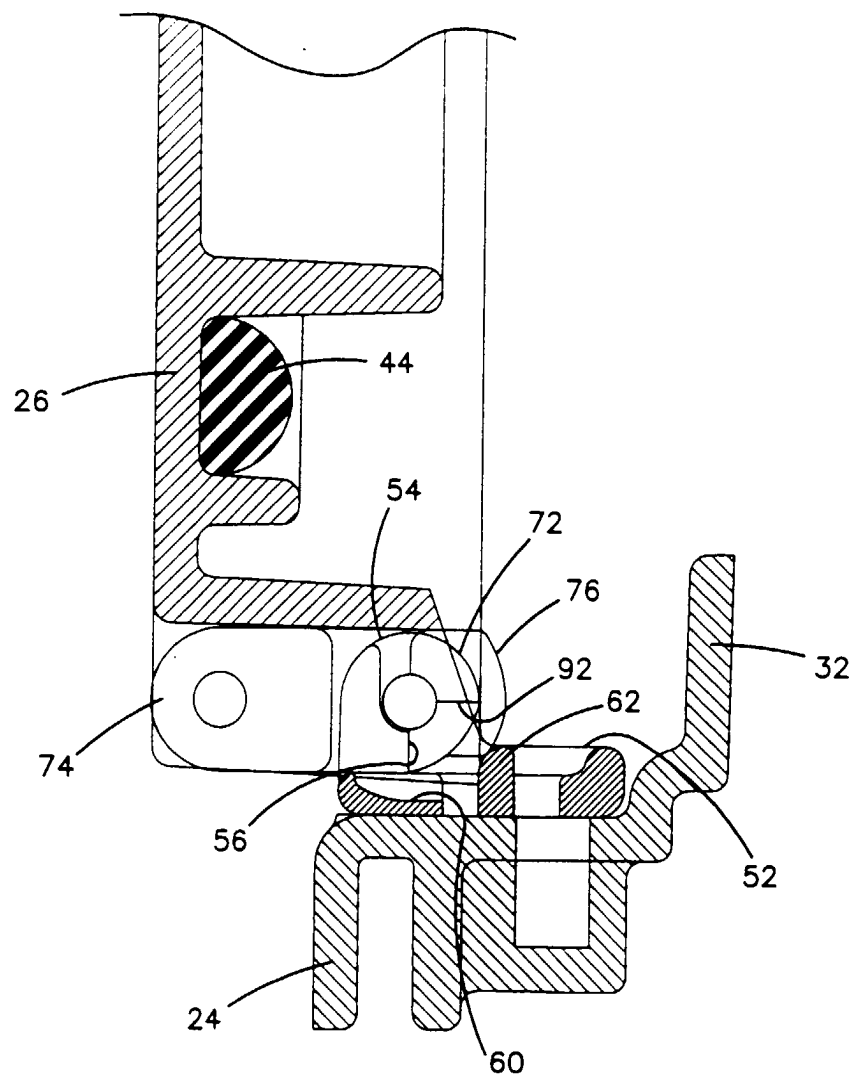


FIG. 5

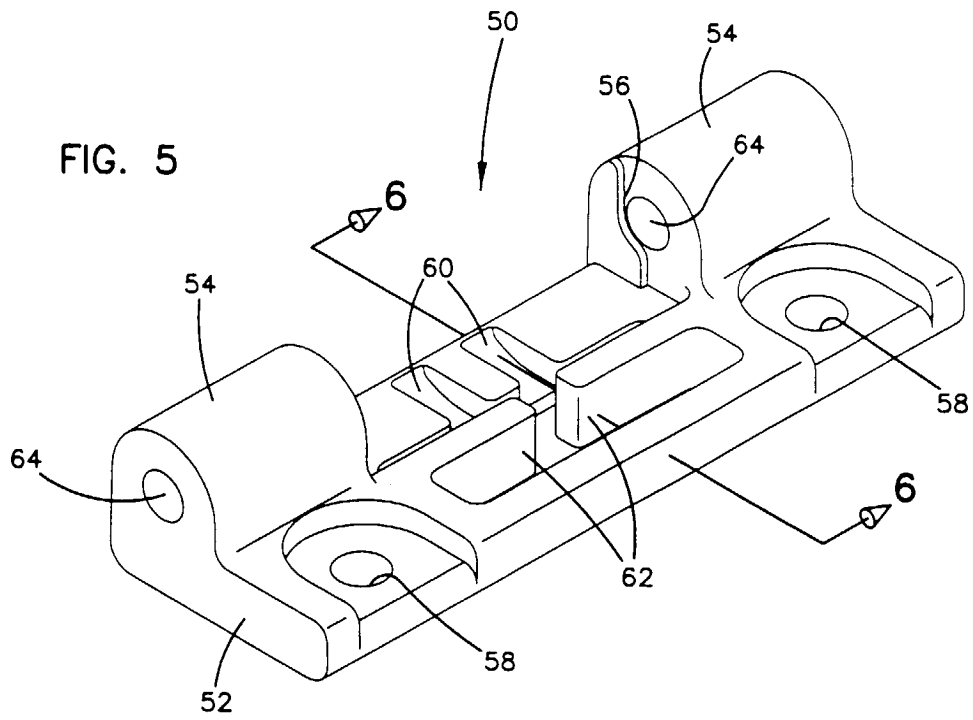
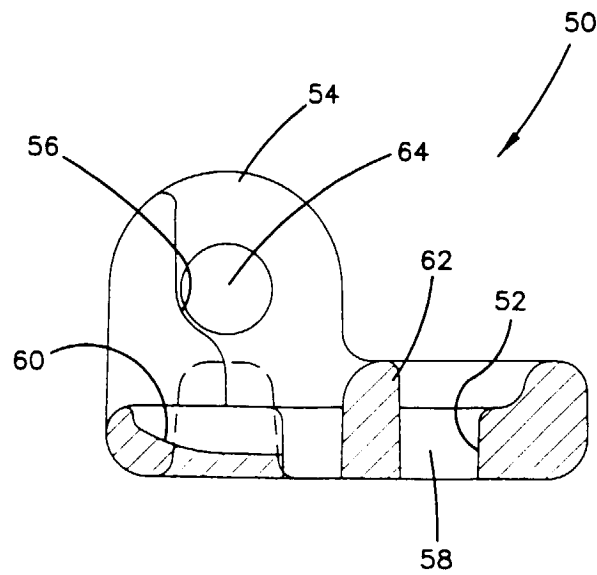


FIG. 6



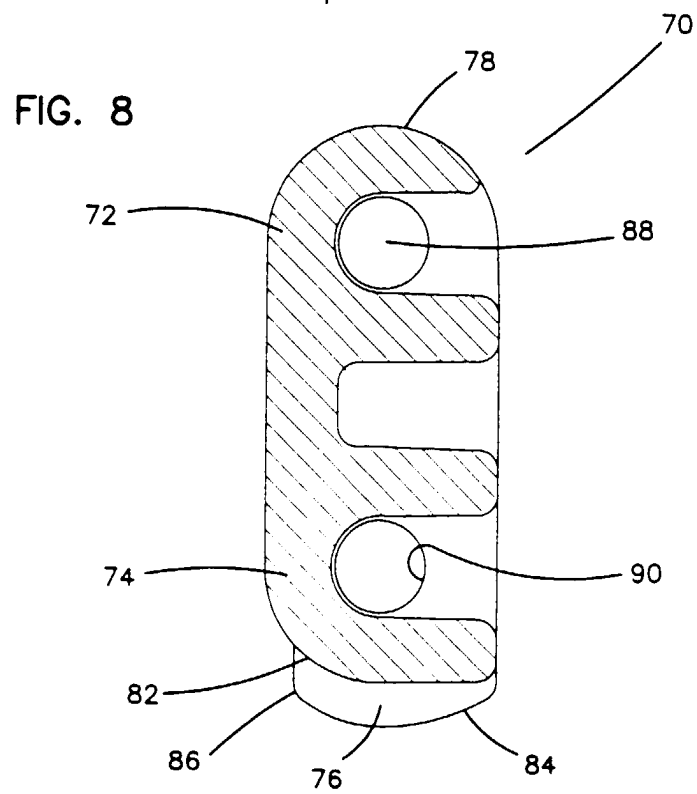
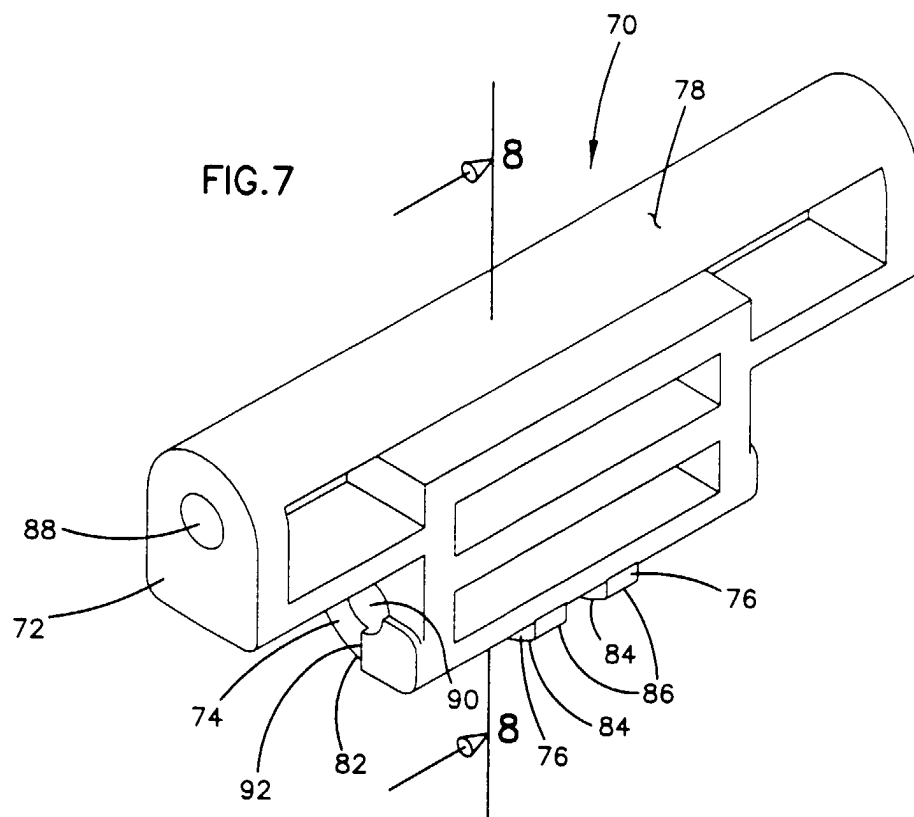


FIG. 9

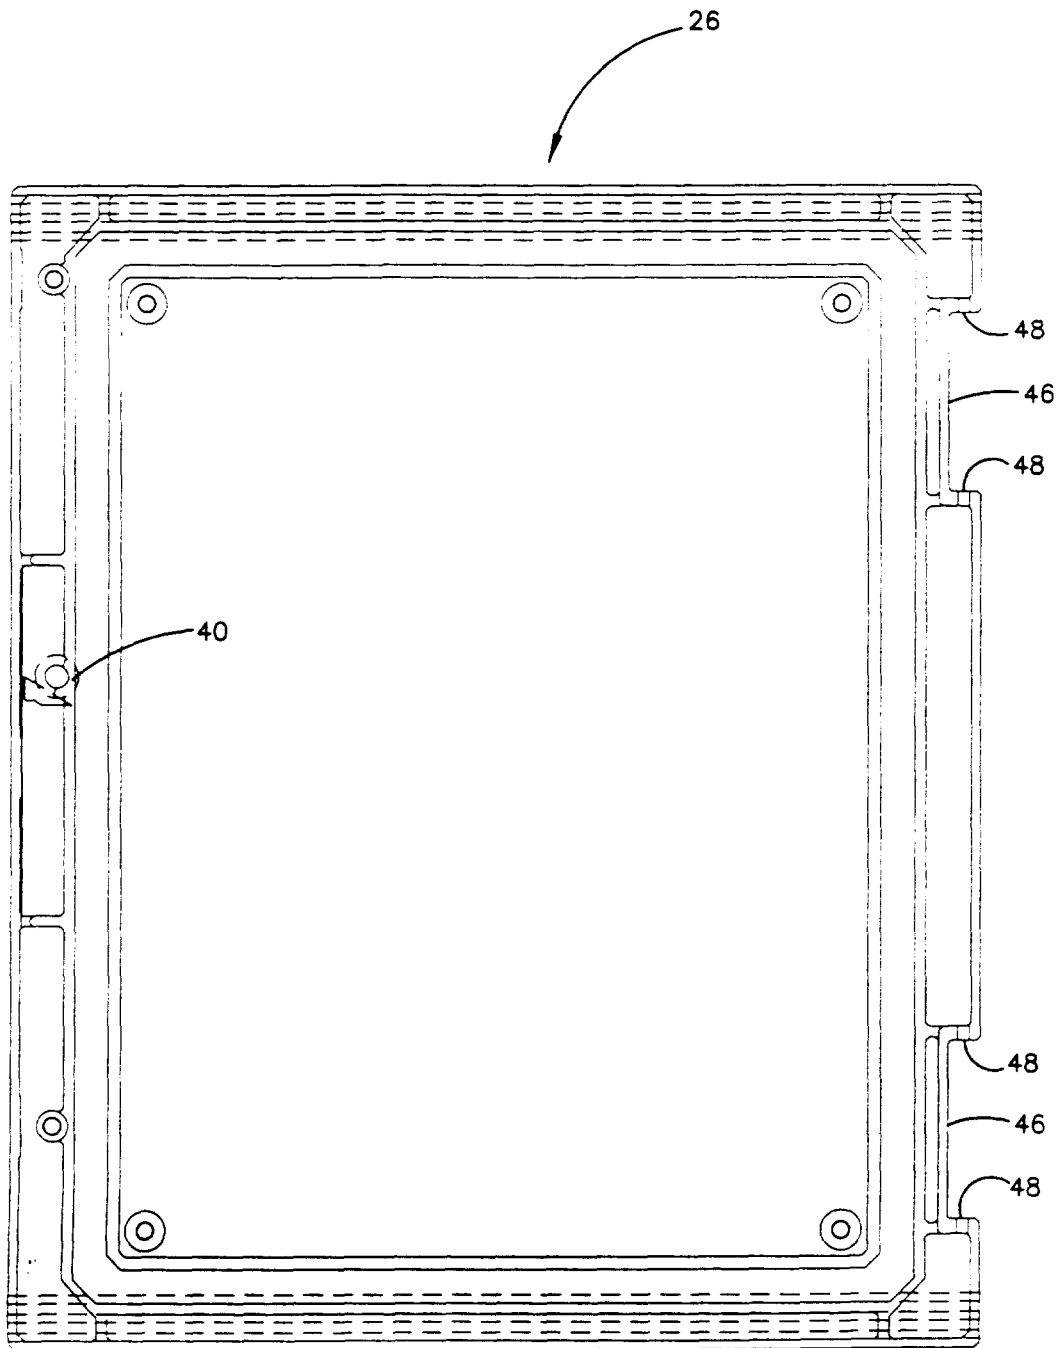


FIG. 10

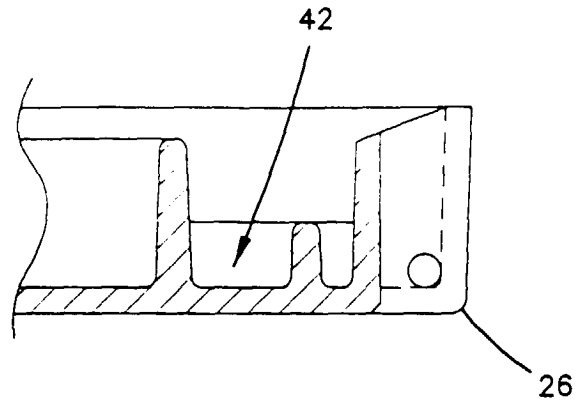


FIG. 12

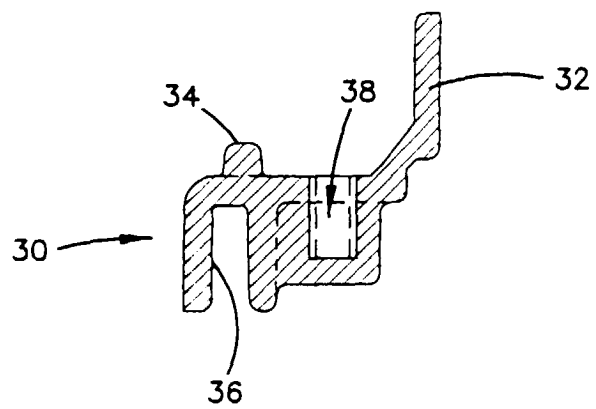


FIG. 11

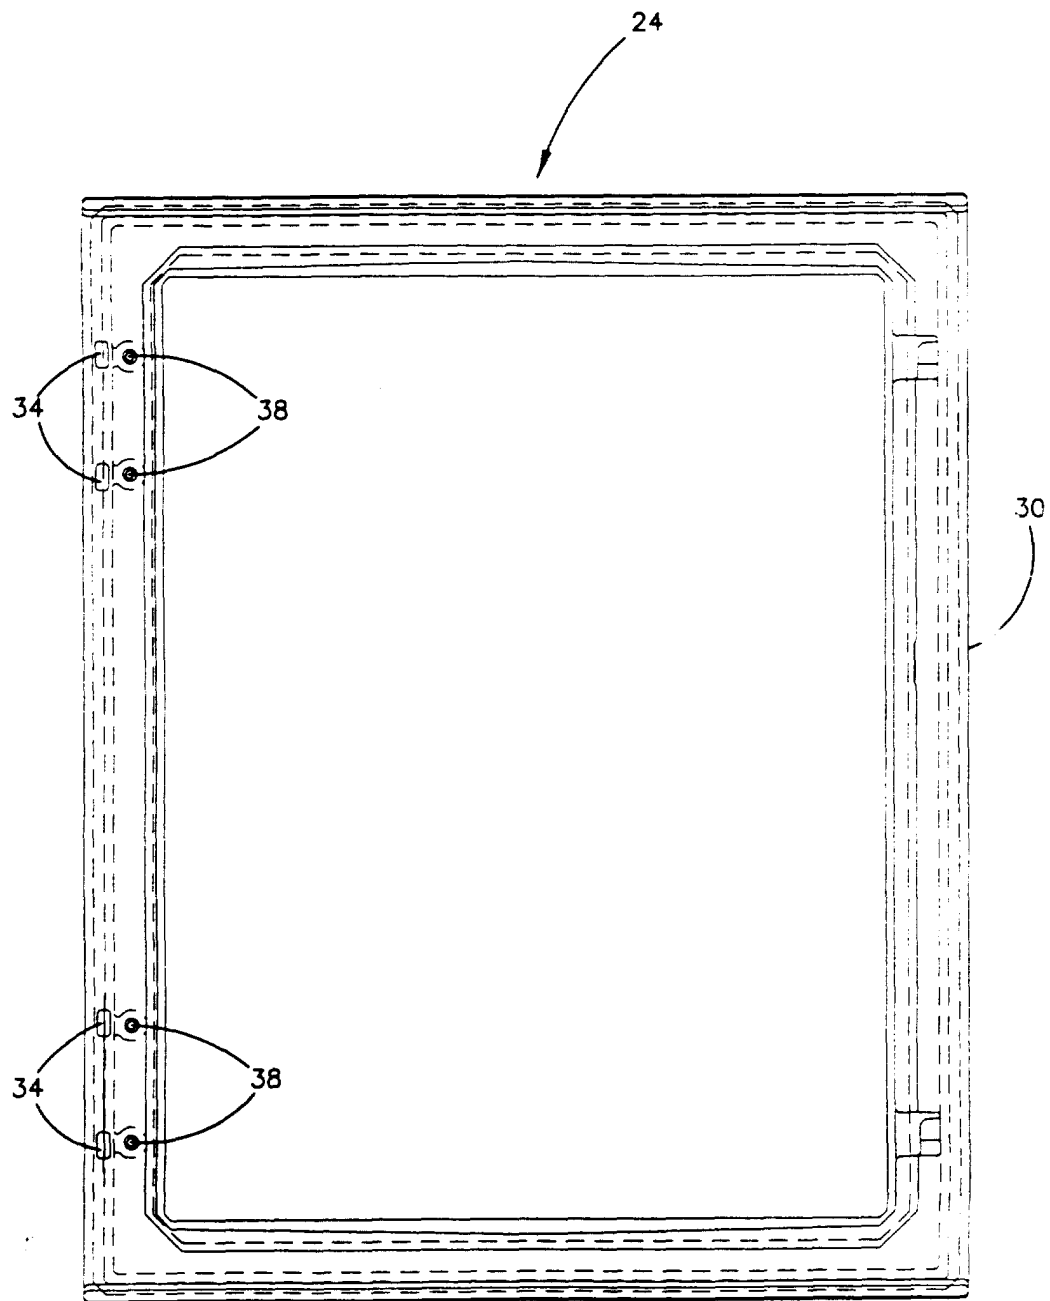


FIG. 13

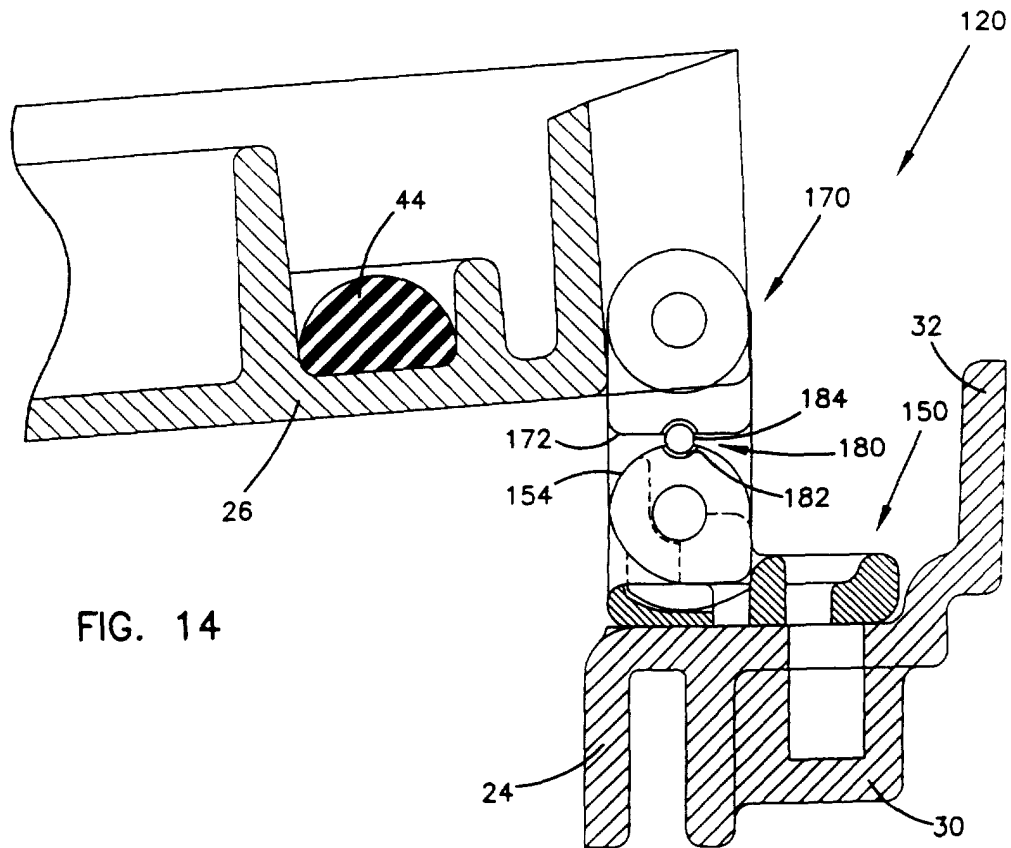
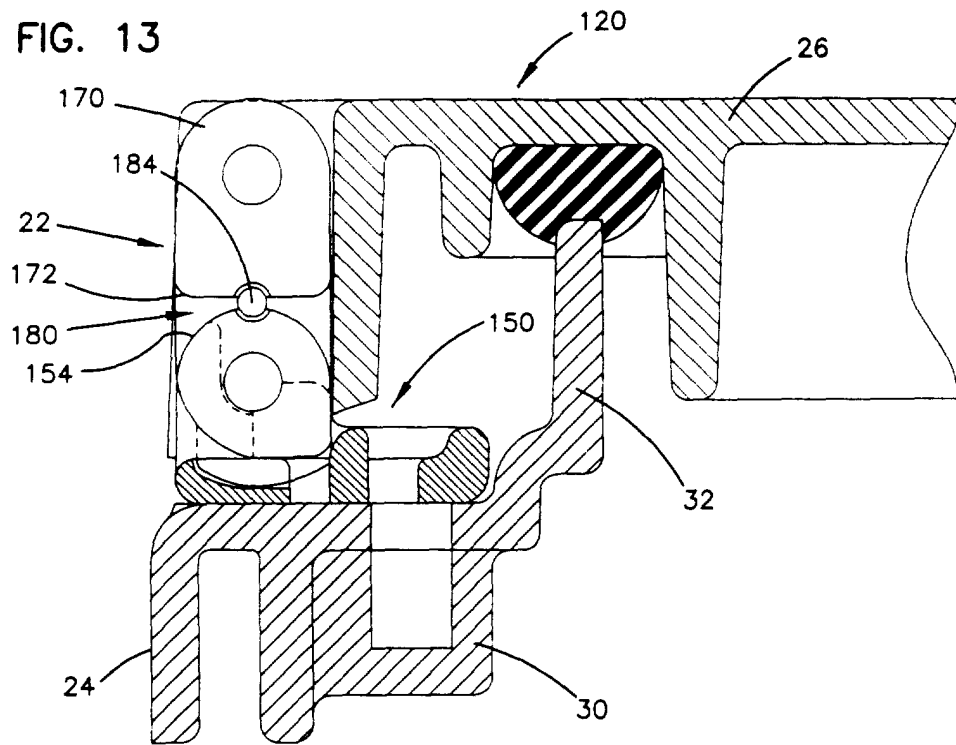


FIG. 14

FIG. 15

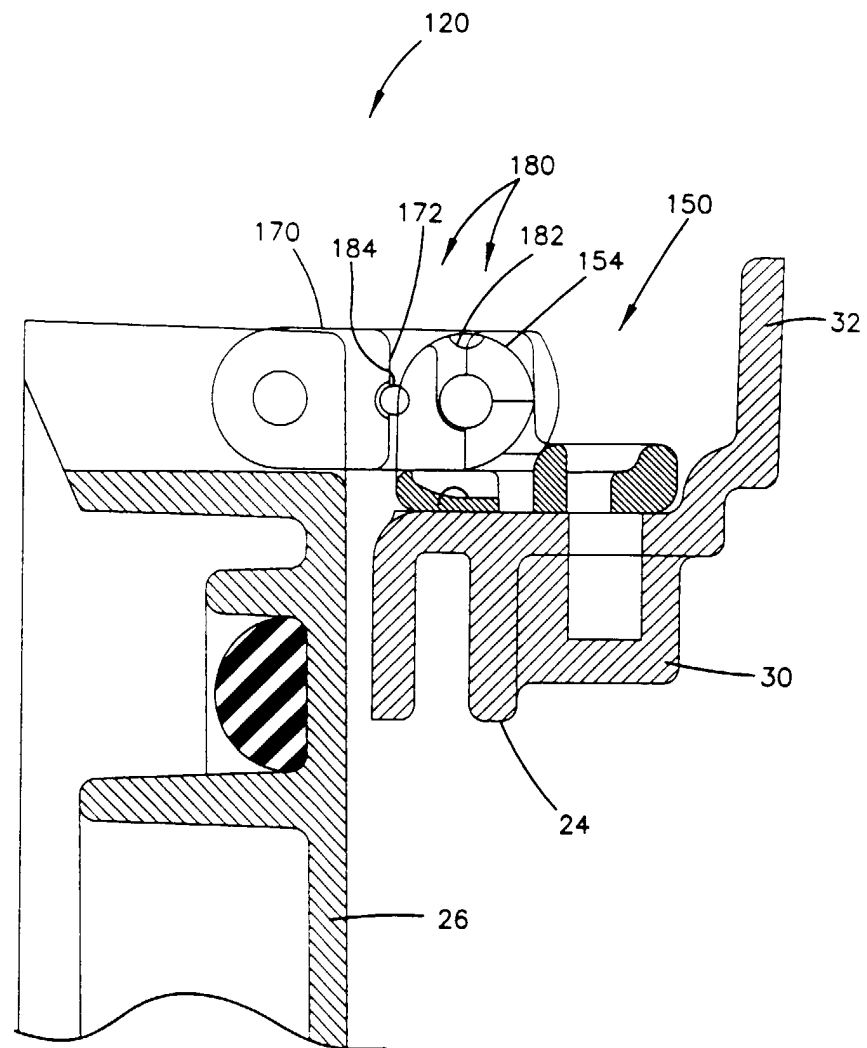


FIG. 16

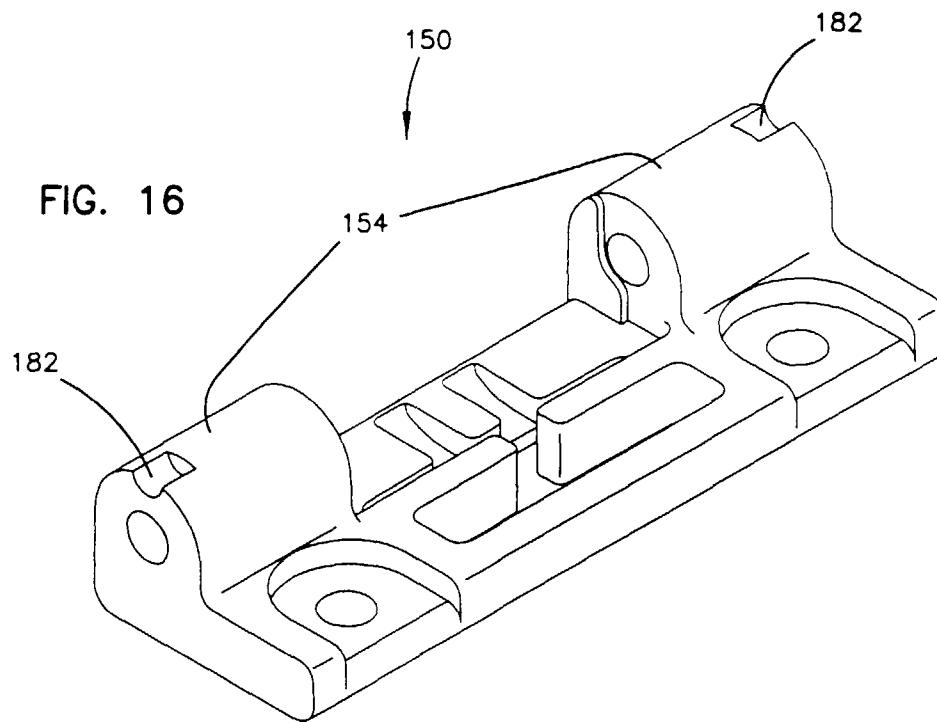


FIG. 17

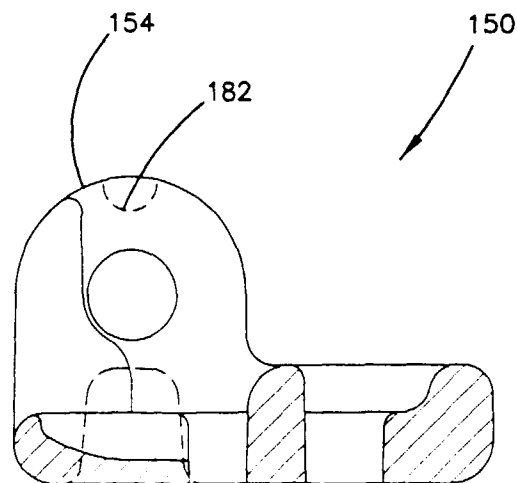


FIG. 19

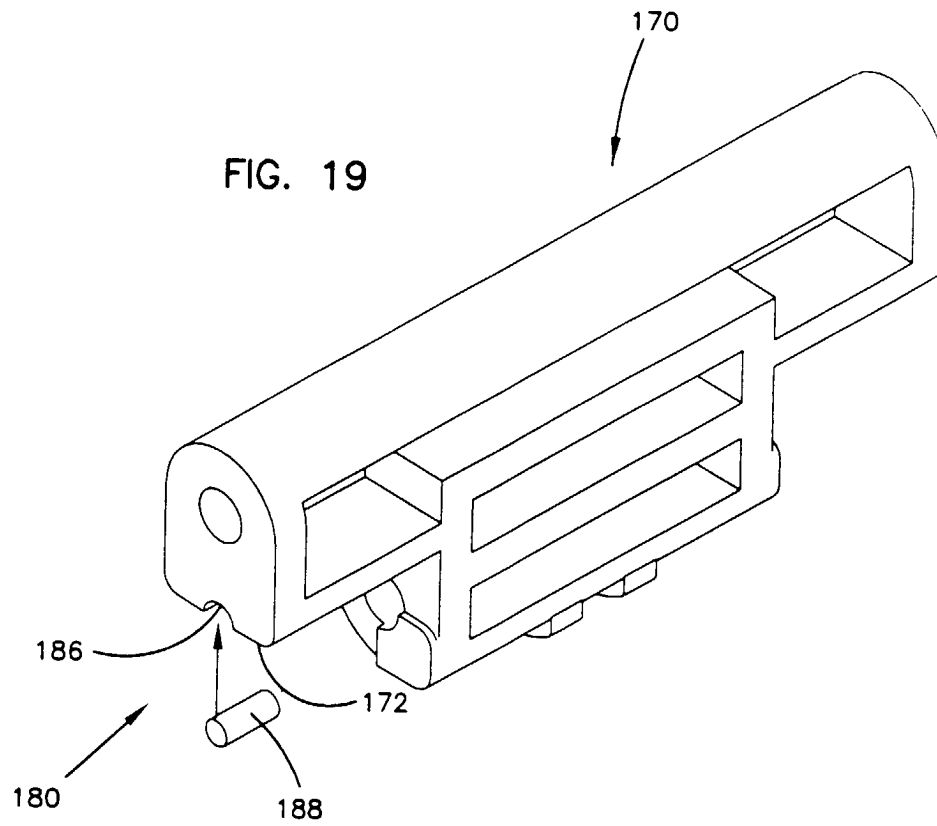


FIG. 18

