



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 026 776 A1**

(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 158(3) EPC

(43) Date of publication:
09.08.2000 Bulletin 2000/32

(51) Int. Cl.⁷: **H01Q 1/24**

(21) Application number: **98959310.8**

(86) International application number:
PCT/RU98/00231

(22) Date of filing: **20.07.1998**

(87) International publication number:
WO 00/05780 (03.02.2000 Gazette 2000/05)

(84) Designated Contracting States:
GB SE

(72) Inventor:
NAGAEV, Farid Ibragimovich
Moscow, 107143 (RU)

(71) Applicant:
Samsung Electronics Co., Ltd.
Suwon-city, Gyungki-do (KR)

(74) Representative:
Hengelhaupt, Jürgen, Dipl.-Ing. et al
Schützenstrasse 15-17
10117 Berlin (DE)

(54) **PORTABLE RECEPTION INDICATOR FOR SATELLITE RADIO-NAVIGATION SYSTEMS**

(57) The invention relates to the design of radio electronic devices and, more particularly, to antenna-and-feeder facilities to be used in portable (pocket) receiver-indicators of the GPS and GLONASS satellite radio navigation systems (SRNS) using the quadrifilar antennas for reception of signals. The claimed portable receiver-indicator comprises a body, made in the form of a parallelepiped and a quadrifilar antenna made as a parallelepiped and connected to the body with a possibility of rotation, said antenna having a connecting cable. The engineering solution ensures convenient use of the receiver-indicator while providing its small size and minimum screening effect of the body in the operating position.

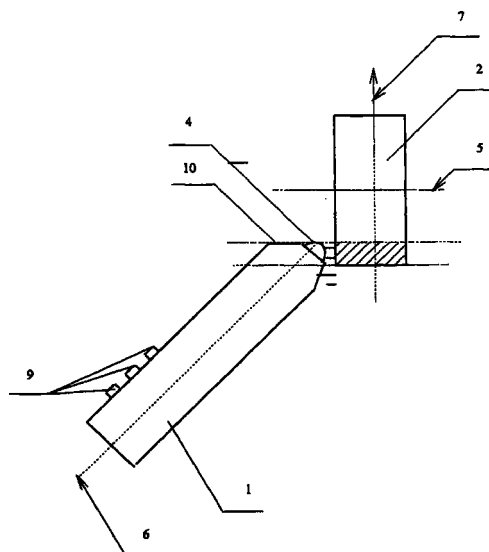


Fig.2

EP 1 026 776 A1

Description

Technical field

[0001] The invention relates to the design of radio electronic devices, including antenna-feeder facilities and can be used in the portable (pocket) receiver-indicators of the GPS and GLONASS satellite radio navigation systems (SRNS) using the quadrifilar antennas for signal reception.

Prior engineering level

[0002] The use of quadrifilar antennas in the receiver-indicators SRNS is stipulated by the fact that the latter have a relatively wide directional pattern and a relatively wide frequency band (compared, for example, with microstrip antennas), acceptable characteristics of the elliptic coefficient and standing-wave ratio, and, what is most important, small dimensions, simple design and a low price (cf. Dyson J.D. Proc. Of the Nat Electronics Conf. Vol. XVII, 1961, pp. 206... 213). The last-mentioned advantage predetermines their application in general-purpose manpack (pocket) receiver-indicators. A point of peculiar interest in designing the receiver-indicator is a choice of a place and a way of fixing the quadrifilar antenna on the body ensuring the best operational parameters of the antenna. Known in the art is a design of the portable receiver-indicator, in which the quadrifilar antenna is rigidly secured to the upper part of the body in parallel to its axis of symmetry (cf. GPS World Sep. 1993, p.38, Magellan III). A specific feature of such a design is that for normal reception of the SRNS signals the antenna pattern and, consequently, the antenna and the whole body should be oriented upwards and this hinders the manipulation of the controls by the operator since for the ergonomics reasons the control panel should be arranged at an angle of 20° to 30° to the horizon. If the receiver-indicator body is located so that it is convenient for the operator, the intensity of the reflected signals increases, the field of view is reduced and the thermal noise also increases due to the reception of the earth radiation, thus decreasing the receiver-indicator accuracy.

[0003] The most close in the technical essence to the claimed design is the portable receiver-indicator selected as a prior art and comprising a body, elongated in the longitudinal direction and made as a parallelepiped, and a quadrifilar antenna with a connecting cable secured on the side wall of the body and capable of rotating in the elevation-angle plane. Both in the operating and non-operating (storage) position the transversal axes of the antenna and body are parallel (cf. GPC World. Dec. 1994, p.48, Magellan Promark V). This construction allows the receiver-indicator body to be installed in a position convenient for the operator, i.e. with the antenna orientated vertically upwards and body oriented at an angle to the horizontal. The disadvantage

of such a construction is an increase of the width of the receiver-indicator by a value equal to antenna cross section that does not allow one to put a such receiver-indicator into a standard clothing pocket. This construction is also featured by partial shielding of an antenna by the body in the operating position.

Disclosure of the invention

[0004] The technical task to be solved by the claimed invention is the provision by constructive methods a convenience of using the portable receiver-indicator while minimizing its size and the screening effect of the body on the antenna in the operating position.

[0005] The essence of the invention consists in development of a receiver-indicator for a satellite radio navigation system made in the form of a parallelepiped comprising an elongated body and a quadrifilar antenna with a connecting cable fixed on the body with a possibility of rotation so that in the operating position the longitudinal axis of the antenna is directed vertically upwards, while the longitudinal axis of the body is directed at an angle to the horizontal; the quadrifilar antenna length does not exceed the width of the body and is fixed on the end-face of the upper part of the body through a spherical hinge joint, through which the connecting cable passes so that in the storage position the transversal axis of the antenna is parallel to the longitudinal axis of the body, the longitudinal axis of the antenna is parallel to the transverse axis of the body while in the operating position the transverse axes of the antenna and body extend in the directions perpendicular to each other.

[0006] The quadrifilar antenna is a four-way spiral whose conductors are excited with identical amplitudes and with 90° phase shift between the adjacent conductors [3]. The conductors are made on the internal or external surface of the body. The length of each conductor is approximately equal to a quarter-wavelength. The maximum of the of the antenna pattern is formed in the direction of axis 7.

Preferable versions of realization of the invention

[0007] The essence of the invention, its realizability and possibility of industrial application are explained in Figs.1 and 2, showing a schematic example of the portable pocket receiver-indicator for satellite radio navigation systems in two positions: in the storage position (Fig.1) and in the operating position (Fig.2).

[0008] The claimed portable receiver-indicator of the satellite radio navigation systems (Figs.1,2) comprises an elongated body 1, made as a parallelepiped and fixed on the body 1 with a possibility of rotation, a quadrifilar antenna 2 made as a parallelepiped and having a connecting cable 3. The quadrifilar antenna 2 is connected to the body 1 with the help of a spherical hinge 4, through which passes the connecting cable 3.

The spherical hinge 4 is located on an edge of the face surface of the upper part of the body 1. The length of the quadrifilar antenna 2 does not exceed the width of the body 1 and the antenna is fixed to the spherical hinge 4 so that in the storage position the transversal axis 5 of the antenna 2 is parallel to the longitudinal axis 6 of the body 1 and the longitudinal axis 7 of the antenna 2 is parallel the transversal axis 8 of the body 1. The control and indication devices 9 of the receiver- indicator are located on the front face of the body 1 whose upper edge 10 is chamfered.

[0009] Shown in Fig. 1 is an example, corresponding to the case of making the quadrifilar antenna 2 with a length equal to the width of the body 1.

[0010] In this case, the transversal axis 5 of the antenna 2 in the storage position coincides with the longitudinal axis 6 of the body 1. Since in the storage position (Fig.1) the longitudinal axis 6 of the body 1 coincides with the transversal axis 5 the antenna 2 and the transversal axis 8 of the body 1 is parallel to the longitudinal axis 7 of the antenna 2, the antenna 2, whose length corresponds to the width of the body 1, in this position behaves as a natural structural prolongation of the body 1 without extending beyond the width of the latter. This ensures the required minimum dimensions and the convenience of storage, for example, in a pocket of a standard size.

[0011] The same requirements are met by the receiver-indicator whose quadrifilar antenna 2 has a length less than the width of the body 1.

[0012] In the operating position (Fig.2) the position of the antenna 2 varies relative to the initial position due to its rotation on the spherical hinge 4. In this case, the direction and angle of turn of the antenna 2 are determined by the operator's convenience when manipulating the controls 9 and by a preset optimal position of the antenna 2, at which the best conditions of reception of the SRNS signals are provided, i.e. the position in which the longitudinal axis 7 of the antenna 2 is directed vertically up and the longitudinal axis 6 the body 1 is at an angle to the horizontal. In this case, the transversal axes 5, 8 of the antenna and body are located in perpendicular directions. The zone of screening the antenna 2 by the body 1 is the zone between the parallel horizontal planes, one of which passing through the lower end face of the antenna 2, and the other one passing through the upper skewed edge 10. Some effect of screening the antenna 2 by the body 1 (shaded part in Fig.2) appearing in this case practically does not worsen the characteristics of the antenna 2.

[0013] For provision of a unobstructed turn of the antenna 2 relative to the body 1, connecting cable 3, extending through the spherical hinge 4, for example, via a through central hole or a cavity made in it, is free. In so doing the cable 3 between the points of its fixation in the antenna 2 and in the body 1 (not shown in Figure) can have, for example, a damping bend or a.

[0014] Thus, the combination of said design fea-

tures allows the claimed portable receiver-indicator of satellite radio navigation systems to provide the convenience of using the receiver-indicator while minimizing its dimensions the screening effect of the body on the antenna in the operating position.

Claims

1. The portable receiver-indicator for satellite radio navigation systems comprising a body extended in a longitudinal direction and made in the form of a parallelepiped and a quadrifilar antenna made as a parallelepiped and provided with a connecting cable, said antenna being fixed on the body with a possibility of rotation so that in the operating position the longitudinal axis of the antenna is directed vertically up and the longitudinal axis of the body is directed an angle to the horizontal, *characterized in that* the length of the quadrifilar antenna does not exceed the width of the body and is fixed on a spherical hinge disposed at the upper part of the body the, said connecting cable passing through said spherical hinge so that in the storage position the transversal axis of the antenna is parallel to the longitudinal axis of the body, the longitudinal axis of the antenna is parallel to the transversal axis of body, and in the operating position the transversal axes of the antenna and the body are disposed in the perpendicular directions.

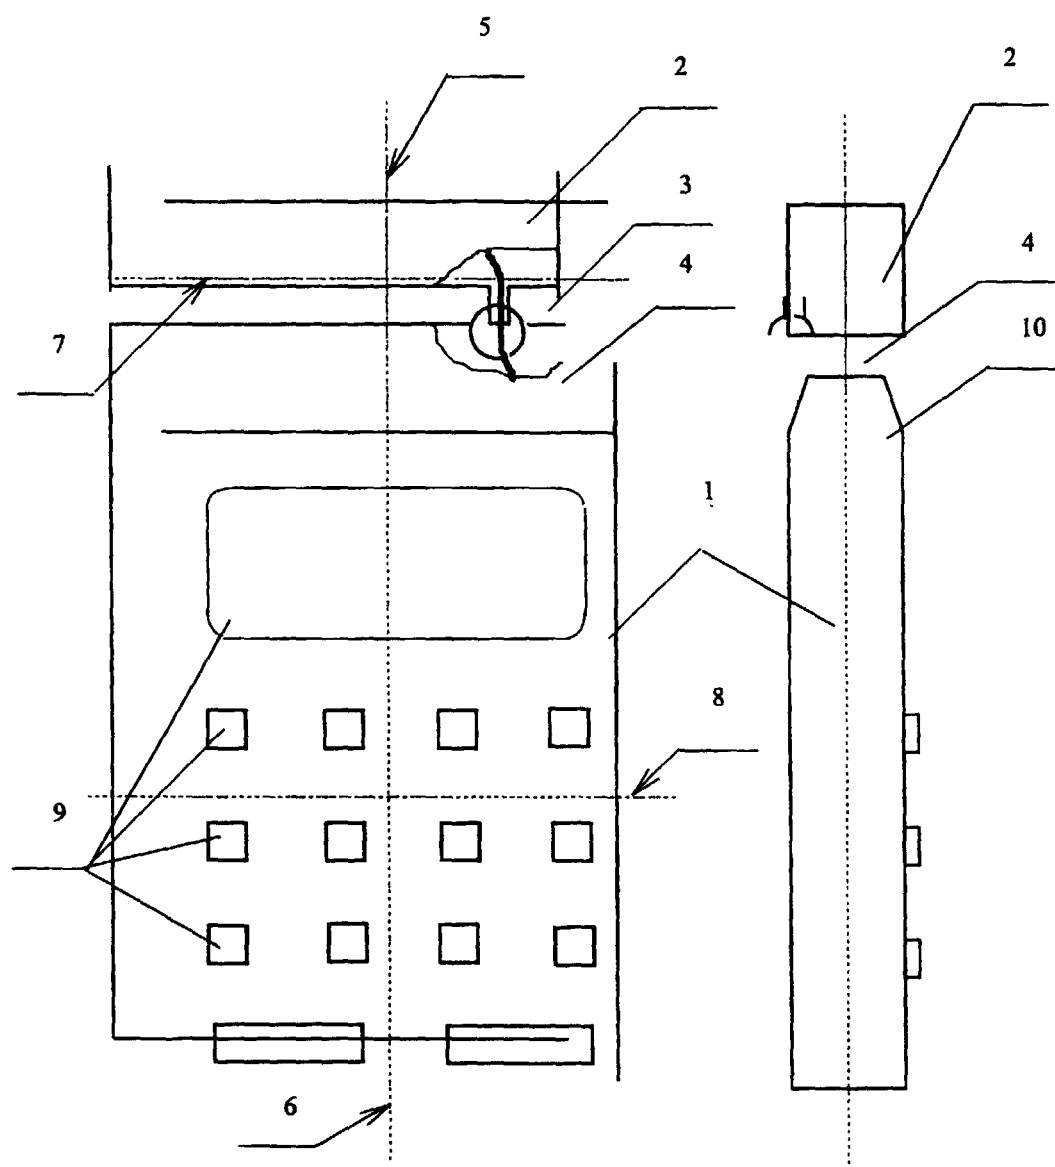


Fig. 1

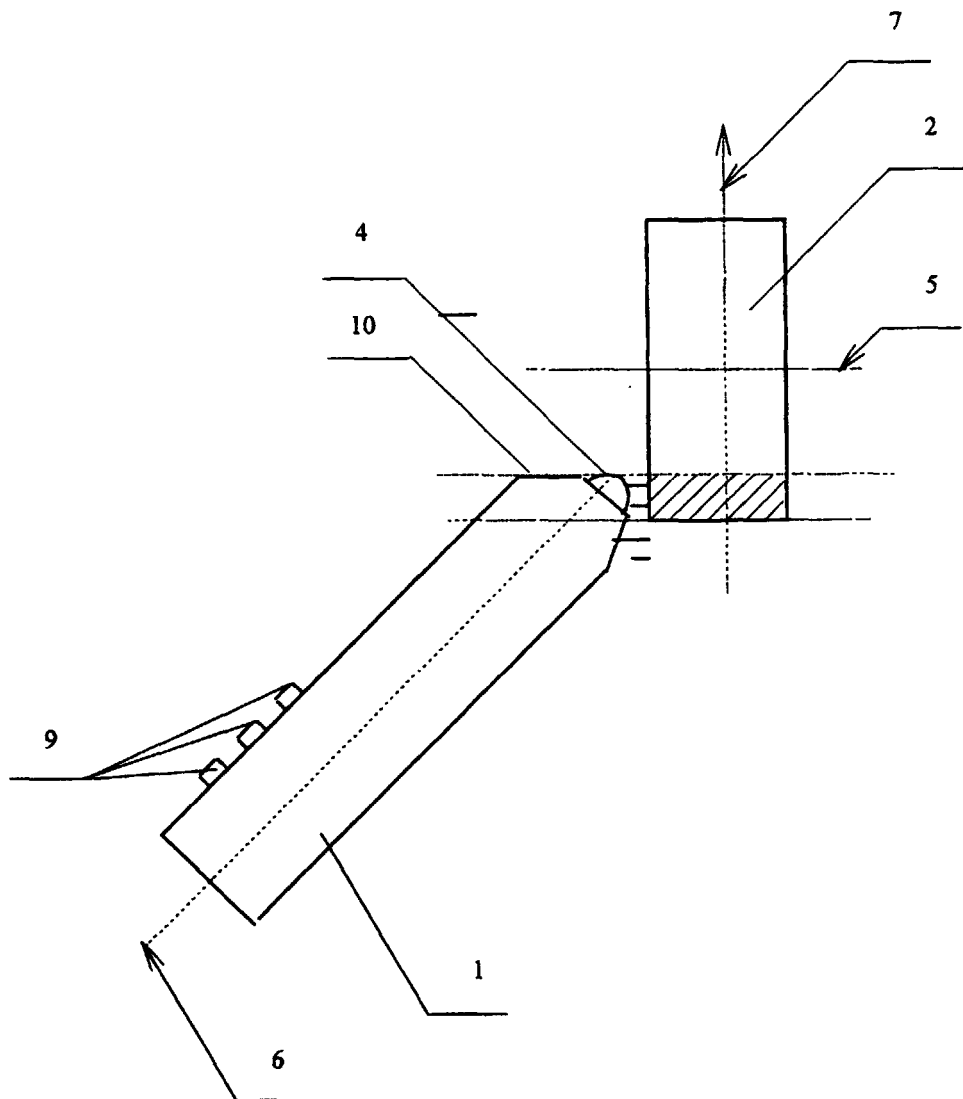


Fig.2

INTERNATIONAL SEARCH REPORT

International application No.

PCT/RU 98/00231

A. CLASSIFICATION OF SUBJECT MATTER ⁶:

IPC6 H01Q 1/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6 H01Q 1/24, H04B 1/38, 7/26, H04M 1/03, H04Q 7/32

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5628057 A (MOTOROLA, INC.) 6 May 1997 (06.05.97)	1
A	EP 0415703 A1 (NEC CORPORATION) 6 March 1991 (06.03.91)	1
A	EP 0694985 A1 (MOTOROLA, INC.) 31 January 1996 (31.01.96)	1
A	JP 03179801 A (NEC CORP) 5 August 1991 (05.08.91)	1
A	EP 0603013 A1 (NEC CORPORATION) 22 June 1994 (22.06.94)	1



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search
25 February 1999 (25.02.99)Date of mailing of the international search report
10 March 1999 (10.03.99)

Name and mailing address of the ISA/ RU

Authorized officer

Facsimile No.

Telephone No.