



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 030 062 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
23.08.2000 Bulletin 2000/34

(51) Int. Cl.⁷: **F04D 19/04, F04D 27/02**

(21) Application number: **00103326.5**

(22) Date of filing: **21.02.2000**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **19.02.1999 JP 4103999**
03.06.1999 JP 15621599
14.07.1999 JP 20099099
28.12.1999 US 473137

(71) Applicant: **EBARA CORPORATION**
Ohta-ku, Tokyo (JP)

(72) Inventors:
• **Miyamoto, Matsutaro**
Chigasaki-shi, Kanagawa-ken (JP)
• **Ogamino, Hiroaki**
Kawasaki-shi, Kanagawa-ken (JP)


(74) Representative:
Wagner, Karl H., Dipl.-Ing. et al
WAGNER & GEYER
Patentanwälte
Gewürzmühlstrasse 5
80538 München (DE)

(54) **Turbo-molecular pump**

(57) A turbo-molecular pump of high safety and reliability was presented, so that if an abnormal condition should develop on the rotor side, it will not lead to damage to the stationary portions such as the stator or pump casing to cause loss of vacuum in a vacuum processing system.

The turbo-molecular pump comprises: a rotor; a stator assembly surrounding the rotor; and a casing portion surrounding the stator assembly, wherein at least a partial clearance is formed between the stator assembly and the casing portion, so that, when an abnormal torque is applied from the rotor to the stator assembly, direct impact transmission is prevented from the stator assembly to the casing portion.

FIG. 1

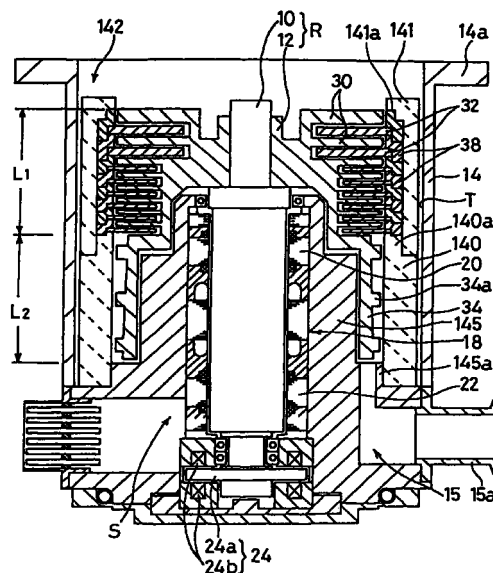

EP 1 030 062 A2

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The present invention relates to a turbo-molecular pump for evacuating gas by using a high speed rotor.

Description of the Related Art

[0002] An example of a conventional turbo-molecular pump is shown in FIG. 25. The turbo-molecular pump is comprised by a cylindrical pump casing 14 housing a vane pumping section L_1 and a groove pumping section L_2 which are constituted by a rotor (rotation member) R and a stator (stationary member) S. The bottom portion of pump casing 14 is covered by a base section 15 which is provided with an exhaust port 15a. The top portion of pump casing 14 is provided with a flange section 14a for coupling the pump to an apparatus or a piping to be evacuated. Stator S comprises a stator cylinder section 16 provided upright at the center of the base section 15, fixed sections of vane pumping section L_1 and groove pumping section L_2 .

[0003] Rotor R is comprised by a rotor cylinder section 12 attached to a main shaft 10 which is inserted into stator cylinder section 16. Between main shaft 10 and stator cylinder section 16 are constituted a drive motor 18, an upper radial bearing 20 and a lower radial bearing 22 disposed on the upper and lower sides of drive motor 18 respectively. Under main shaft 10, there is an axial bearing 24 having a target disk 24a at the bottom end of main shaft 10 and an upper and a lower electromagnets 24b on the stator S side. In this configuration, a high speed rotation of rotor R is supported under a five coordinate active control system.

[0004] Rotor vanes 30 are provided integrally with the upper external surface of rotor cylinder section 12 to form an impeller, and on the inside of pump casing 14, stator vanes 32 are provided in such a way to alternately interweave with rotor vanes 30. These vane members constitute vane pumping section L_1 which carries out gas evacuation by cooperative action of the high speed rotor vanes 30 and stationary stator vanes 32. Below vane pumping section L_1 , groove pumping section L_2 is provided. Groove pumping section L_2 is comprised by a spiral groove section 34 having spiral grooves 34a on the outer surface of the bottom end of rotor cylinder section 12, and stator S comprises a spiral groove section spacer 36 surrounding spiral groove section 34. Gas evacuation action of groove pumping section L_2 is due to the dragging effect of spiral grooves 34a of spiral groove section against gases.

[0005] By providing groove pumping section L_2 at downstream of vane pumping section L_1 , a wide-range turbo-molecular pump can be constructed so as to ena-

ble evacuation over a wide range of gas flow rates using one pumping unit. In this example, the spiral grooves of groove pumping section L_2 are provided on the rotor side of the pump structure, but some pumps have the spiral grooves formed on the stator side of the pump structure.

[0006] Such turbo-molecular pumps are assembled as follows. Firstly, groove pumping section spacer 36 is attached by coupling the lower surface of step 36a to protruded ring section 15b formed on base section 15. Next, rotor R is fixed in some position, and stator vanes 32, which are normally split into two half sections, are clamped around to interweave between rotor vanes 30. This is followed by placing a stator vane spacer 38, having steps on its top and bottom regions, on top of the clamped rotor vane 30. This assembling step is repeated for each rotor vane 30 to complete the assembly of stator vanes 32 around rotor R.

[0007] Lastly, pump casing 14 is attached by sliding it around the layered stator vane structure and fixing flange 14b to the base of stator S by fasteners such as bolts, thereby pressing the top stator vane spacer 38 firmly against stepped surface 14c on the inside surface of pump casing 14 and binding the entire layered assembly and groove pumping section spacer 36. It can be understood from this assembly structure that the peripheries of each of stator vanes 32 are pressed together by stator vane spacers 38 located above and below, and similarly groove pumping section spacer 36 is pressed down by the lowermost stator vane 32, stator vane spacer 38 and protrusion section 15b of base section 15, so that the axially applied pressing force prevents induced rotation of stator vanes 32 and groove pumping section spacer 36 with rotor R in the circumferential direction.

[0008] Also, though not shown in the drawing, sometimes groove pumping section spacer 36 is fastened to stator cylinder section 16 of stator S by bolts to assure such fixation.

[0009] In such turbo-molecular pumps, abnormal rotation caused by eccentricity of rotor R may sometimes occur, and they may be accompanied by damaging of rotor R itself, especially rotor cylinder section and rotor vanes 30. In such a case, the stator structure can also be subjected to significant circumferential or radial force by rotor R and its fragment, which may impact on not only stator vanes 32 but stator vane spacers 38 and groove pumping section spacer 36.

[0010] Such abnormal force can cause not only deformation of stator vanes 32 and spacers 36, 38, but can cause fracture of pump casing 14 and stator cylinder section 16, or damage to their joints or severing of vacuum connections attached to the pump. Such damage and severing to any parts of stator S cause breakage of vacuum in the whole processing system connected to and evacuated by the pump not only to damage the system facilities and in-process goods, but also to lead to accidental release of gases in the system

to outside environment.

SUMMARY OF THE INVENTION

[0011] It is an object of the present invention to provide a turbo-molecular pump of high safety and reliability so that if an abnormal condition should develop on the rotor side, it will not lead to damage to the stator or pump casing to cause loss of vacuum in a vacuum processing system.

[0012] The present invention is a turbo-molecular pump comprising: a rotor; a stator assembly surrounding the rotor; and a casing portion surrounding the stator assembly, wherein at least a partial clearance is formed between the stator assembly and the casing portion, so that, when an abnormal torque is applied from the rotor to the stator assembly, direct impact transmission is prevented from the stator assembly to the casing portion. Accordingly, when an abnormal torque is transmitted to the stator assembly due to some abnormal condition developing in the rotor side, the direct transmission of the impact from the stator assembly to the casing portion is prevented so that damage to casing portion itself and the vacuum connections to the exterior devices can be avoided. The casing portion means the portion constructing an outer envelope for the turbo molecular pump including the above-mentioned pump casing 14 or base section 15.

[0013] The turbo-molecular pump may further comprise a reinforcing member for reinforcing the stator assembly. This is because it is preferable to compensate the lowered strength of the stator assembly due to formation of the clearance between the stator assembly and the casing portion. The reinforcing member may be a cylindrical member arranged between the stator assembly and the casing portion. Also, the reinforcing member may be made to combine the elements constituting the stator assembly.

[0014] The stator assembly may comprise a stacked configuration for fixing the stator vanes in a vane pumping section, and the reinforcing member may be axially aligned to penetrate the stacked configuration. The reinforcing member may be made of a material capable of absorbing impact generated by abnormal torque through its deformation or fracture. The reinforcing member may be comprised of a hollow pipe.

[0015] The turbo-molecular pump may further comprise a slide facilitating member for facilitating the stator assembly to slide in a circumferential direction relative to the casing portion. Accordingly, the slide facilitating member facilitates the stator assembly to rotate when an abnormal torque is applied from the rotor to the stator, and to absorb the impact energy thereby to prevent transmission of torque to the casing portion, so as to prevent the breakage of the stator assembly and its connections with the exterior devices. The slide facilitating member may be a low friction member provided between the stator assembly and the casing portion.

The slide facilitating member may be a support structure for rotatably supporting the stator assembly.

[0016] An impact absorbing member may be provided between the stator assembly and the casing portion. The stator assembly may have a multiple structure. The turbo-molecular pump may further comprise a temperature adjusting mechanism for directly or indirectly heating or cooling the stator assembly.

[0017] Another aspect of the present invention is a turbo-molecular pump comprising: a casing portion housing a stator and a rotor therein; and a vane pumping section and/or a groove pumping section comprised by the stator and the rotor, wherein an impact absorbing structure is provided in at least a part of the stator, the impact absorbing structure being arranged to cooperatively work or interlockingly move with the rotor to absorb impact loaded on the stator when abnormal torque is applied from the rotor to the stator.

[0018] Accordingly, when an abnormal torque is transmitted to the stator assembly due to some abnormal condition developing in the rotor side, the impact absorbing structure cooperatively works with the rotor to absorb the rotational energy of the rotor, as well as to prevent transmission of torque to the casing portion, so as to prevent the breakage of the casing portion and its connections with the exterior devices.

[0019] The impact absorbing structure may comprise an inner casing surrounding the vane pumping section and/or a groove pumping section. The inner casing prevents the fragments of the rotor from scattering when the pump is in an abnormal operation, and also absorbs the impact energy by deforming itself thereby to act to minimize the affect on the casing portion.

[0020] A clearance may be provided between the inner casing and the casing portion. This facilitates the inner casing to smoothly rotate while preventing it from hard contacting with the casing portion, when an abnormal torque is transmitted from the rotor to the stator due to some abnormal condition developing in the rotor, thus absorbing the rotating energy of the rotor. Even when the inner casing somewhat deforms, torque transmission to the casing portion is prevented to avoid the breakage of the casing portion or its connections with the exterior.

[0021] The inner casing may be fixed by fitting a part of an inner surface or an outer surface of the inner casing to a cylindrical portion of the stator or to the casing portion. Thus, when an abnormal torque is transmitted from the rotor to the stator due to some abnormal condition developing in the rotor, the inner casing rotates by being guided by the cylindrical portion of the stator or to the casing portion thereby suppressing transmission of a large rotational torque to the casing portion.

[0022] The impact absorbing structure may comprise a friction reducing mechanism intervening between the inner casing and the stator or the casing

portion. This facilitates rotation of the inner casing so as to prevent the impact due to rotor fracture from being transmitted to the casing portion.

[0023] As for such impact absorbing structure, not only an inherent low friction material such as tetrafluoroethylene polymer, but mechanical bearings such as a ball bearing or a roller bearing can be used. Accordingly, when an abnormal torque is developed by an abnormal situation in the rotor, the bearing in the impact absorbing structure cooperatively rotates with the rotor to absorb the rotational energy of the rotor thereby to prevent a large rotational torque from being further transmitted to the casing portion.

[0024] The mechanical bearing can be located in a groove pumping section which includes a large space between the casing portion and outside of the rotor, so that the impact absorbing structure can be assembled without increasing the overall dimension of the turbomolecular pump. Also, when using more than two bearings, it is preferable, for the purpose of enhancing supporting ability for the inner casing against loaded impact thereon, to locate one of them close to intake port of vane pumping section, and the other close to exhaust port of the spiral groove pumping section, thereby providing a wide axial distance therebetween.

[0025] The impact absorbing structure may comprise an impact absorbing member provided between the stator in the vane pumping section and/or groove pumping section and the inner casing. Accordingly, the member can absorb and moderate the radial and circumferential impact forces due to collision of the fractured rotor fragments, so as to prevent deformation of the inner casing or damaging of supporting structures for the inner casing, thus reducing the impact force transmission to the casing portion.

[0026] The impact absorbing structure may be formed as a connected structure of inner and outer portions respectively located in- and outside the rotor. Since the fragments of the fractured rotor are scattered outwardly to collide with the outer portion outside the impact absorbing structure thereby to deform it, thus the large impact force and rotational torque is reduced. On the other hand, the fragments scarcely collide with the inner portion inside the rotor, so it does not deform and maintains its original shape. Therefore, the impact absorbing structure can be rotated as a whole by being guided by the inner portion, thereby enabling to prevent large impact force and rotational torque from being transmitted to the casing portion.

[0027] The impact absorbing structure may be provided at the upstream of vane pumping section, so that it is located where it is not affected by scattering fragments of the rotor. Although the upstream area of vane pumping section basically does not need the rotor, it is preferable to extend the rotor to the upstream side as necessary. In this case, it is necessary to assure a sufficient flow passage area in order not to interfere the pumping operation itself.

[0028] In the impact absorbing structure, a sealing section may be provided in at least a part of a neighboring space with the casing portion or stator. Accordingly, it is possible to prevent generation of reverse flow flowing from discharge side to intake side in the impact absorbing structure which does not perform any pumping action. The sealing section also serves to protect the mechanical bearing from corrosive gases or by-product materials.

[0029] The inner casing and/or the casing portion may be comprised by a high thermal conductivity material. When the pump comprises double casings, the space between the inner and outer casings puts the inner casing in a vacuum and thermally isolated state. Thus, the generated heat within the vacuum pump (heat generated through gas agitation by the rotor or heat generated in the motor) cannot be released to the exterior effectively, resulting in raising of inner temperatures and narrowing of operation ranges of the pump for gas flow rate and pressure. By constructing the inner casing and/or casing portion by a high thermal conductivity material (aluminum alloys or copper alloys), dissipation of the heat inside the pump can be effectively performed to expand the operation range of the pump. It is also permissible to enhance the heat transfer between the inner casing and casing portion, by providing a high thermal conductivity heat transfer member therebetween, or by putting the inner casing and casing portion in a close contact at least partially.

[0030] The turbo-molecular pump may further comprise a temperature adjusting mechanism for directly or indirectly heating or cooling the inner casing. By providing a heater or a cooling water pipe to the inner casing, it is possible to provide a local temperature control for raising or cooling the temperature at desired location of the pump. It can prevent generation of by-product material within the pump during specific processes and expands the operational range of the pump.

[0031] The vane pumping section may comprise a stacked configuration for fixing the stator vanes of the vane pumping section, and the impact absorbing structure may comprise a bar member axially penetrating the vane pumping section and capable of absorbing an impact generated by abnormal torque through its self deformation or by fracturing. Accordingly, in the normal operation, the bar member maintains rigidity of the apparatus, and when the abnormal torque due to abnormal situation in the rotor is transmitted to the stator vanes, it deforms to allow the stator assembly to deform in a shearing direction, and concurrently absorbs the impact energy through its deformation. Thus, the bar member prevents the transmission of abnormal torque to the casing portion to avoid the fracture of the casing portion and its connections with exterior devices.

[0032] The vane pumping section may comprise a multiple structure. Accordingly, by constructing the vane pumping section at least partially as a multiple structure, it is possible to enhance its rigidity and impact

absorbing ability.

[0033] The bar member may comprise a hollow pipe. Accordingly, it is possible to reduce weight while maintaining its rigidity and energy absorbing characteristics required for the bar member.

[0034] The stator assembly may be attached to the casing portion by way of a friction reducing mechanism. The turbo-molecular pump may further comprise a temperature adjusting mechanism for directly or indirectly heating or cooling the stator portion in the vane pumping section and/or the groove pumping section.

[0035] In another aspect of the present invention, a turbo-molecular pump may comprise: a rotor; a stator assembly surrounding the rotor; a casing portion surrounding the stator assembly; and a constriction releasing structure for releasing constriction of the stator assembly when an abnormal torque is applied to the stator assembly from the rotor. Accordingly, since the stator assembly can slide easily within the casing portion, the impact transmitted to the stator assembly is prevented from being transmitted directly to the casing portion, and the energy is absorbed in a sliding process.

[0036] In another aspect of the present invention, a turbo-molecular pump may comprise: a rotor; a stator assembly surrounding the rotor; a casing portion surrounding the stator assembly; and an impact absorbing structure for absorbing impact transmitted to the stator assembly when an abnormal torque is applied to the stator assembly from the rotor. Accordingly, the impact transmitted to the stator assembly is prevented from being transmitted directly to the casing portion, and the energy is absorbed by the impact absorbing structure.

[0037] In another aspect of the present invention, turbo-molecular pump may comprise: a rotor; a stator assembly surrounding the rotor; a casing portion surrounding the stator assembly; and a reinforcing member for reinforcing the stator assembly. Accordingly, the stator assembly is reinforced and equipped with sufficient strength and energy absorbing ability.

[0038] In another aspect of the present invention, turbo-molecular pump may comprise: a rotor; a stator assembly surrounding the rotor; a casing portion surrounding the stator assembly; and a rotation facilitating structure for facilitating rotation of the stator assembly relative to the casing portion when an abnormal torque is applied to the stator assembly from the rotor. Accordingly, since the stator assembly can slide easily within the casing portion, the impact transmitted to the stator assembly is prevented from being transmitted directly to the casing portion, and the energy is absorbed in a sliding process. The rotation facilitating structure may be comprised by a low friction member provided between the stator assembly and casing portion, or a supporting mechanism rotatably supporting the stator assembly.

BRIEF DESCRIPTION OF THE DRAWINGS

[0039]

FIG. 1 is a cross sectional view of a turbo-molecular pump of another embodiment according to the present invention;

FIG. 2 is a cross sectional view of a variation of the pump shown in FIG. 1;

FIG. 3 is a cross sectional view of another variation of the pump shown in FIG. 1;

FIG. 4 is a cross sectional view of a turbo-molecular pump of another embodiment according to the present invention;

FIG. 5 is a cross sectional view of a variation of the pump shown in FIG. 4;

FIG. 6 is a cross sectional view of another variation of the pump shown in FIG. 4;

FIG. 7 is a cross sectional view of a turbo-molecular pump of another embodiment according to the present invention;

FIG. 8 is a cross sectional view and a perspective view of another embodiment of the impact absorbing member;

FIG. 9 shows a cross sectional view of a turbo-molecular pump of another embodiment according to the present invention;

FIG. 10 is a top view of a turbo-molecular pump shown in FIG. 9;

FIG. 11 is a cross sectional view of a turbo-molecular pump of another embodiment according to the present invention;

FIG. 12 is a top view of a turbo-molecular pump shown in FIG. 11;

FIG. 13 is a cross sectional view of a turbo-molecular pump of another embodiment according to the present invention;

FIG. 14 is a cross sectional view of another embodiment of the mechanical bearing;

FIG. 15 is a cross sectional view of a turbo-molecular pump of another embodiment according to the present invention;

FIG. 16 is a cross sectional view of a turbo-molecular pump of another embodiment according to the present invention;

FIG. 17 is a partially enlarged view of a turbo-molecular pump shown in FIG. 16;

FIG. 18 is a cross sectional view of a turbo-molecular pump of another embodiment according to the present invention;

FIG. 19 is a cross sectional view through a plane X-X in FIG. 18;

FIG. 20 is a cross sectional view of a turbo-molecular pump of another embodiment according to the present invention;

FIG. 21 is a cross sectional view of a turbo-molecular pump of another embodiment according to the present invention;

FIG. 22 is a partial cross sectional view of a turbo-molecular pump of another embodiment according to the present invention;

FIG. 23 is a partial cross sectional view of a turbo-molecular pump of another embodiment according to the present invention;

FIG. 24A is a cross sectional view of an embodiment of the impact absorbing member;

FIG. 24B is a cross sectional view of another embodiment of the impact absorbing member; and
FIG. 25 is a cross sectional view of a conventional turbo-molecular pump.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0040] In the following, preferred embodiments will be presented with reference to the drawings. FIG. 1 shows a first embodiment of the turbo-molecular pump according to the present invention. In this embodiment, an inner casing (impact absorbing structure) 142 is constructed by a lower inner casing 140 and an upper inner casing 141 respectively shaped cylindrically, which fixes stator vanes 32 and stator vane spacers 38 therein.

[0041] That is, upper inner casing 141 houses a stacked or layered assembly comprising stator vanes 32 and stator vane spacers 38 by suppressing the stacked assembly by a stepped surface 141a while being fixed to lower inner casing 140 by fitting the lower edge to an annular protrusion 140a formed on the upper edge of lower inner casing 140. Lower inner casing 140 also functions as a spiral groove section spacer to constitute groove pumping section L2 together with spiral groove section 34 of rotor cylinder section 12.

[0042] The outer diameter of inner casing 142 is set to be smaller than the inner diameter of pump casing 14 so as to form a clearance T therebetween. Inner casing 142 is fixed only by fitting the inner surface of its lower edge to the outer surface of a cylindrical large diameter portion 145a formed on stator cylinder section 145 of stator S. Such arrangement facilitates inner casing 142 to be dragged to rotate when the abnormal torque is transmitted to stator vanes 32 or lower inner casing (spiral vane section spacer) 140 to absorb the impact, so as to prevent such impact to be loaded to the stator system especially to pump casing 14.

[0043] The turbo-molecular pump is operated by connecting flange 14a to a vacuum process chamber, for example, and when rotor R is under abnormal rotation or fractured, rotor R will contact with stator vanes 32 or lower inner casing 140 to transmit the rotational torque to inner casing 142. Thus, inner casing 142 is loaded with a large force, and the stacked assembly of stator vanes 32 or inner casing 142 will partially deform to absorb the impact. Since clearance T is formed between inner casing 142 and pump casing 14, even when a part of inner casing 142 is broken or deformed, the impact is not directly transmitted to pump casing 14

so as to prevent breakage of pump casing 14 or its connection with other facilities or devices.

[0044] When a larger impact is transmitted, due to weak engagement with the stator system, fitting between inner casing 142 and large diameter portion 145a is released, and inner casing 142 is dragged to rotate by being guided by large diameter portion 145a so as further to absorb and dissipate the impact.

[0045] Here, description was made for an embodiment having a clearance T between inner casing 142 and pump casing 14, it is also effective to fill the clearance with an impact absorbing member so that the impact can be more positively absorbed. The impact absorbing member 186 can be made of relatively soft materials such as metal, high polymer, or composite materials thereof, as described above with reference to FIGS. 24A, 24B, or as will be described hereinafter with reference to FIG. 8.

[0046] Although inner casing 142 has a single layer configuration in FIG. 1, it is preferable, in order to moderate the impact caused by collision of rotor fragments or to reinforce inner casing 142 itself, to construct inner casing 142A having a multiple cylindrical (more than double cylinder) construction comprising an outer secondary inner casing 142a around inner casing 142 of FIG. 1, as shown in FIG. 2.

[0047] FIG. 3 shows a variation of the turbo-molecular pump of FIG. 1. In this embodiment, a friction reducing structure 143 is provided between the inner surface of lower inner casing 140 and outer surface of large diameter portion 145a of stator cylinder section 145. For such friction reducing structure 143, low-friction structures comprised by ball bearings or rod bearings may be used, as well as a member made of an inherently low friction material such as tetrafluoroethylene polymer.

[0048] In this turbo-molecular pump, friction reducing structure 143 provided between lower inner casing 140 and large diameter portion 145a of stator cylinder section 145 reduces the frictional force acting between them so as to facilitate lower inner casing 140 to rotate by being guided by large diameter portion 145a. Thus, lower inner casing 140 has improved impact absorbing ability so that it can effectively prevent abnormal rotational torque, which is generated through breakage of rotor R, from being transmitted to pump casing 14.

[0049] FIG. 4 shows another embodiment of the present invention. In this embodiment, lower inner casing 146 has a double cylinder configuration comprised by an outer cylindrical portion 146A located outside spiral groove portion 34 of rotor R and an inner cylindrical portion 146B located inside spiral groove portion 34, which are connected at their bottoms through connecting portion 146C. Thus, spiral groove portion 34 of rotor cylinder section 12 rotates in a space between outer cylindrical portion 146A and inner cylindrical portion 146B. On the upper inner surface of inner cylindrical portion 146B, a protrusion 148 is formed inwardly to fit

with outer surface 147a of stator cylinder section 147 of stator S thereby to fix stator cylinder section 147.

[0050] Outer cylindrical portion 146A also functions as a spiral groove section spacer to construct groove pumping section L2 together with spiral groove section 34 of rotor cylinder section 12. A communicating hole 146D is formed in connecting portion 146C to communicate groove pumping section L2 with exhaust port 15a. Outer cylindrical portion 146A forms an inner casing 142 together with upper inner casing 141 having a clearance between pump casing 14 as in an embodiment of FIG. 1.

[0051] In this turbo-molecular pump, since the fragments of fractured rotor R are scattered outwardly, inner cylindrical portion 146B inside spiral groove section 34 is not likely to deform so that it can maintain the cylindrical shape. Also, since protrusion 148 for fixing inner casing 142 is in the furthest location from upper inner casing 141 which is likely to be affected by abnormal torque, the impact loaded on the upper inner casing 141 is damped in the transmission path so that shapes in the fitting between protrusion 148 and outer surface 147a of stator cylinder section 147 is also maintained for a relatively long period.

[0052] Therefore, even after inner cylindrical portion 146B and outer surface 147a are disengaged, inner casing 142 can rotate as a whole, by being guided by those engagement surfaces, together with outer cylindrical portion 146A and upper inner casing 141, thereby to suppress transmission of abnormal rotational torque caused by rotor fracture to pump casing 14.

[0053] FIG. 5 shows a modification of the embodiment shown in FIG. 4, in which inner cylindrical portion 146B is formed as lower inner casing 146, for constructing inner casing 142, having a smaller thickness than that shown in FIG. 17, and a friction reducing member 184 made of a material such as tetrafluoroethylene polymer is inserted between the inner surface of inner cylindrical portion 146B and outer surface 147a of stator cylinder section 147 of stator S.

[0054] In this turbo-molecular pump, friction reducing member 184 provided between inner cylindrical portion 146B and stator cylinder section 147 reduces the frictional force acting between them so as to facilitate inner cylindrical portion 146B to rotate by being guided by stator cylinder section 147 together with outer cylindrical portion 146A or upper inner casing 141. Thus, it can further reduce transmission of abnormal rotational torque, which is generated through breakage of rotor R, to pump casing 14.

[0055] FIG. 6 shows another modification of the embodiment shown in FIG. 4, in which a mechanical bearing such as a ball bearing or a roller bearing 185 is used as the friction reducing structure instead of friction reducing member 184 shown in FIG. 5, so that inner cylindrical portion 146B etc. can be more easily rotated.

[0056] FIG. 7 shows a turbo-molecular pump of another embodiment according to the present invention.

In this embodiment, lower inner casing 150 and spiral groove section spacer 151 are separately provided. That is, the stacked assembly comprising stator vanes 32 and stator vane spacers 38, and spiral groove section spacer 151 are fixedly held by lower inner casing 150 and upper inner casing 153, which are mutually fitted to construct inner casing 152. Upper inner casing 153 comprises an annular suppressing portion 153a protruding inwardly from the upper edge thereof.

[0057] An impact absorbing member 186 is provided between the inner surfaces of outer cylindrical portion 150A and upper inner casing 153 and the outer surfaces of each stator vane spacer 38 and spiral groove section spacer 151, which is made of a material such as relatively soft metal, high polymer, or composite material thereof.

[0058] The lower inner casing is comprised by an outer cylindrical portion 150A and an inner cylindrical portion 150B connected by connecting portion 150C comprising communicating hole 150D, as similar to FIG. 6. A friction reducing structure (mechanical bearing) 185 is provided between the inner surface of inner cylindrical portion 150B and outer surface 147a of stator cylinder section 147 of stator S.

[0059] In this embodiment, since impact absorbing member 186 is provided between outer cylindrical portion 150A and upper inner casing 153, and each stator vane spacer 38 and spiral groove section spacer 151, additional effects to that of the embodiment of FIG. 6 are obtained such that, the amount of impact force transmitted to inner casing 152 itself is reduced, which has been transmitted from rotor R to stator vane spacers 38 etc. The protection function of inner casing 152 has been improved, resulting in that clearance T between upper inner casing 153 or outer cylindrical portion 150A and pump casing 14 can be smaller to enable the overall pump to be compact.

[0060] FIG. 8 shows another embodiment for impact absorbing member 186 shown in FIG. 7, comprising axially elongated pipes 189 which are laterally stacked into a cylindrical shape and arranged in a space between inner casing 142 and stator vane spacer 38 or spiral groove section spacer. The impact absorbing member 186 of this embodiment has advantages of enabling easy manufacturing of the pipe and easy assembly of the turbo-molecular pump. Impact absorbing member 186 is not limited to this embodiment, and materials such as relatively soft metal, high polymer, or composite materials thereof can be shaped into an impact absorptive configuration such as honeycomb structure or aggregate of simple spheres. It is preferable to select corrosion resistant raw material in consideration of evacuating corrosive gases, and a similar effect can be obtained at a lower cost by applying corrosion resistant surface treatment such as nickel coating.

[0061] FIGS. 9 and 10 show a turbo-molecular pump of another embodiment according to the present invention. In this embodiment, another impact absorb-

ing structure 154 is additionally provided at the upstream of vane pumping section L1, i.e., at the entrance of the turbo-molecular pump shown in FIG. 7. Specifically, an extended portion 10a is provided at the top of main shaft 10, and an annular suppressing portion 154a is formed at the top of upper inner casing 153. Stay members 154b are provided to inwardly protrude form annular suppressing portion 154a and are connected to a ring shaped upper inner cylindrical portion 154c, which surrounds extended portion 10a with a small gap t.

[0062] In the turbo-molecular pump, additional effects can be obtained to that of FIG. 7, as follows. That is, separate impact absorbing structure 154 is provided at the upstream of vane pumping section L1, where there are no rotor vanes 30 or stator vanes 32 so that it is not affected by collision etc. resulting from fracture of the vanes. Thus, suppressing portion 154a, stay member 154b, upper inner cylindrical portion 154c can maintain their configuration, so that whole inner casing 152 can rotate about main shaft 10 for longer period while sliding against extended portion 10a of main shaft 10 thereby to maintain the impact absorbing function for longer period.

[0063] FIGS. 11 and 12 show a turbo-molecular pump of another embodiment according to the present invention. In this embodiment, impact absorbing structure 154 at the entrance is mounted on a shaft body fixed to stator S, instead of rotor R, by way of friction reducing structure. That is, the upper end of main shaft 10 is shorter, and bearing supporting member 190 is provided to protrude inwardly from the top inner surface of pump casing 14.

[0064] Bearing supporting member 190 comprises an annular section 190a fixed to pump casing 14, stay members 190b extending radially inwardly from annular section 190a, a disc 190c connected to stay members 190b at the central region, and cylindrical shaft 190d extending downward from disc 190c. On the other hand, a rectangular plate-like stay members 154b is provided to radially inwardly extend from annular suppressing portion 154a of upper inner casing 153, and upper inner cylindrical portion 154c is formed at the central region of stay members 154b above main shaft 10. A mechanical bearing (friction reducing mechanism) 192 is provided between the outer surface of shaft body 190d and upper inner cylindrical portion 154c.

[0065] In the turbo-molecular pump, since impact absorbing structure 154 is attached around shaft body fixed to stator S by way of friction reducing mechanism 192, it can more effectively function to maintain the rotation of inner casing 152 than the embodiment shown in FIG. 9.

[0066] FIG. 13 shows a modification of the embodiment shown in FIG. 7, in which a lower inner casing 150 and upper inner casing 153, for constructing inner casing 152, have respective different outer diameters. That is, lower inner casing 150 is not provided with inner

cylindrical portion 150B so that lower inner casing 150 has a smaller outer diameter than upper inner casing 153. This is because stator S is loaded with a higher stress from rotor R in spiral groove pumping section L2 than in vane pumping section L1 so that smaller diameter in spiral groove pumping section L2 than in vane pumping section L1 makes the turbo-molecular pump operation more stable.

[0067] Likewise FIG. 7, an impact absorbing member 186 is arranged in the spaces between upper inner casing 153 and stator assembly comprising stator vane spacers 38 of vane pumping section L1 or lower inner casing 150 and spiral groove section spacer 151, which is made from a coil-shaped pipe, respectively.

[0068] A friction reducing mechanism 196 comprising two (upper and lower) mechanical bearings 194 are provided in a space between lower inner casing 150 thus constructed and pump casing 14. Friction reducing mechanism 196 has a larger diameter than the mechanical bearing provided on stator cylinder section 147 side shown in FIG. 7, so that it can support inner casing 152 more stably while it rotates when abnormal torque is generated. Since mechanical bearing 194 is arranged in a space between lower inner casing 150 and pump casing 14, impact absorbing structure can be assembled without increasing the overall dimension of the turbo-molecular pump.

[0069] Since these two bearings 194 receive a large radial force when rotor R is fractured, it is preferable to enhance their supporting ability by providing a wide axial distance therebetween thereby to avoid slanting of inner casing 152. It is preferable to locate one close to intake port of vane pumping section L1, and the other close to exhaust port of spiral groove pumping section L2, or more than three bearings can be provided along the axial direction.

[0070] As for mechanical bearing 194, a deep groove ball bearing or a roller bearing can be used for exclusively receiving the radial direction load, but angular bearings can be used in a single or combined arrangement to receive axial load potentially loaded in case when rotor R is fractured. It is preferable, in case of handling corrosive gases, to manufacture the bearing from corrosion resistant material such as stainless steel, or to apply surface treatment such as nickel coating to a less corrosion resistant material.

[0071] Mechanical bearing 194 can be constructed, instead of using a readily assembled one, by forming raceway surfaces 195 directly on the surfaces of pump casing 14 and inner casing 152 and providing only balls 195a on the raceway surfaces when assembling thereby to save the manufacturing cost.

[0072] In this embodiment, in order to prevent the exhaust gas from reversely flowing from discharge side to intake side or to protect the mechanical bearing from corrosive gases, sealing members 200 are provided between the uppermost stator vane spacer 38 of vane pumping section L1 and suppressing member 198 pro-

truding from inner surface of pump casing (outer casing) 14, and between lower inner casing 150 and stator. Seal member 200 can be made as an O-ring or a sheet formed from material such as fluoro rubber.

[0073] Since stator vane spacers 38 or spiral groove section spacer 151 may be brought in contact with pump casing 14 or stator S when inner casing 142, 152 are rotated to interfere with rotation, it is preferable to reduce its radial direction thickness as much as possible so as to minimize the area of regions close to or in contact with pump casing 14 or stator S. It is also preferable to provide a local fragility structure (such as circumferential slot) so as to assure axial mechanical disengagement of those members when an abnormal torque is applied.

[0074] In the above described embodiments, suitable thickness of inner casing 142, 152, or clearance T between inner casing 142, 152 and pump casing 14 is several millimeters (3mm ~ 10mm). Also, configuration of the connection between upper inner casing 141, 153 and lower inner casing 140, 146, 150 shown in FIG. 15 is effective, in which the lower flange thickness t1 is made as small as 3~5 mm and the bolts are inserted radially from outside, because such configuration can reduce the radial size of the pump as well as secure a wide axial length between the bearings. Size of the bolt is suitably M6 ~ M10, and number is suitably from several to less than 50.

[0075] In the embodiments above, inner casing 142, 152, stator vanes 32 or stator vane spacers 38 are loaded with impact in case of rotor fracture, so that these elements should be made of materials with high strength and high elongation such as stainless steel or aluminum alloys. Especially aluminum alloys are effective in consideration of cost saving and weight reduction of the pump. Also, use of aluminum alloys having high specific strength for pump casing 14 is effective for weight reduction. Stator vane spacer 38 can be made into deformable shape by providing a circumferential groove etc. so that the spacer itself can moderate the impact force.

[0076] FIGS. 16 and 17 show a modification of the embodiment shown in FIG. 13, in which a pump casing 14 has two sections having different outer diameters corresponding to respective different diameters of vane pumping section L1 and spiral groove pumping section L2, i.e., groove pumping section L2 has a smaller diameter than vane pumping section L1. That is, pump casing 14 comprises an upper pump casing 14A on the intake side and a lower pump casing 14B below having a smaller diameter. An impact absorbing member 186 is provided between lower inner casing 150 and spiral groove section spacer 151. Lower inner casing 150 is supported at its upper and lower edges of the outer surface by two mechanical bearings 194a, 194b.

[0077] A heat transfer member 202 made of a high thermal conductivity material (such as aluminum alloy or copper etc.) is arranged inside the upper flange of

lower inner casing 150, which is in contact with a second heat transfer member 204 attached to upper flange 14d of exhaust side pump casing 14B. On the other hand, a cooling pipe 206 is provided in the vicinity of upper flange 14d of exhaust side pump casing 14B for flowing cooling water therein. Thus, heat generated by rotor R when it agitates exhaust gas in the downstream area of vane pumping section L1 is transferred to exhaust side pump casing 14B via heat transfer members 202, 204 to be dissipated. Therefore, the generated heat is effectively removed so that a wide operation range (range for gas flow rate and pressure) for the pump is obtainable. Even when rotor R is in an abnormal situation and inner casing 152 is going to rotate, two heat transfer members 202, 204 are separate so as not to interfere with rotation thereby to reduce the generated torque.

[0078] On the other hand, a heater 208 for preventing the deposition of exhaust gas components is assembled below spiral groove pumping section spacer 151. By adjusting the temperature by controlling the heater 208, which is directly attached to the area of the spiral groove section spacer of the spiral groove pumping section vulnerable to such deposition, in combination with temperature sensing function, such deposition is effectively prevented. In this embodiment, heater or cooling pipe can be attached or heat transfer members can be incorporated to inner casing 152 or its auxiliary elements so that necessary localized temperature control is provided at desired location of the pump. It can prevent generation of byproduct material within the pump during specific processes thereby to expand the operational range of the pump.

[0079] FIGS. 18 and 19 show a turbo-molecular pump of another embodiment according to the present invention, which differs from the conventional turbo-molecular pump shown in FIG. 25 in that a vane pumping section stator assembly 244, having a stacked configuration comprising stator vane spacers 252 of vane pumping section, is not in a close contact with pump casing 14.

[0080] Vane pumping section stator assembly 244 is comprised by a plurality of annular stator vane spacers 252 mutually stacked and holding stator vanes 32 therebetween. Stator vane spacers 252 comprises circumferential step 252a for facilitating mutual alignment and preventing mutual displacement. The outer diameter of stator vane spacer 252 is smaller than the inner diameter of pump casing 14 so that a clearance T having several millimeters (3mm ~ 10 mm) thickness is formed therebetween.

[0081] Each of stator vane spacer 252 is formed with apertures 262 (recesses 264a on the uppermost stator vane spacer 252), so that axially extending through holes 263 are formed when vane pumping section stator assembly 244 is assembled by stacking stator vane spacers 252. A bar member (reinforcing bar) 242 having almost same length with vane pumping sec-

tion stator assembly 244 and hollow cylindrical shape is inserted in each of through holes 263 to penetrate stator vane spacers. Bar member 242 may be solid or have any shape, but a hollow pipe shape can provide a light weight while maintaining necessary rigidity and specific energy absorption characteristics. Bar member 242 has almost the same outer diameter as the inner diameter of through holes 263 in this embodiment, but a smaller diameter may be applicable, or, by forming longitudinal grooves on the outer surface, bar member may contact partially with the inner surface of through holes 263.

[0082] Bar member 242 should have a mechanical property such that it does not deform during normal operating conditions to maintain the shape of vane pumping section stator assembly 244, while, when an impact torque is loaded due to abnormal contact of rotor R, it absorbs the impact energy through its plastic deformation or fracture. Therefore, material, dimension such as diameter or thickness, shape of bar member 242, or number to be installed in one stator assembly 244 should be determined in consideration of anticipated magnitude of impact. Material such as stainless steel having high toughness and high deformability is suitable. Also, it may be a composite material comprising different materials combined together.

[0083] Spiral groove pumping section L2 comprises a spiral groove section 34 of rotor cylinder section 12 and spiral groove section spacer 256 surrounding spiral groove section 34. Spiral groove section spacer 256 is attached to cylindrical lower inner casing 250 via cylindrical impact absorbing member 254 made of a material such as relatively soft metal, high polymer or composite material thereof. Lower inner casing 250 is slidably mounted on pump casing 14 by being supported by two vertically spaced mechanical bearings (friction reducing mechanism) 258.

[0084] A flange 251 is outwardly protruding from the upper portion of lower inner casing 250, and a recess 264b having the same diameter as and corresponding locations to through holes 263 are formed on the upper surface of flange 250. The tips of bar member 242 protruding from the lower end of through holes 263 are respectively inserted into recesses 264b so that vane pumping section stator assembly 244 and lower inner casing 250 are connected together to restrict relative circumferential move, thereby to construct a pump section stator assembly 265 separate from pump casing 14.

[0085] These two bearings 258 are widely distant to each other in an axial direction so that supporting performance is enhanced for holding pump section stator assembly 265, thus, it would not tilt even a large radial impact force is loaded when rotor R is fractured. In order to establish this, one bearing may be located adjacent the intake port of vane pumping section L1, that is, on the outer surface of vane pumping section stator assembly 244, and the other adjacent the exhaust port of spiral groove pumping section L2. Also, more than

three bearings may be provided along the axial direction. In this embodiment, since the spaces for installing bearings 258 is defined by taking advantage that spiral groove pumping section L2 has smaller diameter than vane pumping section, it is not necessary to increase the overall diameter of the pump thereby to maintain its compactness.

[0086] As for mechanical bearing 258, a deep groove ball bearing or a roller bearing can be used for exclusively receiving the radial direction load, but angular bearings can be used in a single or combined arrangement to receive axial load potentially loaded when rotor R is fractured. It is preferable, in case of handling corrosive gases, to manufacture the bearing from corrosion resistant material such as stainless steel, or to apply surface treatment such as nickel coating to a less corrosion resistant material.

[0087] Assembling such pumping section stator assembly 265 is basically similar to that of conventional one shown in FIG. 25. That is, a stator vane 32 comprising two half sections is arranged on the upper surface of lower inner casing 250 from both sides, then stator vane spacer 252 is mounted by fitting thereon, further, a stator vane 32 is built in from both sides of rotor vanes 30, and stator vane spacer 252 is mounted by fitting thereon. This assembling step is repeated to complete the stacked assembly of stator vanes 32 surrounding rotor R. Pumping section stator assembly 265 is inserted into pump casing 14 from the bottom side thereof, which is then covered with base section 15. Thus, pumping section stator assembly 265 is fixed between suppressing member 260 protruding from upper inner surface and base section 15.

[0088] In this embodiment, seal members 266 are provided between the uppermost stator vane spacer 252 and suppressing member 260 of pump casing 14, or lower inner casing 250 and stator for preventing the exhaust gas from reversely flowing from exhaust side to intake side or protecting mechanical bearings 258. Seal member 266 is, for instance, an O-ring or a sheet formed from material such as fluoro rubber.

[0089] In this embodiment, since vane pumping section stator assembly 244 (stator vane spacers 252 and stator vanes 32) and lower inner casing 250 for constructing pumping section stator assembly 265 are loaded with impact in case of rotor fracture, these elements should be made of a material with high strength and high elongation such as stainless steel or aluminum alloys. Especially aluminum alloys are effective in consideration of cost saving and weight reduction of the pump. Also, use of aluminum alloys having high specific strength for pump casing 14 is effective for weight reduction of the pump.

[0090] The turbo-molecular pump is operated by connecting flange 14a to a vacuum process chamber or conduits thereto, for example, and when rotor R is fractured or under abnormal rotation, rotor R will contact with stator vanes 32 or spiral vane section spacer 256

and its rotational torque will be transmitted to vane pumping section stator assembly 244 or lower inner casing 250, i.e., pumping section stator assembly 265.

[0091] Here, in vane pumping section L1, impact is loaded to some of stator vanes 252 in a peripheral direction which is then loaded to bar members 242 to deform or fracture it. Since bar members 242 plastically deform or fracture to absorb the impact energy thereby to prevent impact from being transmitted to pump casing 14. Since clearance T is provided between vane pumping section stator assembly 244 and pump casing 14, even if vane pumping section stator assembly 244 has deformed to some degree, the impact would not be transmitted directly to pump casing 14. Therefore, fracturing of pump casing 14 itself or connections between

[0092] Concurrently with, or before or after this deformation of bar members 242, pumping section stator assembly 265 is dragged to rotate by rotating rotor R. Pumping section stator assembly 265 is rather weakly engaged to pump casing 14 because it is held only through seal member 266 from top and bottom ends. Also, mechanical bearings 258 are intervened between pumping section stator assembly 265 and pump casing 14. Thus, pumping section stator assembly 265 is easily dragged to rotate by rotor R thereby to further absorb the impact. Here, clearance T is provided between stator vane spacers 252 and pump casing 14, impact would not be transmitted directly to pump casing 14 even when pumping section stator assembly 265 is dragged to rotate. In spiral groove pumping section L2, impact force transmitted from rotor R to lower inner casing 250 is moderated by impact absorbing member 254. Deformation and dragging of pumping section stator assembly 265 do not always happen concurrently, and only one of them may happen depends on cases, which can be set according to assumed magnitude of potential impact.

[0093] FIG. 20 shows another embodiment according to the present invention, in which stator vane spacers 252 do not comprise the step on their upper or lower surface for fitting into neighboring stator vane spacer. Thus, mutual positioning of stator vane spacers 252 in a radial direction is performed only by bar members 242, providing weaker constraint therebetween. Other construction is same as the previous embodiment.

[0094] In this embodiment, stator vane 32 can slide in a radial direction as well as peripheral direction when fragments of rotor R collide with stator vane spacers 252. Thus, bar members 242 deform or fracture in both radial and peripheral directions thereby to absorb a larger amount of impact energy. Since stator vane spacers 252 are not provided with fitting steps requiring a high precision machining, they can be easily manufactured to raise productivity.

[0095] FIG. 21 shows another embodiment according to the present invention, in which, as similar to the embodiment shown in FIGS. 16 and 17, necessary tem-

perature control is provided at desired location of the pump thereby to prevent generation of byproduct within the pump during given process to enlarge the operational range.

[0096] FIG. 22 shows a further embodiment according to the present invention where stator assembly comprises a double cylinder construction corresponding to configuration that the rotor vanes in the exhaust side have a smaller diameter than the intake side in vane pumping section L1. In the drawing, a detailed illustration for a magnetic bearing and motor section for supporting and rotating the rotor is omitted. Vane pumping section stator assembly 244a, 244b are comprised by outer and inner stator vane spacers 252A, 252B and bar members 242 respectively penetrating stator vane spacers 244a, 244b. It is necessary to construct inner stator vane spacers 252B, likewise outer stator vane spacers 252A, from plural segmentations in order to house stator vanes 32 therein. Assembly of turbo-molecular pump according to this embodiment is performed by, firstly, forming vane pumping section stator assembly 244b, and then assembling it inside outer vane pumping section stator assembly 244a formed from outer stator vane spacers 252A. The upper surface of the flange of lower inner casing 250 is formed with recesses 264b for receiving lower edges of outer and inner bar members 242a, 242b.

[0097] By such configuration, surface area of rotor vanes for agitating the gas at the exhaust side of the vane pumping section is reduced thereby to suppress the heat generation due to the gas agitation. Also, such partial dual cylinder construction will provide a higher rigidity and higher impact absorbing ability to vane pumping section stator assembly 244.

[0098] FIG. 23 shows a modified embodiment of the one shown in FIG. 22, in which, impact absorbing members 254a, 254b are provided between vane pumping section stator assembly 244a, 244b or vane pumping section stator assembly 244b and pump casing 14. In this drawing also, a detailed illustration for a magnetic bearing and motor section for supporting and rotating the rotor is omitted. It is preferable to use a pipe element made of energy absorbable material, which deforms when abnormal torque is generated, formed in a coil shape or arranged into a cylinder shape. By such configuration, overall energy absorbing ability is further enhanced. It is also preferable to use a base material or a surface layer having a good slidability for impact absorbing member 254b installed between pumping section stator assembly 265 and pump casing 14.

[0099] FIGS. 24A and 24B show embodiments of the composite structure of an impact absorbing member 186. In FIG. 24A, impact absorbing member 186 is made as a combined material by laminating a relatively tough or rigid material such as stainless steel plate 187 with a relatively soft and high impact absorbing material 188 such as lead plate, thus providing both impact absorbing function and shape retaining function. In FIG.

24B, impact absorbing member 186 is made as a metal pipe wound into a coil.

[0100] It should be noted that, in the foregoing embodiments, the invention was represented by wide-range type turbo-molecular pumps having a vane pumping section L_1 and groove pumping section L_2 . However, depending on the nature of the processing facilities under consideration, the invention can be applied to those pumps having only vane pumping section L_1 or only groove pumping section L_2 . For those wide-range pumps having both pumping sections L_1 and L_2 , it is understandable that the invention can be provided only on one of the two pumping sections. It is equally understandable that any of the embodied structures can be combinedly used.

SUMMARY OF THE INVENTION

[0101]

1. A turbo-molecular pump comprising:

a rotor;
a stator assembly surrounding said rotor; and
a casing portion surrounding said stator assembly,
wherein at least a partial clearance is formed between said stator assembly and said casing portion, so that, when an abnormal torque is applied from said rotor to said stator assembly, direct impact transmission is prevented from said stator assembly to said casing portion.

2. A turbo-molecular pump wherein said stator assembly comprises a stacked configuration for fixing said stator vanes in a vane pumping section.

3. A turbo-molecular pump further comprising a reinforcing member for reinforcing said stator assembly.

4. A turbo-molecular pump wherein said reinforcing member is a cylindrical member arranged between said stator assembly and said casing portion.

5. A turbo-molecular pump wherein said reinforcing member combining elements constituting said stator assembly.

6. A turbo-molecular pump wherein said reinforcing member is axially aligned to penetrate said stacked configuration.

7. A turbo-molecular pump wherein said stator assembly includes a groove

pumping section spacer.

8. A turbo-molecular pump wherein said reinforcing member is made of a material capable of absorbing impact generated by abnormal torque.

9. A turbo-molecular pump wherein said reinforcing member comprises a hollow pipe.

10. A turbo-molecular pump further comprising a slide facilitating member for facilitating said stator assembly to slide in a circumferential direction relative to said casing portion.

11. A turbo-molecular pump wherein said slide facilitating member is a low friction member provided between said stator assembly and said casing portion.

12. A turbo-molecular pump wherein said slide facilitating member is a support structure for rotatably supporting said stator assembly.

13. A turbo-molecular pump wherein an impact absorbing member is provided between said stator assembly and said casing portion.

14. A turbo-molecular pump wherein said stator assembly has a multiple structure for fixing stator vanes.

15. A turbo-molecular pump further comprising a temperature adjusting mechanism for directly or indirectly heating or cooling said stator assembly.

16. A turbo-molecular pump comprising:
a casing portion housing a stator and a rotor therein; and
a vane pumping section and/or a groove pumping section comprised by said stator and said rotor,
wherein an impact absorbing structure is provided in at least a part of said stator, said impact absorbing structure being arranged to cooperatively work with said rotor to absorb impact loaded on said stator when abnormal torque is applied from said rotor to said stator.

17. A turbo-molecular pump

wherein said impact absorbing structure comprises an inner casing surrounding said vane pumping section and/or a groove pumping section.

18. A turbo-molecular pump
wherein a clearance is provided between said inner casing and said casing portion. 5

19. A turbo-molecular pump
wherein said inner casing is fixed by fitting a part of an inner surface or an outer surface of said inner casing to a cylindrical portion of said stator or to said casing portion. 10

20. A turbo-molecular pump
wherein said impact absorbing structure comprises a friction reducing mechanism provided between said inner casing and said stator or said casing portion. 15

21. A turbo-molecular pump
wherein said impact absorbing structure comprises an impact absorbing member provided between said stator in said vane pumping section and/or groove pumping section and said inner casing. 20 25

22. A turbo-molecular pump
wherein said inner casing and/or said casing portion is comprised by a high thermal conductivity material. 30

23. A turbo-molecular pump
wherein said vane pumping section comprises a vane pumping section stator assembly of a stacked configuration for fixing said stator vanes, and said impact absorbing structure comprises a bar member axially penetrating said vane pumping section and capable of absorbing an impact generated by abnormal torque. 35 40

24. A turbo-molecular pump
wherein said reinforcing member absorbs impact through its self deformation.

25. A turbo-molecular pump
wherein said deformation is performed through elastic or plastic deformation. 45

26. A turbo-molecular pump
wherein said deformation is accompanied by fracturing. 50

27. A turbo-molecular pump
wherein said vane pumping section comprises a multiple structure. 55

28. A turbo-molecular pump
wherein said multiple structure is formed corre-

sponding to said stator vanes having a different diameters along the axial direction.

29. A turbo-molecular pump
wherein said bar member comprises a hollow pipe.

30. A turbo-molecular pump
wherein said vane pumping section stator assembly is attached to said casing portion by way of a friction reducing mechanism.

31. A turbo-molecular pump
further comprising a temperature adjusting mechanism for directly or indirectly heating or cooling said stator portion in said vane pumping section and/or said groove pumping section.

32. A turbo-molecular pump
wherein said impact absorbing structure comprises an inner casing surrounding said vane pumping section and/or said groove pumping section, said temperature adjusting mechanism being provided on said inner casing.

Claims

1. A turbo-molecular pump comprising:

a rotor;
a stator assembly surrounding said rotor; and
a casing portion surrounding said stator assembly,
wherein at least a partial clearance is formed between said stator assembly and said casing portion, so that, when an abnormal torque is applied from said rotor to said stator assembly, direct impact transmission is prevented from said stator assembly to said casing portion.

2. A turbo-molecular pump according to claim 1, wherein said stator assembly comprises a stacked configuration for fixing said stator vanes in a vane pumping section.

3. A turbo-molecular pump according to claim 2, further comprising a reinforcing member for reinforcing said stator assembly.

4. A turbo-molecular pump according to claim 3, wherein said reinforcing member is a cylindrical member arranged between said stator assembly and said casing portion.

5. A turbo-molecular pump according to claim 3, wherein said reinforcing member combining elements constituting said stator assembly.

6. A turbo-molecular pump according to any of the preceding claims wherein said reinforcing member is axially aligned to penetrate said stacked configuration,

and/or wherein preferably said stator assembly includes a groove pumping section spacer,

and/or wherein preferably said reinforcing member is made of a material capable of absorbing impact generated by abnormal torque,

and/or wherein preferably said reinforcing member comprises a hollow pipe,

and/or further preferably comprising a slide facilitating member for facilitating said stator assembly to slide in a circumferential direction relative to said casing portion,

and/or wherein preferably said slide facilitating member is a low friction member provided between said stator assembly and said casing portion,

and/or wherein preferably said slide facilitating member is a support structure for rotatably supporting said stator assembly,

and/or wherein preferably an impact absorbing member is provided between said stator assembly and said casing portion,

and/or wherein preferably said stator assembly has a multiple structure for fixing stator vanes,

and/or further preferably comprising a temperature adjusting mechanism for directly or indirectly heating or cooling said stator assembly.

7. A turbo-molecular pump comprising:

a casing portion housing a stator and a rotor therein; and

a vane pumping section and/or a groove pumping section comprised by said stator and said rotor,

wherein an impact absorbing structure is provided in at least a part of said stator, said impact absorbing structure being arranged to cooperatively work with said rotor to absorb impact loaded on said stator when abnormal torque is applied from said rotor to said stator.

8. A turbo-molecular pump according to any of the preceding claims wherein said impact absorbing structure comprises an inner casing surrounding

said vane pumping section and/or a groove pumping section,

and/or wherein preferably a clearance is provided between said inner casing and said casing portion,

and/or wherein preferably said inner casing is fixed by fitting a part of an inner surface or an outer surface of said inner casing to a cylindrical portion of said stator or to said casing portion,

and/or wherein preferably said impact absorbing structure comprises a friction reducing mechanism provided between said inner casing and said stator or said casing portion,

and/or wherein preferably wherein said impact absorbing structure comprises an impact absorbing member provided between said stator in said vane pumping section and/or groove pumping section and said inner casing,

and/or wherein preferably said inner casing and/or said casing portion is comprised by a high thermal conductivity material.

9. A turbo-molecular pump according to any of the preceding claims wherein said vane pumping section comprises a vane pumping section stator assembly of a stacked configuration for fixing said stator vanes, and said impact absorbing structure comprises a bar member axially penetrating said vane pumping section and capable of absorbing an impact generated by abnormal torque,

and/or wherein preferably said reinforcing member absorbs impact through its self deformation,

and/or wherein preferably said deformation is performed through elastic or plastic deformation,

and/or wherein preferably said deformation is accompanied by fracturing,

and/or wherein preferably said vane pumping section comprises a multiple structure,

and/or wherein preferably said multiple structure is formed corresponding to said stator vanes having a different diameters along the axial direction,

and/or wherein preferably said bar member comprises a hollow pipe,

and/or wherein preferably said vane pumping section stator assembly is attached to said casing portion by way of a friction reducing mechanism.

5

10. A turbo-molecular pump according to any of the preceding claims further comprising a temperature adjusting mechanism for directly or indirectly heating or cooling said stator portion in said vane pumping section and/or said groove pumping section, 10

and/or wherein preferably said impact absorbing structure comprises an inner casing surrounding said vane pumping section and/or said groove pumping section, said temperature adjusting mechanism being provided on said inner casing. 15

20

25

30

35

40

45

50

55

FIG. 1


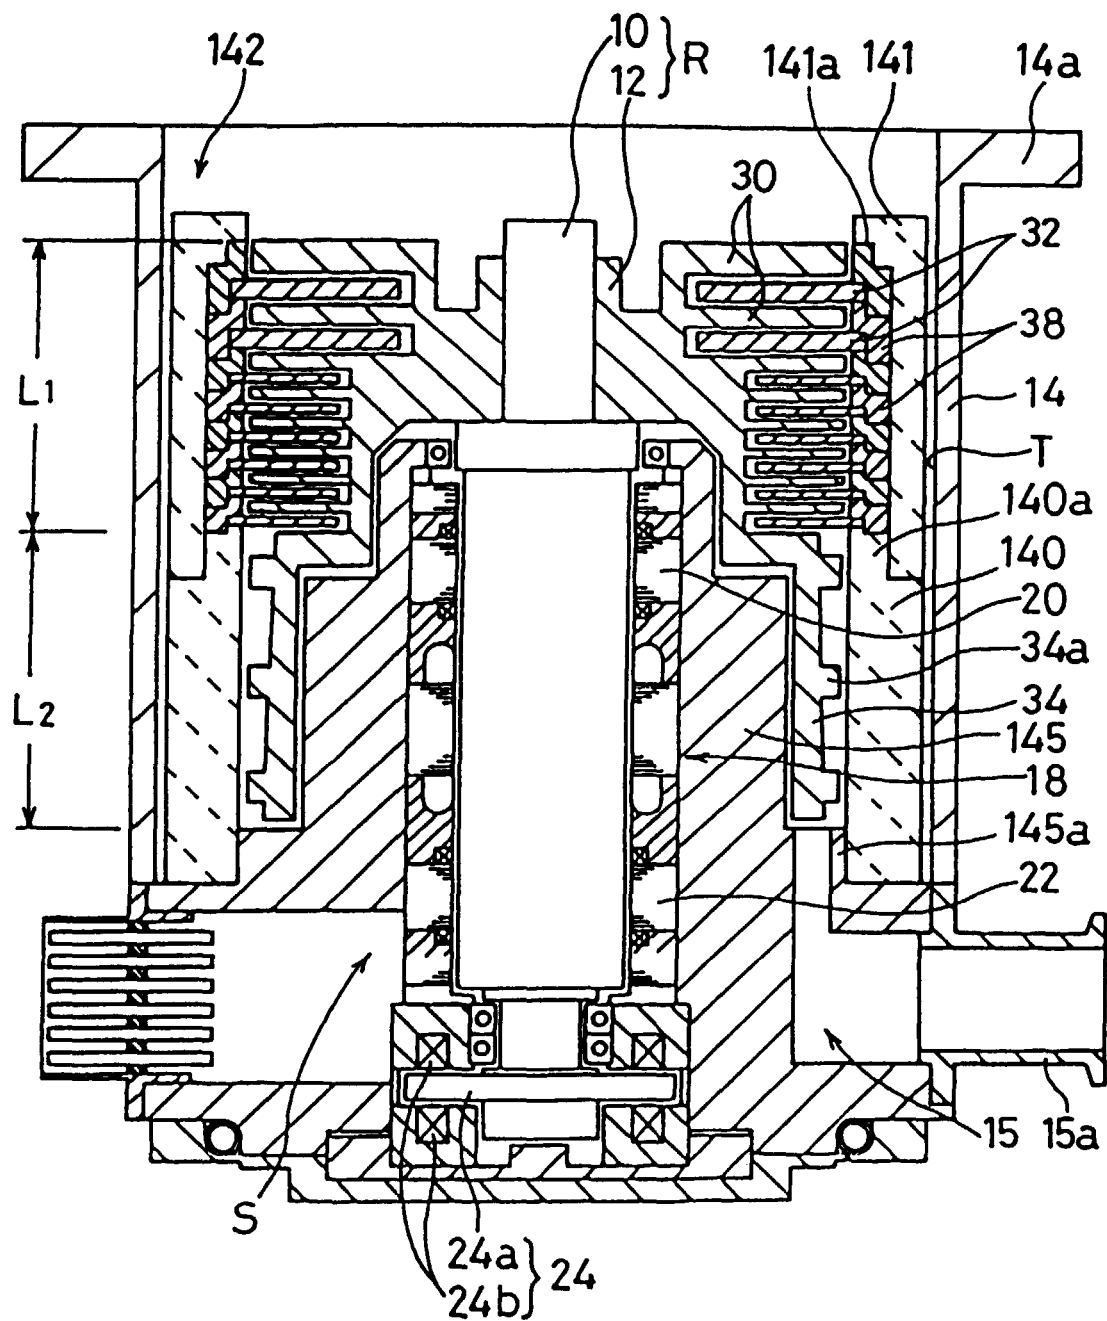


FIG. 2

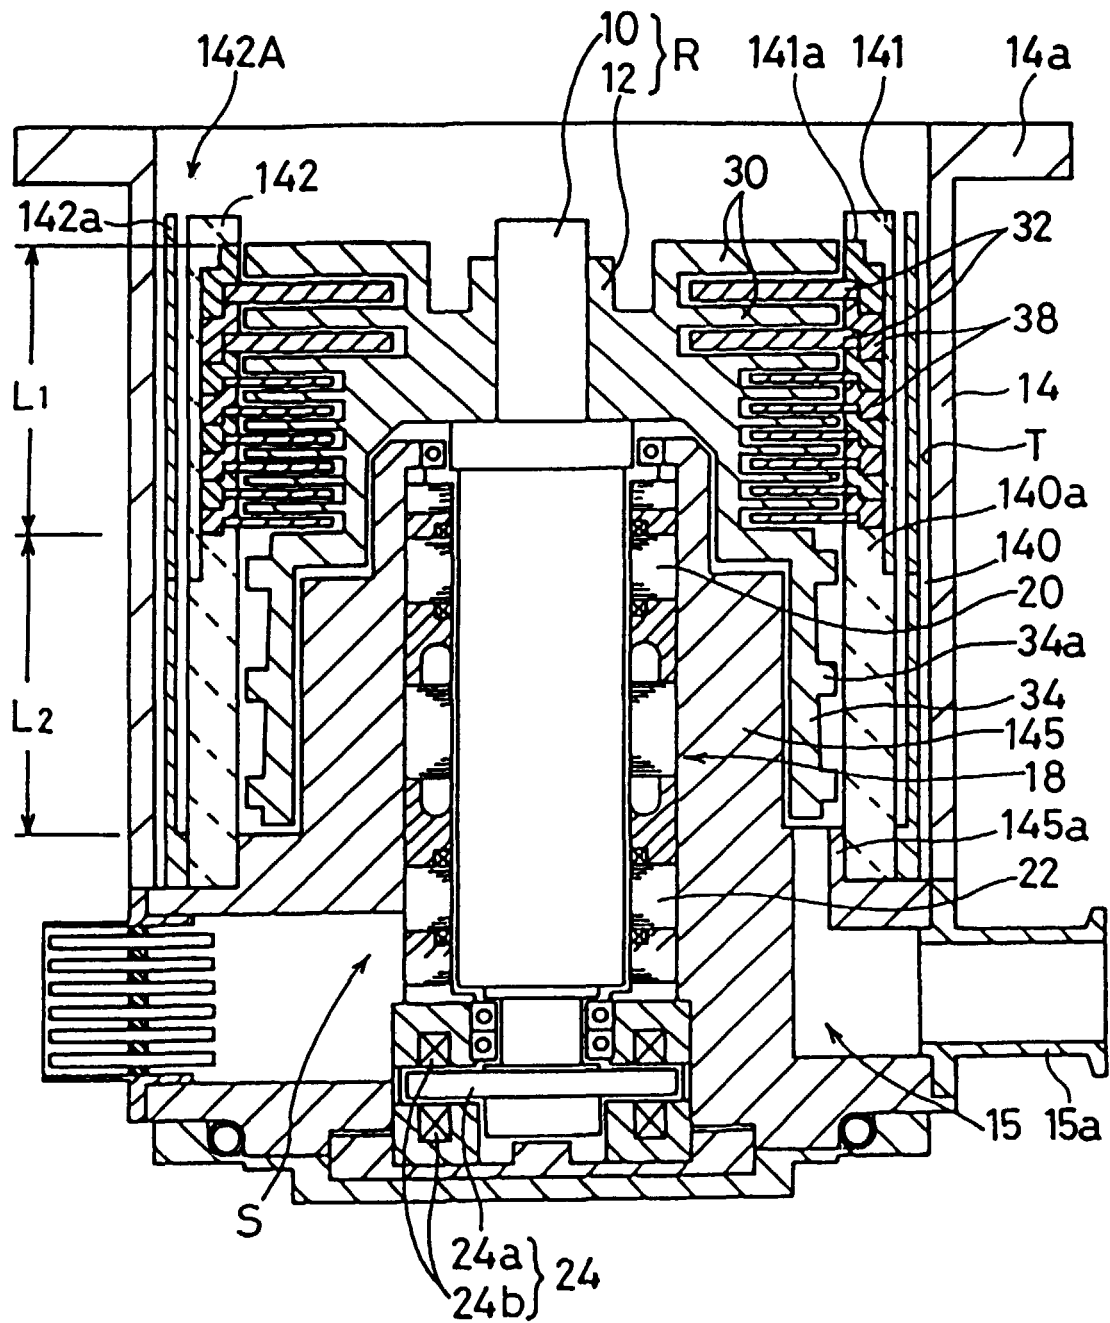

F I G. 3

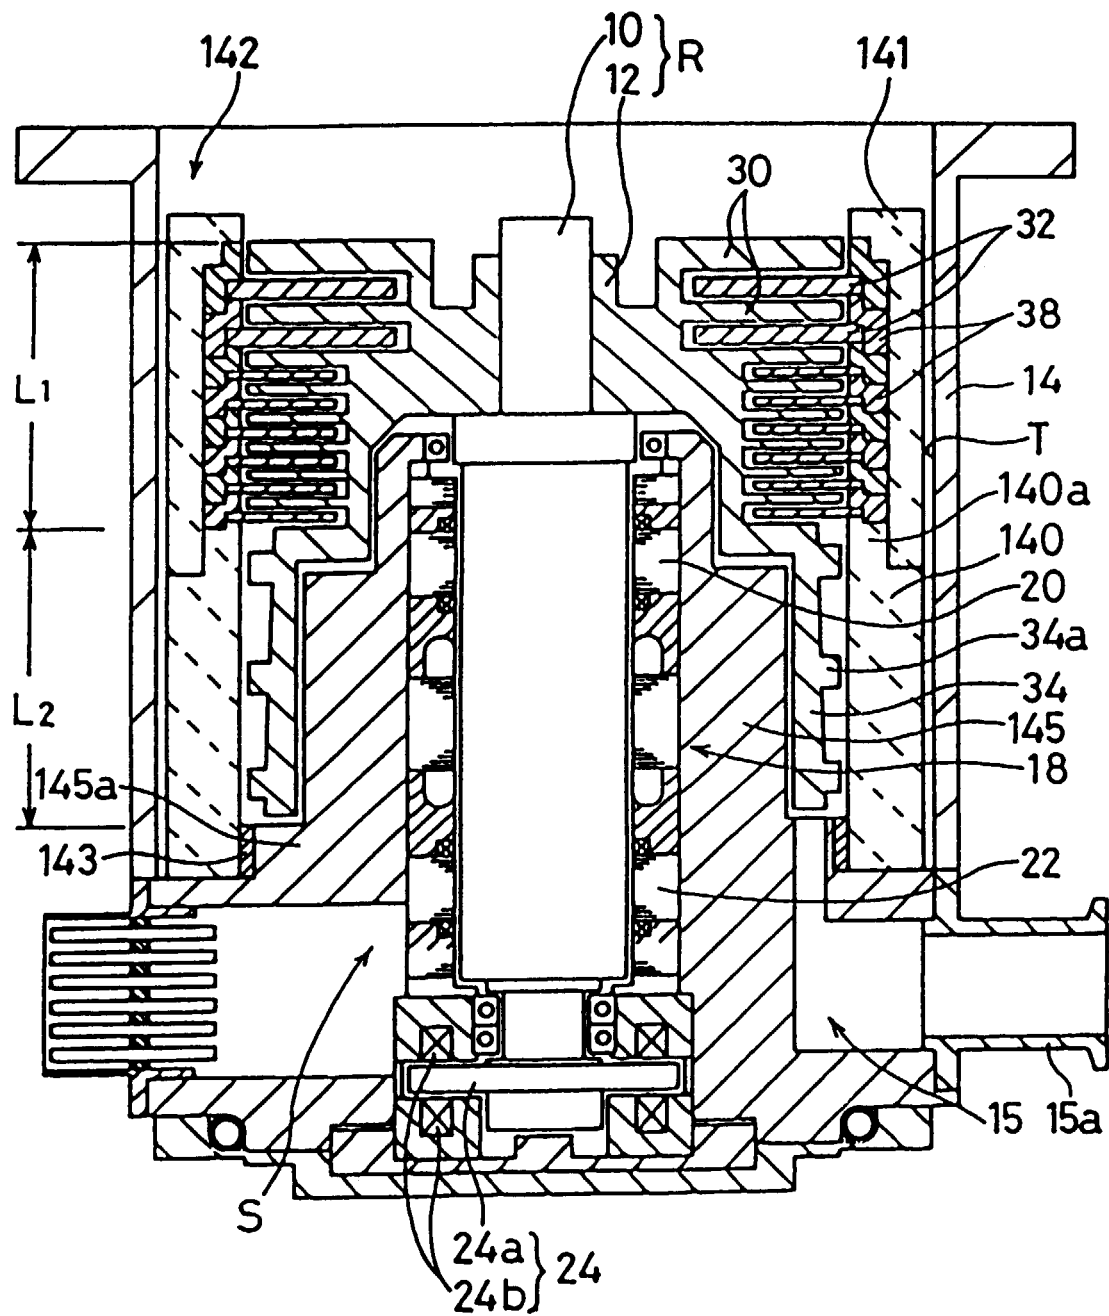


FIG. 4

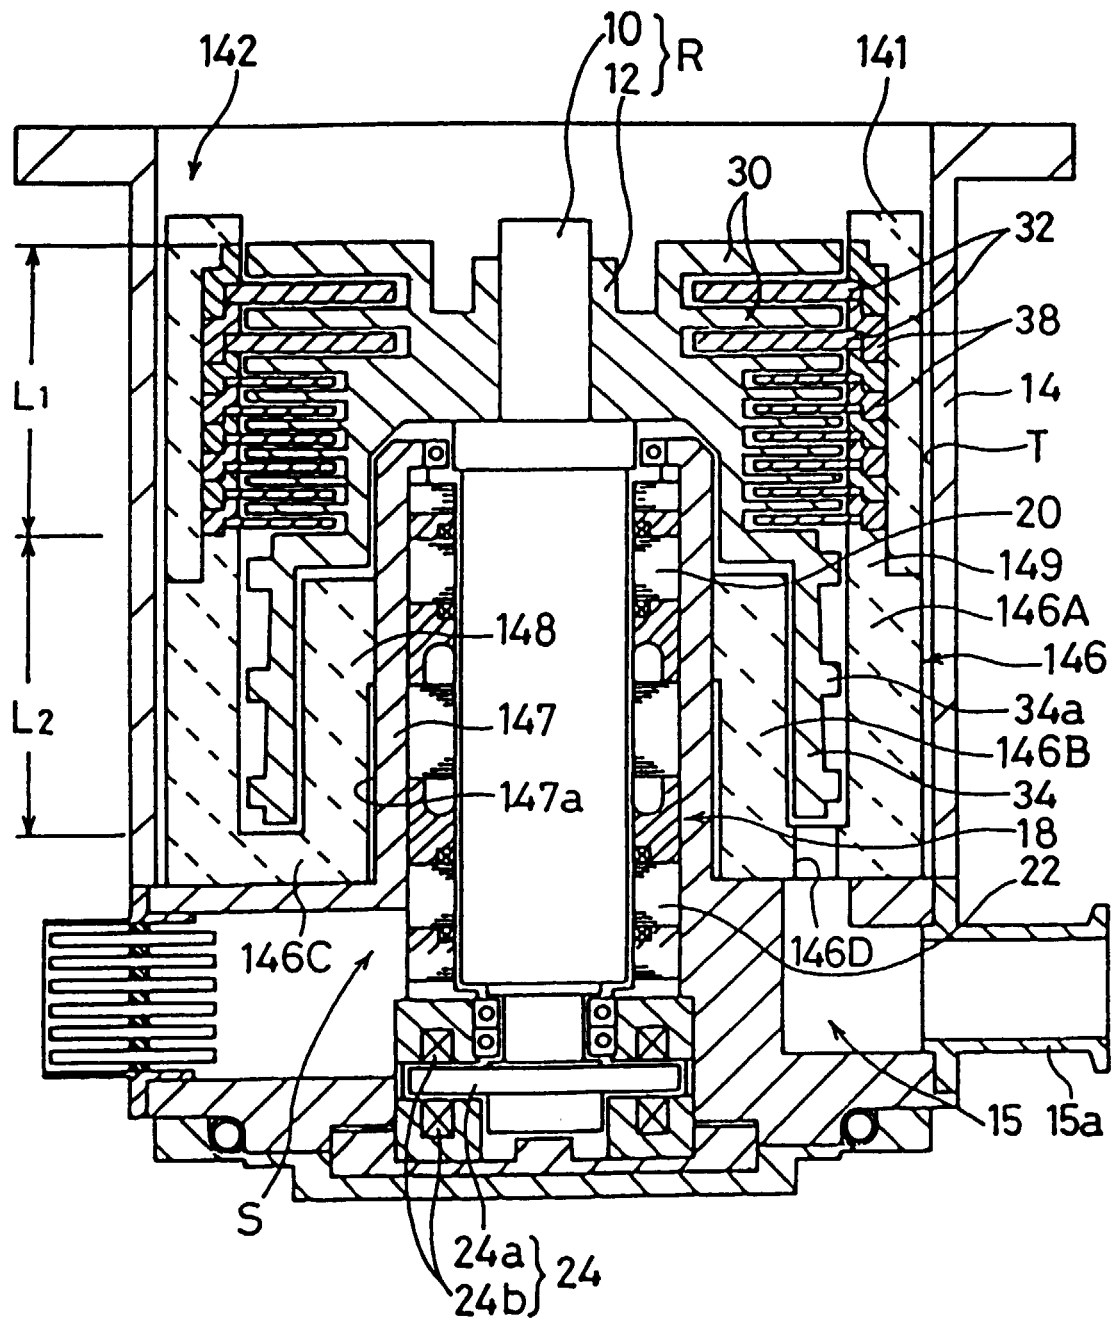


FIG. 5

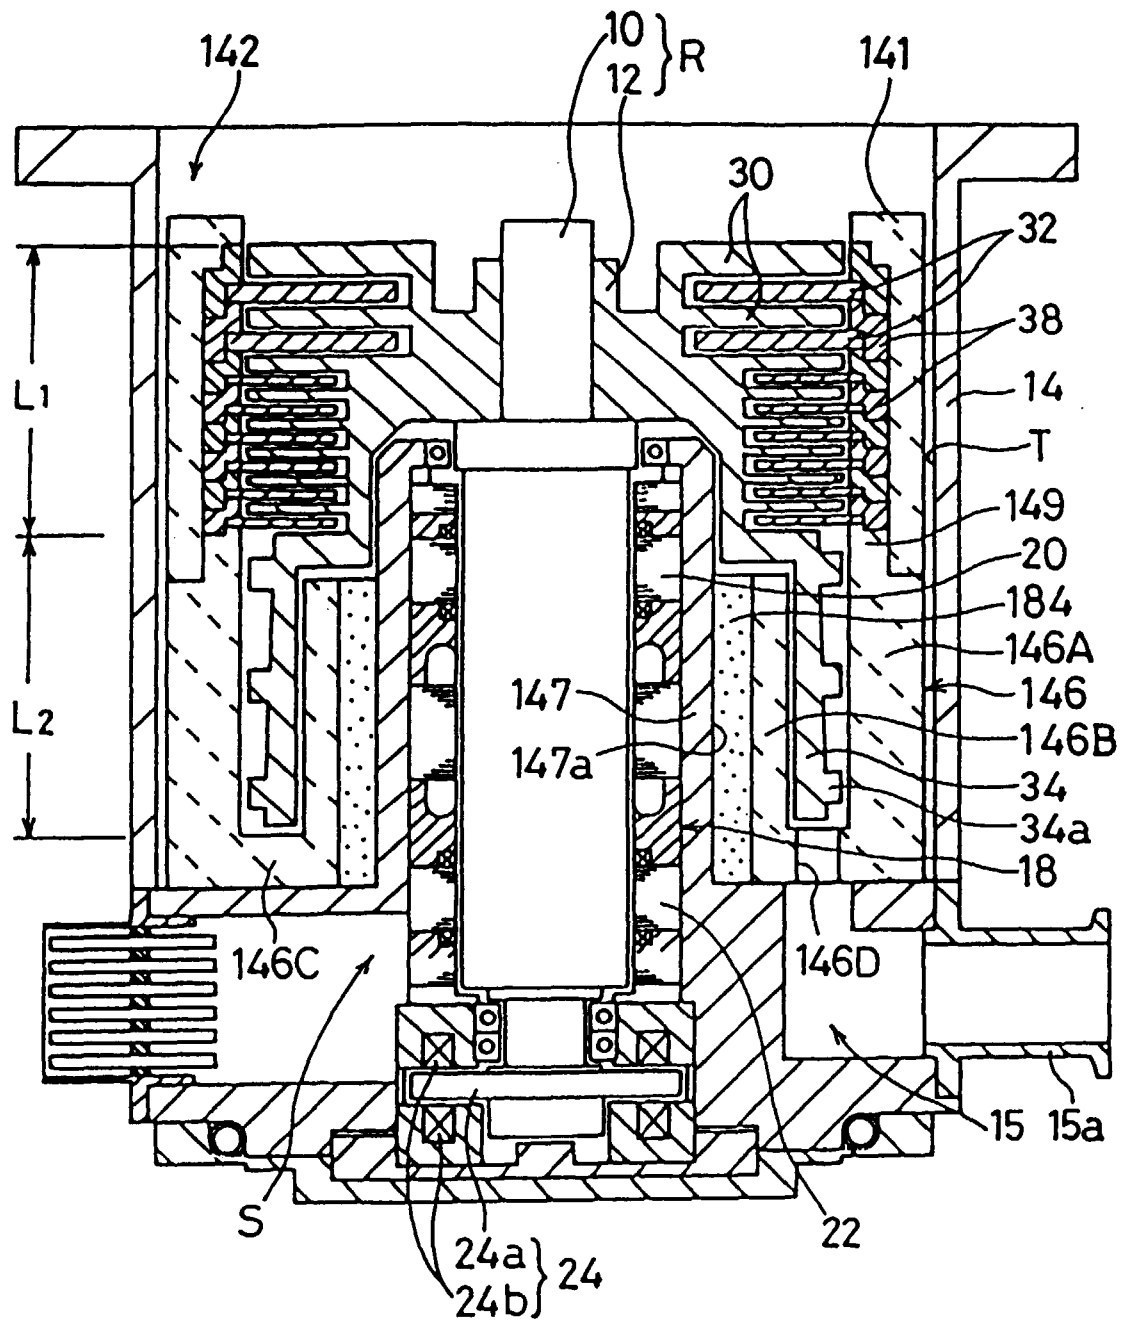


FIG. 6

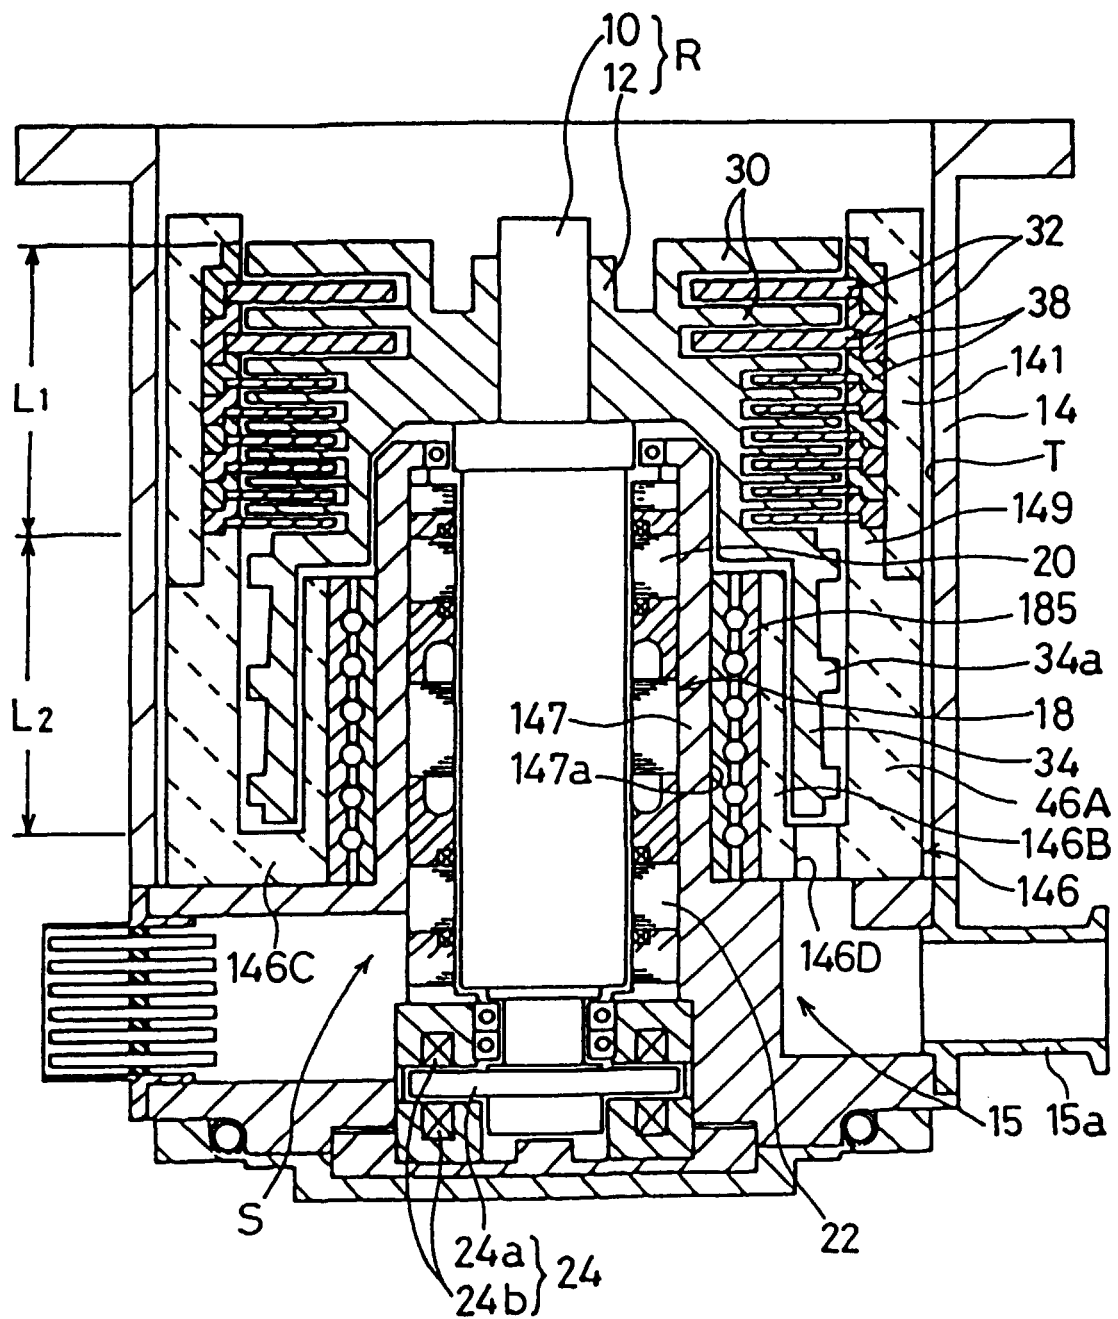


FIG. 7

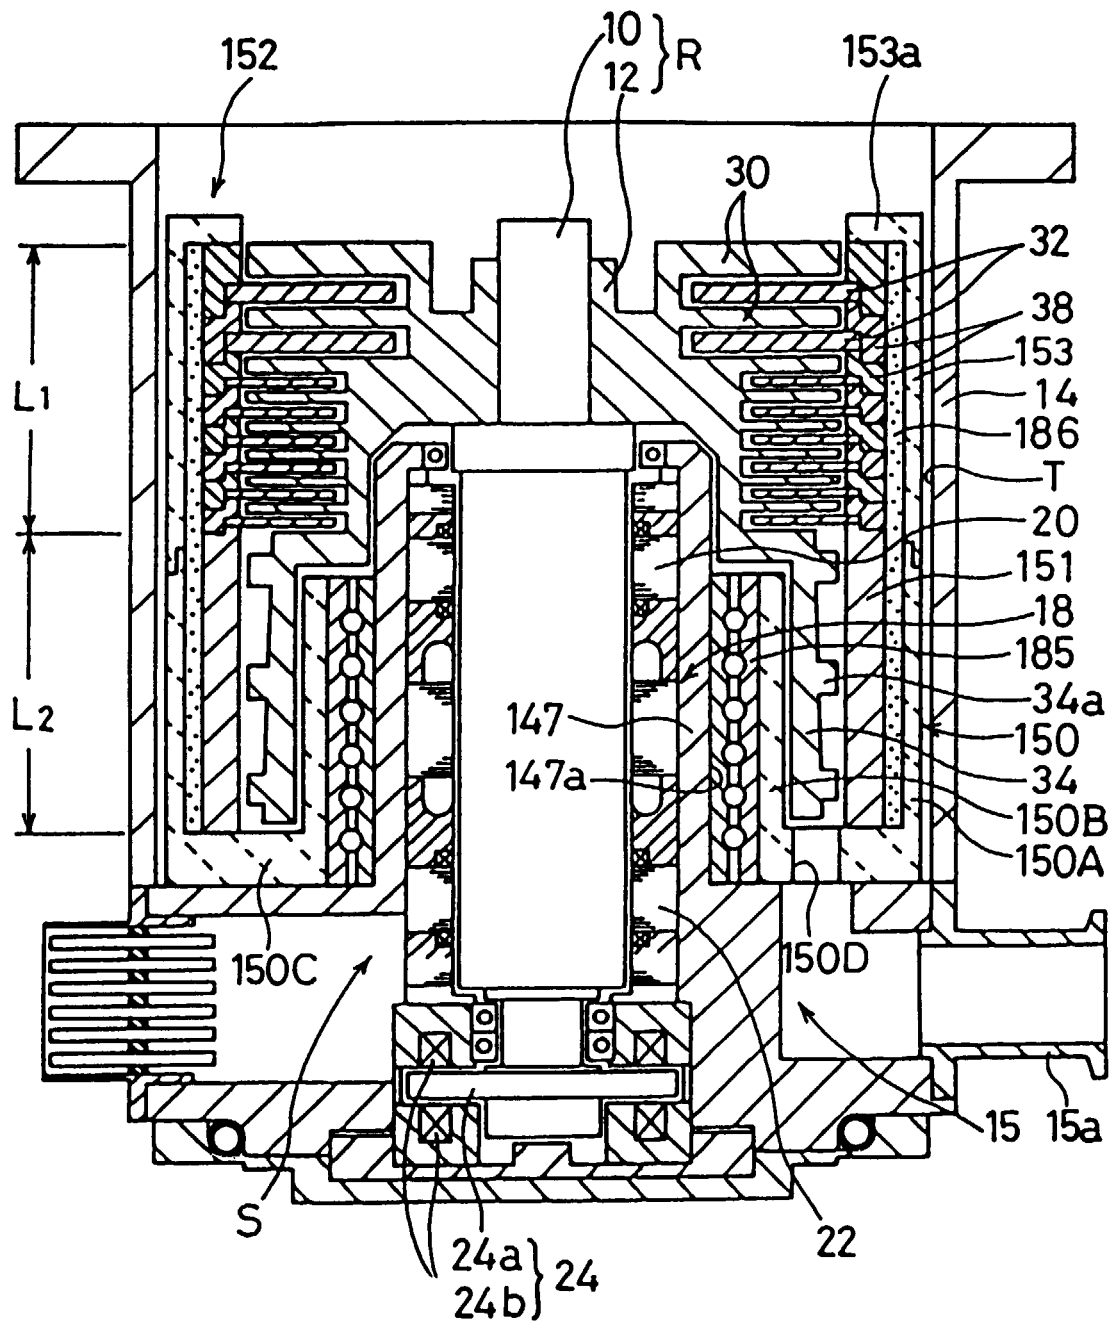


FIG. 8A


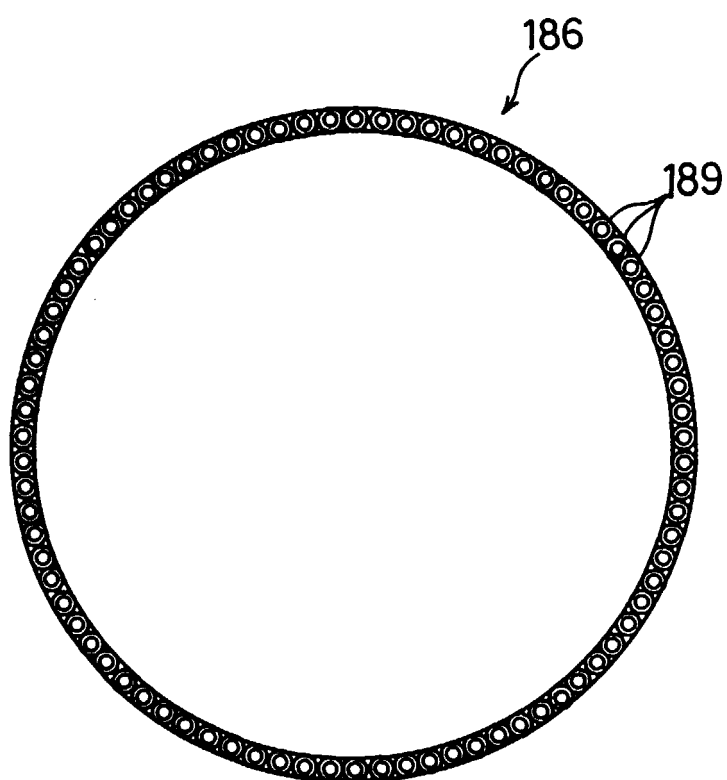


FIG. 8B

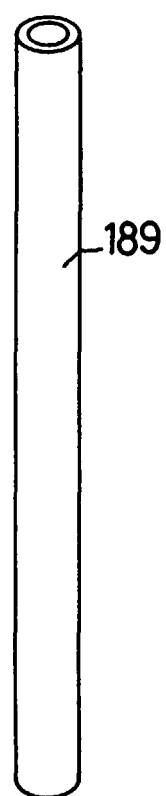

F / G. 9

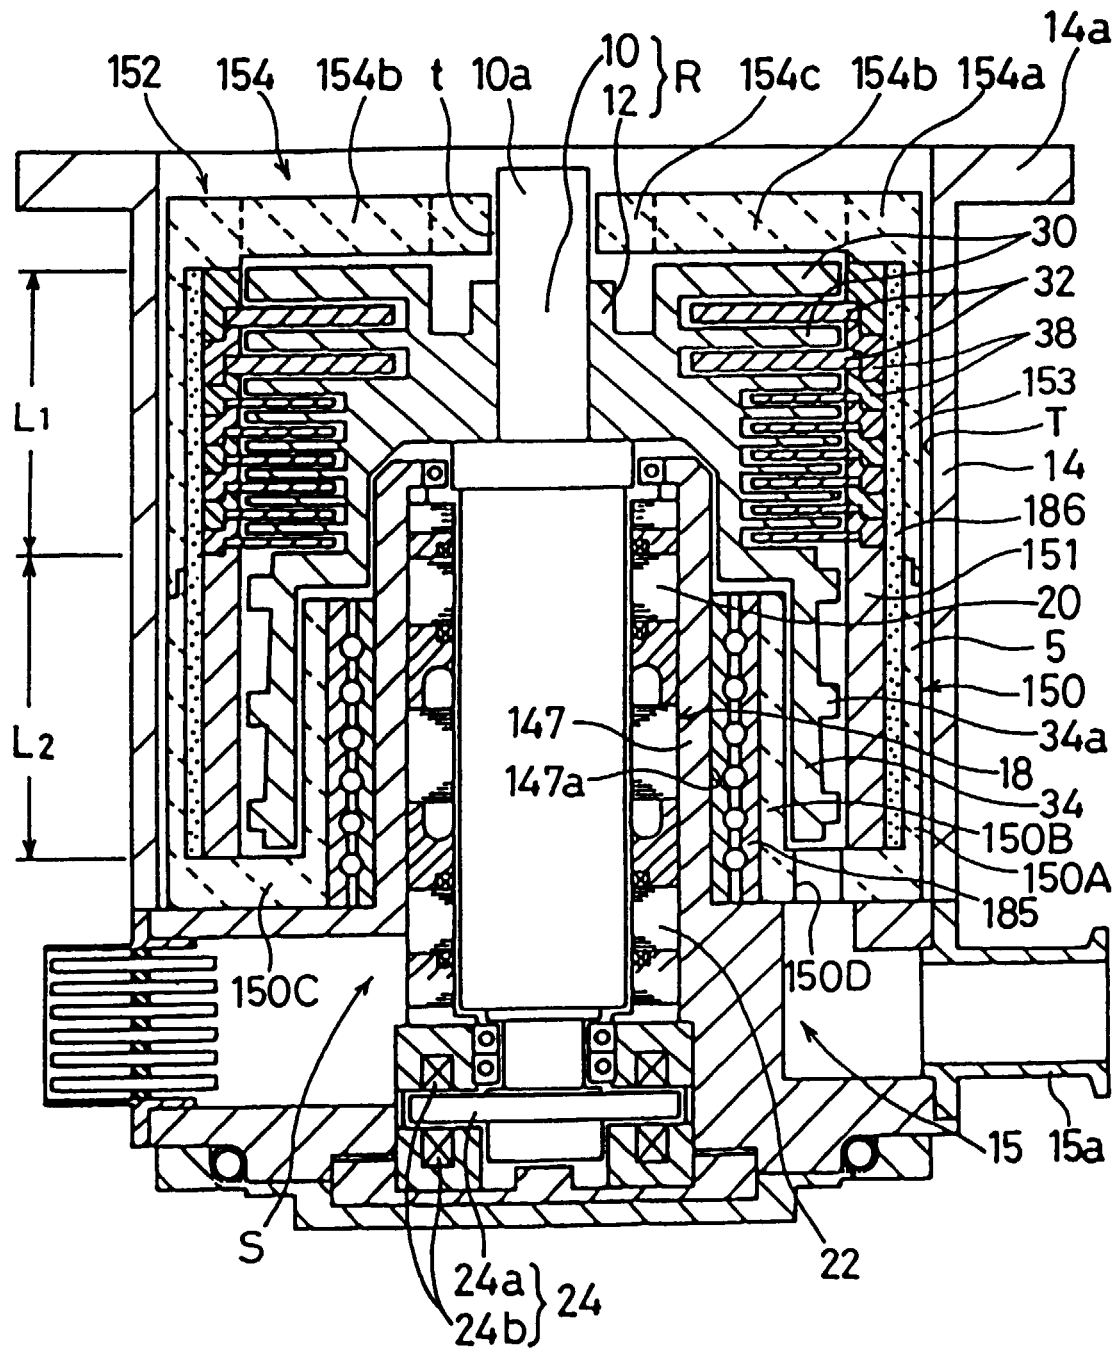


FIG. 10

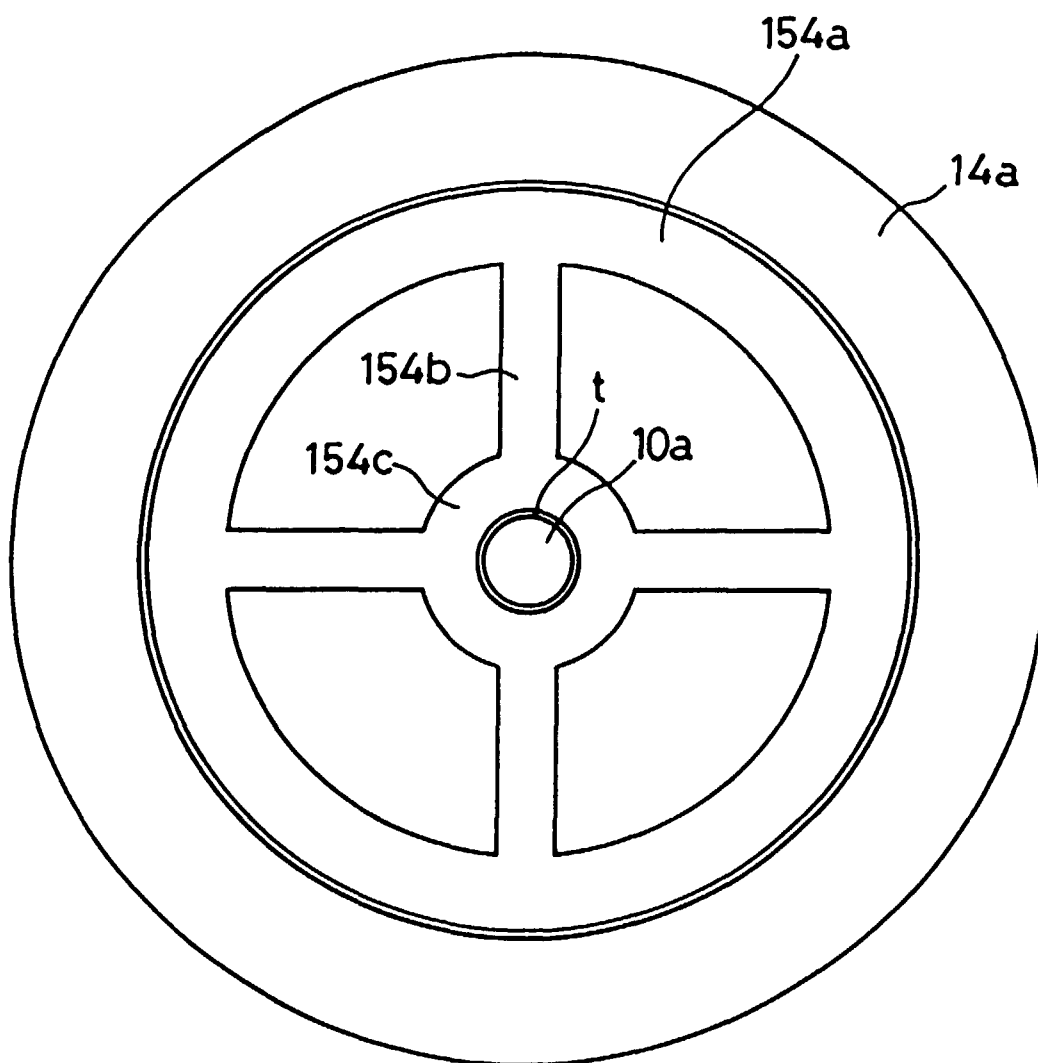


FIG. 11

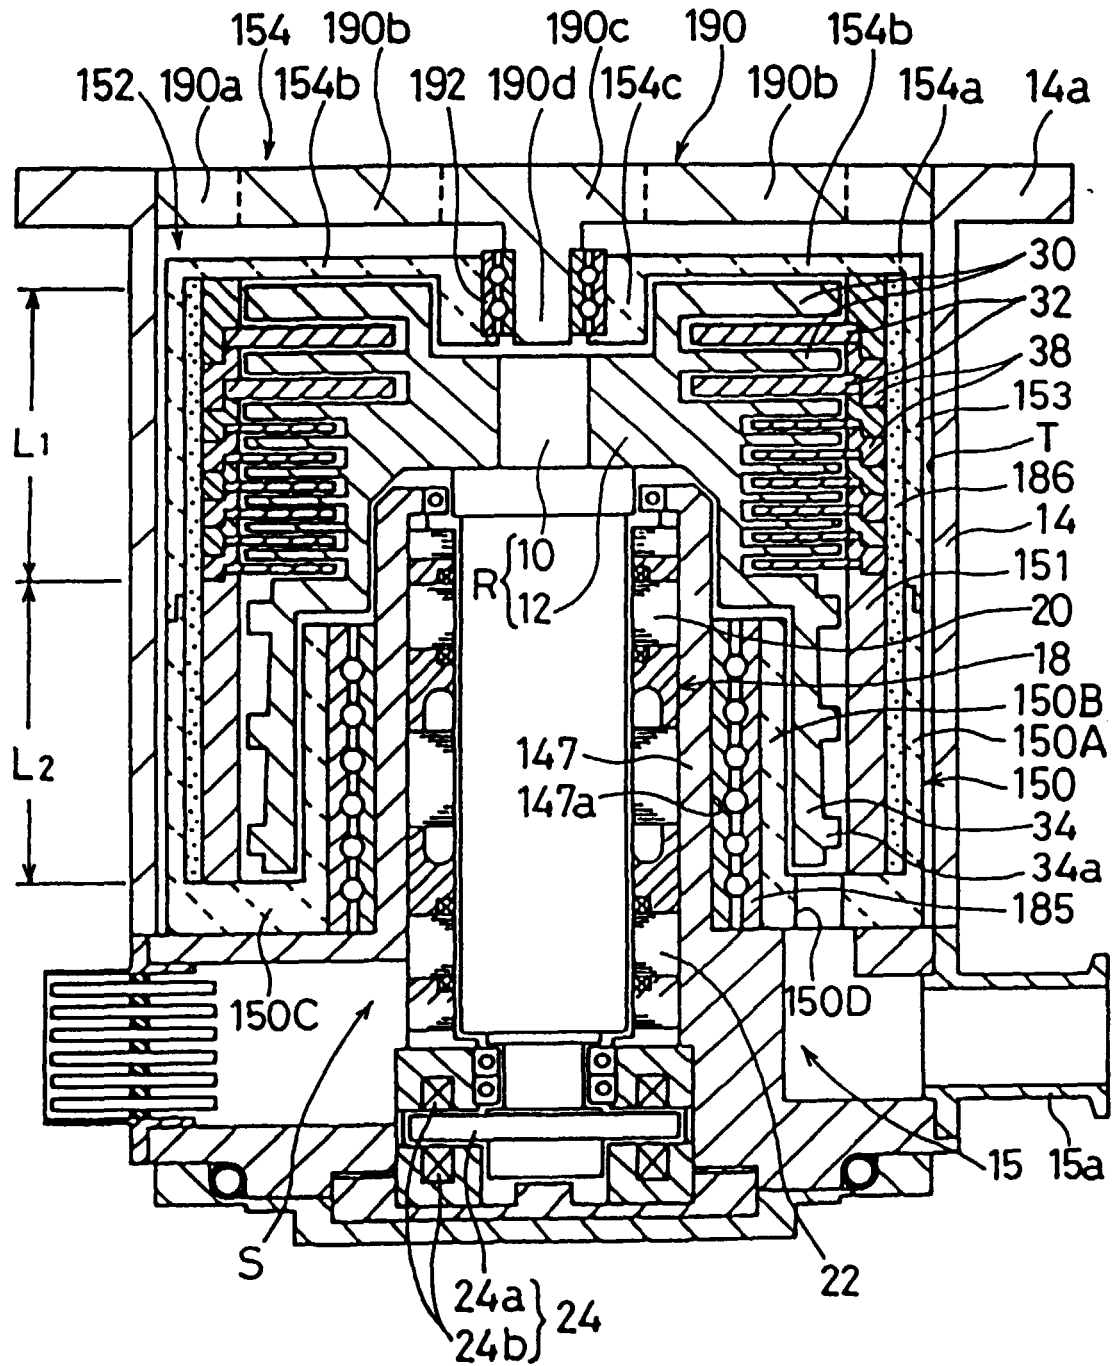


FIG. 12

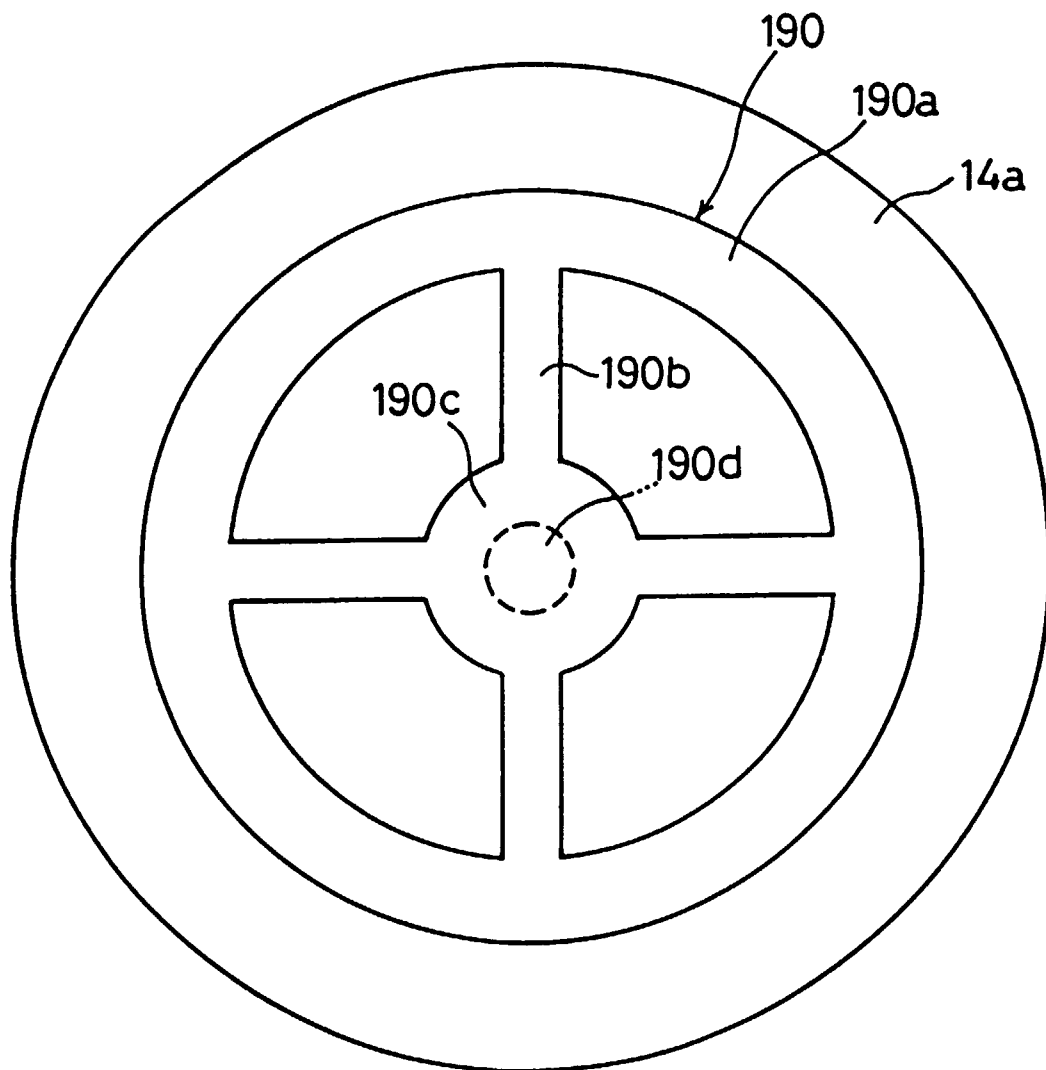


FIG. 13

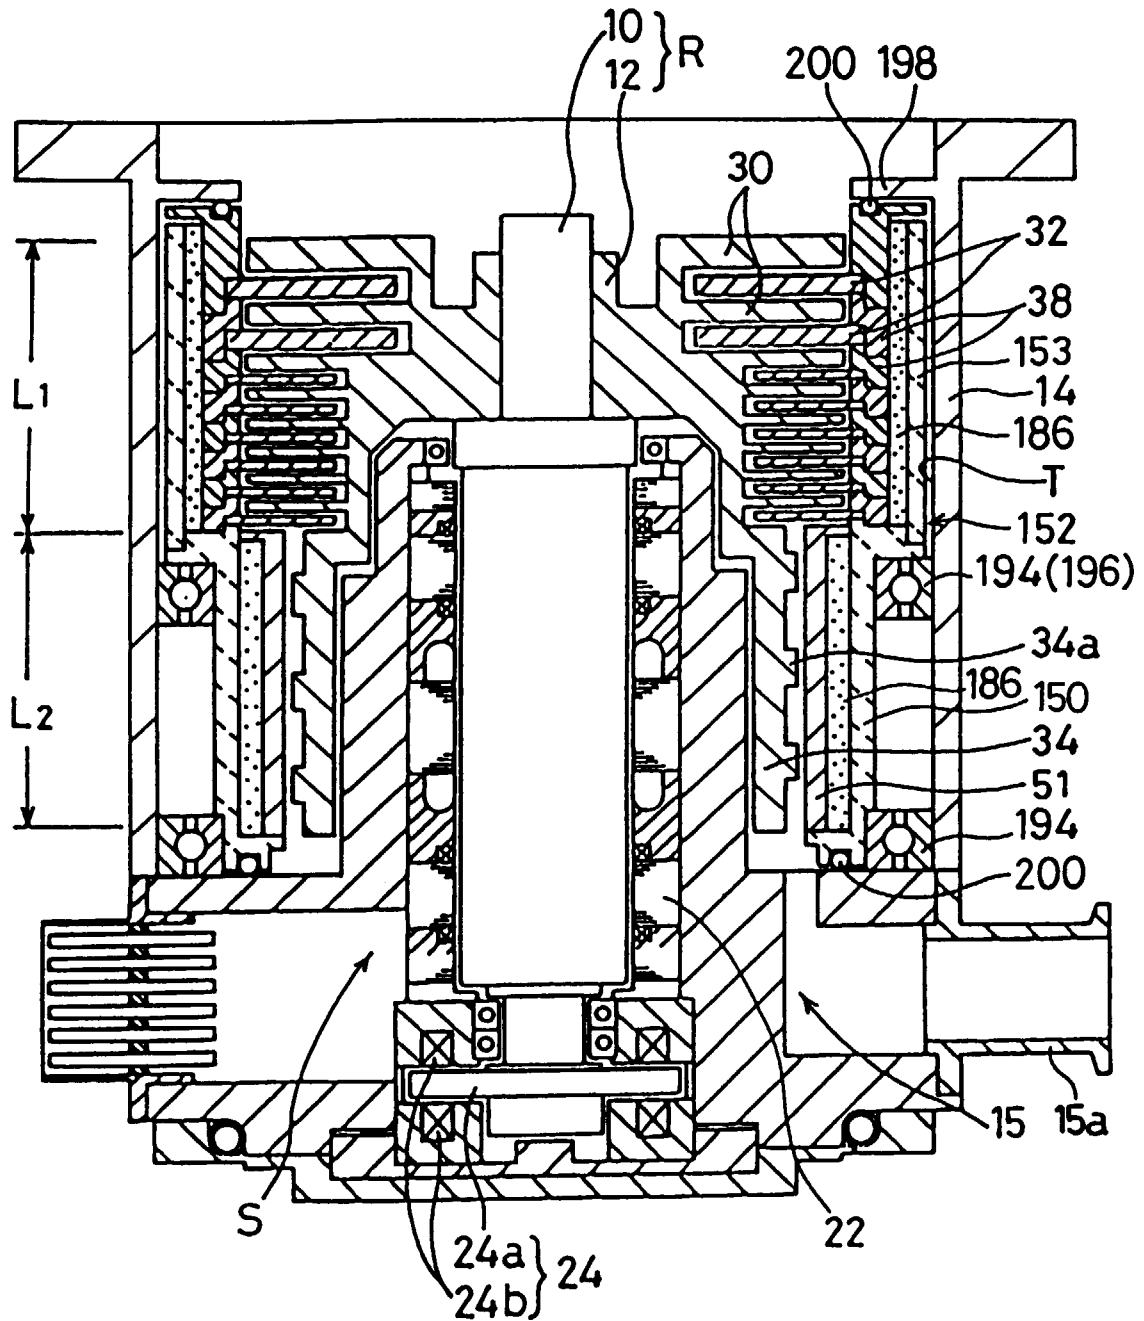


FIG. 14

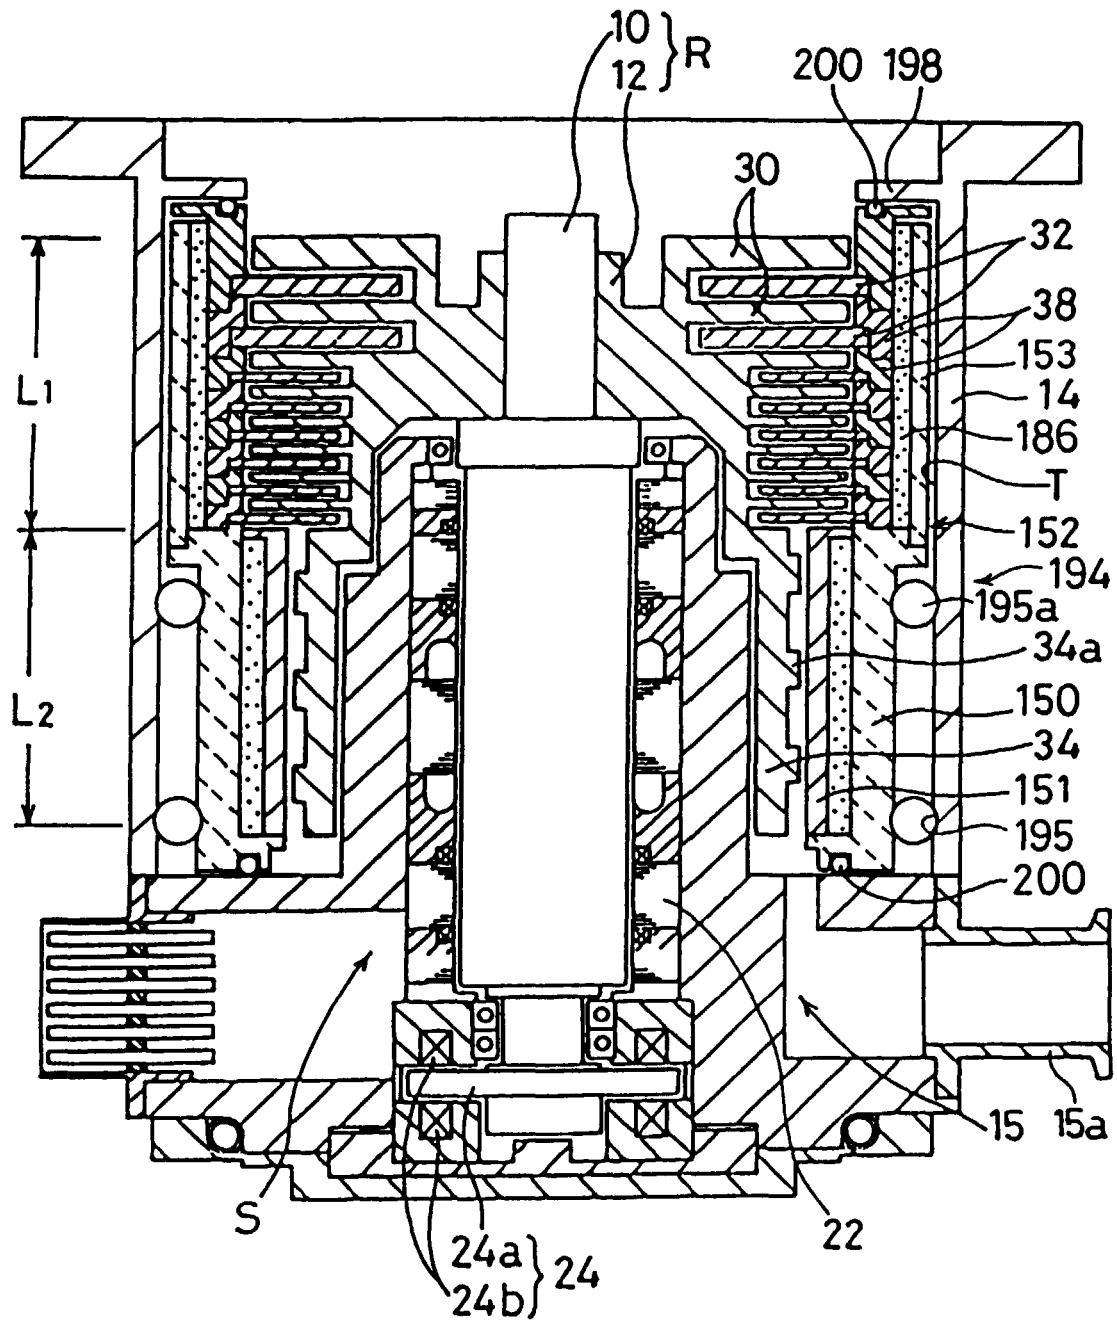


FIG. 15

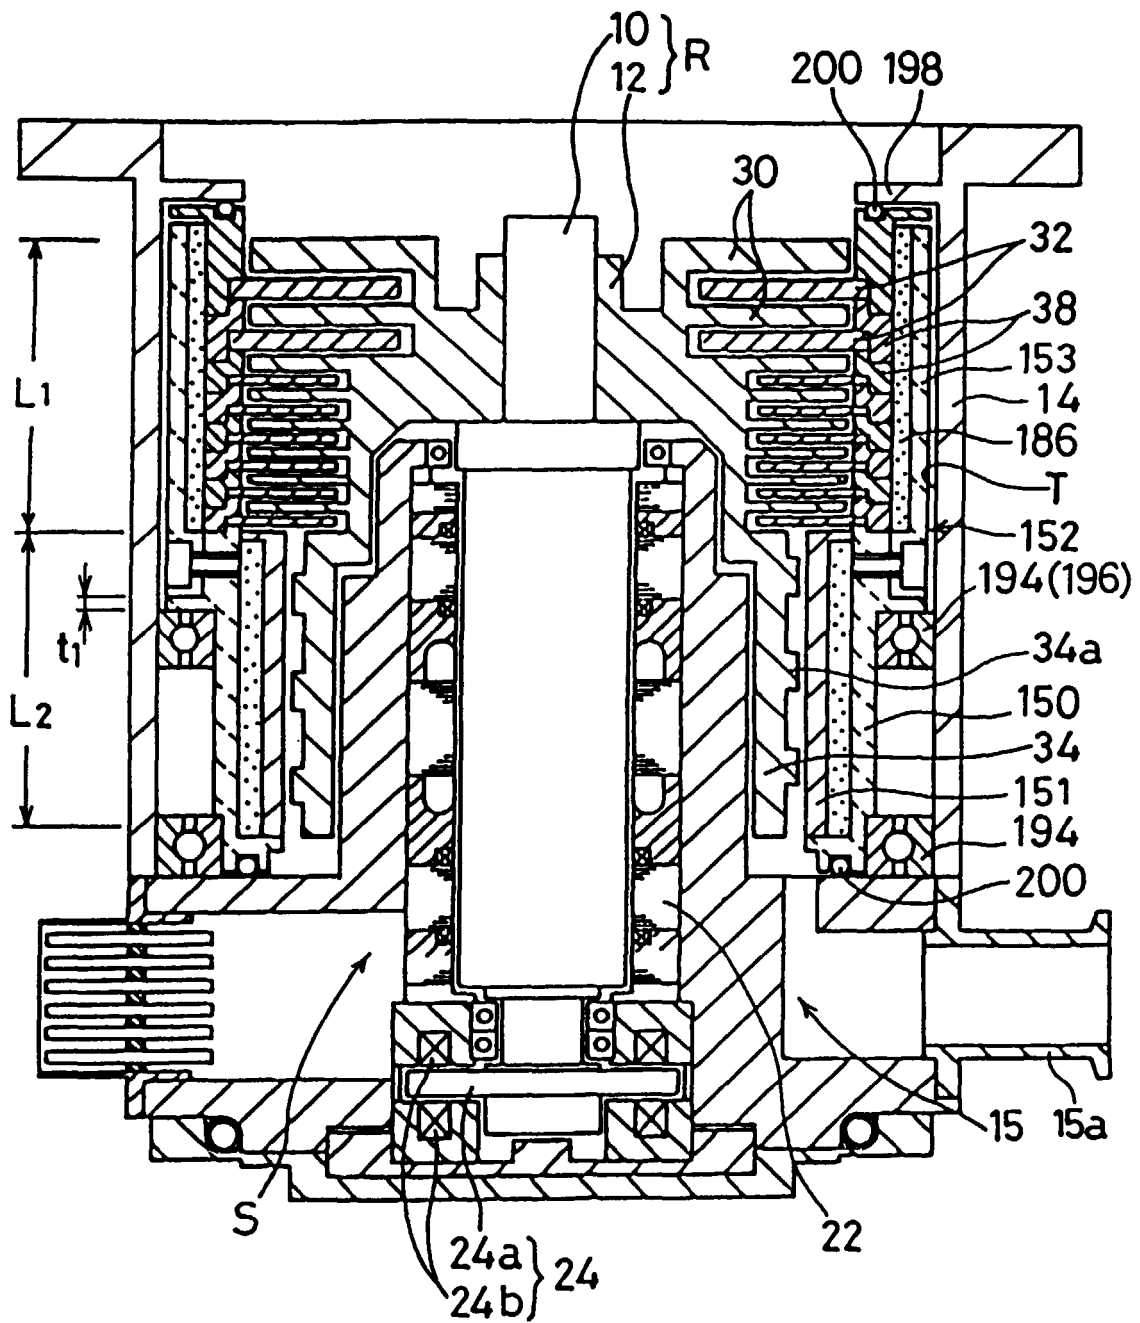


FIG. 16

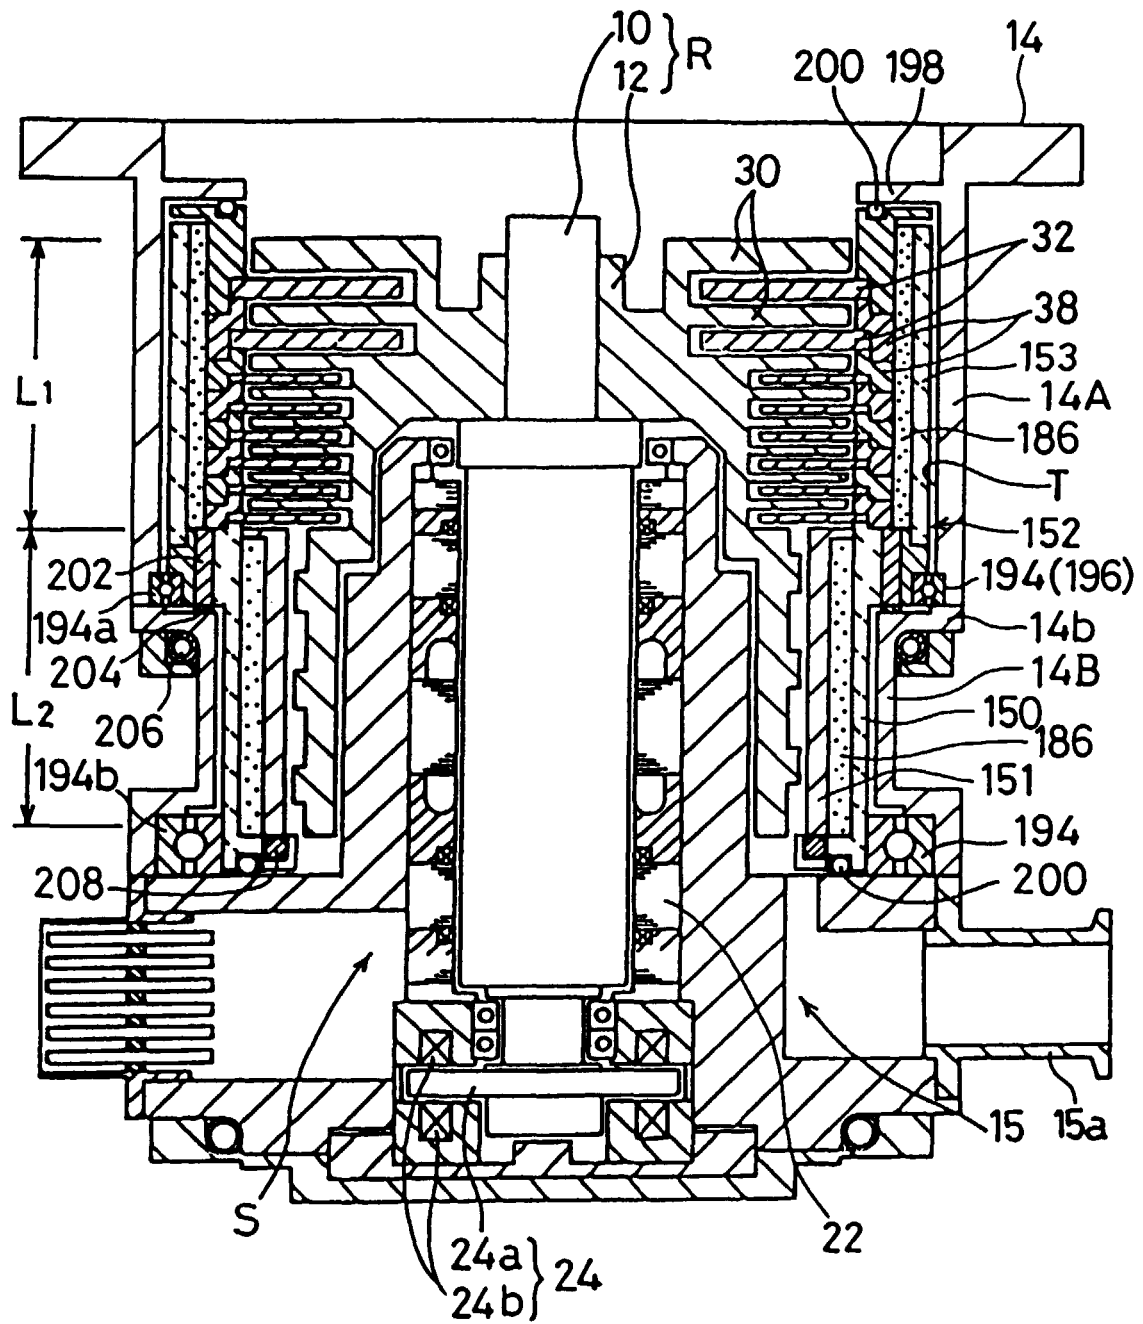


FIG. 17

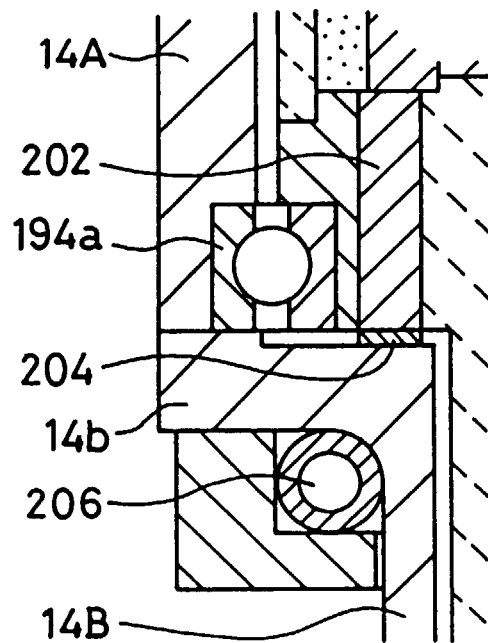


FIG. 18

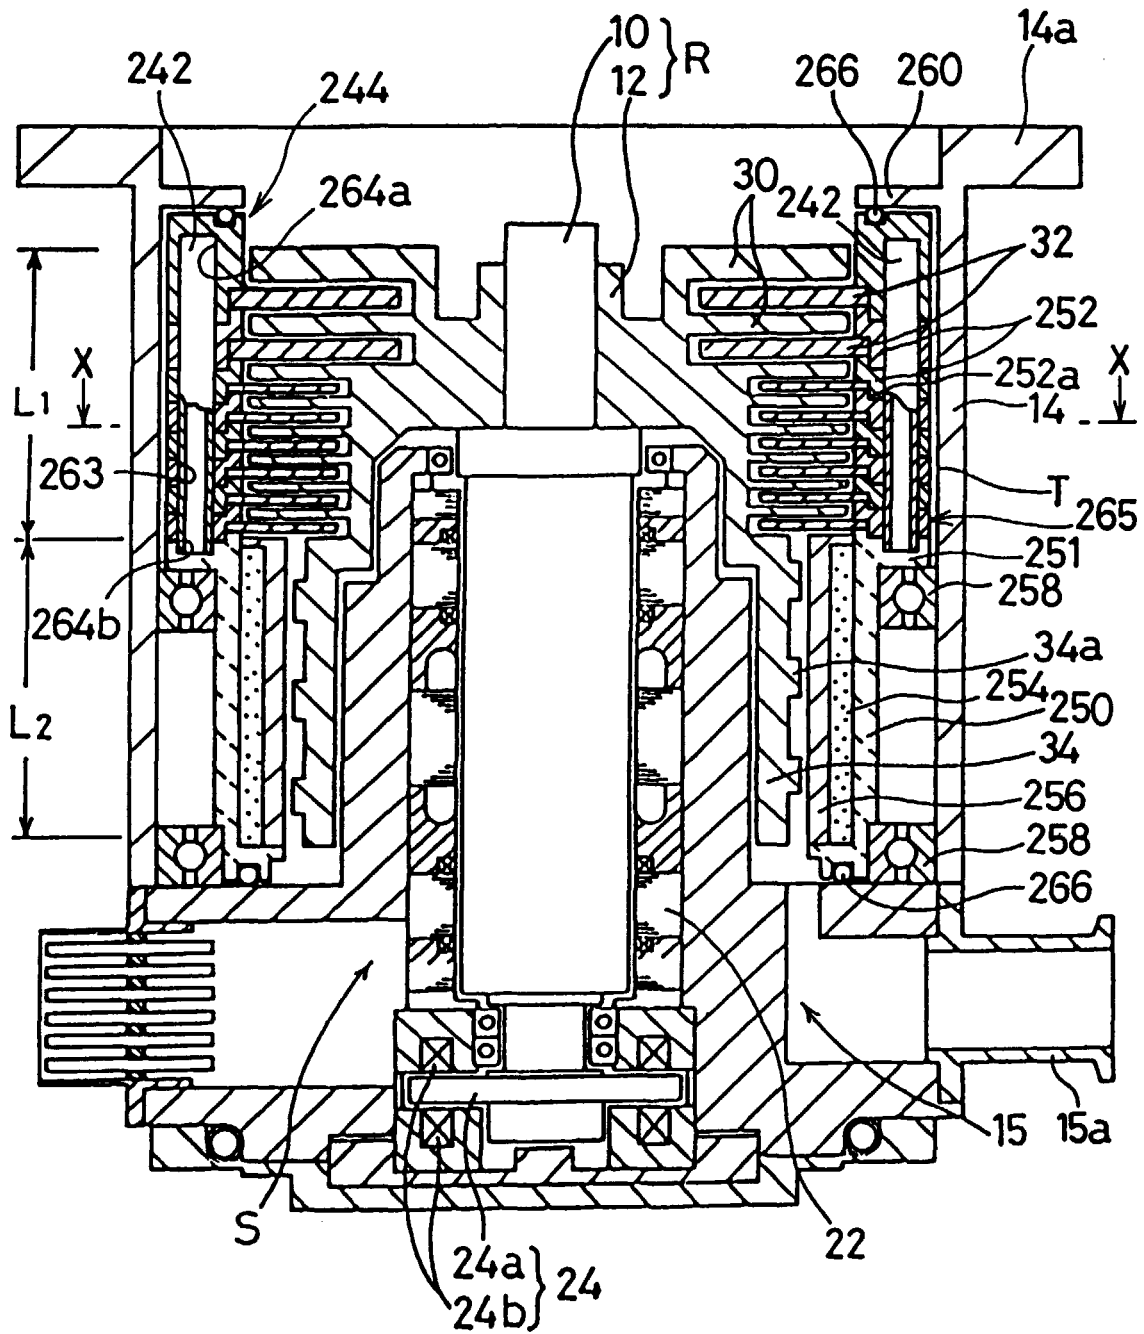


FIG. 19

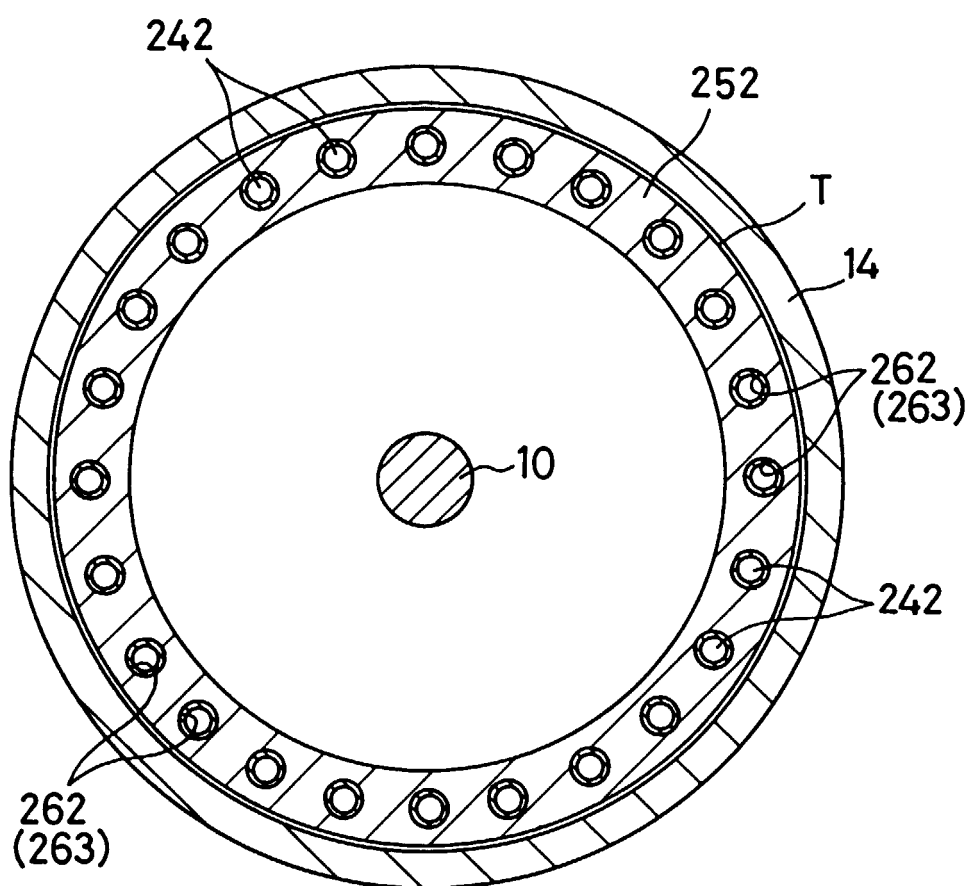


FIG. 20

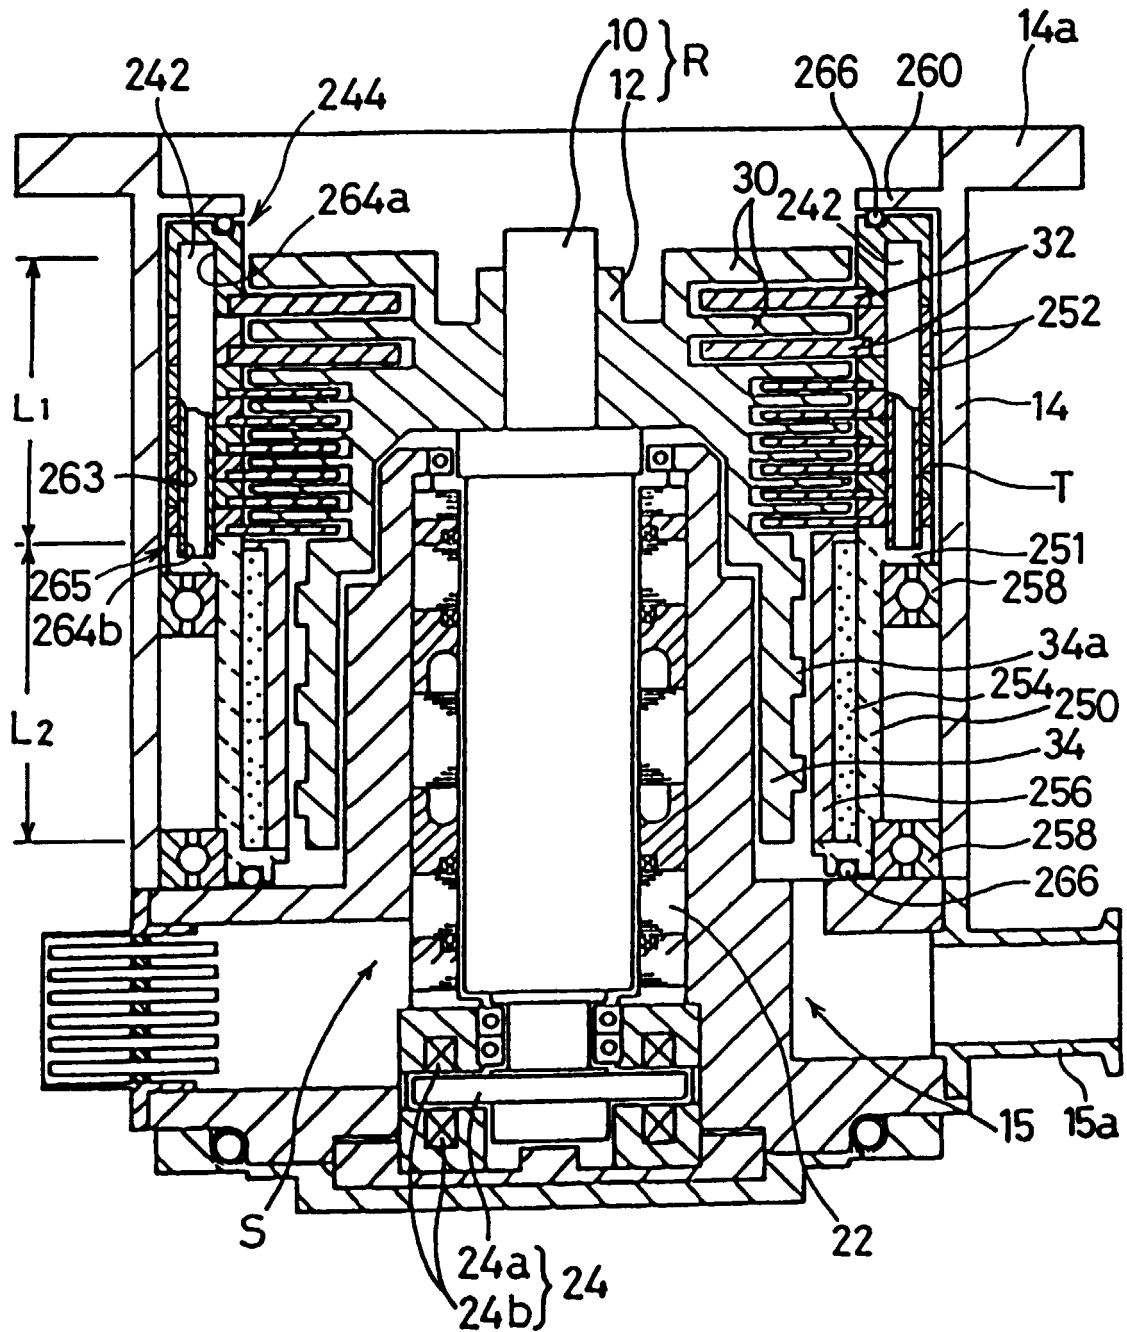


FIG. 21

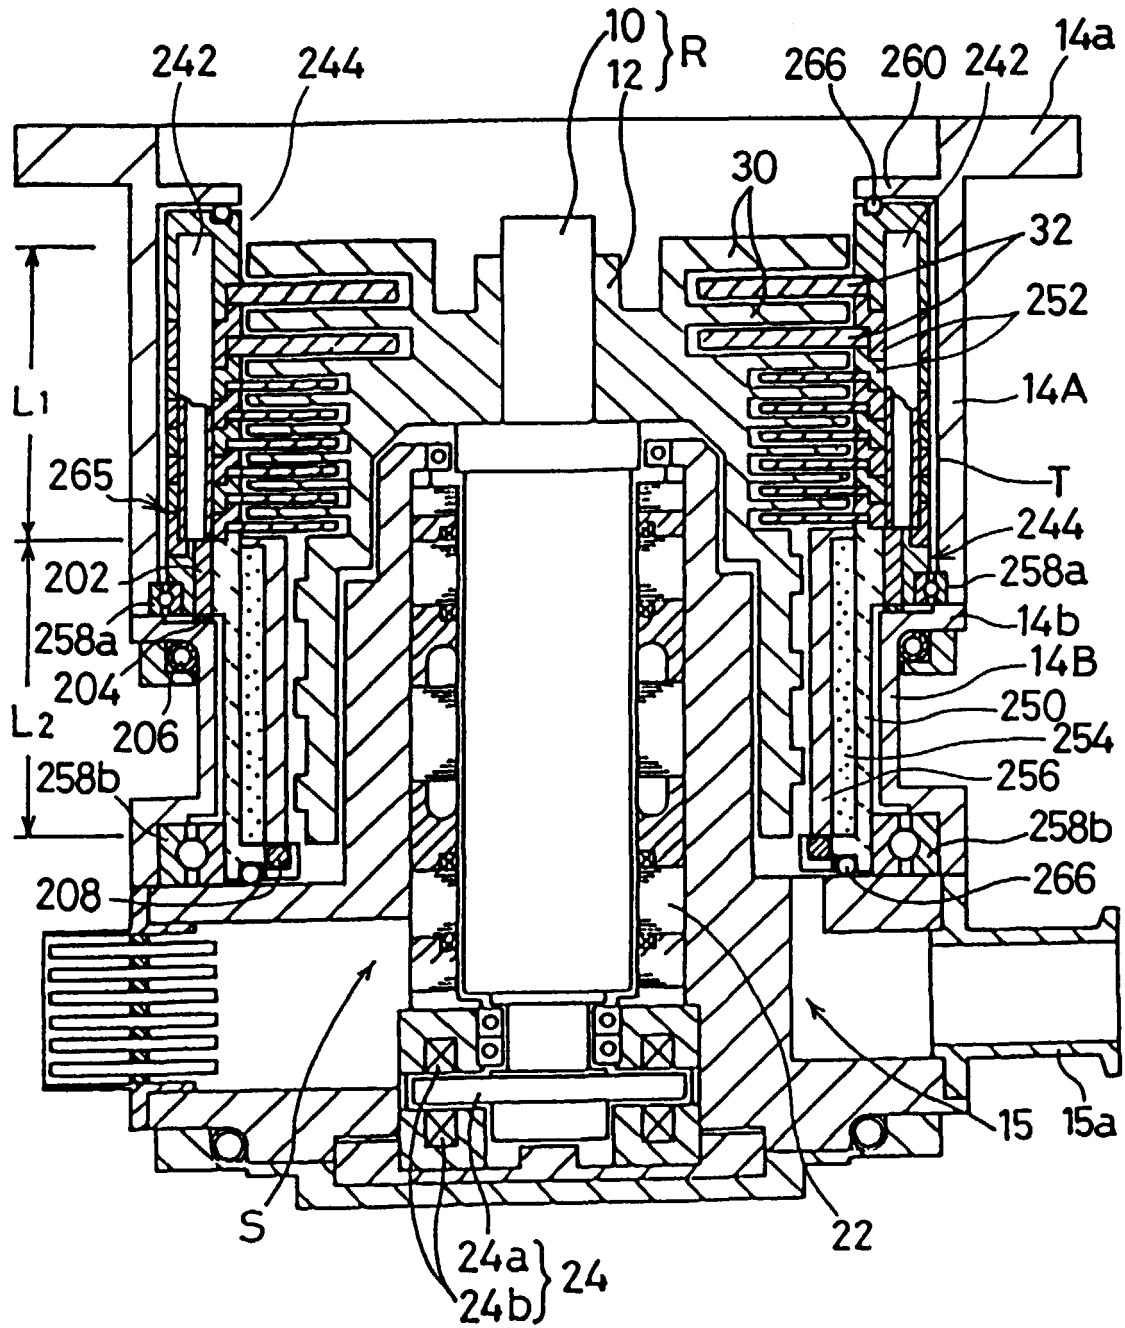


FIG. 22

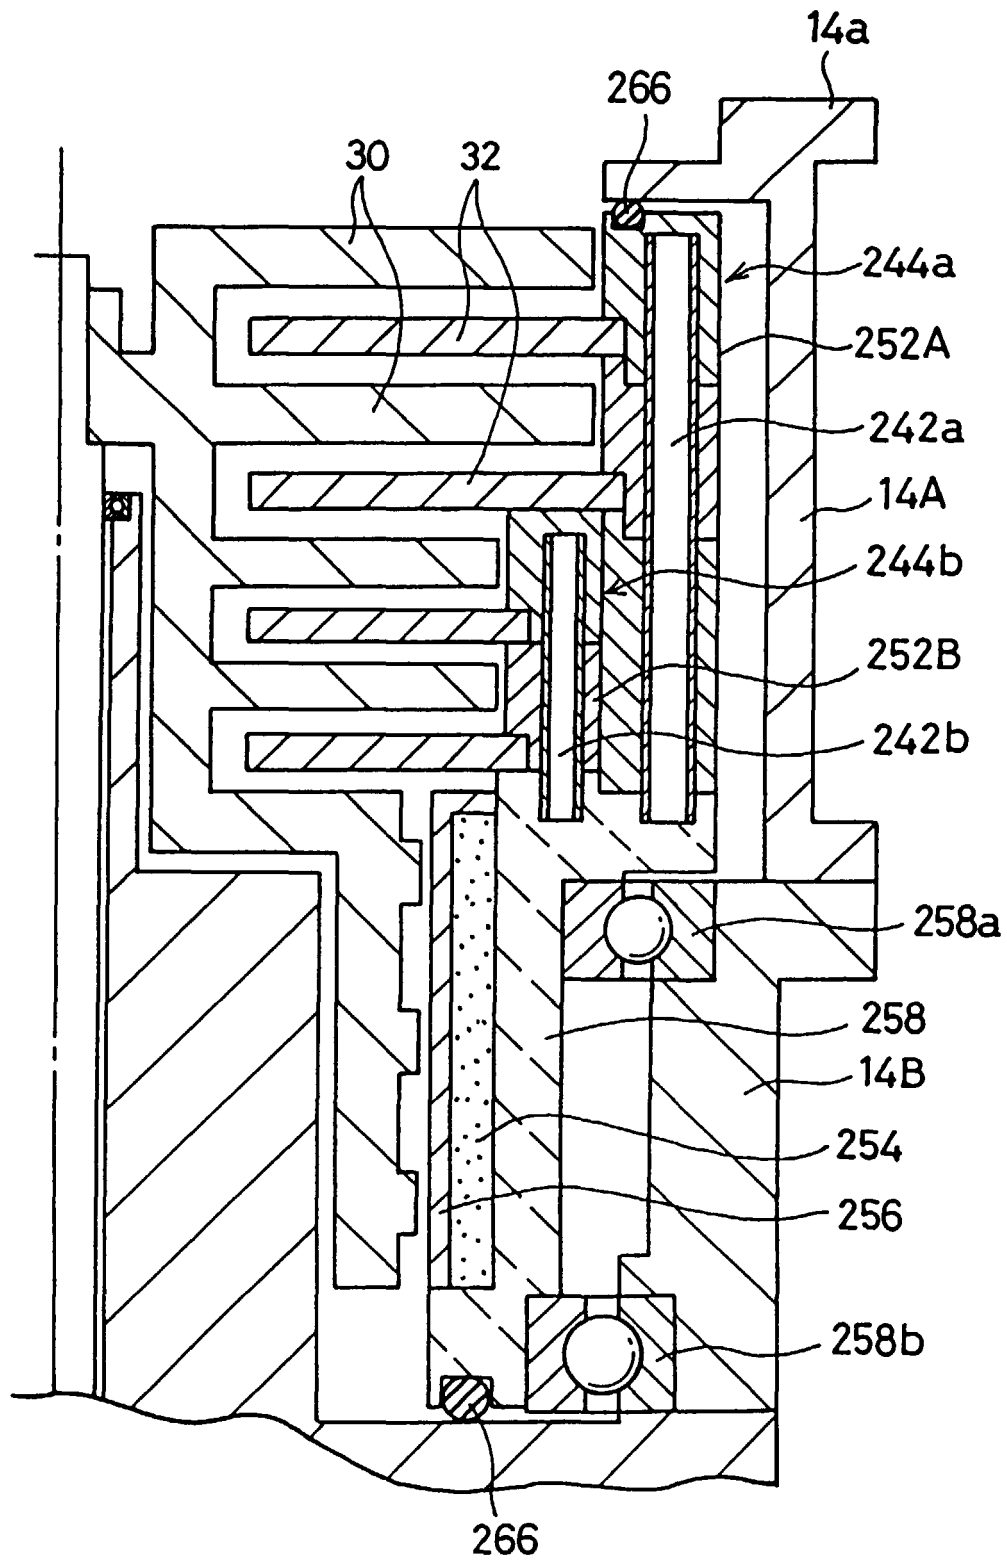


FIG. 23

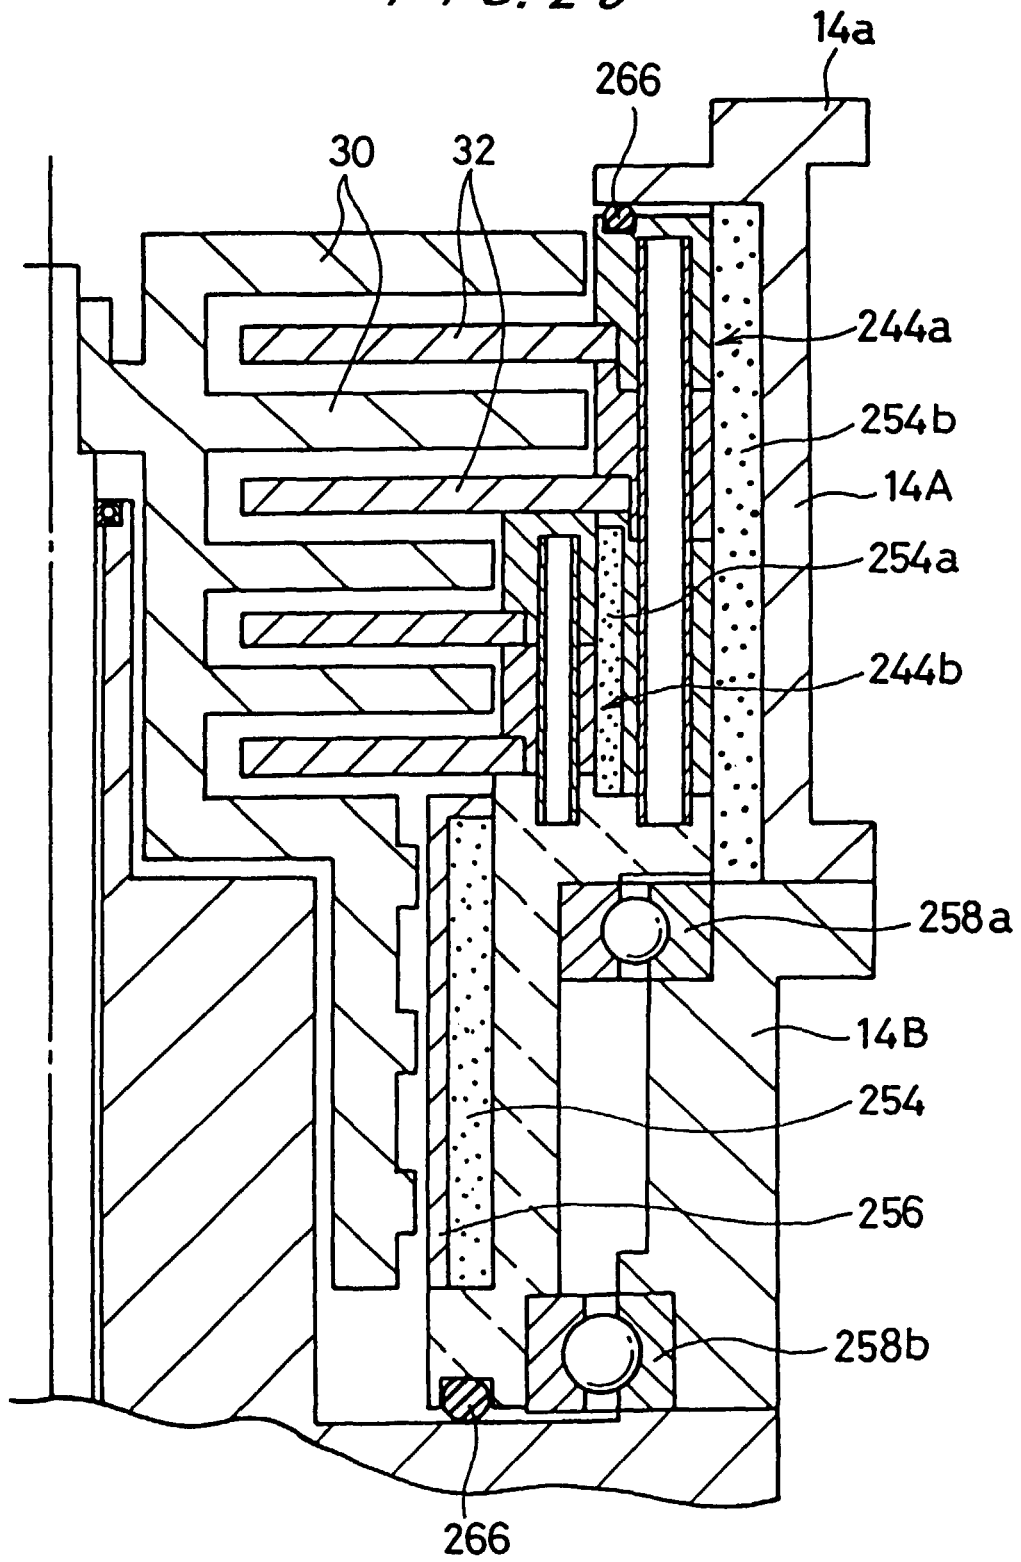


FIG. 24A


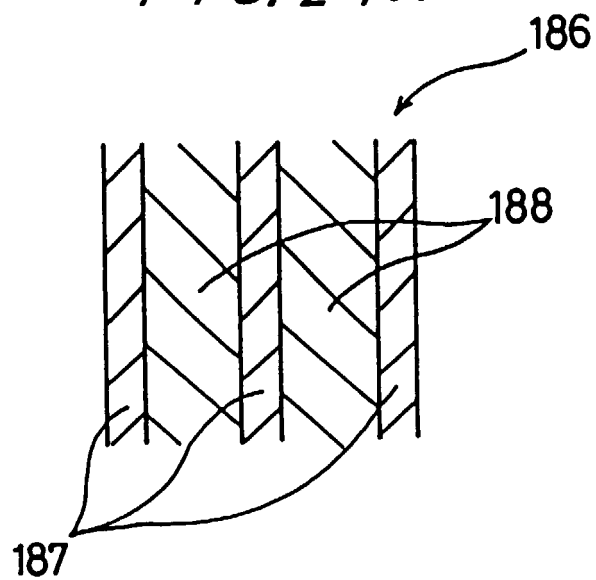


FIG. 24B



F / G. 25

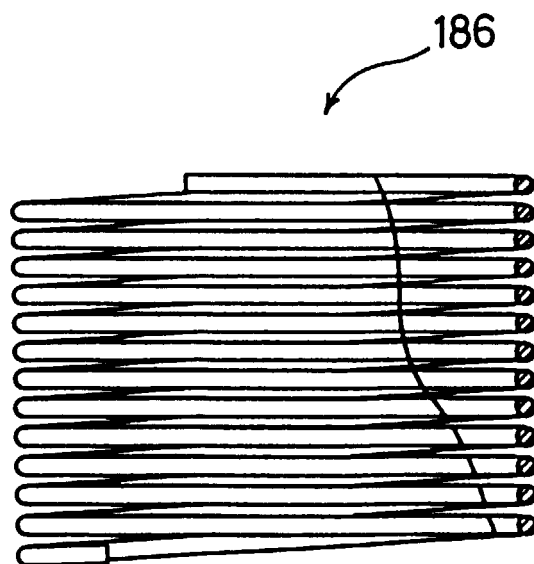