



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 031 415 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
30.08.2000 Bulletin 2000/35

(51) Int Cl.7: **B41C 1/10**

(21) Application number: **99200528.0**

(22) Date of filing: **23.02.1999**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(71) Applicant: **AGFA-GEVAERT N.V.**
2640 Mortsel (BE)

(72) Inventors:
• **Vermeersch, Joan c/o Agfa-Gevaert N.V.**
2640 Mortsel (BE)
• **Leenders, Luc c/o Agfa-Gevaert N.V.**
2640 Mortsel (BE)
• **Meisters, Augustin c/o Agfa-Gevaert N.V.**
2640 Mortsel (BE)

(54) **Dry method for preparing a thermal lithographic printing plate precursor**

(57) According to the present invention there is provided a method for making a negative working non-ablative imaging material, suitable for making a lithographic printing plate, comprising the steps of applying a dry

powder containing at least a compound capable of converting light into heat and an organic compound on a surface of a non-electrically charged metal support, characterized in that the amount of organic compound in said powder ranges from 51 to 95% by weight.

EP 1 031 415 A1

Description

FIELD OF THE INVENTION

[0001] The present invention relates to a method for making a heat-mode lithographic printing plate precursor and a lithographic printing master in computer-to-plate and computer-to-press procedures.

BACKGROUND OF THE INVENTION

[0002] Rotary printing presses use a so-called master such as a printing plate which is mounted on a cylinder of the printing press. The master carries an image which is defined by the ink accepting areas of the printing surface and a print is obtained by applying ink to said surface and then transferring the ink from the master onto a substrate, which is typically a paper substrate. In conventional lithographic printing, ink as well as an aqueous fountain solution are fed to the printing surface of the master, which is referred to herein as lithographic surface and consists of oleophilic (or hydrophobic, i.e. ink accepting, water repelling) areas as well as hydrophilic (or oleophobic, i.e. water accepting, ink repelling) areas.

[0003] Printing masters are generally obtained by the so-called computer-to-film method wherein various pre-press steps such as typeface selection, scanning, colour separation, screening, trapping, layout and imposition are accomplished digitally and each colour selection is transferred to graphic arts film using an image-setter. After processing, the film can be used as a mask for the exposure of an imaging material called plate precursor and after plate processing, a printing plate is obtained which can be used as a master.

[0004] In recent years the so-called computer-to-plate method has gained a lot of interest. This method, also called direct-to-plate method, bypasses the creation of film because the digital document is transferred directly to a plate precursor by means of a so-called plate-setter. In the field of such computer-to-plate methods the following improvements are being studied presently :

(i) On-press imaging. A special type of a computer-to-plate process, involves the exposure of a plate precursor while being mounted on a plate cylinder of a printing press by means of an image-setter that is integrated in the press. This method may be called 'computer-to-press' and printing presses with an integrated image-setter are sometimes called digital presses. A review of digital presses is given in the Proceedings of the Imaging Science & Technology's 1997 International Conference on Digital Printing Technologies (Non-Impact Printing 13). Computer-to-press methods have been described in e.g. **EP-A 770 495**, **EP-A 770 496**, **WO 94001280**, **EP-A 580 394** and **EP-A 774 364**. The best known imaging methods are based on ablation. A problem associated with ablative plates is the generation of debris which is difficult to remove and may disturb the printing process or may contaminate the exposure optics of the integrated image-setter. Other methods require processing with chemicals which may damage the electronics and other devices of the press.

(ii) On-press coating. whereas a plate precursor normally consists of a sheet-like support and one or more functional coatings, computer-to-press methods have been described wherein a composition, which is capable to form a lithographic surface upon image-wise exposure and optional processing, is provided directly on the surface of a plate cylinder of the press. **EP-A 101 266** describes the coating of a hydrophobic layer directly on the hydrophilic surface of a plate cylinder. After removal of the non-printing areas by ablation, a master is obtained. However, ablation should be avoided in computer-to-press methods, as discussed above. **US-P 5,713,287** describes a computer-to-press method wherein a so-called switchable polymer such as tetrahydro-pyranyl methylmethacrylate is applied directly on the surface of a plate cylinder. The switchable polymer is converted from a first water-sensitive property to an opposite water-sensitive property by image-wise exposure. The latter method requires a curing step and the polymers are quite expensive because they are thermally unstable and therefore difficult to synthesise. **EP-A 802 457** describes a hybrid method wherein a functional coating is provided on a plate support that is mounted on a cylinder of a printing press. This method also needs processing. A major problem associated with known on-press coating methods is the need for a wet-coating device which needs to be integrated in the press.

(iii) Elimination of chemical processing. The development of functional coatings which require no processing or may be processed with plain water is another major trend in plate making. **WO 90002044**, **WO 91008108** and **EP-A 580 394** disclose such plates, which are, however, all ablative plates. In addition, these methods require typically multi-layer materials, which makes them less suitable for on-press coating. A non-ablative plate which can be processed with plain water is described in e.g. **EP-A 770 497** and **EP-A 773 112**. Such plates also allow on-press processing, either by wiping the exposed plate with water while being mounted on the press or by the fountain solution during the first runs of the printing job.

(iv) Thermal imaging. Most of the computer-to-press methods referred to above use so-called thermal materials, i.e. plate precursors or on-press coatable compositions which comprise a compound that converts absorbed light

into heat. The heat which is generated on image-wise exposure triggers a (physico-)chemical process, such as ablation, polymerisation, insolubilisation by cross-linking of a polymer, decomposition, or particle coagulation of a thermoplastic polymer latex. This heat-mode process then results in a lithographic surface consisting of ink accepting and ink repelling areas.

[0005] EP-A- 786 337 discloses a process for imaging a printing plate, wherein the printing plate is charged over the whole surface and over the whole surface is covered with toner particles, which are charged oppositely. Thereon is the layer, formed by the particles imagewise fixed or imagewise ablated by infrared exposure on the surface of the printing plate. Thereafter the parts which are not fixed are removed and optionally the non-ablated areas are fixed by heating over the whole surface of the plate. This process requires a cumbersome development.

[0006] A problem associated with most thermal materials disclosed in the prior art is that these materials are suitable for exposure with either an internal drum image-setter (i.e. typically a high-power short-time exposure) or an external drum image-setter (i.e. relatively low-power long-time exposure). Providing a universal material that can be exposed with satisfactory results on both these types of laser devices known in the art is a requirement difficult to fulfil.

OBJECTS OF THE INVENTION

[0007] It is an object of the present invention to provide a cost effective method for preparing a material which is suitable for making a printing master for conventional lithographic printing by using computer-to-plate, computer-to-press or on-press coating methods and which requires no processing or can be processed with plain water. It is another object of the present invention to provide a method for making a universal material which can be exposed with internal as well as external drum image-setters.

[0008] Further advantages of the present invention will become apparent from the following description.

SUMMARY OF THE INVENTION

[0009] According to the present invention there is provided a method for making a negative working non-ablative imaging material, suitable for making a lithographic printing plate, comprising the steps of applying a dry powder containing at least a compound capable of converting light into heat and an organic compound on a surface of a non-electrically charged metal support, characterized in that the amount of organic compound in said powder ranges from 51 to 95% by weight.


DETAILED DESCRIPTION OF THE INVENTION

[0010] Said organic compound is present in said powder in an amount of at least 51%. Said organic compound is preferably a thermoplastic polymer particle, more preferably with a diameter between 0.02 μm and 10 μm , most preferably between 0.050 μm and 2 μm . Preferred thermoplastic polymers are novolac, polystyrene or a polyacrylate, used alone or mixed with one or two of the other components. Preferably said thermoplastic polymer particles contain a reactive compound inside or outside these particles. Particles containing reactive compounds inside the particles are prepared according to the well known technique of preparing microcapsules or by adding the reactive compound in a water immiscible solvent to the particles dispersed in water. Particles containing reactive compounds outside the particles are prepared according to the well known technique of loading latices as described in **EP-A- 483 416**. Reactive compounds are compounds which can cause cross-linking. Preferred reactive compounds are melamine resins, urethanes, phenol-formaldehyde resins and epoxy compounds.


[0011] The compound which is capable of converting light into heat is preferably an organic dye or pigment, carbon black, graphite, metal carbides, borides, nitrides, carbonitrides, or oxides.

[0012] The materials made by the method of the present invention are preferably sensitive to near infrared light. Accordingly, the compound capable of converting light into heat is preferably a near infrared light absorbing compound such as carbon or an infrared dye. It is also possible to use dry, finely divided polymer particles consisting of e.g. a polypyrrole or polyaniline-based polymer. The infrared dyes listed in Table 1 are highly preferred.


Table 1

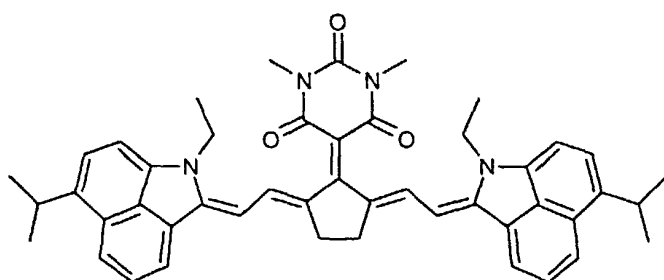


Cpd 1

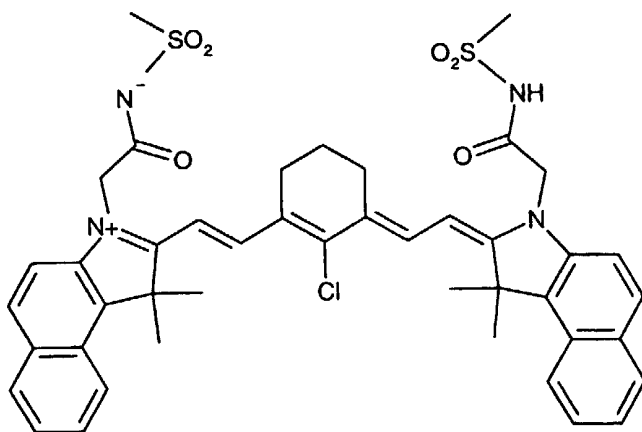


Cpd 2

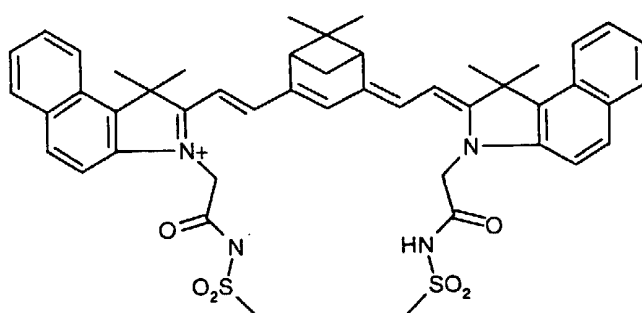


Cpd 3

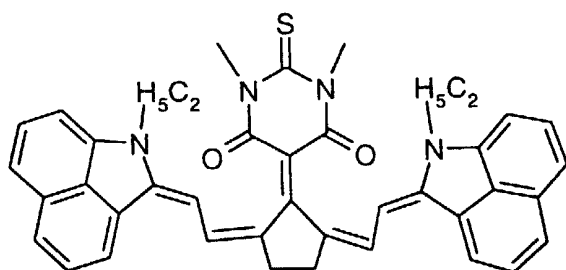


Cpd 4


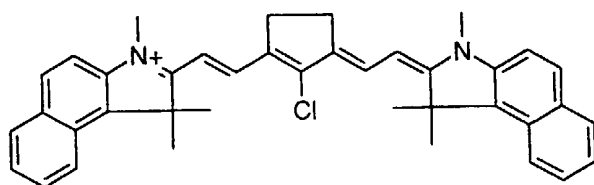


Cpd 5





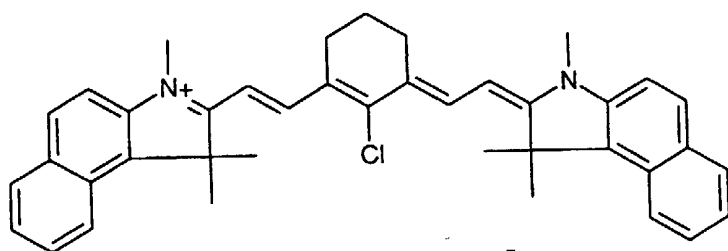



Cpd 6

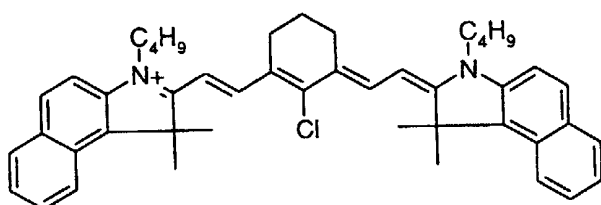


Cpd 7

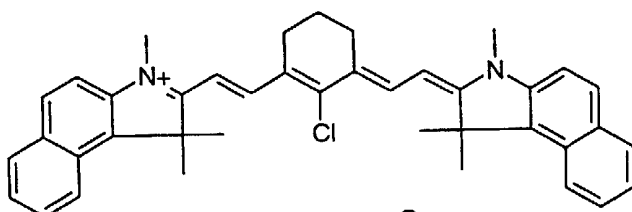


Cpd 8

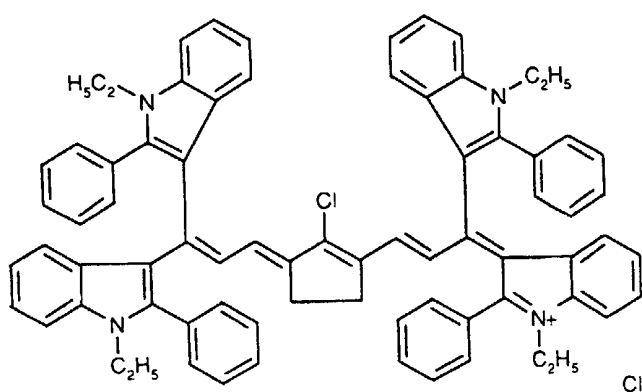

Cpd 9

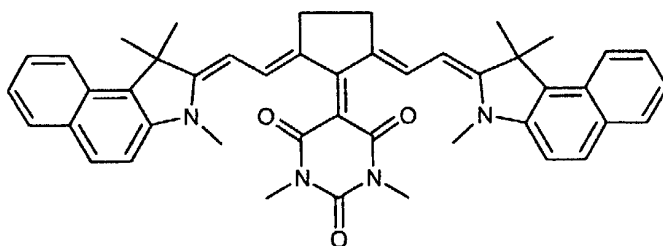

Cpd 10

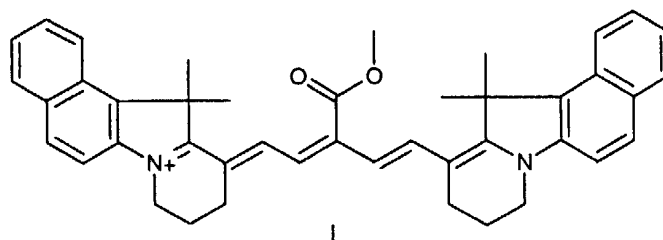

Cpd 11

[0013] The amount of the compound capable of converting light into heat is in the range of 5 to 49% by weight, more preferably between 10 to 49% by weight of the dry powder.

[0014] The compound capable of converting light into heat can also be incorporated in or adsorbed to or mixed with the polymeric particles or is heterogeneously mixed with said organic compound.

[0015] The materials made by the method of the present invention require no processing or can be processed with plain water. Since it is a dry coating method, the method of the present invention is very suitable for computer-to-press applications and on-press coating procedures.

[0016] The imaging mechanism of the materials that are made according to the present invention is not known, but may rely on a thermal interaction between the light absorbing compound and the metal support.

[0017] The features of the present invention, as specified in the claims, shall be understood as indicated hereafter. The word "image" is used herein in the context of lithographic printing, i.e. "a pattern consisting of oleophilic and hydrophilic areas". The material that is made according to the present invention is negative working, which means that the areas, which are exposed to light, are rendered oleophilic and thus ink accepting due to said exposure. In the context of the present invention, the feature "negative working" may be considered as an equivalent of the feature "non-ablative", since in ablative materials the functional layers are completely removed from the underlying (hydrophilic) metal support upon image-wise exposure so as to obtain a positive image (exposed areas are hydrophilic, ink repelling). Analysis of the exposed areas of the material made according to the method of the present invention indeed showed that the layer or stack of layers is not removed upon image-wise exposure but is converted into a hydrophobic surface on the metal support. The unexposed areas are hydrophilic or become hydrophilic after processing with plain water.

[0018] The dry powder used in the present invention may further comprise non-reactive compounds, i.e. inert components such as e.g. a matting agent or a filler. The word "inert" shall not be understood in the meaning of "non-functional", since these inert compounds may be added to the powder to adjust certain physical properties, such as e.g. surface roughness and friction coefficient of the applied layer or the rheological properties of the powder. The word "inert" shall rather be understood as meaning "not essential for the imaging process", though some inert compounds may have a (minor) influence on the speed and image quality of the material.

[0019] The method of the present invention may be used to apply a stack of layers on a metal support but a single layer is preferred. The compound capable of converting light into heat may be present in all the layers of said stack or may be localised in just a single layer of said stack. In a method according to the latter embodiment the layer comprising the compound capable of converting light into heat is preferably applied directly on the metal support. The layer comprising the compound capable of converting light into heat is preferably very thin, i.e. having a dry layer thickness below 2 μm , preferably not higher than 1 μm .

[0020] The support used in the present invention is a non-electrically charged metal support. Preferred examples of said metal support are steel, especially polished stainless steel, and aluminium. Phosphor bronze (an alloy comprising >90 wt.% of copper, <10 wt.% of tin and small amounts of phosphor) can also be used. The aluminium support is preferably an electrochemically grained and anodised aluminium support. Most preferably said aluminium support is grained in nitric acid, yielding imaging elements with a higher sensitivity. The anodised aluminium support may be treated to improve the hydrophilic properties of its surface. For example, the aluminium support may be silicated by

treating its surface with sodium silicate solution at elevated temperature, e.g. 95°C. Alternatively, a phosphate treatment may be applied which involves treating the aluminium oxide surface with a phosphate solution that may further contain an inorganic fluoride. Further, the aluminium oxide surface may be rinsed with a citric acid or citrate solution. This treatment may be carried out at room temperature or can be carried out at a slightly elevated temperature of about 30 to 50°C. A further treatment may involve rinsing the aluminium oxide surface with a bicarbonate solution. Still further, the aluminium oxide surface may be treated with poly(vinyl phosphonic acid), poly(vinyl methylphosphonic acid), phosphoric acid esters of poly(vinyl alcohol), poly(vinyl sulphonic acid), poly(vinyl benzenesulphonic acid), sulphuric acid esters of poly(vinyl alcohol), and acetals of poly(vinyl alcohols) formed by reaction with a sulphonated aliphatic aldehyde. It is evident that one or more of these post treatments may be carried out alone or in combination.

[0021] A highly preferred material made according to the present invention comprises a non-electrically charged anodised aluminium support and provided directly thereon a single recording layer which consists essentially of a compound capable of converting light into heat and thermoplastic polymer particles. On top of said recording layer there may be provided a top layer for protecting the recording layer against moisture, chemicals, oxygen, mechanical impact, etc.

[0022] According to the present invention, a non-electrically charged metal support can be applied with a dry powder by rubbing in the surface of said support with said dry powder. Alternative dry coating methods can also be used, e.g. sputter-coating of the powder on the metal support.

[0023] The method of the present invention can be used in computer-to-plate (off-press exposure) or computer-to-press (on-press exposure) procedures. The method may also involve on-press coating, i.e. applying a dry powder according to the present invention directly on the non-electrically charged metal surface of a cylinder of a rotary printing press. Said on-press coating can also be performed indirectly by applying the dry powder on a metal support which is mounted on a cylinder of a rotary printing press. In still another method according to the present invention, said composition can be applied on a metal sleeve which, after image-wise exposure and optional processing, is then transferred to a cylinder of a rotary printing press.

[0024] The dry powder may also be applied on the non-electrically charged metal support by contacting the surface of said support with another material, which carries a dry layer containing an organic compound and a compound capable of transferring light into heat which are then transferred to the metal support. The method of this embodiment can be automated easily, e.g. by incorporating a supply roll of such a transfer material, such as a ribbon impregnated with the dry powder in a print station of a digital press similar to the configuration which is described in **EP-A 698 488**.

The transfer material can be unwound from said supply roll and the layer containing the dry powder can then be brought in direct contact with the surface of a plate cylinder by one or more contact rollers. After the transfer step, which may be carried out by applying pressure and/or heat on said transfer material while being in contact with the metal support, the used transfer material may be wound up again on a take-up roll. In the latter embodiment, the transfer of dry powder can be carried out so as to obtain a uniform layer which then can be image-wise exposed. Alternatively said pressure and/or heat can be applied image-wise, so that the dry powder is transferred image-wise to the metal support. This step then may be followed by intense overall heating, e.g. by infrared laser exposure. However, if sufficient heat is applied during said image-wise transfer, a suitable printing master may directly be obtained without intense overall heating.

[0025] In an even more preferred embodiment of the automated method, described above, a dry coating unit as described above, consisting of a supply roll, one or more contact rollers and a take-up roll, is mounted on the same carriage as the laser exposure unit of an external drum image-setter. Reference is made to e.g. Figure 1 of **US-P- 5 713 287** which illustrates a similar device wherein a spray coating unit is mounted on the same carriage as the laser exposure unit in an external drum configuration. In this way, said dry coating unit moves in front of the laser exposure unit along the so-called slow scan axis, parallel to the axis of the plate cylinder. As the plate cylinder is rotated during image-wise exposure (fast scan movement), the whole surface of said cylinder passes the dry coating unit and a layer is coated along a spiral path around the cylinder. Since the laser exposure unit moves together with the dry coating unit, an area which has been coated during one revolution of the cylinder is exposed by the laser exposure unit a number of revolutions later, i.e. coating and image-wise exposing can be carried out almost simultaneously during the same scan procedure.

[0026] The materials made according to the present invention can be exposed to light by a light emitting diode or a laser such as a He/Ne or Ar laser. Preferably a laser emitting near infrared light having a wavelength in the range from about 700 to about 1500 nm is used, e.g. a semiconductor laser diode, a Nd:YAG or a Nd:YLF laser. The required laser power depends on the pixel dwell time of the laser beam, which is determined by the spot diameter (typical value of modern plate-setters at $1/e^2$ of maximum intensity : 10-25 μm), the scan speed and the resolution (i.e. the number of distinct pixels per unit of linear distance, often expressed in dots per inch or dpi; typical value : 1000-4000 dpi). A major benefit of the materials made according to the present invention is that they can be used as a universal imaging material which is suitable for exposure by internal (ITD) as well as external drum (XTD) image-setters. ITD image-setters are typically characterised by very high scan speeds up to 500 m/sec and may require a laser power of several

Watts. Satisfactory results have also been obtained by using XTD image-setters having a typical laser power from 100 mW to 500 mW at a lower scan speed, e.g. from 0.1 to 10 m/sec.

[0027] The unexposed areas of the material made according to the present invention can be removed easily by wiping the material after exposure with plain water. This step may be performed on-press, i.e. after mounting the exposed plate on the plate cylinder of a printing press. The materials can even be used as a printing master immediately after image-wise exposure without any additional processing because the unexposed areas are readily removed by the fountain solution or the ink applied during the first runs of the printing job.

[0028] The printing plate of the present invention can also be used in the printing process as a seamless sleeve printing plate. In this option the printing plate is soldered in a cylindrical form by means of a laser. This cylindrical printing plate which has as diameter the diameter of the print cylinder is slid on the print cylinder instead of mounting a conventional printing plate. More details on sleeves are given in "Grafisch Nieuws", 15, 1995, page 4 to 6.

[0029] Most printing plates described in the prior art require a so-called post-bake, i.e. an overall heating treatment after image-wise exposure and optional processing so as to increase the run length of the plate. The materials made according to the present invention allow to achieve satisfactory run lengths without a post-bake.

EXAMPLES

[0030] While the present invention will hereinafter be described in connection with preferred embodiments thereof, it will be understood that it is not intended to limit the invention to those embodiments.

Example 1

[0031] An aluminum support was electrochemically roughened using hydrochloric acid, anodized in sulphuric acid and subsequently treated with polyvinylphosphonic acid. The obtained hydrophilic surface was further used for the application of a dry powder.

[0032] Dry powders consisting of organic compounds and infrared absorbing compounds were used for rubbing in the above described hydrophilic surface of the electrochemically roughened and anodized aluminum support, using a cotton pad.

[0033] Powders with various types and ratios of the organic compound and the IR-absorbing compound were prepared and applied by dry rubbing.

[0034] The carbon black containing powders were prepared by mixing the aqueous carbon black dispersion with an aqueous latex or dispersion of the organic compound in an appropriate ratio and freeze drying the aqueous mixture to remove water from the mixture. The carbon black used in these experiments is Printex L6™, a trade name of Degussa and the different organic compounds are described in tabel 2.

In the composition 6, the IR-dye was included into the latex particle and in composition 7 the IR-dye was absorbed on the latex particle.

Table 2

Organic compound (particle size)	IR_sensitive compound	Required plane image power	Ratio organic comp./IR- sensitive comp.
1.Polystyrene(71 nm)	carbon black	between 190 and 292 mW	90/10
2.Polystyrene(71nm)	carbon black	≅190 mW	55/45
3.Polymethylmethacrylate (72nm)	carbon black	between 80 and 190 mW	90/10
Polymethylmethacrylate (72nm)	carbon black	≅292 mW	55/45
Novolac(phenol/creso 1 resin)	carbon black	<80 mW	55/45
Polymethylmethacrylate (1μm)	Tab 1 Cpd 7	between 80 and 190 mW	94.8/5.2
Polymethylmethacrylate (90nm)	Tab 1 Cpd 7	>292 mW	94.8/5.2

[0035] After rubbing the powder in the hydrophilic aluminum surface, the obtained imaging element was exposed

with a 830 nm diode laser (Isomet-3600dpi-spot size 11 μm - at a speed of 3.2 m/s; i.e. pixel dwell time of 3.4 μs -image plane power was varied :80mW-190mW-292mW were used) and printed on a conventional offset printing machine equipped with a conventional ink and fountain solution.

[0036] Printing was started without any treatment between imaging and the press start.

[0037] All of the tested compositions resulted in good prints with good image quality.

Example 2

[0038] An aluminum support is electrochemically roughened using hydrochloric acid, anodized in sulphuric acid, and subsequently treated with polyvinylphosphonic acid.

[0039] The obtained hydrophilic surface was further used for the application of dry powders consisting of polymethylmethacrylate beads of 1 μm and graphite (Graphite Natural™ trade name of Carbone Lorraine, France- with a particle size < 20 μm as an infrared absorbing compound were used for dry rubbing in the above described hydrophilic surface of an electrochemically roughened and anodized aluminum support, using a cotton pad.

[0040] After rubbing the powder in the hydrophilic aluminum surface, the obtained imaging element was exposed with an 830 nm laser diode (Isomet-3600 dpi-spot size 11 μm -at a speed of 3.2 m/s; i.e.pixel dwell time of 3.4 μs -Image plane power was varied: 200 mW and 300 mW were used) as well as with a 1060 nm NdYLF laser (Isomet-3600 dpi-spot size 18 μm -at a speed of 3.2 m/s-image plane power was varied: 585 mW and 780 mW were used) and printed on a conventional offset printing machine equipped with a conventional ink and fountain solution system.

[0041] Printing was started without any treatment between imaging and the press start.

[0042] All of the tested powders resulted in good image quality, but sensitivity and the lithographic behaviour , e.g. ink-uptake, were different.

[0043] The ink-uptake, measured by Dmax on print 100 (see table 3), proves that the organic compound is needed in an amount of at least 51% to print high densities (>1.55 required); without said amount of polymethylmethacrylate-beads high densities print could not be guaranteed.

[0044] With only organic compound (no IR-absorbing compound) in the imaging material no image was formed at all.

Table 3

Ratio graphite/ polymethylmethacrylate 1 μm beads	Dmax (100 sheets) Isomet NdYLF 3.2 m/s		Dmax (100 sheets) Isomet diode 3.2 m/s	
100/0	585 mW	1.45	200 mW	0.81
	780 mW	1.12	300 mW	1.52
75/25	585 mW	1.41	200 mW	1.42
	780 mW	1.52	300mW	1.49
50/50	585mW	1.43	200 mW	1.51
	780mW	1.53	300 mW	1.52
25/75	585mW	1.61	200 mW	1.55
	780 mW	1.61	300 mW	1.60

Claims

1. A method for making a negative working non-ablative imaging material, suitable for making a lithographic printing plate, comprising the steps of applying a dry powder containing at least a compound capable of converting light into heat and an organic compound on a surface of a non-electrically charged metal support, characterized in that the amount of organic compound in said powder ranges from 51 to 95% by weight.
2. A method according to claim 1 wherein said organic compound consists of organic thermoplastic polymer particles having a diameter between 0.02 and 10 μm .
3. A method according to claim 1 or 2 wherein said organic compound consists of organic thermoplastic polymer particles having a diameter between 0.05 and 2 μm .

4. A method according to claim 2 or 3 wherein said organic thermoplastic polymer particles have a reactive compound inside or outside said particles.

5. A method according to claim 2 or 3 wherein said organic thermoplastic polymer particles consist of novolac and/or polystyrene and/or a polyacrylate.

6. A method according to claim 1 to 5 wherein the compound capable of converting light into heat is a near infrared absorbing compound.

7. A method according to claim 6 wherein the near infrared absorbing compound is an organic dye or carbon.

8. A method according to any of the claims 6 or 7 wherein the near infrared absorbing compound is incorporated into or adsorbed on or mixed with said polymer particles.

9. A method according to claim 6 or 7 wherein the near infrared absorbing compound is heterogeneously mixed with said organic compound.

10. A method according to any of the previous claims wherein the metal support is a sleeve or a cylinder of a rotary printing press.

11. A method for making a printing plate comprising the steps of:

- exposing a material prepared according to any of the previous claims;
- optionally wiping the exposed material with water.

12. A method for making a printing plate comprising the steps of:

- image-wise exposing with an IR-laser a material prepared according to any of claims 1 to 9;
- mounting the exposed material on a printing cylinder of a rotating press;
- rotating said cylinder while supplying an aqueous dampening liquid and/or supplying ink to said image-wise exposed material.

13. A method for making a printing plate comprising the steps of:

- mounting a material prepared according to any of claims 1 to 9 on a printing cylinder of a rotating press;
- image-wise exposing with an IR-laser said material and;
- rotating said cylinder while supplying an aqueous dampening liquid and/or supplying ink to said image-wise exposed material.



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 20 0528

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION
X	GB 1 157 918 A (RCA) 9 July 1969 (1969-07-09) * page 1, line 90 - page 2, line 13; claims 1,6,7 *	1-9	B41C1/10
A	US 5 683 848 A (NG T HWEE ET AL) 4 November 1997 (1997-11-04) * column 1, line 24 - column 2, line 13 * * column 5, line 17 - column 6, line 31; claims 1,2,5 *	1-9	
A	A.S.DIAMOND: "HANDBOOK OF IMAGING MATERIALS", MARCEL DEKKER, NEW YORK XP002111081 * page 165, paragraph 4.2.1 - page 166 * * page 168, paragraph 4.2.2 *	1	
A,D	EP 0 786 337 A (ROLAND MAN DRUCKMASCH) 30 July 1997 (1997-07-30) * column 2, line 4 - column 3, line 8; claims 11-16 *	1-13	
A	EP 0 099 264 A (VICKERS PLC) 25 January 1984 (1984-01-25) * page 4, line 4 - line 21; example 1 *	1-9	B41C B41M
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 3 August 1999	Examiner Philosoph, L
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 20 0528

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-08-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 1157918 A	09-07-1969	CA 923195 A	20-03-1973
		DE 1597796 A	18-06-1970
		FR 1549808 A	13-12-1968
US 5683848 A	04-11-1997	EP 0834776 A	08-04-1998
		JP 10123758 A	15-05-1998
		US 5804349 A	08-09-1998
EP 0786337 A	30-07-1997	DE 19602328 A	31-07-1997
		CA 2195826 A	25-07-1997
		JP 9201931 A	05-08-1997
EP 0099264 A	25-01-1984	NONE	