

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 048 463 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
02.11.2000 Bulletin 2000/44

(51) Int Cl. 7: B41F 17/00

(21) Application number: 99870075.1

(22) Date of filing: 29.04.1999

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(71) Applicant: PRINTING INTERNATIONAL
9880 Aalter (BE)

(72) Inventor: De Volder, Laurent
9880 Aalter (BE)

(74) Representative: Pieraerts, Jacques et al
Gevers & Vander Haeghen NV,
Patent Attorneys,
Livornostraat 1
1060 Brussel (BE)

(54) Process for inking a printing plate with thermoplastic inks and ink tanks to be used therein

(57) The invention relates to a process for inking a printing plate attached to a holder, with a thermoplastic ink, to be used in pad printing, whereby a relative movement is maintained between the holder and an ink tank

filled with thermoplastic ink, characterised in that the holder or the ink tank, or both these components are heated at the temperature required for the thermoplastic ink. The invention also relates to the ink tanks to be used in this process.

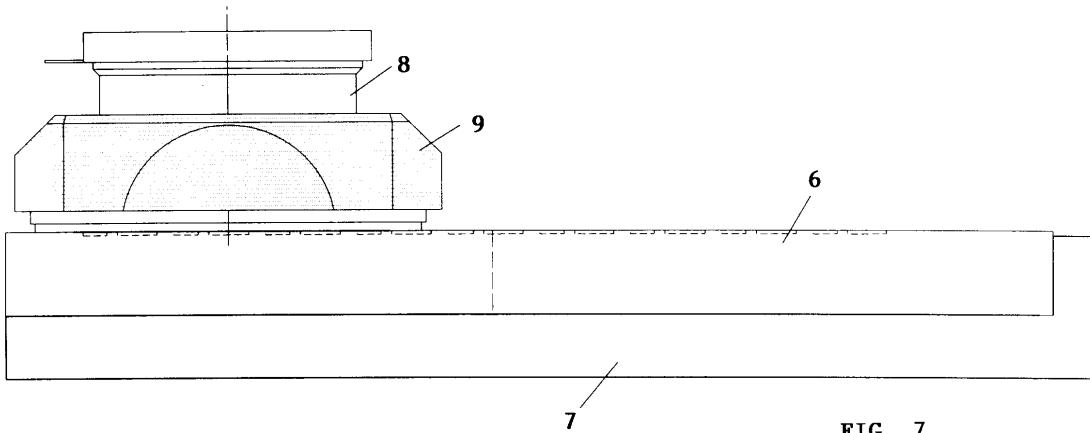


FIG. 7

Description

[0001] This invention relates to a process for inking a printing plate attached to a holder, with a thermoplastic ink, to be used in pad printing, whereby a relative movement is maintained between the holder and an ink tank filled with thermoplastic ink.

[0002] For the printing of substrates such as glass, ceramics and china, mostly a so-called thermoplastic ink is used. Such an ink has the viscosity of a thick paste at room temperature. For printing, this ink is heated to about 80°C, whereby it becomes very fluid. After printing, the very fluid ink on the printed substrate cools down to room temperature and consequently coagulates again. The print on the substrate is fixed by drying the printed product for a certain time at high temperature (around 800°C). By doing so, the ink vitrifies and fuses to the substrate. The result is a strongly adhesive print that does not fade or wear off, even when frequently cleaned in the dishwasher.

[0003] Silkscreen printing is at present the current process used for printing glass with thermoplastic inks to obtain an acceptable quality.

[0004] In the existing silkscreen technique, a screen is used that is comprised of a plastic material or metal, but must resist to a temperature of maximum 100°C, and that is attached to a wooden or metallic frame. The screen is covered with an impermeable layer, except in the spots where ink must be able to pass the screen to form the image to be printed on the substrate.

[0005] The pasty thermoplastic inks are placed on the screen. The screen is heated, so that the thermoplastic ink becomes fluid.

[0006] By means of a doctor blade of plastic material or metal, the thermoplastic ink is pushed through the screen, only through the openings that show the image directly on the product: glass, ceramics or china. This method has the following limitations:

- limited in resolution by the use of a screen, of which the density of the threads forming the screen is physically limited;
- can only be used for printing flat and cylindrical objects;
- quality is sharply reduced as soon as the surface of the object to be printed is bent inside or outside.

[0007] Apart from silkscreen printing, also the technique known as pad printing may be used.

[0008] Pad printing with thermoplastic ink has known little success up to now, because of lack of reliability and lack of constant quality.

[0009] In the technique which is known as "pad printing", an engraved printing plate is used, which in a first stage is inked over its entire surface, whereupon with a doctor blade the excess ink is scraped off, and collected in an ink duct or the like. The ink thus exclusively remains in the engraved parts.

[0010] The different operations involved in this, may be summarized as follows:

- 5 1) The doctor blade holder with slab is removed from the printing plate and is kept at a distance from the printing plate during the inking stage.
- 10 2) The doctor blade holder with slab is moved with respect to the printing plate during the inking stage, in the longitudinal direction thereof.
- 15 3) After the inking stage, the doctor blade is brought into contact with the printing plate.
- 20 4) The doctor blade is moved with respect to the printing plate, the ink is scraped off, except in the engraved portions, and is collected in an ink tank.

[0011] It is clear that the relative movements of the doctor blade holder with slab, with respect to the printing plate, are the result from both a moving of these parts with respect to a stationary printing plate, and the reverse, and that consequently both the printing plate and the doctor blade and the slab can be moved in opposite sense.

[0012] The doctor blade is always adjusted in such a way with respect to the printing plate, that it forms a sharp angle with this plate, with the portion of the printing plate that has been inked and must yet be scraped off.

[0013] The techniques which are generally applied and briefly described, show a series of disadvantages which can be summarized as follows:

- 30 a) The printing plate is subjected to high wear, because of the pressure exerted by the doctor blade on the printing plate. A good scraping off of the ink is indeed an absolute requirement, and this requires, at the installation of the doctor blade as described above, a high pressure of the doctor blade on the printing plate.
- 35 b) Each time, two movements are required, which can be summarized as follows: up or down movement of the doctor blade knife during the relative movements of the doctor blade with respect to the printing plate.
- 40

[0014] Since thermoplastic inks are used, which must be held at a constant, controlled temperature, many disadvantages are associated to this system. These are summarized hereafter:

- 45
- 50 - severe wear of the printing plate and doctor blade knife because of the required high pressure of the doctor blade knife on the printing plate, which strongly affects the print quality in a negative way.
- 55 - problems to keep the temperature at a constant level during the up and down movements of the doctor blade knife, which is continuously heated and cooled, as a result of which the doctor blade knife is rapidly "polluted" by hardened ink.

[0015] The combination of above disadvantages is the reason why a production with a constant print quality is almost impossibly feasible.

[0016] It is the aim of the invention to remediate the disadvantages of this known technique, and to prescribe a process and a device ensuring with technically reliable means, an increased life of the printing plate and enabling a reliable use of thermoplastic inks.

[0017] In order to make this possible according to the invention, the holder or the ink tank, or both these components, are heated to the temperature required for the thermoplastic ink.

[0018] In a first possible embodiment, as an ink tank, an electrically heated ink tank is used, with circular or oval doctor blade of a hard material, such as hard metal or plastic material in the shape of a monolithic component of undeformable material, in which, at the periphery a circular or oval canal is made for attaching above said doctor blade by snap connection, as well as for attaching above said doctor blade to this component by glueing.

[0019] According to another possible embodiment, a device is used consisting of a combination of a heated ink tank and at least one doctor blade, of which at least the bottom edge which is contacting the printing plate, is adjusted with respect to the printing plate at a negative angle, measured with respect to the inked portion of the printing plate to be scraped off, and without changing the position of the doctor blade, a relative movement of the doctor blade with respect to the printing plate is generated, on the one hand, in a direction to ink the printing plate, and on the other hand, in the other direction, to scrape off the ink from the printing plate.

[0020] The invention also relates to closed ink tanks to be used within the frame of the invention.

[0021] Other details and advantages of the invention will show from the process for inking a printing plate attached to a holder, with thermoplastic ink and the ink tank used herein according to the invention. The reference numbers refer to the attached figures.

[0022] Figures 1 to 4 schematically illustrate a classical pad printing process.

[0023] Figure 5 schematically shows a closed ink tank with heated printing plate holder.

[0024] Figure 6 schematically shows a closed ink tank with heated printing plate.

[0025] Figure 7 schematically shows a closed ink tank with heated holder.

[0026] Figure 8 schematically shows a closed ink tank with heated ink tank.

[0027] Figure 9 schematically shows a closed doctor blade chamber with heated printing plate holder.

[0028] Figure 10 schematically shows a closed doctor blade chamber with heated printing plate.

[0029] Figure 11 schematically shows a closed and heated doctor blade chamber.

[0030] The process shown by figures 1-4 schematically, but clearly illustrates the different steps of inking in the pad printing technique.

[0031] 1 refers to the printing plate which is fixed in a holder 2, the deepened part of which forms the ink chamber 3, in which the ink is collected after the scraping off of the printing plate 1. In principle, a device for inking a printing plate always comprises an ink slab 4 and a doctor blade 5. These components are separately moved up and down by means which will not be described in detail here.

[0032] It is clear that the relative movements of the doctor blade holder with slab, with respect to the printing plate, are the result of both a movement of these components with respect to a stationary printing plate, and the reverse, and consequently that both the printing plate and the doctor blade with slab can be moved in opposite sense.

[0033] The techniques generally applied and briefly described show a series of disadvantages which can be summarized as follows:

[0034] a) The doctor blade is always adjusted in such a way with respect to the printing plate, that it forms a sharp angle with this plate, with the portion of the printing plate that has been inked and must yet be scraped off.

b) The printing plate is subjected to high wear, because of the pressure exerted by the doctor blade on the printing plate. A good scraping off of the ink is indeed an absolute requirement, and this requires, at the installation of the doctor blade as described sub a), a high pressure of the doctor blade on the printing plate.

c) Each time, two movements are required, which can be summarized as follows: up or down movement of the doctor blade knife during the relative movements of the doctor blade with respect to the printing plate.

[0035] Since thermoplastic inks should be held at a constant controlled temperature, many disadvantages are connected to the process just described. These disadvantages are, i.a.

- severe wear of printing plate and doctor blade knife because of the required high pressure of the doctor blade knife on the printing plate, which strongly affects the print quality in a negative way.
- problems to keep the temperature at a constant level during the up and down movements of the doctor blade knife, which is continuously heated and cooled, as a result of which the doctor blade knife is rapidly "polluted" by hardened ink.

The combination of above disadvantages is the reason why a production with a constant print quality is almost impossibly feasible.

[0036] According to the invention now, because of the use of thermoplastic inks, a heated printing plate holder 4 or a closed, heated ink tank is used, but it will imme-

diately be obvious that both these components could be heated.

[0036] The different embodiments of the process and the holders or ink tanks to be used herein, will be discussed hereafter.

[0037] In the embodiment according to figure 5, a printing plate 6 is used that is fixed into the printing plate holder 7. With 8, reference is made to an inking chamber with holder 9. So in this embodiment, only the printing plate holder 7 is heated.

[0038] Figure 6 concerns an alternative of the invention according to which the printing plate 6 is heated, whereas neither the printing plate holder 7, nor the inking chamber 8 are heated. As has been said before, a combination of the embodiments described just now, is conceivable.

[0039] In the embodiment according to figure 7, exclusively the inking chamber holder 9 is heated, whereas according to figure 8, only the inking chamber 8 is heated. In the spirit of the invention, the embodiments according to figures 5-8 can be both mutually combined.

[0040] The closed chambers 10 according to figures 9-11 relate to a very remarkable embodiment of the inking chamber to be used with this application. The closed inking chambers are combined here according to the embodiment described hereafter; i.e.

- a) (Fig. 9) Here the inking chamber 10 is used in combination with a heated printing plate holder 7;
- b) (Fig. 10) Here, exclusively the printing plate 6 is heated;
- c) (Fig. 11) In this embodiment, exclusively the inking chamber 10 is heated.

[0041] In the spirit of the invention, the embodiments according to figures 9-11 may be mutually combined.

[0042] The inking chamber 10 is a particularly attractive embodiment. It consists of a housing 11, which in combination with two doctor blades 12, forms a completely closed inking chamber 13.

[0043] The ink 14 present in the inking chamber is spread out on and scraped off from the printing plate, simultaneously by both the doctor blades 8.

[0044] Because of the particular angle at which the doctor blades 8 are adjusted with respect to the printing plate 8, an "inking gap" of the closed inking chamber is realised, which is particularly advantageous for the use of thermoplastic inks.

[0045] The implementation of a closed inking chamber of the type illustrated by figures 9, 10 and 11, creates ideal conditions for the use of thermoplastic inks.

[0046] The striking advantages of the process according to the invention and of the closed inking chambers used herein, may be summarized as follows:

- a) Since there are no up- and downward movements of both the closed inking chamber and the doctor blade chamber mechanism, these cannot

cool down.

b) Due to the limited amount of used thermoplastic ink which will be used according to the process, maintaining a constant temperature is simpler.

c) Minimum wear of the printing plate, because the pressure of the doctor blade chamber or inkpot on the printing plate is low.

d) Printing plates and ink are easily exchangeable, with very short exchange times.

e) A very economical ink consumption, because the ink losses upon cleaning are very small.

f) Because of the limited amount of used thermoplastic ink, and the absence of an ink tank, the machine more rapidly arrives at operating temperature after switching on, when starting up at room temperature.

Claims

- 5 1. Process for inking a printing plate attached to a holder, with a thermoplastic ink, to be used in pad printing, whereby a relative movement is maintained between the holder and an ink tank filled with thermoplastic ink, characterised in that the holder or the ink tank, or both these components are heated at the temperature required for the thermoplastic ink.
- 10 2. Process according to claim 1, characterised in that as an ink tank, a heated ink tank is used, with circular or oval doctor blade of a hard material, such as hard metal or plastic material in the shape of a monolithic component of undeformable material, in which at the periphery a circular or oval canal is made for attaching above said doctor blade by snap connection, as well as for attaching above said doctor blade to this component by glueing.
- 15 3. Process according to claim 1, characterised in that as an ink tank, a device is used consisting of the combination of a heated ink tank and at least one doctor blade, of which at least the bottom edge which is contacting the printing plate, is adjusted with respect to the printing plate at a negative angle, measured with respect to the inked portion of the printing plate to be scraped off, and without changing the position of the doctor blade, a relative movement of the doctor blade with respect to the printing plate is generated, on the one hand, in a direction to ink the printing plate, and on the other hand, in the other direction, to scrape off the ink from the printing plate.
- 20 4. Ink tank to be used in the application of the process according to claim 2, characterised in that it is realised in the shape of a monolithic component of an undeformable material, in which, at the periphery a

circular or oval canal is made for attaching above said doctor blade by snap connection, as well as for attaching above said doctor blade to this component by glueing.

5. Ink tank according to claim 4, characterised in that above said hard material is a synthetic substance.

6. Ink tank according to claim 5, characterised in that above said synthetic substance is a polyacetate.

7. Ink tank according to any one of claims 5 and 6, characterised in that above said doctor blade of above said synthetic substance is attached by an adhesive. 15

8. Ink tank according to claim 4, characterised in that above said doctor blade of above said synthetic substance is attached to the monolithic component by a snap connection. 20

9. Ink tank according to any one of claims 4-5, characterised in that above said doctor blade, during spraying or casting of above said synthetic substance of which above said ink tank is made, was joined to it. 25

10. Heated ink tank for implementing the process according to claim 3, characterised in that it consists of the combination of 30

a) an ink tank for inking the printing plate during a relative movement of the inking plate with respect to this ink tank, and of 35

b) at least one doctor blade of which the bottom edge which is contacting the printing plate, is adjusted with respect to the printing plate at a negative angle, meaning an angle measured with respect to the inked portion of the printing plate that has yet to be scraped off. 40

11. Ink tank according to claim 10, characterised in that above said doctor blade is adjusted at a negative angle between substantially 90 and substantially 180°. 45

12. Ink tank according to any one of claims 10 and 11, characterised in that it is elongated and forms with above said doctor blade an elongated ink gap. 50

13. Ink tank according to claim 12, characterised in that above said doctor blade and the ink tank are mounted on a common elongated housing.

14. Ink tank according to claim 13, characterised in that above said doctor blade and above said elongated housing form a whole. 55

15. Ink tank according to any one of claims 10-14, characterised in that two doctor blades are mounted facing each other.

5 16. Ink tank according to any one of claims 10-15, characterised in that above said doctor blade forms a closed circle and that a portion of the doctor blade extends according to above said negative angle.

10 17. Ink tank according to any one of claims 13-16, characterised in that in above said housing, a heating resistance is mounted.

FIG. 1

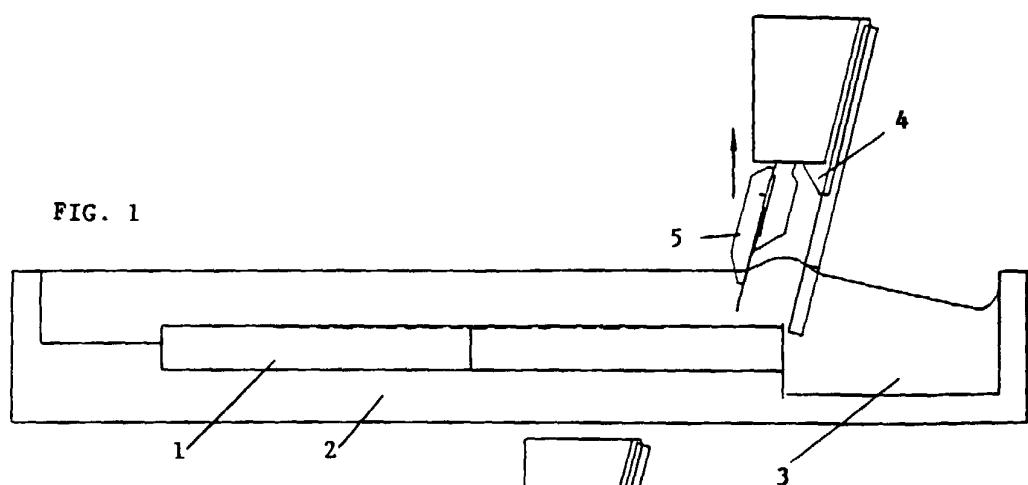


FIG. 2

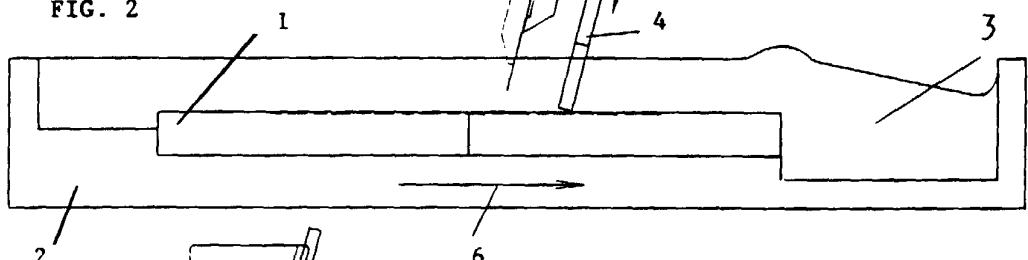


FIG. 3

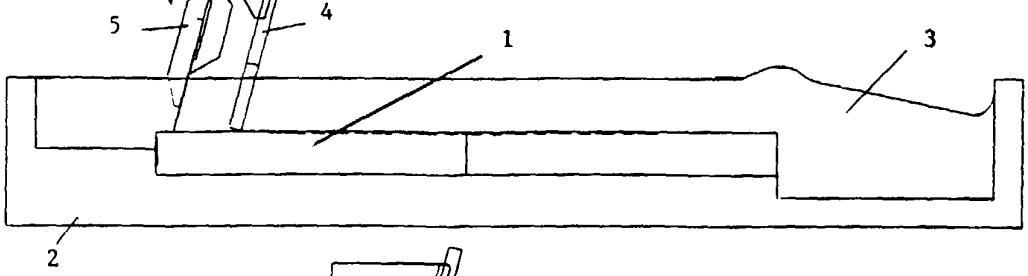


FIG. 4

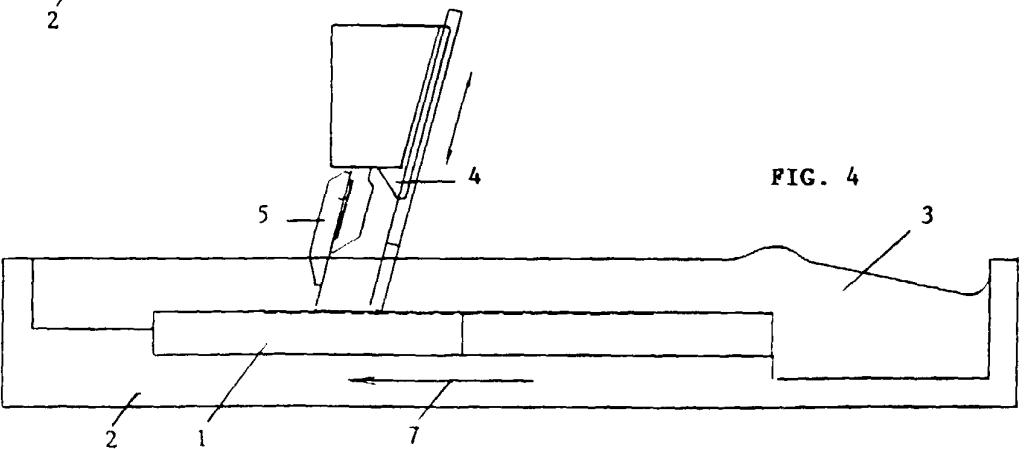


FIG. 6

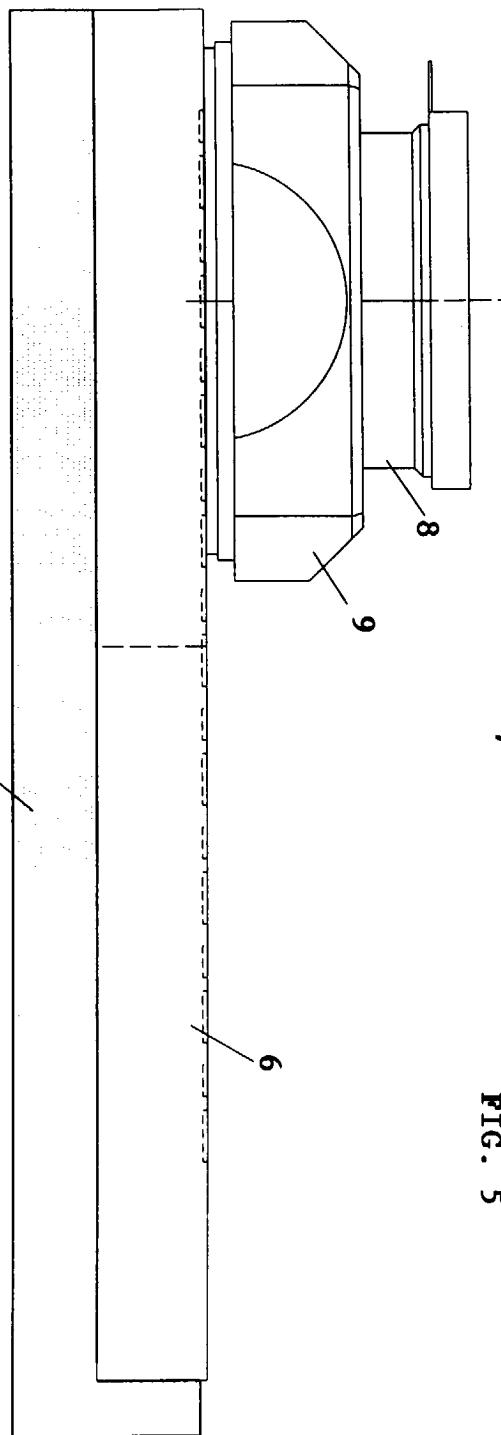
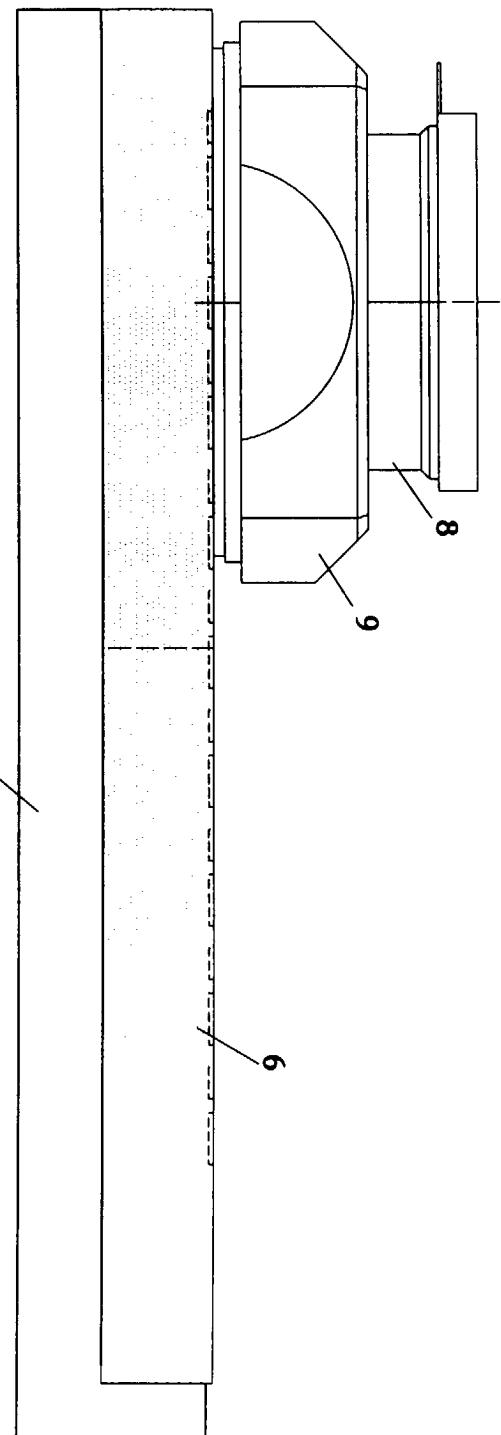


FIG. 5





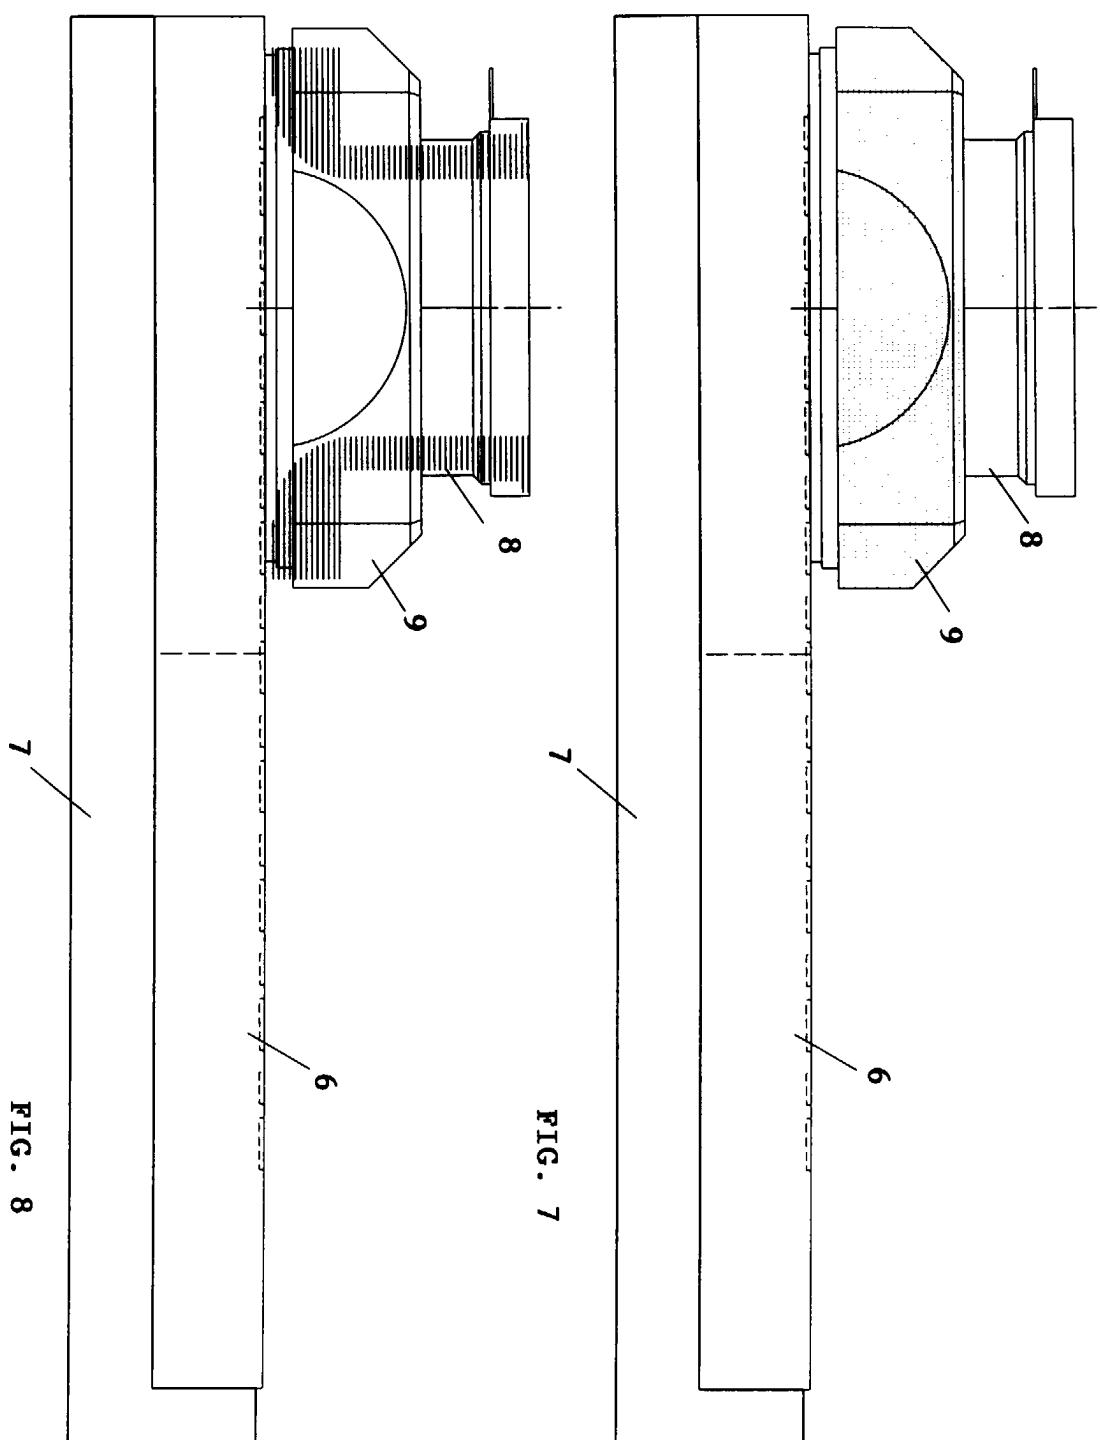


FIG. 8



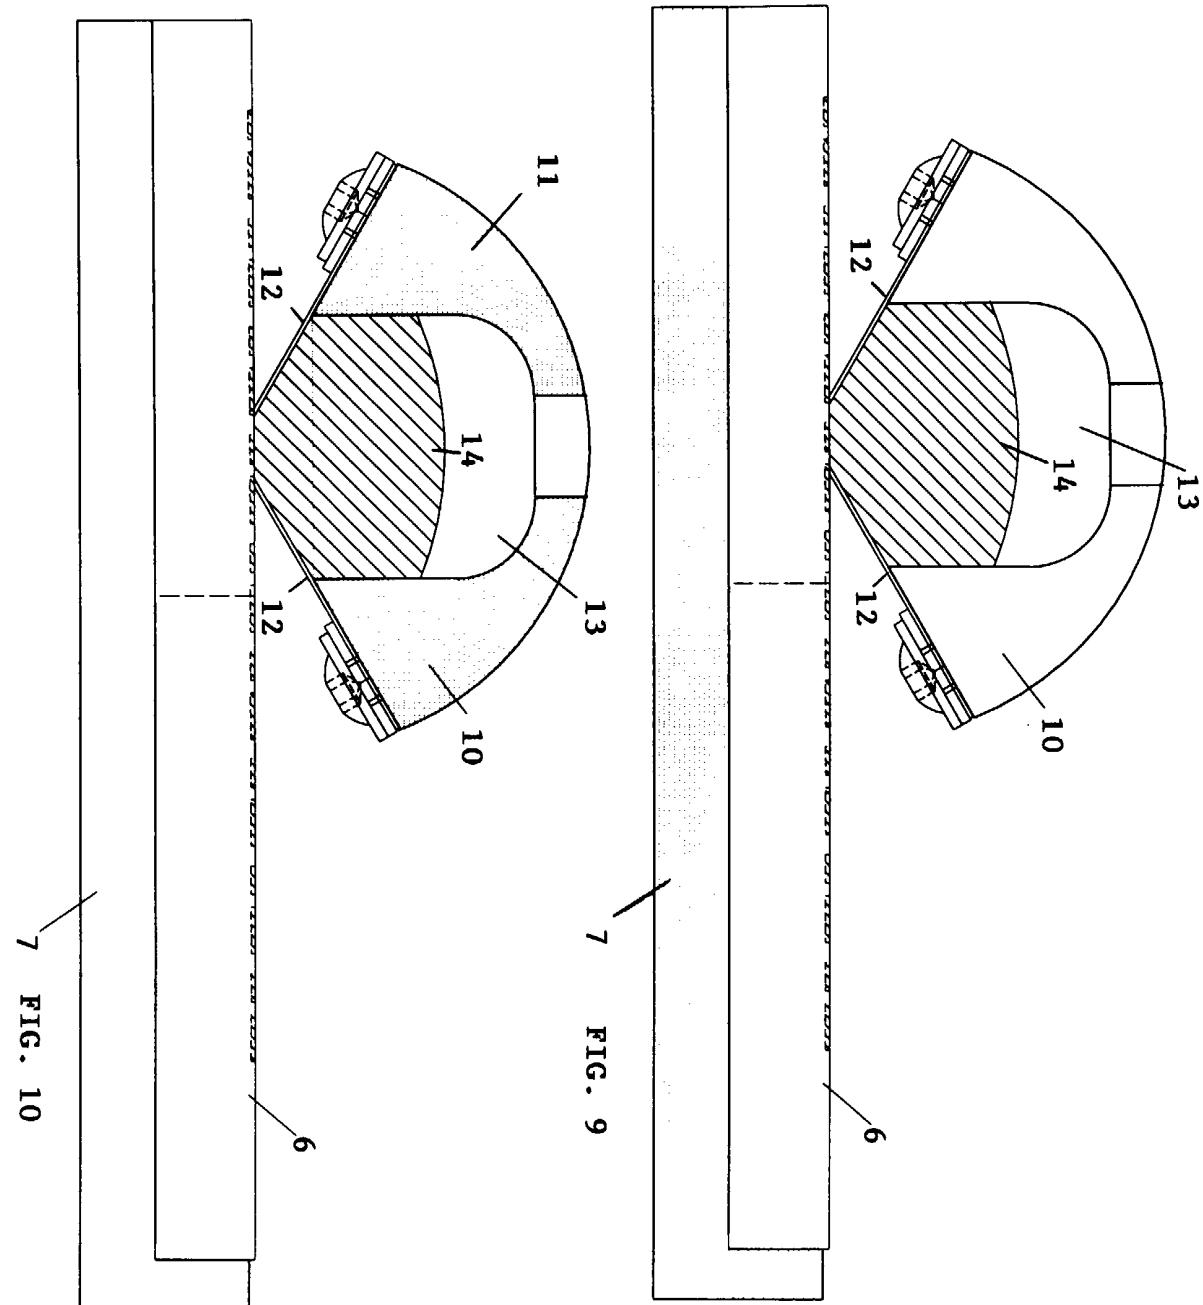

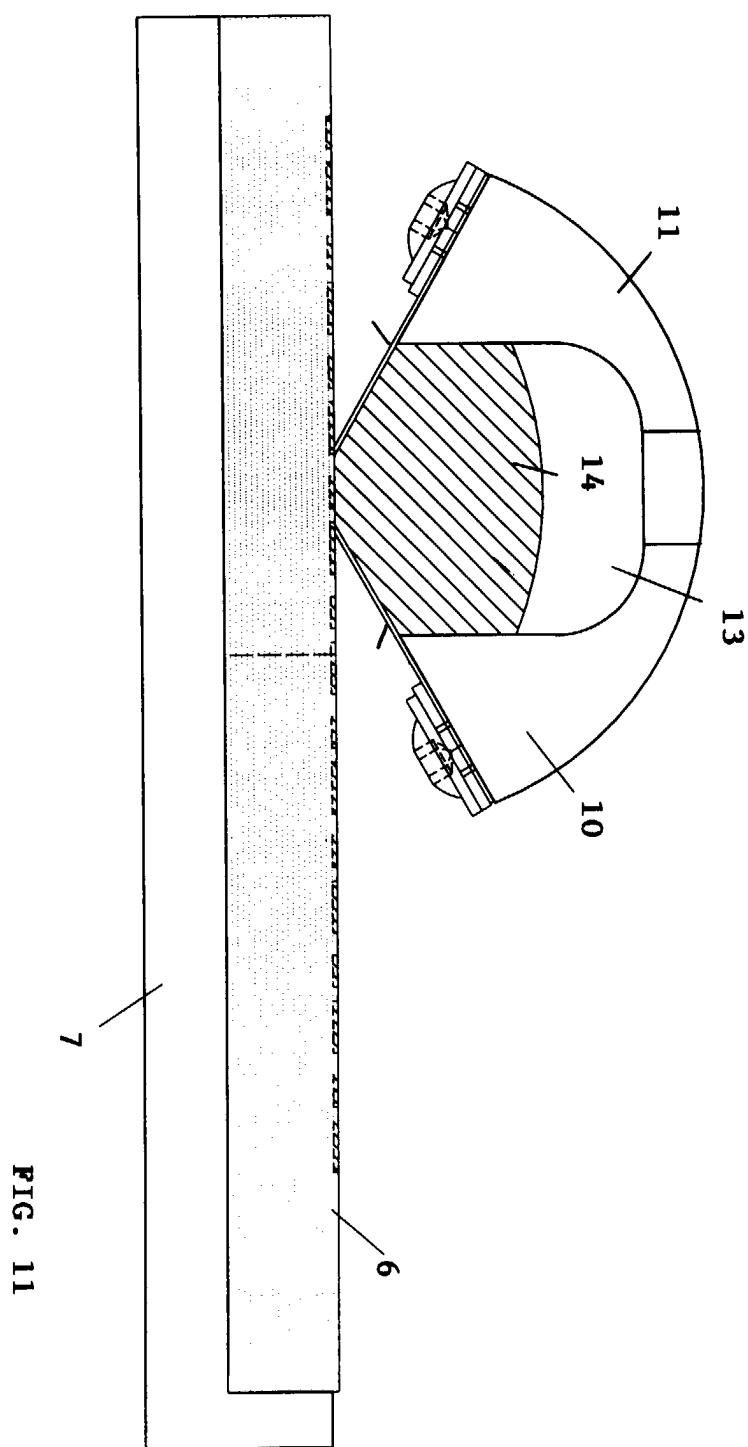

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	DE 40 15 684 A (TAMPOFLEX GMBH) 21 November 1991 (1991-11-21) * column 1, line 5 - line 27; figures 1,2 *	1,10, 12-15,17	B41F17/00
Y	--- PATENT ABSTRACTS OF JAPAN vol. 15, no. 491 (M-1190), 12 December 1991 (1991-12-12) & JP 03 213341 A (THINK LAB KK), 18 September 1991 (1991-09-18) * abstract *	1,10, 12-15,17	
P,A	--- EP 0 917 953 A (PRINTING INTERNATIONAL) 26 May 1999 (1999-05-26) * the whole document *	1-17	
A	--- EP 0 736 380 A (PRINTING INTERNATIONAL) 9 October 1996 (1996-10-09) * column 1, line 54 - column 2, line 21; claim 1; figure 1 *	1,4-6,10	
A	--- WO 97 37850 A (TECAPRINT AG) 16 October 1997 (1997-10-16) * page 4, line 18 - line 29; figures 1,2 *	1,10, 12-15,17	B41F TECHNICAL FIELDS SEARCHED (Int.Cl.7)
A	--- PATENT ABSTRACTS OF JAPAN vol. 13, no. 385 (M-864), 25 August 1989 (1989-08-25) & JP 01 136747 A (SEIKO EPSON CORP), 30 May 1989 (1989-05-30) * abstract *	1,10,11	
A	--- PATENT ABSTRACTS OF JAPAN vol. 17, no. 623 (M-1511), 17 November 1993 (1993-11-17) & JP 05 193115 A (MITSUBISHI HEAVY IND LTD), 3 August 1993 (1993-08-03) * abstract *	1,10	
	---	-/-	
The present search report has been drawn up for all claims			
Place of search	Date of completion of the search		Examiner
BERLIN	16 September 1999		Ducreau, F
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			



European Patent Office

EUROPEAN SEARCH REPORT

Application Number

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	DE 40 27 587 C (TAMPOPRINT GMBH) 2 October 1991 (1991-10-02) * column 6, line 66 - column 7, line 33; figure 4 * -----	1,10, 12-15,17	
TECHNICAL FIELDS SEARCHED (Int.Cl.7)			
The present search report has been drawn up for all claims			
Place of search	Date of completion of the search	Examiner	
BERLIN	16 September 1999	Ducreau, F	
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone	T : theory or principle underlying the invention		
Y : particularly relevant if combined with another document of the same category	E : earlier patent document, but published on, or after the filing date		
A : technological background	D : document cited in the application		
O : non-written disclosure	L : document cited for other reasons		
P : intermediate document	& : member of the same patent family, corresponding document		

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 99 87 0075

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on. The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

16-09-1999

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
DE 4015684	A	21-11-1991	WO	9117888 A		28-11-1991
JP 03213341	A	18-09-1991	JP	2565782 B		18-12-1996
EP 917953	A	26-05-1999		NONE		
EP 736380	A	09-10-1996	BE	1009272 A		07-01-1997
WO 9737850	A	16-10-1997	AU	2147997 A		29-10-1997
			EP	0894049 A		03-02-1999
JP 01136747	A	30-05-1989		NONE		
JP 05193115	A	03-08-1993		NONE		
DE 4027587	C	02-10-1991	AT	108142 T		15-07-1994
			DE	59102113 D		11-08-1994
			EP	0473947 A		11-03-1992
			US	5222433 A		29-06-1993