



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 049 582 B9**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

Note: Bibliography reflects the latest situation

(15) Correction information:
Corrected version no 1 (W1 B1)
Corrections, see page(s) 30, 31

(48) Corrigendum issued on:
27.10.2004 Bulletin 2004/44

(45) Date of publication and mention
of the grant of the patent:
31.03.2004 Bulletin 2004/14

(21) Application number: **99903273.3**

(22) Date of filing: **22.01.1999**

(51) Int Cl.7: **B41C 1/10**

(86) International application number:
PCT/US1999/001321

(87) International publication number:
WO 1999/037481 (29.07.1999 Gazette 1999/30)

(54) **LASER-IMAGEABLE PRINTING MEMBERS FOR WET LITHOGRAPHIC PRINTING**

LASERAUFZEICHNUNGSSATZ FÜR NASSFLACHDRUCK

ELEMENTS D'IMPRESSION POUVANT ETRE IMPRIMES AU LASER ET DESTINES A
L'IMPRESSION LITHOGRAPHIQUE HUMIDE

(84) Designated Contracting States:
BE DE FR GB IT

(30) Priority: **23.01.1998 US 72358 P**
23.01.1998 US 72359 P
21.09.1998 US 101229 P

(43) Date of publication of application:
08.11.2000 Bulletin 2000/45

(73) Proprietor: **Presstek, Inc.**
Hudson, New Hampshire 03051 (US)

(72) Inventors:
• **RORKE, Thomas, P.**
Holyoke, MA 01040 (US)

- **D'AMATO, Richard, J.**
South Hadley, MA 01075 (US)
- **DUNLEY, Timothy, J.**
Springfield, MA 01108 (US)
- **HOGDINS, George, R.**
Granby, MA 01033 (US)

(74) Representative: **Hackett, Sean James**
Marks & Clerk,
Alpha Tower,
Suffolk Street Queensway
Birmingham B1 1TT (GB)

(56) References cited:
EP-A- 0 580 393 **US-A- 5 353 705**
US-A- 5 493 971 **US-A- 5 605 780**
US-A- 5 649 486

EP 1 049 582 B9

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

DescriptionRELATED APPLICATION

5 **[0001]** This application claims priority to U.S. Provisional Patent Application Serial Nos. 60/072,358, titled "Lithographic Printing Plates For Use With Laser Discharge Imaging Apparatus," filed on January 23, 1998; 60/072,359, titled "Lithographic Printing Plates Comprising A Novel Ablatable Layer And Method Of Manufacture Thereof," filed on January 23, 1998; and 60/101,229, titled "Lithographic Printing Plates For Use With Laser Imaging Apparatus," filed on September 21, 1998.

FIELD OF THE INVENTION

10 **[0002]** The present invention relates in general to lithography and more particularly to systems for imaging lithographic printing plates using digitally controlled laser output. More specifically, this invention relates to a novel lithographic printing plate especially suitable for directly imaging and utilizing with a wet lithographic printing press.

BACKGROUND OF THE INVENTION

20 **[0003]** Traditional techniques for introducing a printed image onto a recording material include letterpress printing, gravure printing, and offset lithography. All of these printing methods require a plate. To transfer ink in the pattern of the image, the plate is usually loaded onto a plate cylinder of a rotary press for efficiency. In letterpress printing, the image pattern is represented on the plate in the form of raised areas that accept ink and transfer it onto the recording medium by impression. Gravure printing cylinders, in contrast, contain a series of wells or indentations that accept ink for deposit onto the recording medium. Excess ink must be removed from the cylinder by a doctor blade or similar device prior to contact between the cylinder and the recording medium.

25 **[0004]** The term "lithographic," as used herein, is meant to include various terms used synonymously, such as offset, offset lithographic, planographic, and others. By the term "wet lithographac," as used herein, is meant the type of lithographic printing plate where the printing is based upon the immiscibility of oil and water, wherein the oily material or ink is preferentially retained by the image area and the water or fountain solution is preferentially retained by the non-image area. When a suitably prepared surface is moistened with water and an ink is then applied, the background or non-image area retains the water and repels the ink while the image area accepts the ink and repels the water. The ink on the image area is then transferred to the surface of a material upon which the image is to be reproduced, such as paper, cloth, and the like. Commonly the ink is transferred to an intermediate material called the blanket, which in turn transfers the ink to the surface of the material upon which the image is to be reproduced. In a dry lithographic printing system that does not utilize water, the plate is simply inked and the image transferred directly onto a recording material or transferred onto a blanket and then to the recording material.

30 **[0005]** Aluminum has been used for many years as a support for lithographic printing plates. In order to prepare the aluminum for such use, it is typically subject to both a graining process and a subsequent anodizing process. The graining process serves to improve the adhesion of the image to the plate and to enhance the water-receptive characteristics of the background areas of the printing plate. The graining and anodizing affect both the performance and the durability of the printing plate. Both mechanical and electrolytic graining processes are well known and widely used in the manufacture of lithographic printing plates. Processes for anodizing aluminum to form an anodic oxide coating and then hydrophilizing the anodized surface by techniques such as silication are also well known in the art, and need not be further described herein. The aluminum support is thus characterized by having a porous, wear-resistant hydrophilic surface which specifically adapts it for use in lithographic printing, particularly where long press runs are required.

35 **[0006]** The plates for an offset press are usually produced photographically. The aluminum substrate described above is typically coated with a wide variety of radiation-sensitive materials suitable for forming images for use in the lithographic printing process. Any radiation-sensitive layer is suitable which, after exposure and any necessary developing and/or fixing, provides an image which can be used for printing. Lithographic printing plates of this type are usually developed with an aqueous alkaline developing solution which often additionally comprises a substantial quantity of an organic solvent.

40 **[0007]** To prepare a wet plate using a typical negative-working subtractive process, the original document is photographed to produce a photographic negative. This negative is placed on an aluminum plate having a water-receptive oxide surface coated with a photopolymer. Upon exposure to light or other radiation through the negative, the areas of the coating that received radiation (corresponding to the dark or printed areas of the original) cure to a durable oleophilic state. The plate is then subjected to a developing process that removes the uncured areas of the coating (i. e., those which did not receive radiation, corresponding to the non-image or background areas of the original), thereby

exposing the hydrophilic surface of the aluminum plate.

[0008] Throughout this application, various publications, patents, and published patent applications are referred to by an identifying citation. The disclosures of the publications, patents, and published patent applications referenced in this application are hereby incorporated by reference into the present disclosure to more fully describe the state of the art to which this invention pertains.

[0009] As is evident from the above description, photographic platemaking processes tend to be time consuming and require facilities and equipment adequate to support the necessary chemistry. Efforts have been made for many years to manufacture a printing plate which does not require development or which only uses water for development. In addition, practitioners have developed a number of electronic alternatives to plate imaging, some of which can be utilized on-press. With these systems, digitally controlled devices alter the ink-receptivity of blank plates in a pattern representative of the image to be printed. Such imaging devices include sources of electromagnetic radiation, produced by one or more laser or non-laser sources, that create chemical changes on plate blanks (thereby eliminating the need for a photographic negative); ink jet equipment that directly deposits ink-repellent or ink-accepting spots on plate blanks; and spark-discharge equipment, in which an electrode in contact with or spaced closely to a plate blank produces electrical sparks to physically alter the topology of the plate blank, thereby producing "dots" which collectively form a desired image (see, e.g., U.S. Pat. No. 4,911,075). Because of the ready availability of laser equipment and its amenability to digital control, significant effort has been devoted to the development of laser-based imaging systems. These systems include:

1) Argon-ion, frequency-doubled Nd-YAG and infrared lasers used to expose photosensitive blanks for traditional chemical processing, as for example described in U.S. Pat. Nos. 3,506,779; 4,020,762; 4,868,092; 5,153,236; 5,372,915; and 5,629,354. In an alternative to this approach, a laser has been employed to selectively remove, in an imagewise pattern, an opaque coating that overlies a photosensitive plate blank. The plate is then exposed to a source of radiation, with the unremoved material acting as a mask that prevents radiation from reaching underlying portions of the plate, as for example described in U. S. Pat. No. 4,132,168.

However, the need for high writing speeds, coupled with the constraint of the low-powered lasers favored by industry, has resulted in a requirement for printing plates that have a very high photosensitivity. Unfortunately, high photosensitivity almost always reduces the shelf life of these plates.

2) Another approach to laser imaging uses thermal-transfer materials, as for example described in U.S. Pat. Nos. 3,945,318; 3,962,513; 3,964,389; 4,395,946; and 5,395,729. With these systems, a polymer sheet transparent to the radiation emitted by the laser is coated with a transferable material. The transfer side of this construction is brought into contact with an acceptor sheet, and the transfer material is selectively irradiated through the transparent layer. Irradiation causes the transfer material to adhere preferentially to the acceptor sheet. The transfer and acceptor materials exhibit different affinities for fountain solution and/or ink, so that removal of the transparent polymer sheet with the unirradiated transfer material still on it leaves a suitably imaged, finished plate. Typically, the transfer material is oleophilic, and the acceptor material is hydrophilic.

Plates produced with transfer type systems tend to exhibit short useful lifetimes due to the limited amount of material that can effectively be transferred. Airborne dirt can create an image quality problem depending on the particular construction. In addition, because the transfer process involves melting and resolidification of material, image quality further tends to be visibly poorer than that obtainable with other methods.

3) Other patents describe lithographic printing plates comprising a support and a hydrophilic imaging layer which, upon imagewise laser exposure, becomes oleophilic in the exposed areas while remaining hydrophilic in the unexposed areas, as for example disclosed in U.S. Pat. Nos. 3,793,033; 4,034,183; 4,081,572; and 4,693,958. However, these types of lithographic printing plates suffer from the lack of a sufficient degree of discrimination between oleophilic image areas and hydrophilic non-image areas, with the result that image quality on printing is poor.

4) Early examples utilizing lasers used the laser to etch away material from a plate blank to form an intaglio or letterpress pattern, as for example described in U.S. Pat. Nos. 3,506,779 and 4,347,785. This approach was later extended to production of lithographic plates, e.g., by removal of a hydrophilic surface to reveal an oleophilic underlayer, as for example described in U.S. Pat. No. 4,054,094. These early systems generally required high-power lasers, which are expensive and slow.

[0010] More recently, other infrared laser ablation based systems for imaging hydrophilic plates have been developed. These operate by laser-mediated removal of organic hydrophilic polymers which are coated onto an oleophilic substrate such as a polyester/metal laminate or onto an oleophilic polymer coating on a metal support. Use of these materials between the ablation coating and the heat absorbing metal support provides a thermal barrier material which

reduces the amount of laser energy required to ablate or physically transform the hydrophilic surface layer, as for example described in U.S. Pat. Nos. 5,353,705; and 5,570,636. Laser output either ablates one or more plate layers, or physically transforms, the oleophobic or hydrophilic surface layer, in either case resulting in an imagewise pattern of features on the plate.

[0011] One problem with this approach is that the hydrophilic non-image areas are not sufficiently durable to permit long printing runs, and are easily scratched. Also, the hydrophilic coatings are not like the traditional hydrophilic grained and anodized surfaces and generally are considered outside the mainstream of conventional printing. One other disadvantage of these plates is that they are negative working, since the portions removed by ablation are the image regions that accept ink. When lasers with a large spot size are used for imaging, the size of the smallest printed dot is as large as the spot size. Consequently, the image quality on printing is not high. For example, a 35 micron laser spot size would print its smallest dot size at 35 microns with a negative working plate. On a 200 lines per inch (lpi) halftone screen, this is equivalent to a 5% to 6% dot.

[0012] U.S. Pat. No. 5,493,971 extends the benefit of the traditional grained metal plate to ablative laser imaging and also provides the advantage of a positive working plate. These plates are positive working since the portions not removed by ablation are the image regions that accept ink. This construction includes a grained metal substrate, a hydrophilic protective coating which also serves as an adhesion-promoting primer, and an ablatable oleophilic surface layer. The imaging laser interacts with the ablatable surface layer, causing ablation thereof. When lasers with a large spot size are used for imaging, the size of the smallest printed dot can be very small since the large spot size laser beam can be programmed to remove material around a very small area. Although the smallest hole in a solid printed area is large, this does not seriously affect print quality since very small holes in solids tend to fill in with ink. Consequently, the image quality on printing is high. After imaging which removes at least the surface layer and also at least some of the hydrophilic protective layer, the plate is then cleaned with a suitable solvent, e.g., water, to remove portions of the hydrophilic protective layer still remaining in the laser-exposed areas. Depending on the solubility properties of the residual plug of the partially ablated hydrophilic protective layer in the cleaning solvent, including solubility changes from the damage caused by the laser exposure, the cleaning reveals the hydrophilic protective coating at less than its original thickness, or reveals the hydrophilic metal substrate in the laser where the hydrophilic protective coating is entirely removed by the cleaning solvent. After cleaning, the plate behaves like a conventional positive working grained metal wet lithographic plate on the printing press.

[0013] However, adhesion of the remaining oleophilic surface coating to the hydrophilic protective layer has proven a difficult problem to overcome. Loss of adhesion can result if the protective hydrophilic thermal barrier layer in the non-image areas of the plate are damaged or degraded during laser imaging. Too much solvent or solubilizing action by the cleaning solution or the fountain solution on press can corrode the walls, eliminating the underlying support provided by the hydrophilic barrier layer around the periphery of the image feature and degrading small image elements. This leads to a major loss of image quality. Small dots and type are often removed during cleaning or early in the print run. Efforts to improve the adhesion of the ablatable surface coating and/or its durability to permit longer printing runs typically leads to a significant increase in the laser energy required to image the plate.

[0014] U.S. Pat. No. 5,605,780 describes a lithographic printing plate comprising an anodized aluminum support having thereon an oleophilic image-forming layer comprising an infrared-absorbing agent dispersed in a film-forming cyanoacrylate polymer binder. The hydrophilic protective layer has been eliminated. The '780 patent describes low required laser energy, good ink receptivity, good adhesion to the support, and good wear characteristics. Print runs of more than 8,200 impressions are shown in the examples.

[0015] Despite the many efforts directed to the development of a laser imageable positive working wet lithographic printing plate, there still remains a need for plates that require no alkaline or solvent developing solution, that look and perform like a conventional lithographic printing plate on press, that are sensitive to a broad spectrum of laser energy (700 nm to 1150 nm), that provide a high resolution image, and that will be long running at high resolution on press (greater than 100,000 impressions).

SUMMARY OF THE INVENTION

[0016] According to a first aspect of the present invention, there is provided a positive working, wet lithographic printing member as defined in claim 1.

[0017] One embodiment pertains to a positive working, wet lithographic printing member imageable by laser radiation comprising (a) an ink-accepting surface layer comprising one or more polymers and a sensitizer, said sensitizer being characterized by absorption of the laser radiation and the surface layer being characterized by ablative absorption of the laser radiation, (b) a hydrophilic layer underlying the surface layer, which hydrophilic layer comprises a crosslinked, polymeric reaction product of a hydrophilic polymer and a first crosslinking agent and is characterized by the absence of ablative absorption of the laser radiation and by being not soluble in water, and (c) a substrate.

[0018] The term "printing member," as used herein, is synonymous with the term "plate" and pertains to any type of

printing member or surface capable of recording an image defined by regions exhibiting differential affinities for ink and/or fountain solution. As used herein, for the purpose of determining the weight per cent of the organic sulfonic acid component, the term "polymers" includes all the materials which are polymeric film formers, including monomeric species which polymerize or combine with a polymeric species, such as, for example, a monomeric crosslinking agent, to form the polymeric film component of the ablative-absorbing layer.

[0019] Suitable hydrophilic polymers for the hydrophilic layers of the printing members include, but are not limited to, polyvinyl alcohols and cellulose. In a preferred embodiment, the hydrophilic polymer is a polyvinyl alcohol. In one embodiment, the first crosslinking agent is a zirconium compound. In one embodiment, the first crosslinking agent is ammonium zirconyl carbonate. In a preferred embodiment, the first crosslinking agent is ammonium zirconyl carbonate, and the ammonium zirconyl carbonate is present in an amount greater than 10% by weight of the polyvinyl alcohol, and, more preferably, present in an amount of 20 to 50% by weight of the polyvinyl alcohol. In another preferred embodiment, the hydrophilic layer further comprises a second crosslinking agent. In one embodiment, the hydrophilic layer further comprises a crosslinked, polymeric reaction product of a polyvinyl alcohol and the second crosslinking agent. In one embodiment, the second crosslinking agent is a melamine. In one embodiment, the hydrophilic layer further comprises a catalyst for the second crosslinking agent. In one embodiment, the catalyst is an organic sulfonic acid component.

[0020] In one embodiment, the thickness of the hydrophilic layer is from about 1 to about 40 microns. In one embodiment, the thickness of the hydrophilic layer is from about 2 to about 25 microns.

[0021] In one embodiment, suitable substrates comprise non-metal substrates and non-hydrophilic substrates, preferably papers, polymeric films, and non-hydrophilic metals such as non-hydrophilic aluminum. In one embodiment, the substrate is a hydrophilic metal. Suitable metals for the hydrophilic metal substrate include, but are not limited to, aluminum, copper, steel, and chromium. In a preferred embodiment, the metal substrate is grained, anodized, silicated, or a combination thereof. In one embodiment, the metal substrate is aluminum. In a preferred embodiment, the metal substrate is an aluminum substrate comprising a surface of uniform, non-directional roughness and microscopic depressions, which surface is in contact to the hydrophilic layer and, more preferably, this surface of the aluminum substrate has a peak count in the range of 300 to 450 peaks per linear inch which extend above and below a total bandwidth of 20 microinches.

[0022] In one embodiment, the ablative-absorbing layer comprises one or more materials selected from the group consisting of: sulfonated carbon blacks having sulfonated groups on the surface of the carbon black, carboxylated carbon blacks having carboxyl groups on the surface of the carbon black, carbon blacks having a surface active hydrogen content of not less than 1.5 mmol/g, and polyvinyl alcohols. In a preferred embodiment, the sulfonated carbon black is CAB-O-JET 200. In another preferred embodiment, the carbon black is BONJET BLACK CW-1. In one embodiment, one or more polymers of the ablative-absorbing layer comprises a crosslinked, polymeric reaction product of a polymer and a crosslinking agent. In a preferred embodiment, the crosslinked, polymeric reaction product is selected from the group consisting of: crosslinked reaction products of a crosslinking agent with the following polymers: a polyvinyl alcohol; a polyvinyl alcohol and a vinyl polymer; a cellulosic polymer; a polyurethane; an epoxy polymer; and a vinyl polymer. In one embodiment, the crosslinking agent is a melamine.

[0023] In one embodiment, the ablative-absorbing surface layer comprises a polyvinyl alcohol. In one embodiment, the polyvinyl alcohol is present in an amount of 20 to 95 per cent by weight of the total weight of polymers present in the ablative-absorbing layer. In one embodiment, the polyvinyl alcohol is present in an amount of 25 to 75 per cent by weight of the total weight of polymers present in the ablative-absorbing layer. Suitable polymers for use in combination with polyvinyl alcohol in the ablative-absorbing layer include, but are not limited to, other water-soluble or water-dispersible polymers such as, for example, polyurethanes, cellulose, epoxy polymers, and vinyl polymers.

[0024] In a preferred embodiment, the ablative-absorbing layer comprises greater than 13 weight per cent of an organic sulfonic acid component. In one embodiment, the organic sulfonic acid component is present in an amount of 15 to 75 weight per cent of the total weight of polymers present in the ablative-absorbing layer of the printing member. In another embodiment, the organic sulfonic acid component is present in an amount of 20 to 45 weight per cent of the total weight of polymers present in the ablative-absorbing layer.

[0025] In one embodiment, the thickness of the ablative-absorbing surface layer of the printing members of this invention is from about 0.1 to about 20 microns. In a preferred embodiment, the thickness of the ablative-absorbing surface layer is from about 0.1 to about 2 microns.

[0026] In one embodiment, the surface layer of the printing member comprises a polymer and a crosslinking agent. Suitable polymers in the surface layer include, but are not limited to, polyurethanes, epoxy polymers, nitrocellulose, and polycyanoacrylates. In one embodiment, the crosslinking agent in the surface layer is a melamine. In one embodiment, the surface layer of the printing member of this invention further comprises an organic sulfonic acid component. In a preferred embodiment, the organic sulfonic acid component in the surface layer is a component of an amine-blocked p-toluenesulfonic acid.

[0027] Another embodiment pertains to positive working, wet lithographic printing members imageable by laser ra-

diation, which printing member comprises (a) an ink-accepting surface layer comprising one or more polymers and a sensitizer, the sensitizer being characterized by absorption of the laser radiation and the surface layer being characterized by ablative absorption of the laser radiation; (b) a hydrophilic layer underlying the surface layer, which hydrophilic layer comprises one or more polymers and is characterized by the absence of ablative absorption of the laser radiation and by being compatible with but not soluble in water; and, (c) a substrate; wherein the hydrophilic layer comprises (i) a porous layer comprising a crosslinked, polymeric reaction product of a hydrophilic polymer and a first crosslinking agent, and (ii) a second crosslinking agent contained within pores of the porous layer. In one embodiment, the hydrophilic polymer of the hydrophilic layer is selected from the group consisting of polyvinyl alcohols and cellulose. In one embodiment, the hydrophilic polymer is a polyvinyl alcohol. In one embodiment, the first crosslinking agent is a zirconium compound, and preferably the zirconium compound is ammonium zirconyl carbonate present in an amount greater than 10% by weight of the polyvinyl alcohol. In one embodiment, the hydrophilic layer further comprises a crosslinked, polymeric reaction product of a polyvinyl alcohol and the second crosslinking agent, preferably a melamine crosslinking agent. In one embodiment, the hydrophilic layer further comprises a catalyst for the second crosslinking agent, which catalyst is contained within pores of the porous layer. In a preferred embodiment, the catalyst is an organic sulfonic acid component. In one embodiment, the hydrophilic layer further comprises a polymer contained within pores of the porous layer. In one embodiment, the polymer contained within pores of the porous layer is the same as one or more polymers of the surface layer. In one embodiment, the polymer contained within pores of the porous layer is a hydrophilic polymer.

[0028] Another embodiment pertains to a positive working, wet lithographic printing member imageable by laser radiation comprising (a) an ink-accepting surface layer comprising one or more polymers and a sensitizer, the sensitizer being characterized by absorption of the laser radiation and the surface layer being characterized by ablative absorption of the laser radiation; (b) a hydrophilic layer underlying the surface layer, the hydrophilic layer comprising one or more polymers and being characterized by the absence of ablative absorption of the laser radiation; and (c) a substrate; wherein interposed between the surface layer and the hydrophilic layer is a primer layer comprising an adhesion-promoting agent, the primer layer being characterized by the absence of ablative absorption of the laser radiation. In one embodiment, the adhesion-promoting agent comprises a crosslinked, polymeric reaction product of a hydrophilic polymer and a crosslinking agent. In one embodiment, the hydrophilic polymer is a polyvinyl alcohol. In one embodiment, the crosslinking agent is a melamine. In one embodiment, the primer layer further comprises a catalyst, preferably the catalyst is an organic sulfonic acid component. In a preferred embodiment, the primer layer comprises an organic sulfonic acid component, the primer layer being characterized by the absence of ablative absorption of the laser radiation. In one embodiment, the primer layer comprises a zirconium compound.

[0029] In a preferred embodiment of the printing members of the present invention, the substrate is selected from the group consisting of non-metal substrates and non-hydrophilic metal substrates.

[0030] According to a second aspect of the present invention, there is provided a positive working wet lithographic printing member as defined in claim 2.

[0031] One embodiment pertains to a three layer product design of the printing members, the members comprising (a) an ink-accepting surface layer comprising one or more polymers and being characterized by the absence of ablative absorption of the laser radiation; (b) a second layer underlying the surface layer, the second layer comprising one or more polymers and a sensitizer, the sensitizer being characterized by absorption of the laser radiation and the second layer being characterized by ablative absorption of the laser radiation; (c) a hydrophilic third layer underlying the second layer, the third layer comprising a crosslinked, polymeric reaction product of a hydrophilic polymer and a first crosslinking agent and being characterized by the absence of ablative absorption of the laser radiation and by being not soluble in water; and, (d) a substrate. In one embodiment, the hydrophilic third layer comprises (i) a porous layer comprising a crosslinked, polymeric reaction product of a hydrophilic polymer and a first crosslinking agent; and (ii) a second crosslinking agent contained within pores of the porous layer. In a preferred embodiment, the printing member further comprises a primer layer interposed between the second and the third layers, the primer layer comprising an adhesion-promoting agent.

[0032] Methods for preparing a positive working, wet lithographic printing member, are described herein for both two layer and three layer product designs with highly crosslinked layers and with various approaches for interaction of the crosslinking chemistry by interfacial reactions between two adjacent layers. The ablative-absorbing layers for use with the highly crosslinked but hydrophilic layers are not limited to organic sensitizers, but may also include metallic layers as the ablative-absorbing layer, such as for example, titanium metal layers, as are well known in the art of laser ablation imaging.

[0033] According to another aspect of the present invention there is provided a method of preparing an imaged wet lithographic plate as defined in claim 57.

[0034] Embodiments pertain to methods of preparing an imaged wet lithographic printing plate, the method comprising the steps of (a) providing a wet lithographic printing member as described herein; (b) exposing the printing member to a desired imagewise exposure of laser radiation to ablate the ablative-absorbing layer of the member to form a

residual layer in the laser-exposed areas of the ablative-absorbing layer, the residual layer being in contact to the hydrophilic layer; and (c) cleaning the residual layer from the hydrophilic layer with water or a cleaning solution; wherein the hydrophilic layer is characterized by the absence of removal of the hydrophilic layer in the laser-exposed areas during steps (b) and (c).

[0035] In one embodiment, the surface layer of the printing member is further characterized by being not soluble in water or in a cleaning solution. The term "cleaning solution," as used herein, pertains to a solution used to clean or remove the residual debris from the laser-ablated region of the print member of this invention and may comprise water, solvents, and combinations thereof, including buffered water solutions, as described in U.S. Pat. 5,493,971. In a preferred embodiment, the surface layer is further characterized by being not soluble in water or in a cleaning solution and by durability on a wet lithographic printing press.

[0036] In one embodiment, the ablative-absorbing second layer of the three layer designs of the printing members is ink-accepting. In one embodiment, the ablative-absorbing second layer of the three layer designs of the printing members is further characterized by not accepting ink and by accepting water on a wet lithographic printing press.

[0037] In a related example, the ablative-absorbing second layer of the printing member comprises an infrared sensitizer. In an example, the infrared sensitizer in the ablative-absorbing second layer is a carbon black. In one example, the carbon black of the infrared sensitizer of the ablative-absorbing layer may comprise sulfonate groups on the surface of the carbon black, and most preferably the carbon black is CAB-O-JET 200. Suitable polymers in the ablative-absorbing second layer include, but are not limited to, nitrocellulose; polycyanoacrylates; polyurethanes; polyvinyl alcohols; polyvinyl acetates; polyvinyl chlorides; and copolymers and terpolymers thereof. In one example, one or more of the polymers of the ablative-absorbing second layer is a hydrophilic polymer. In one example, the crosslinking agent of the ablative-absorbing second layer is a melamine.

[0038] Another related example pertains to a positive working, wet lithographic printing member imageable by laser radiation comprising (a) an ink-accepting surface layer characterized by the absence of ablative absorption of the laser radiation, as described herein; (b) a second layer under the surface layer, which second layer comprises one or more polymers and is characterized by the ablative absorption of the laser radiation, as described herein; (c) a hydrophilic third layer underlying the second layer, which third layer is characterized by the absence of ablative absorption of the laser radiation; and (d) a substrate; wherein the second layer comprises greater than 13 weight per cent of an organic sulfonic acid component, as described herein, based in the total weight of polymers present in the second layer. In one example, the thickness of the third layer of the printing member of this invention is from about 1 to about 40 microns. In one example, the thickness of the third layer is from about 2 to about 25 microns.

[0039] In one example, the hydrophilic third layer of the printing member comprises a hydrophilic polymer and a crosslinking agent. Suitable hydrophilic resins for the third layer include, but are not limited to, polyvinyl alcohols and cellulose. In one example, the hydrophilic polymer of the third layer is polyvinyl alcohol. In one example, the crosslinking agent is a zirconium compound such as, for example, ammonium zirconyl carbonate.

[0040] In one example, the hydrophilic third layer of the printing member is characterized by being not soluble in water or in a cleaning solution.

[0041] Suitable substrates for the printing member which printing member comprises a hydrophilic polymeric or third layer interposed between the ablative-absorbing layer and the substrate, are either hydrophilic or non-hydrophilic/ink-accepting and include, but are not limited to, metals, papers, and polymeric films. Suitable polymeric films for the substrate include, but are not limited to, polyesters, polycarbonates, and polystyrene. In an example, the polymeric film of the substrate is treated to make it hydrophilic. In one example, the substrate is a polyester film, preferably a polyethylene terephthalate film. Suitable metals for the substrate include, but are not limited to, aluminum, copper, chromium, and steel. In one example, the metal of the substrate is grained, anodized, silicated, or a combination thereof. In one example, the substrate is aluminum.

[0042] Another related example pertains to a positive working, wet lithographic printing member imageable by laser radiation comprising (a) an ink-accepting surface layer characterized by the absence of ablative absorption of the laser radiation, as described herein; (b) a second layer underlying the surface layer, which second layer comprises one or more polymers and is characterized by the ablative absorption of the laser radiation, as described herein; and (c) a hydrophilic substrate, as described herein; wherein interposed between the second layer and the hydrophilic substrate is a primer layer comprising an adhesion-promoting agent. The primer layer is characterized by the absence of ablative absorption of the laser radiation.

[0043] In one example, the adhesion-promoting agent of the primer layer comprises a zirconium compound. In one example, the adhesion-promoting agent of the primer layer comprises ammonium zirconyl carbonate. In one example, the adhesion-promoting agent of the primer layer comprises zirconium propionate.

[0044] In one example, the adhesion-promoting agent of the primer layer comprises an organic sulfonic acid component, preferably an aromatic sulfonic acid, and more preferably p-toluenesulfonic acid. In one example, the organic sulfonic acid component in the primer layer interposed between the ablative-absorbing second layer and the hydrophilic substrate is present in an amount of 2 to 100 weight per cent of the primer layer, preferably in an amount of 50 to 100

weight per cent of the primer layer, and most preferably in an amount of 80 to 100 weight per cent of the primer layer.

[0045] In one example, the thickness of the primer layer interposed between the second layer and the substrate is from about 0.01 to about 2 microns, and preferably from about 0.01 to about 0.1 microns.

[0046] Another related example pertains to a positive working, wet lithographic printing member imageable by laser radiation comprising (a) an ink-accepting surface layer characterized by the absence of ablative absorption of the laser radiation, as described herein; (b) a second layer underlying the surface layer, which second layer comprises one or more polymers and is characterized by the ablative absorption of the laser radiation, as described herein; (c) a hydrophilic third layer underlying the second layer, which third layer is characterized by the absence of ablative absorption of the laser radiation, as described herein; and (d) a substrate, as described herein; wherein interposed between the second and the third layer is a primer layer comprising an adhesion-promoting agent. The primer layer is characterized by the absence of ablative absorption of the laser radiation.

[0047] In an example, the adhesion-promoting agent of the primer layer comprises a zirconium compound. In one embodiment, the adhesion-promoting agent of the primer layer comprises ammonium zirconyl carbonate. In an example, the adhesion-promoting agent of the primer layer comprises zirconium propionate. In an example, the adhesion-promoting agent of the primer layer comprises an organic sulfonic acid component, preferably an aromatic sulfonic acid. In one example, the organic sulfonic acid component in the primer layer interposed between the second and the third layer is present in an amount of 2 to 100 weight per cent of the primer layer, preferably in an amount of 50 to 100 weight per cent of the primer layer, and most preferably in an amount of 80 to 100 weight per cent of the primer layer.

[0048] In one example, the thickness of the primer layer interposed between the second and the third layer is from about 0.01 to about 2 microns, and preferably from about 0.01 to about 0.1 microns.

[0049] According to a further aspect of the present invention there is provided a method of preparing a positive-working, wet lithographic printing member as defined in claim 34.

[0050] According to still another aspect of the present invention there is provided a method of preparing a positive-working, wet lithographic printing member as defined in claim 35.

[0051] In a preferred embodiment, the method of preparing a positive working, wet lithographic printing member imageable by laser radiation comprises (a) providing a grained and anodized metal substrate, (b) coating a hydrophilic polymer layer on the substrate, which polymer layer comprises a hydrophilic polymer and a crosslinking agent and subsequently curing the polymer layer, (c) coating an intermediate layer over the polymer layer, which intermediate layer comprises an ablative-absorbing sensitizer, a hydrophilic polymer, and a crosslinking agent, and subsequently curing the intermediate layer to form an ablative-absorbing layer, and (d) coating an ink-accepting surface layer over the intermediate layer, which surface layer comprises a polymer and a crosslinking agent, and subsequently curing to form a thin durable ink-accepting surface layer; wherein the intermediate layer further comprises greater than 13 weight per cent of an organic sulfonic acid component based on the total weight of polymers present in the second layer. In a more preferred embodiment, the surface layer of the printing member further comprises an organic sulfonic acid component.

[0052] The lithographic printing members are positive working plates. The second layer, which is ablative absorptive, and the surface layer, which is ink-accepting, oleophilic, hydrophobic, and durable, are ablated and substantially completely removed in a post-imaging cleaning step in the regions exposed to the laser radiation so that the non-exposed regions serve as the ink-transferring surface in lithographic printing. After imaging, in a preferred embodiment, when a hydrophilic third layer is present underlying the ablative-absorbing second layer, a crosslinked hydrophilic polymeric third layer remains on the plate in the laser imaged areas, along with a quantity of ablation by-products or residual composite layer, typically loosely bound to the hydrophilic third layer. The hydrophilic third layer enhances the clean-up of the by-product or residual composite layer, since it is much easier to remove from the hydrophilic third layer than from a hydrophilic substrate, such as a grained and anodized aluminum surface. One advantage is that the lithographic printing member or plate can be used to print immediately, since fountain solution will easily clean the ablation debris or residual composite layer from the plate. In the course of a long printing run, the hydrophilic third layer, when present, typically is not solubilized, and non-hydrophilic substrates may be utilized. Optionally, the hydrophilic third layer may only very slowly solubilize, and hydrophilic substrates are then preferred so that, if the hydrophilic third layer is removed by solubilization, the hydrophilic substrate is uncovered underneath. In this latter case, the printing characteristics of the non-image areas are not affected since one hydrophilic layer is merely exchanged for another. On the other hand, the hydrophilic third layer under the non-exposed image areas of the present invention provides an excellent adhesion primer for this image layer since it is nearly impossible to undercut through solubilization, particularly when the hydrophilic third layer is crosslinked.

[0053] The superiority of the lithographic printing member described herein over those previously known is particularly manifest in its ability to be imaged rapidly with relatively inexpensive diode lasers with large spot sizes, its ease of cleaning, its excellent image resolution and printing quality, its resistance to water, alkali, and solvents which provides excellent durability and image adhesion on the printing press, and its low cost of manufacture.

[0054] The presence of greater than 13 weight per cent of an organic sulfonic acid component based on the total

polymers present in the ablative-absorbing second layer and, optionally, the presence of an organic sulfonic acid component in the ink-accepting surface layer, in the hydrophilic third layer when present, and in a primer layer when present, significantly enhances the combination of high laser sensitivity, high image resolution, ease of cleaning the residual composite layer formed in the laser-exposed areas, and the excellent durability, adhesion, and water and fountain solution resistance of the ink-accepting image areas on the printing press that are desired in lithographic printing utilizing direct imaging by lasers.

[0055] An embodiment pertains to a positive working, wet lithographic printing member comprising an ablative-absorbing layer as an ink-accepting surface layer, wherein the ablative-absorbing layer comprises greater than 13 weight per cent of an organic sulfonic acid component, as described herein, based on the total weight of polymers present in the ablative-absorbing layer. The high weight per cent of an organic sulfonic acid component in the ablative-absorbing surface layer provides the lithographic printing member with the combined benefits of rapid imaging, ease of cleaning the residual non-ablated debris in the laser imaged areas, excellent image resolution and quality, and resistance to water for excellent durability and image adhesion on the printing press, but without requiring the additional non-ablative absorbing, ink-accepting overcoat surface layer of other aspects of this invention. Thus, another embodiment pertains to a positive working, wet lithographic printing member imageable by laser radiation comprising (a) an ink-accepting surface layer, which surface layer comprises one or more polymers and is characterized by the ablative absorption of laser radiation, as described herein; (b) optionally, a hydrophilic polymeric layer, which hydrophilic polymeric layer underlies the surface layer and is characterized by the absence of ablative absorption of the laser radiation, as described herein; and, (c) a substrate, as described herein; wherein the surface layer further comprises greater than 13 weight per cent of an organic sulfonic acid component based on the total weight of polymers present in the surface layer.

[0056] Further, still another example pertains to a positive working, wet lithographic printing member imageable by laser radiation comprising (a) an ink-accepting surface layer, which surface layer comprises one or more polymers and is characterized by the ablative absorption of the laser radiation, as described herein; (b) optionally, a hydrophilic polymeric layer, which hydrophilic polymeric layer underlies the surface layer and is characterized by the absence of ablative absorption of the laser radiation, as described herein; and, (c) a substrate, as described herein; wherein interposed between the hydrophilic polymeric layer and the surface layer is a primer layer comprising an adhesion-promoting agent. The primer layer is characterized by the absence of ablative absorption of the laser radiation. In one example, the adhesion-promoting agent of the primer layer comprises a zirconium compound. In one example, the adhesion-promoting agent of the primer layer comprises ammonium zirconyl carbonate. In one example, the adhesion-promoting agent of the primer layer comprises zirconium propionate. In another example, the adhesion-promoting agent of the primer layer comprises an organic sulfonic acid component, preferably an aromatic sulfonic acid. In one example, the organic sulfonic acid component in the primer layer interposed between the hydrophilic polymeric layer and the ablative-absorbing surface layer is present in the amount of 2 to 100 weight per cent of the primer layer, preferably in an amount of 50 to 100 weight per cent of the primer layer, and most preferably in an amount of 80 to 100 weight per cent of the primer layer. In one example, in addition to the presence of the primer layer, the ablative-absorbing surface layer further comprises greater than 13 weight per cent of an organic sulfonic acid component based on the total weight of polymers present in the ablative-absorbing surface layer.

[0057] As one of skill in the art will appreciate, features of one embodiment and aspect of the invention are applicable to other embodiments and aspects of the invention.

[0058] The above-discussed and other features and advantages of the present invention will be appreciated and understood by those skilled in the art from the following detailed description and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0059] The foregoing discussion will be understood more readily from the following detailed description of the invention when taken in conjunction with the accompanying drawings.

[0060] Figure 1 shows enlarged cross-sectional views of the mechanism, as known in the art, for imaging and cleaning a wet lithographic plate having an absorptive, ablatable top layer, a protective layer, and a grained metal substrate.

[0061] Figure 2 shows enlarged cross-sectional views of the two layer embodiment of the wet lithographic printing members of the present invention having an ink-accepting, ablative-absorbing surface layer, a hydrophilic layer, and a substrate.

[0062] Figures 3A and 3B show enlarged cross-sectional views of a lithographic printing member of the present invention: (A) after imaging; and (B) after cleaning.

[0063] Figure 4 shows an enlarged cross-sectional view of an alternative embodiment of a lithographic printing member in accordance with the present invention having an ink-accepting, non-ablative-absorbing surface layer, an ablative-absorbing second layer, a hydrophilic third layer, and a substrate.

[0064] Figure 5 shows an enlarged cross-sectional view of an alternative embodiment of a lithographic printing member in accordance with the present invention having an ink-accepting surface layer, an ablative-absorbing second layer,

and a hydrophilic support substrate.

[0065] Figure 6 shows enlarged cross-sectional views of the three layer product design in one embodiment of the present invention: (A) after imaging; and (B) after cleaning.

[0066] Figure 7 shows an enlarged cross-sectional view of an alternative embodiment of a lithographic plate of this invention having an ablative-absorbing, ink-accepting surface layer, an hydrophilic polymeric second layer, and a support substrate.

[0067] Figure 8 shows an enlarged cross-sectional view of an alternative embodiment of a lithographic plate of the present invention having an ablative-absorbing, ink-accepting surface layer and a hydrophilic support substrate.

DETAILED DESCRIPTION OF THE INVENTION

Organic Sulfonic Acids

[0068] Embodiments pertain to the use of organic sulfonic acids in a positive working, wet lithographic printing member imageable by laser radiation, particularly the use of large amounts of an organic sulfonic acid component in the ablative-absorbing layer of the printing member.

[0069] For example, in Plate A of Example 1, about 5.4 weight per cent of p-toluenesulfonic acid (PTSA) component in NACURE 2530, a trademark for an amine-blocked organic sulfonic acid catalyst available from King Industries, Norwalk, CT, based on the total weight of polymers present was utilized in the ablative-absorbing second layer. This PTSA-based catalyst assisted in the curing of the CYMEL 303, a trademark for melamine crosslinking agents available from Cytec Corporation, Wayne, NJ, AIRVOL 125, a trademark for polyvinyl alcohol polymers available from Air Products, Allentown, PA, and UCAR WBV-110, a trademark for a vinyl copolymer water-based dispersion available from Union Carbide Corporation, Danbury, CT, polymers that constitute the polymeric film-forming materials in the ablative-absorbing second layer. To calculate the weight per cent of organic sulfonic acid component in the ablative-absorbing layer of the present invention, the weight of organic sulfonic acid component (p-toluenesulfonic acid constitutes 25 per cent by weight of NACURE 2530 in the examples) is divided by the total dry weight of polymers present (in this example, the combined weight of CYMEL 303, AIRVOL 125, and UCAR WBV-110). In this example, the weight of p-toluenesulfonic acid is the weight of NACURE 2530 (1.2 parts by weight) multiplied by 0.25 to give 0.3 parts by weight of p-toluenesulfonic acid. The combined weight of polymers is calculated by adding the parts by dry weight of AIRVOL 125 (2.20 parts by weight), UCAR WBV-110 (2.10 parts by weight), and CYMEL 303 (1.21 parts by weight) for a total of 5.51 parts by weight. Dividing the weight of the p-toluenesulfonic acid (0.3 parts by weight) by this combined total of polymers present (5.51 parts by weight) and multiplying by 100 to convert to per cent by weight gives 5.4 weight per cent for the weight per cent of the organic sulfonic acid component in the ablative-absorbing layer for this example.

[0070] Surprisingly, it has been found that significantly increased levels of an organic sulfonic acid component, such as the p-toluenesulfonic acid in NACURE 2530, in the ablative-absorbing layer to weight per cents greater than 13% of the total weight of polymers present provide significant improvements in the ease of cleaning the laser-exposed areas, in the durability and adhesion of the ink-accepting areas of the plate during long press runs, in the sensitivity to the laser radiation, and in the fine image resolution and printing quality that can be achieved. These weight per cents of greater than 13 weight per cent of the total weight of polymers present are higher than the levels of organic sulfonic acid catalysts typically utilized to accelerate the curing of coatings. These benefits from high levels of organic sulfonic acid components may be obtained without any significant disadvantages, such as loss in resistance to solubilization by water, by the fountain solution, or by a cleaning solution.

[0071] In addition to the benefits of increased levels of an organic sulfonic acid component in the ablative-absorbing second layer of the lithographic printing member, the concomitant presence of an organic sulfonic acid component in the ink-accepting surface layer of the printing member may provide further increased benefits.

[0072] In one embodiment, the organic sulfonic acid component is present in a primer layer between the ablative-absorbing second layer and either the hydrophilic third layer or, alternatively, between the ablative-absorbing second layer and a hydrophilic substrate when no hydrophilic third layer is present in the product construction. The levels of organic sulfonic acid component in the primer layer may vary widely and include, but are not limited to, the range of 2 to 100 weight per cent of the primer layer. The benefits of the organic sulfonic acid component in the primer layer are similar to those achieved with the increased levels of an organic sulfonic acid component in the ablative-absorbing layer.

[0073] The term "organic sulfonic acid," as used herein, refers to organic compounds that have at least one sulfonic acid moiety, $-\text{SO}_3\text{H}-$, covalently bonded to a carbon atom of the organic compound. The term "organic sulfonic acid component," as used herein, pertains to free organic sulfonic acids and also pertains to the free organic sulfonic acids formed when a blocked or latent organic sulfonic acid catalyst, is decomposed, such as by heat or by radiation, to form a free or unblocked organic sulfonic acid to catalyze the desired curing reaction, as is well known in the art. The weight of the free organic sulfonic acid that may be obtained from the blocked or latent organic sulfonic acid catalyst is used herein to calculate the weight per cent of the organic sulfonic acid component based on the total weight of polymers

present in the ablative-absorbing coating layer. As is well known in the art, the blocked organic sulfonic acid catalysts may be an adduct or complex of an organic sulfonic acid with a complexing material, such as an amine, and the molar ratios of the organic sulfonic acid and the complexing material may vary widely, such as, for example, from 1.0:0.5 to 1.0:2.0. Alternatively, the blocked organic sulfonic acid catalysts may be a reaction product of an organic sulfonic acid with a suitable material, such as, for example, with an alcohol to provide the blocked catalyst in the form of an ester of an organic sulfonic acid. A wide variety of blocked or latent organic sulfonic acid catalysts are known and may be utilized in the present invention to provide the organic sulfonic acid component. Examples of suitable blocked or latent organic sulfonic acid catalysts that provide suitable organic sulfonic acid components include, but are not limited to, amine-blocked organic sulfonic acids such as, for example, described in U.S. Pat. Nos. 4,075,176; 4,200,729; 4,632,964; 4,728,545; 4,812,506; 5,093,425; 5,187,019; 5,681,890; and 5,691,002; esters of an organic sulfonic acid as, for example, described in U.S. Pat. Nos. 4,192,826; 4,323,660; 4,331,582; 4,618,564; 5,102,961; 5,364,734; and 5,716,756; reaction products of an organic sulfonic acid and a glycidamide as, for example, described in U.S. Pat. No. 4,839,427; and amides of an organic sulfonic acid as, for example, described in U.S. Pat. No. 4,618,526. Instead of the free or unblocked organic sulfonic acid in the coating solutions to be applied to a substrate, the blocked or latent organic sulfonic acid catalysts are typically utilized to crosslink coatings in order to provide a stable shelf life to the coating solution by reducing the viscosity buildup due to premature crosslinking and because of the better coating uniformity and water resistance often obtained in the finished coating layers.

[0074] A wide variety of organic sulfonic acid components are known and may be utilized. Examples of suitable organic sulfonic acid components include, but are not limited to, organic sulfonic acids having a pK_a below 4, such as, for example, p-toluenesulfonic acid, dodecylbenzenesulfonic acid, dinonylnaphthalene sulfonic acid, tridecylbenzene sulfonic acid, methane sulfonic acid, polystyrene sulfonic acid, and didecylbenzenedisulfonic acid. In one embodiment, the organic sulfonic acid component of the present invention is an aromatic sulfonic acid. In a preferred embodiment, the organic sulfonic acid component is p-toluenesulfonic acid (PTSA).

[0075] In one embodiment, the organic sulfonic acid component of the present invention is a component of a blocked or latent organic sulfonic acid catalyst, preferably an amine-blocked organic sulfonic acid. The term "amine," as used herein, pertains to ammonia, as well as to aliphatic primary, secondary, and tertiary amines, including heterocyclic amines having a saturated ring. In one embodiment, the amine-blocked organic sulfonic acid is an amine-blocked aromatic sulfonic acid. In a preferred embodiment, the amine-blocked organic sulfonic acid is an amine-blocked p-toluenesulfonic acid, such as, for example, NACURE 2530.

[0076] The amounts of organic sulfonic acid components typically used to catalyze polymer curing in coating layers is in the range of 0.1 to 12 weight per cent based on the total weight of polymers present, exclusive of pigments. Preferred amounts are typically less than 5 weight per cent with about 1 weight per cent or less being particularly preferred. For example, U.S. Pat. No. 4,728,545 discloses a preferred range for the amine-blocked organic sulfonic acid catalyst of from 0.01 to 3.0% by weight of the total solid content of the coating composition exclusive of pigments. Since the organic sulfonic acid component is less than 100% of the weight of the amine-blocked catalyst, the preferred range for the organic sulfonic acid component in the '545 patent is even below 0.01 to 3.0% by weight. The '545 patent describes greater than 3.0% by weight of amine-blocked organic sulfonic acid catalyst as adversely affecting the appearance, strength, and other properties of the resulting film when the organic sulfonic acid component remains therein at high concentrations.

Lithographic Printing Members with Hydrophilic Third Layers

[0077] Referring now to Figure 4, which illustrates a preferred embodiment of a lithographic printing member, printing member **10** comprises an ink-accepting and durable surface layer **100**, an ablative-absorbing second layer **102**, a hydrophilic third layer **104**, and a support substrate **106**. Each of these layers is discussed in more detail below.

Ink-Accepting Surface Layers

[0078] The primary characteristics of ink-accepting surface layer **100** are its oleophilicity and hydrophobicity, resistance to solubilization by water and solvents, and durability on the printing press. Suitable polymers utilized in this layer should have relatively low decomposition temperatures to assist in the heat-induced ablative imaging initiated in the ablative-absorbing second layer **102**, excellent adhesion to the ablative-absorbing second layer **102**, and high wear resistance. They can be either water-based or solvent-based polymers. Ink-accepting surface layer **100** should also, upon imaging, produce environmentally and toxicologically innocuous decomposition by-products. This layer also may include a crosslinking agent which provides improved bonding to the ablative-absorbing second layer **102** and increased durability of the plate for extremely long print runs.

[0079] Suitable polymers include, but are not limited to, polyurethanes, cellulosic polymers such as nitrocellulose, polycyanoacrylates, and epoxy polymers. For example, polyurethane based materials are typically extremely tough

and may have thermosetting or self-curing capability. An exemplary coating layer may be prepared by mixing and coating methods known in the art, for example, wherein a mixture of polyurethane polymer and hexamethoxymethylmelamine crosslinking agent in a suitable solvent, water, or solvent-water blend is combined, followed by the addition of a suitable amine-blocked p-toluenesulfonic acid catalyst to form the finished coating mix. The coating mix is then applied to the ablative-absorbing second layer **102** using one of the conventional methods of coating application, such as wire wound rod coating, reverse roll coating, gravure coating, and slot die coating, and subsequently dried to remove the volatile liquids and to form a coating layer.

[0080] Polymeric systems containing components in addition to polyurethane polymers may also be combined to form the ink-accepting surface layer **100**. For example, an epoxy polymer may be added to a polyurethane polymer in the presence of a crosslinking agent and a catalyst.

[0081] Ink-accepting surface layer **100** is coated in this invention typically at a thickness in the range of from about 0.1 microns to about 20 microns and more preferably in the range of from about 0.1 to about 2 microns. After coating, the layer is dried and preferably cured at a temperature of between 145 °C and 165 °C.

Ablative-Absorbing Second Layers

[0082] Referring to Figure 6A, the primary characteristics of ablative-absorbing second layer **102** are vulnerability or sensitivity to ablation using commercially practicable laser imaging equipment, and sufficient adhesion to the hydrophilic third layer **104** and the ink-accepting surface layer **100** to provide long running plates and retention of small 1% and 2% dots at 175 lpi in halftone images when running on press. It is also preferable that the ablative-absorbing second layer **102** produces environmentally and toxicologically innocuous decomposition by-products upon ablation. Vulnerability to laser ablation ordinarily arises from strong absorption in the wavelength region in which the imaging laser emits. It is also advantageous to use polymers having relatively low decomposition temperatures to assist in the heat-induced ablative imaging. Adhesion to the hydrophilic third layer **104** is dependent in part upon the chemical structure and the amount of the material that absorbs the laser radiation and the bonding sites available on the polymers in the ablative-absorbing second layer **102**. It is important that the bonding by the polymers in the ablative-absorbing second layer **102** is strong enough to provide adequate adhesion to the hydrophilic third layer **104**, but is easily weakened during laser ablation and subsequently provides ease of cleaning of the residual debris layer in the ablated areas from the hydrophilic third layer **104**. For example, vinyl-type polymers, such as polyvinyl alcohol, strike an appropriate balance between these two properties. For example, significantly improved adhesion to the hydrophilic third layer **104** as well as easy cleaning after imaging is provided by use of AIRVOL 125 polyvinyl alcohol incorporated into the ablative-absorbing second layer **102**. Crosslinking agents may also be added.

[0083] A radiation-absorbing compound or sensitizer is added to the composition of the ablative-absorbing second layer **102** and dispersed therein. When the laser radiation is of an infrared wavelength, a variety of infrared-absorbing compounds, such as organic dyes and carbon blacks, are known and may be utilized as the radiation-absorbing sensitizer in the present invention. Of the infrared sensitizers evaluated, CAB-O-JET 200, a trademark for surface modified carbon black pigments available from Cabot Corporation, Bedford, MA, surprisingly least affected the adhesion to the hydrophilic third layer **104** at the amounts required to give adequate sensitivity for ablation. In other words, CAB-O-JET 200 has good ablative-sensitizing properties, and also allows enhanced adhesion to the hydrophilic third coating layer **104**.

[0084] The results obtained with CAB-O-JET 200 were better than those obtained with a related compound, CAB-O-JET 300. The CAB-O-JET series of carbon black products are unique aqueous pigment dispersions made with novel surface modification technology, as, for example, described in U.S. Pat. Nos. 5,554,739 and 5,713,988. Pigment stability is achieved through ionic stabilization. The surface of CAB-O-JET 300 has carboxyl groups, while that of CAB-O-JET 200 contains sulfonate groups. No surfactants, dispersion aids, or polymers are typically present in the dispersion of the CAB-O-JET materials. CAB-O-JET 200 is a black liquid, having a viscosity of less than about 10 cP (Shell #2 efflux cup); a pH of about 7; 20% (based on pigment) solids in water; a stability (i.e., no change in any physical property) of more than 3 freeze-thaw cycles at -20 °C, greater than six weeks at 70 °C, and more than 2 years at room temperature; and a mean particle size of 0.12 microns, with 100% of the particles being less than 0.5 microns. Significantly, CAB-O-JET 200 also absorbs across the entire infrared spectrum, as well as across the visible and ultraviolet regions. Suitable coatings may be formed by known mixing and coating methods, for example, wherein a base coating mix is formed by first mixing all the components, such as water, 2-butoxyethanol; AIRVOL 125 polyvinyl alcohol; UCAR WBV-110 vinyl copolymer; CYMEL 303 hexamethoxymethylmelamine crosslinking agent; and CAB-O-JET 200 carbon black, except for not including any crosslinking catalyst. To extend the stability of the coating formulation, any crosslinking agent, such as NACURE 2530, is subsequently added to the base coating mix or dispersion just prior to the coating application. The coating mix or dispersion may be applied by any of the known methods of coating application, such as, for example, wire wound rod coating, reverse roll coating, gravure coating, and slot die coating. After drying to remove the volatile liquids, a solid coating layer is formed.

[0085] Another water-dispersed infrared sensitizer evaluated, BONJET BLACK CW-1, a trademark for a surface modified carbon black aqueous dispersion available from Orient Corporation, Springfield, N.J., also surprisingly improved adhesion to the hydrophilic third layer **104** at the amounts required to give adequate sensitivity for ablation.

[0086] The ablative-absorbing second layer **102** comprises one or more polymers. In one embodiment, the ablative-absorbing layer **102** comprises a crosslinking agent. Suitable polymers include, but are not limited to, cellulosic polymers such as nitrocellulose; polycyanocrylates; polyurethanes; polyvinyl alcohols; and other vinyl polymers such as polyvinyl acetates, polyvinyl chlorides, and copolymers and terpolymers thereof. In one embodiment, one or more polymers of the ablative-absorbing second layer **102** is a hydrophilic polymer. In one embodiment, the crosslinking agent of the ablative-absorbing second layer **102** is a melamine.

[0087] A particular aspect of embodiments is the presence of an organic sulfonic acid catalyst in the ablative-absorbing second layer **102** at levels higher than those typically used for catalyst purposes, such as, for example, 0.01 to 12 weight per cent based on the total weight of polymers present in the coating layer for conventional crosslinked coatings. For example, in the aforementioned U.S. Pat. No. 5,493,971, NACURE 2530 is present in Examples 1 to 8 as a catalyst for the thermoset-cure of an ablative-absorbing surface layer. By assuming that the NACURE 2530 used in these examples in the '971 patent contained the same 25% by weight of p-toluenesulfonic acid as reported by the manufacturer for the lots of NACURE 2530 used in the examples, calculation of the weight per cent of the p-toluenesulfonic acid component in the ablative-absorbing surface layer of the '971 patent may be done by multiplying the weight of NACURE 2530 (4 parts by weight) by 0.25 to give 1.0 parts by weight and then dividing the 1.0 parts by weight by the combined dry weight of the polymers present (13.8 parts by weight in Examples 1 to 7 and 14.0 parts by weight in Example 8) to give 7.2 weight per cent (Examples 1 to 7 of the '971 patent) and 7.1 weight per cent (Example 8 of the '971 patent).

[0088] High levels of NACURE 2530 added to the nitrocellulose solvent mix provide some improvements in adhesion although the improvement is not nearly as great as that found in water-based coatings containing polyvinyl alcohol polymers and high levels of NACURE 2530, as for example, shown in Example 2.

[0089] In one embodiment, the ablative-absorbing second layer **102** comprises greater than 13 weight per cent of an organic sulfonic acid component based on the total weight of polymers present in the ablative absorbing second layer. In one embodiment, the organic sulfonic acid component is an aromatic sulfonic acid. In a preferred embodiment, the organic sulfonic acid component is p-toluenesulfonic acid, such as, for example, present as a component of the amine-blocked p-toluenesulfonic acid, NACURE 2530.

[0090] In one embodiment, the organic sulfonic acid component is present in an amount of 15 to 75 weight per cent of the total weight of polymers present in the ablative-absorbing second layer **102**. In a preferred embodiment, the organic sulfonic acid component is present in an amount of 20 to 45 weight per cent of the total weight of polymers present in the ablative-absorbing second layer **102**.

[0091] Ablative-absorbing second layer **102** is typically coated at a thickness in the range of from about 0.1 to about 20 microns and more preferably in the range of from about 0.1 to about 2 microns. After coating, the layer is dried and subsequently cured at a temperature between 135 °C and 185 °C for between 10 seconds and 3 minutes and more preferably cured at a temperature between 145 °C and 165 °C for between 30 seconds to 2 minutes.

[0092] In one embodiment, the ablative-absorbing second layer **102** of the printing member is ink-accepting. Examples of an ink-accepting, ablative-absorbing second layer are illustrated in Examples 1 and 6 of the present invention.

[0093] In another embodiment, the ablative-absorbing second layer **102** is further characterized by not accepting ink and by accepting water on a wet lithographic printing press, as illustrated in Example 5 of this invention.

[0094] In one embodiment, the ablative-absorbing second layer **102** of the printing member is characterized by being not soluble in water or in a cleaning solution.

Hydrophilic Third Layers

[0095] Hydrophilic third layer **104** provides a thermal barrier during laser exposure to prevent heat loss and possible damage to the substrate **106**, when the substrate is a metal, such as aluminum. It is hydrophilic so that it may function as the background hydrophilic or water-loving area on the imaged wet lithographic plate. It should adhere well to the support substrate **106** and to the ablative-absorbing second layer **102**. In general, polymeric materials satisfying these criteria include those having exposed polar moieties such as hydroxyl or carboxyl groups such as, for example, various cellulose modified to incorporate such groups, and polyvinyl alcohol polymers.

[0096] Preferably, the hydrophilic third layer **104** withstands repeated application of fountain solution during printing without substantial degradation or solubilization. In particular, degradation of the hydrophilic third layer **104** may take the form of swelling of the layer and/or loss of adhesion to both the ablative-absorbing second layer **102** and/or to the substrate **106**. This swelling and/or loss of adhesion may deteriorate the printing quality and dramatically shorten the press life of the lithographic plate. One test of withstanding the repeated application of fountain solution during printing is a wet rub resistance test, as described in Examples 1 to 6 of this invention. Satisfactory results for withstanding the

repeated application of fountain solution and not being excessively soluble in water or in a cleaning solution, as defined herein, are the retention of the 3% dots in the wet rub resistance test, as described and illustrated in Examples 1 to 6.

[0097] To provide insolubility to water, for example, polymeric reaction products of polyvinyl alcohol and crosslinking agents such as glyoxal, zinc carbonate, and the like are well known in the art. For example, the polymeric reaction products of polyvinyl alcohol and hydrolyzed tetramethylorthosilicate or tetraethylorthosilicate are described in U.S. Pat. No. 3,971,660. However, it is preferred that the crosslinking agent have a high affinity for water after drying and curing the hydrophilic resin. Suitable polyvinyl alcohol-based coatings for use in the present invention include, but are not limited to, combinations of AIRVOL 125 polyvinyl alcohol; BACOTE 20, a trademark for an ammonium zirconyl carbonate solution available from Magnesium Elektron, Flemington, NJ; glycerol, available from Aldrich Chemical, Milwaukee, WI; and TRITON X-100, a trademark for a surfactant available from Rohm & Haas, Philadelphia, PA. Typical amounts of BACOTE 20 utilized in crosslinking polymers are less than 5% by weight of the weight of the polymers, as described, for example, in "The Use of Zirconium in Surface Coatings," Application Information Sheet 117 (Provisional), by P.J. Moles, Magnesium Electron, Inc., Flemington, N.J. Surprisingly, it has been found that significantly increased levels of BACOTE 20, such as 40% by weight of the polyvinyl alcohol polymer, provide significant improvements in the ease of cleaning the laser-exposed areas, in the durability and adhesion of the ink-accepting areas of the plate during long press runs, and in the fine image resolution and printing quality that can be achieved. These results show that zirconium compounds, such as, for example, BACOTE 20, have a high affinity for water when it is dried and cured at high loadings in a crosslinked coating containing polyvinyl alcohol. The high levels of BACOTE 20 also provide a hydrophilic third layer **104** which interacts with a subsequent coating application of the ablative-absorbing layer or a primer layer to further increase the insolubility and resistance to damage by laser radiation and by contact with water, a cleaning solution, or a fountain solution. In one embodiment, the hydrophilic third layer **104** comprises ammonium zirconyl carbonate in an amount greater than 10% by weight based on the total weight of the polymers present in the hydrophilic third layer. In one embodiment, the hydrophilic third layer **104** comprises ammonium zirconyl carbonate in an amount of 20 to 50% by weight based on the total weight of polymers present in the hydrophilic third layer **104**.

[0098] In one embodiment, the hydrophilic third layer **104** of the printing member of the present invention comprises a hydrophilic polymer and a crosslinking agent. Suitable hydrophilic polymers for the hydrophilic third layer **104** include, but are not limited to, polyvinyl alcohol and cellulose. In a preferred embodiment, the hydrophilic polymer of the third layer is polyvinyl alcohol. In one embodiment, the crosslinking agent is a zirconium compound, preferably ammonium zirconyl carbonate.

[0099] In one embodiment, the hydrophilic third layer **104** is characterized by being not soluble in water or in a cleaning solution. In another embodiment, the hydrophilic third layer **104** is characterized by being slightly soluble in water or in a cleaning solution.

[0100] Hydrophilic third layer **104** is coated in this invention typically at a thickness in the range of from about 1 to about 40 microns and more preferably in the range of from about 2 to about 25 microns. After coating, the layer is dried and subsequently cured at a temperature between 135 °C and 185 °C for between 10 seconds and 3 minutes and more preferably at a temperature between 145 °C and 165 °C for between 30 seconds and 2 minutes.

Substrates

[0101] Suitable substrates for support substrate **106** may be a number of different substrates, including those known in the art as substrates for lithographic printing plates, such as, for example, metals, papers, and polymeric films. Since the hydrophilic third layer **104** is typically not soluble in water, in a cleaning solution, or in the fountain solution, and further is not ablated during the imaging, the substrate does not need to be hydrophilic to provide the discrimination between the ink-accepting or non-hydrophilic image areas of the surface layer and the water-accepting or hydrophilic background areas of the plate needed for wet lithographic printing. The term, "hydrophilic," as used herein, pertains to the property of a material or a composition of materials that allows it to preferentially retain water or a water-based fountain solution in wet lithographic printing while the non-hydrophilic, ink-accepting materials or composition of materials on the surface of the plate preferentially retain the oily material or ink. Thus, the substrate **106** either may be hydrophilic or may be non-hydrophilic/ink-accepting when a hydrophilic layer such as layer **104** is interposed between the ablative-absorbing layer and the substrate.

[0102] Suitable metals include, but are not limited to, aluminum, copper, steel, and chromium, preferably that have been rendered hydrophilic through graining or other treatments. The grained and hydrophilic metal substrate makes it easier to coat the hydrophilic third layer; provides better adhesion to the third layer; and also provides a suitable surface if the hydrophilic third layer is scratched during preparation of the printing member. The printing members of this invention preferably use an anodized aluminum support substrate. Examples of such supports include, but are not limited to, aluminum which has been anodized without prior graining, aluminum which has been mechanically grained and anodized, and aluminum which has been mechanically grained, electrochemically etched, anodized, and treated

with an agent effective to render the substrate hydrophilic, for example, treatment to form a silicate layer. The grain on the aluminum substrate is critical to removal of the residual debris layer **108**, as shown in one embodiment in Figures 3A and 6A. If the grain is not uniform with non-directional roughness and without random deep depressions, then many very small particles of residual ink-accepting surface coating will remain on the surface after cleaning. These may accept ink during the early stages of the printing run, and may transfer to the printed sheet. Although these particles may be removed by the ink during the printing, they extend the necessary time to achieve an acceptable printed sheet. In one embodiment, the aluminum substrate comprises a surface of uniform non-directional roughness and microscopic uniform depressions which has been anodized and treated with an agent effective to render the effective to remove the substrate hydrophilic, for example, treatment to form a silicate layer. The grain on the aluminum substrate in the preferred embodiment has non-directional roughness and a microscopic uniform peak count in the range of 300 to 450 peaks per linear inch which extend above and below a total bandwidth of 20 microinches, as described, for example, in PCT Int. Application No. WO 97/31783. In one preferred embodiment, the grained aluminum is SATIN FINISH aluminum litho sheet, a trademark for aluminum sheets available from Alcoa, Inc., Pittsburgh, PA,

[0103] A wide variety of papers may be utilized. Typically, these papers have been treated or saturated with a polymeric treatment to improve dimensional stability, water resistance, and strength during the wet lithographic printing. Examples of suitable polymeric films include, but are not limited to, polyesters such as polyethylene terephthalate and polyethylene naphthalate, polycarbonates, polystyrene, polysulfones, and cellulose acetate. A preferred polymeric film is polyethylene terephthalate film, such as, for example, the polyester films available under the trademarks of MYLAR and MELINEX polyester films from E. I. duPont de Nemours Co., Wilmington, DE. Where the polymeric film substrate is not hydrophilic, these supports may further comprise a hydrophilic surface formed on at least one surface of the support such as, for example, a hydrophilic coating layer comprising a hydrophilic material applied to the polymeric film, such as, for example, to polyethylene terephthalate film or to other polymeric films that are not intrinsically hydrophilic or that may benefit from a special hydrophilic surface added to the substrate. Preferred thicknesses for support substrate **106** range from 0.003 to 0.02 inches, with thicknesses in the range of 0.005 to 0.015 inches being particularly preferred.

Lithographic Printing Plates With Hydrophilic Third Layers and Primer Layers

[0104] Referring to Figure 4, another aspect of embodiments of the present invention and their utilization of organic sulfonic acids to enhance the laser imaging sensitivity, printing quality, cleanability, press durability, ink-accepting image adhesion, and fine dot resolution of lithographic printing plates is the incorporation of a primer layer interposed between the ablative-absorbing second layer **102** and the hydrophilic third layer **104**, wherein the primer layer comprises an adhesion-promoting agent, in which the primer layer is characterized by the absence of ablative absorption of the laser radiation. Suitable adhesion-promoting agents include, but are not limited to, organic sulfonic acid components, zirconium compounds, crosslinked polymeric reaction products of a hydrophilic polymer and a crosslinking agent, titanates, and silanes. In one embodiment, the organic sulfonic acid component of the adhesion-promoting agent in the primer layer is an aromatic sulfonic acid. In a preferred embodiment, the organic sulfonic acid component of the adhesion-promoting agent in the primer layer is p-toluenesulfonic acid.

[0105] In one embodiment, the organic sulfonic acid component in the primer layer interposed between the ablative-absorbing second layer **102** and the hydrophilic third layer **104** is present in an amount of 2 to 100 weight per cent of the primer layer, preferably in an amount of 50 to 100 weight per cent of the primer layer, and most preferably in an amount of 80 to 100 weight per cent of the primer layer.

[0106] In one embodiment, the thickness of the primer layer interposed between the ablative-absorbing second layer **102** and the hydrophilic third layer **104** is from about 0.01 to about 2 microns, and preferably from about 0.01 to about 0.1 microns.

[0107] When this primer layer comprising an organic sulfonic acid component is present, the increased levels of an organic sulfonic acid component in the ablative-absorbing second layer **102** of the present invention may not be necessary to provide the multiple benefits desired, and the level of an organic sulfonic acid component in the ablative-absorbing second layer **102** may be less than 13 weight per cent of the total weight of the polymers present in the ablative-absorbing second layer or may even be negligible. However, it is suitable to use a combination of the primer layer and the ablative-absorbing second layer **102** comprising greater than 13 weight per cent of an organic sulfonic acid component.

[0108] Nitrocellulose by itself or in combination with other polymers provides a high degree of vulnerability to ablation. Suitable coatings may be formed by incorporating a solvent dispersable carbon black into coating. For example, a base coating mix is formed by admixture of all components, such as 6 sec. RS nitrocellulose available from Aqualon Co., Wilmington, DE VULCAN VXC 72r, a trademark for carbon black pigments available from Cabot Corporation, Bedford, MA; CYMEL 303, hexamethoxymethylmelanin crosslinking agent, and a crosslinking catalyst which is subsequently added to the base coating mix just prior to the coating application.

[0109] When a primer layer comprising an organic sulfonic acid component is present, between the ablative-absorbing, nitrocellulose-coating second layer **102** and the hydrophilic third layer **104**, some improvement in adhesion is achieved; however, the improvement is not nearly as great as that found in the water based coating containing polyvinyl alcohol polymer and high levels of NACURE 2530. Unexpectedly, it has been found that when a primer coat composed of high amounts of CYMEL 303 is interposed between the ablative-absorbing, nitrocellulose-containing second layer **102** and hydrophilic third layer **104**, a significant improvement in adhesion is achieved. A second unforeseen consequence is the significant improvement in the water resistance and durability of the hydrophilic third layer **104** in the laser imaged and cleaned areas. In one embodiment, a primer layer as described above is interposed between a solvent based ablation layer **102** and the hydrophilic third layer.

[0110] In one embodiment, the adhesion-promoting agent of the primer layer is ammonium zirconyl carbonate such as, for example, BACOTE 20. In another embodiment, the adhesion-promoting agent of the primer layer is zirconium propionate. Other suitable zirconium compounds in the primer layer include, but are not limited to, those zirconium-based adhesion promoters described in the aforementioned "The Use of Zirconium in Surface Coatings," Application Information Sheet 117 (Provisional), by P.J. Moles.

Lithographic Printing Plates Without Hydrophilic Third Layers

[0111] An alternative embodiment of a positive working wet lithographic plate is shown in Figure 5, comprising a support substrate **106**, an ablative-absorbing layer **130**, and an ink-accepting surface layer **100**. The support substrate **106** is hydrophilic. An example of a support layer and ablative-absorbing layer having this configuration, but without an additional ink-accepting surface layer present, is given in the above-referenced U.S. Pat. No. 5,605,780.

[0112] One aspect of the lithographic printing members are those printing members that do not comprise a hydrophilic third layer, which printing members instead comprise, in one embodiment, an ink-accepting surface layer, an ablative-absorbing second layer, and a hydrophilic support substrate, as illustrated in Figure 5. The ink-accepting surface layer and the ablative-absorbing second layer are as described herein for the lithographic printing members that do comprise a hydrophilic third layer overlying the support substrate. The support substrate **106**, as shown in Figure 3, is as described for only those support substrates that are hydrophilic, as described for the lithographic printing members that do comprise a hydrophilic third layer overlying the support substrate.

[0113] In particular, the lithographic printing members, that do not comprise a hydrophilic third layer overlying the support substrate, share the key aspect of this invention in the presence of large amounts of an organic sulfonic acid component in one or more layers of the printing member. For example, the lithographic printing members, that do not comprise a hydrophilic third layer overlying the support substrate, comprise an organic sulfonic acid component present in the ablative-absorbing layer **130** at levels significantly higher than those typically used for catalyst purposes, such as, for example, 0.01 to 12 weight per cent based on the total weight of polymers present in the coating layer for conventional crosslinked coatings. Thus, one aspect of embodiments pertains to a positive working, wet lithographic printing member imageable by laser radiation comprising (a) an ink-accepting surface layer characterized by the absence of ablative absorption of the laser radiation, (b) a second layer underlying the surface layer, which second layer comprises one or more polymers and is characterized by the ablative absorption of the laser radiation, and (c) a hydrophilic substrate, wherein the second layer comprises greater than 13 weight per cent of an organic sulfonic acid component based on the total weight of polymers present in the second layer. In one embodiment, the organic sulfonic acid component is an aromatic sulfonic acid. In a preferred embodiment, the organic sulfonic acid component is p-toluenesulfonic acid, such as, for example, present as a component of the amine-blocked p-toluenesulfonic acid, NACURE 2530.

[0114] In one embodiment, the organic sulfonic acid component is present in an amount of 15 to 75 weight per cent of the total weight of polymers present in the ablative-absorbing second layer **130**. In a preferred embodiment, the organic sulfonic acid component is present in an amount of 20 to 45 weight per cent of the total weight of polymers present in the ablative-absorbing second layer **130**.

[0115] Except for the absence of a hydrophilic third layer underlying the ablative-absorbing second layer **130** and overlying the support substrate **106** as described for the lithographic printing members of the present invention that comprise hydrophilic third layers, the other aspects of the coating layers of the lithographic printing member without a hydrophilic third layer, including such aspects as the ink-accepting surface layer and the ablative-absorbing second layer, are as described herein for the lithographic printing members with hydrophilic third layers.

[0116] Referring to Figure 5, still another aspect of embodiments and their utilization of organic sulfonic acids to enhance the laser imaging sensitivity, printing quality, cleanability, press durability, ink-accepting image adhesion, and fine dot resolution of lithographic printing plates is the incorporation of a primer layer interposed between the ablative-absorbing second layer **130** and the hydrophilic support substrate **106**, wherein the primer layer comprises an adhesion-promoting agent, in which the primer layer is characterized by the absence of ablative absorption of the laser radiation. Suitable adhesion-promoting agents include, but are not limited to, organic sulfonic acid components, zirconium com-

pounds, crosslinked polymeric reaction products of a hydrophilic polymer and a crosslinking agent, titanates, and silanes. In one embodiment, the organic sulfonic acid component of the adhesion-promoting agent in the primer layer is an aromatic sulfonic acid. In a preferred embodiment, the organic sulfonic acid component of the adhesion-promoting agent in the primer layer is p-toluenesulfonic acid.

[0117] In one embodiment, the organic sulfonic acid component in the primer layer interposed between the ablative-absorbing second layer **130** and the hydrophilic support substrate **106**, as shown in Figure 5, is present in an amount of 2 to 100 weight per cent of the primer layer, preferably in an amount of 50 to 100 weight per cent of the primer layer, and most preferably in an amount of 80 to 100 weight per cent of the primer layer.

[0118] In one embodiment, the thickness of the primer layer interposed between the ablative-absorbing second layer **130** and the hydrophilic support substrate **106** is from about 0.01 to about 2 microns, and preferably from about 0.01 to about 0.1 microns.

[0119] When this primer layer comprising an organic sulfonic acid component is present, the increased levels of an organic sulfonic acid in the ablative-absorbing second layer **130** may not be necessary to provide the multiple benefits desired, and the level of an organic sulfonic acid component in the ablative-absorbing second layer **130** may be less than 13 weight per cent of the total weight of polymers present in the ablative-absorbing second layer or may even be negligible. However, it is suitable to utilize a combination of the primer layer and the ablative-absorbing second layer **130** comprising greater than 13 weight per cent of an organic sulfonic acid component of the present invention.

[0120] In one embodiment, the zirconium compound of the adhesion-promoting agent of the primer layer is ammonium zirconyl carbonate such as, for example, BACOTE 20. In another embodiment, the zirconium compound of the adhesion-promoting agent of the primer layer is zirconium propionate. Other suitable zirconium compounds in the primer layer of the present invention include, but are not limited to, those zirconium-based adhesion promoters described in "The Use of Zirconium in Surface Coatings," Application Information Sheet 117 (Provisional), by P.J. Moles.

Ablative-Absorbing Surface Layers

[0121] An alternative embodiment of a positive working wet lithographic plate is shown in Figure 7, comprising a support substrate **210**, a hydrophilic polymeric layer **215**, and an ablative-absorbing, ink-accepting surface layer **220**. An example of a support layer, an intermediate polymeric layer, and an ablative-absorbing, ink-accepting layer having this configuration is given in the above-referenced U.S. Pat. No. 5,493,971.

[0122] One aspect of the lithographic printing members, that do not comprise a non-ablative absorbing surface layer, comprise an ablative-absorbing, ink-accepting surface layer, a hydrophilic polymeric layer; and a support substrate. The support substrate **210** is as described herein for the support substrate **106** of the lithographic printing members with hydrophilic third layers, as illustrated in Figure 4. Similarly, the hydrophilic polymeric layer **215** is as described herein for the hydrophilic third layer **104** of the lithographic printing members with hydrophilic third layers, as illustrated in Figure 4. The ablative-absorbing, ink-accepting surface layer **220** is as described herein for the ablative-absorbing second layer **102** of the lithographic printing members with hydrophilic third layers, as illustrated in Figure 4, except that there is no non-ablative absorbing, ink-accepting surface layer **100** overlying the ablative-absorbing layer **220**.

[0123] In particular, the lithographic printing members, that do not comprise a non-ablative absorbing surface layer overlying the ablative-absorbing layer, share a key aspect of this invention in the presence of significant amounts of an organic sulfonic acid component in one or more layers of the printing member. For example, the lithographic printing member, as illustrated in Figure 7, comprises an organic sulfonic acid component present in the ablative-absorbing layer **220** at levels higher than those typically used for catalyst purposes, such as, for example, 0.01 to 12 weight per cent based on the total weight of polymers present in the coating layer for conventional crosslinked coatings. Thus, one aspect of embodiments pertains to a positive working, wet lithographic printing member imageable by laser radiation comprising (a) an ink-accepting surface layer, which surface layer comprises one or more polymers and is characterized by the ablative absorption of the laser radiation, (b) a hydrophilic polymeric layer underlying said surface layer, and (c) a substrate, wherein the surface layer comprises greater than 13 weight per cent of an organic sulfonic acid component based on the total weight of polymers present in the surface layer. In one embodiment, the organic sulfonic acid component is an aromatic sulfonic acid. In a preferred embodiment, the organic sulfonic acid component is p-toluenesulfonic acid, such as, for example, present as a component of the amine-blocked p-toluenesulfonic acid, NACURE 2530.

[0124] In one embodiment, the organic sulfonic acid is present in an amount of 15 to 75 weight per cent of the total weight of polymers present in the ablative-absorbing surface layer **220**. In a preferred embodiment, the organic sulfonic acid component is present in an amount of 20 to 45 weight per cent of the total weight of polymers present in the ablative-absorbing surface layer **220**.

[0125] Referring to Figure 7, still another aspect of embodiments and their utilization of organic sulfonic acids to enhance the laser imaging sensitivity, printing quality, cleanability, press durability, ink-accepting image adhesion, and fine dot resolution of wet lithographic printing plates is the incorporation of a primer layer interposed between the

ablative-absorbing surface layer **220** and the hydrophilic polymeric layer **215**, wherein the primer layer comprises an adhesion-promoting agent, in which the primer layer is characterized by the absence of ablative absorption of the laser radiation. Suitable adhesion-promoting agents include, but are not limited to, organic sulfonic acid components, zirconium compounds, crosslinked polymeric reaction products of a hydrophilic polymer and a crosslinking agent, titanates, and silanes. In one embodiment, the adhesion-promoting agent in the primer layer is an organic sulfonic acid component, preferably an aromatic sulfonic acid, and, more preferably, p-toluenesulfonic acid.

[0126] In one embodiment, the organic sulfonic acid component in the primer layer interposed between the ablative-absorbing surface layer **220** and the hydrophilic polymeric layer **215** is present in an amount of 2 to 100 weight per cent of the primer layer, preferably in an amount of 50 to 100 weight per cent of the primer layer, and most preferably in an amount of 80 to 100 weight per cent of the primer layer.

[0127] In one embodiment, the thickness of the primer layer interposed between the ablative-absorbing surface layer **220** and the hydrophilic polymeric layer **215** is from about 0.01 to about 2 microns, and preferably from about 0.01 to about 0.1 microns.

[0128] When this primer layer comprising an organic sulfonic acid component is present, the increased levels of an organic sulfonic acid in the ablative-absorbing surface layer **220** of the present invention may not be necessary to provide the multiple benefits desired, and the level of an organic sulfonic acid component in the ablative-absorbing surface layer **220** may be less than 13 weight per cent of the total weight of polymers present in the ablative-absorbing surface layer or may even be negligible. However, it is suitable to utilize a combination of the primer layer and the ablative-absorbing surface layer **220** comprising the greater than 13 weight per cent of an organic sulfonic acid component of the present invention.

[0129] In one embodiment, the adhesion-promoting agent of the primer layer is ammonium zirconyl carbonate such as, for example, BACOTE 20. In another embodiment, the adhesion-promoting agent of the primer layer is zirconium propionate. Other suitable zirconium compounds in the primer layer of the present invention include, but are not limited to, those zirconium-based adhesion promoters described in "The Use of Zirconium in Surface Coatings," Application Information Sheet 117 (Provisional), by P.J. Moles.

Lithographic Printing Plates Without Hydrophilic Third Layers and With Ablative-Absorbing Surface Layers

[0130] An alternative embodiment of a positive working, wet lithographic plate is shown in Figure 8, comprising a hydrophilic support substrate **210** and an ablative-absorbing, ink-accepting surface layer **320**. An example of a support layer and ablative-absorbing surface layer having this configuration is given in the above-referenced U.S. Pat. No. 5,605,780.

[0131] The lithographic printing members, that do not comprise a hydrophilic third layer and further do not comprise a non-ablative absorbing, ink-accepting surface layer, comprise an ablative-absorbing, ink-accepting surface layer and a hydrophilic support substrate. The hydrophilic support substrate **210** is as described herein for the hydrophilic support substrate **106** of the lithographic printing members without hydrophilic third layers, as illustrated in Figure 7. The ablative-absorbing, ink-accepting layer **320** is as described herein for the ablative-absorbing second layer **130** of the lithographic printing members without hydrophilic third layers, as illustrated in Figure 5, except that there is not a non-ablation absorbing, ink-accepting surface layer **100** overlying the ablative-absorbing layer.

[0132] In particular, the lithographic printing members, that do not comprise a hydrophilic third layer overlying the support substrate and further do not comprise a non-ablative absorbing surface layer, share the key aspect of this invention in the presence of large amounts of an organic sulfonic acid component in one or more layers of the printing member. For example, in one aspect of this invention, the lithographic printing member, as illustrated in Figure 8, comprises an organic sulfonic acid component present in the ablative-absorbing layer **320** at a level higher than that typically used for catalyst purposes, such as, for example, 0.01 to 12 weight per cent based on the total weight of polymers present in the coating layer for conventional crosslinked coatings. Thus, one aspect of embodiments pertains to a positive working, wet lithographic printing member imageable by laser radiation comprising (a) an ink-accepting surface layer, which surface layer comprises one or more polymers and is characterized by the ablative absorption of the laser radiation, and (b) a hydrophilic substrate; wherein the surface layer comprises greater than 13 weight per cent of an organic sulfonic acid component based on the total weight of polymers present in the surface layer. In one embodiment, the organic sulfonic acid component is an aromatic sulfonic acid. In a preferred embodiment, the organic sulfonic acid component is p-toluenesulfonic acid, such as, for example, present as a component of the amine-blocked p-toluenesulfonic acid, NACURE 2530.

[0133] In one embodiment, the organic sulfonic acid component is present in an amount of 15 to 75 weight per cent of the total weight of polymers present in the ablative-absorbing surface layer **320**. In a preferred embodiment, the organic sulfonic acid component is present in an amount of 20 to 45 weight per cent of the total weight of polymers present in the ablative-absorbing surface layer **320**.

[0134] Referring to Figure 8, still another aspect of embodiments and their utilization of organic sulfonic acids to

enhance the laser imaging sensitivity, printing quality, cleanability, press durability, ink-accepting image adhesion, and fine dot resolution of wet lithographic printing plates is the incorporation of a primer layer interposed between the ablative-absorbing surface layer **320** and the support substrate **210**, wherein the primer layer comprises an adhesion-promoting agent, in which the primer layer is characterized by the absence of ablative absorption of the laser radiation.

Suitable adhesion-promoting agents include, but are not limited to, organic sulfonic acid components, zirconium compounds, crosslinked reaction products of a hydrophilic polymer and a crosslinking agent, titanates, and silanes. In one embodiment, the adhesion-promoting agent in the primer layer is an organic sulfonic acid component, preferably an aromatic sulfonic acid, and, more preferably, p-toluenesulfonic acid.

[0135] In one embodiment, the organic sulfonic acid component in the primer layer interposed between the ablative-absorbing surface layer **320** and the hydrophilic support substrate **210** is present in an amount of 2 to 100 weight per cent of the primer layer, preferably in an amount of 50 to 100 weight per cent of the primer layer, and most preferably in an amount of 80 to 100 weight per cent of the primer layer.

[0136] In one embodiment, the thickness of the primer layer interposed between the ablative-absorbing surface layer **320** and the hydrophilic support substrate **210** is from about 0.01 to about 2 microns, and preferably from about 0.01 to about 0.1 microns.

[0137] When this primer layer comprising an organic sulfonic acid component is present, the increased levels of an organic sulfonic acid component in the ablative-absorbing surface layer **320** may not be necessary to provide the multiple benefits desired, and the level of an organic sulfonic acid component in the ablative-absorbing surface layer **320** may be less than 13 weight per cent of the total weight of polymers present in the ablative-absorbing surface layer or may even be negligible. However, it is preferred to utilize a combination of the primer layer and the ablative-absorbing surface layer **320** comprising the greater than 13 weight per cent of an organic sulfonic acid component.

[0138] In one embodiment, the adhesion-promoting agent of the primer layer is ammonium zirconyl carbonate such as, for example, BACOTE 20. In another embodiment, the adhesion-promoting agent of the primer layer is zirconium propionate. Other suitable zirconium compounds in the primer layer of the present invention include, but are not limited to, those zirconium-based adhesion promoters described in the aforementioned "The Use of Zirconium in Surface Coatings," Application Information Sheet 117 (Provisional), by P.J. Moles.

Imagine Apparatus

[0139] Imaging apparatus suitable for use in conjunction with the present invention include, but are not limited to, known laser imaging devices such as infrared laser devices that emit in the infrared spectrum. Laser outputs can be provided directly to the plate surface via lenses or other beam-guiding components, or transmitted to the surface of a printing plate from a remotely sited laser using a fiber-optic cable. The imaging apparatus can operate on its own, functioning solely as a platemaker, or it can be incorporated directly into a lithographic printing press. In the latter case, printing may commence immediately after application of the image to a blank plate. The imaging apparatus can be configured as a flatbed recorder or as a drum recorder.

[0140] The laser-induced ablation of the wet lithographic printing plates may be carried out using a wide variety of laser imaging systems known in the art of laser-induced ablation imaging, including, but not limited to, the use of continuous and pulsed laser sources, and the use of laser radiation of various ultraviolet, visible, and infrared wavelengths. Preferably, the laser-induced ablation of this invention is carried out utilizing a continuous laser source of near-infrared radiation, such as, for example, with a diode laser emitting at 830 nm.

Imaging Techniques

[0141] In operation, the plates are imaged in accordance with methods well-known to those of ordinary skill in the art. Thus, a lithographic printing plate of the present invention is selectively exposed, in a pattern representing an image, to the output of an imaging laser which is scanned over the plate. Referring to Figures 3 A and 3B, radiative laser output removes and/or damages or transforms the ablative-absorbing second layer **102** and the ink-accepting surface layer **100**, thereby directly producing on the plate an array of image features or potential image features.

[0142] Figures 6A and 6B show this imaging process in greater detail. As shown in Figure 6A, imaging radiation partially removes layers **100** and **102**, leaving residual debris **108** on the hydrophilic third layer **104**. The laser-imaged plate is then cleaned with water or fountain solution in order to remove debris **108**, thereby exposing the surface of the hydrophilic third layer **104** as shown in Figure 6B. When the plate is imaged and placed on the press without water cleaning, debris **108** is carried by the conveying rollers back to the bulk source of fountain solution.

[0143] Thus, in one aspect, a method of preparing an imaged wet lithographic printing plate comprises (a) providing a positive working, wet lithographic printing member of the present invention; (b) exposing the printing member to a desired imagewise exposure of laser radiation to ablate the surface and second layers of the member to form a residual debris layer or residual composite layer in contact to the hydrophilic third or hydrophilic polymeric layer, or alternatively,

to form a residual composite layer in contact to the hydrophilic substrate when no hydrophilic third or hydrophilic polymeric layer is present underlying the ablative-absorbing second layer and overlying the substrate; and (c) cleaning the residual layer from the hydrophilic third layer with water or with a cleaning solution, or alternatively, from the hydrophilic substrate when no such hydrophilic third or hydrophilic polymeric layer is present; wherein the hydrophilic third or hydrophilic polymeric layer of the three layer and two layer product designs of this invention is characterized by the absence of removal of the hydrophilic third or hydrophilic polymeric layer in the laser-exposed areas during steps (b) and (c), as illustrated in Figures 6B and 3B, respectively.

EXAMPLES

[0144] Several examples are described, which are offered by way of description and not by way of limitation.

Example 1

[0145] Lithographic printing plates were prepared using a grained and anodized aluminum sheet with a silicate overlayer. The aluminum sheet was coated with the hydrophilic polymeric third layer, as illustrated by layer **104** in Figures 2 and 4. The following components shown on a dry weight basis for the solids were mixed in water to make a 6.3% by weight solution:

Component	Parts	Source
Polyvinyl alcohol polymer	6.25	AIRVOL 125
Ammonium zirconyl carbonate	2.50	BACOTE 20
Glycerol	0.25	Aldrich Chemical, Milwaukee, WS
Surfactant	0.10	TRITON X-100, Rohm & Haas

A #18 wire wound rod was used to apply the hydrophilic polymeric coating formulation to the aluminum sheet. After curing this hydrophilic third layer containing AIRVOL 125, BACOTE 20, glycerol, and TRITON X-100 for 120 seconds at 145 °C, the following ablative-absorbing second layers were coated using a #4 wire wound rod on the cured hydrophilic polymeric layer and cured for 120 seconds at 145 °C to provide samples with three different ablative-absorbing second layers: A, B, and C. The ablative-absorbing second layer was cured for 120 seconds at 145 °C.

Component	Parts (A)	Parts (B)	Parts (C)
AIRVOL 125 (5% solids in water)	44.0	44.0	44.0
UCAR WBV-110 (48% solids in water)	4.37	4.37	4.37
2-Butoxyethanol	3.75	3.75	3.75
CYMEL 303	1.21	1.21	1.21
CAB-O-JET 200 (20% solids in water)	14.5	14.5	14.5
TRITON X-100 (10% solids in water)	3.60	3.60	3.60
NACURE 2530 (25% PTSA)	1.20	6.0	10.8
Water	27.37	22.57	17.77

[0146] An ink-accepting first layer from a water-based formulation was then overcoated using a #3 wire wound rod upon each of the second layers: A, B, and C. Each was then cured for 120 seconds at 145 °C. The ink-accepting coating formulation was as follows:

Component	Parts
WITCOBOND W-240 (30% solids in water)	11.4
2-Butoxyethanol	1.0
CYMEL 303	1.2
NACURE 2530 (25% PTSA)	2.4
TRITON X-100 (10% solids in water)	1.0
Water	83

WITCOBOND W-240 is a trademark for aqueous polyurethane dispersions available from Witco Corp., Chicago, IL.

[0147] Plates with each of the different second layers (A, B, and C), were imaged on a PEARLSETTER 74, a trademark for laser imaging equipment available from Presstek, Inc., Hudson, NH, containing IR laser diodes emitting energy at 870 nm. The laser spot size was 35 microns. The laser energy at the plate surface was approximately 700 mj/cm². Plates were cleaned through an Anitec desktop plate processor using water as the cleaning liquid.

[0148] After cleaning with water, the plates were evaluated for ease of cleaning, diode banding, resolution, and wet rub resistance. Diode banding is a measure of the latitude of the imaging sensitivity due to variations in output among the different IR laser diodes, coating thickness variations, and other variables. A low degree of banding is highly desirable in order to obtain uniform printing images. Resolution is a measure of the finest lines or dots of imaging quality that are achieved on the plate after imaging and post-imaging cleaning. Wet rub resistance is a measure of the finest lines or dots of imaging quality that are maintained on the plate during press operation and is estimated by measuring the finest lines or dots on the plate that survive 50 wet rubs with a WEBRIL cloth, a trademark for a lint-free cloth available from Veratec Corporation, Walpole, MA, which has been wet with water. The wet rubs each involve a double pass back and forth across the imaged areas so that 50 wet rubs in the wet rub resistance tests of this invention actually involve a total of 100 passes or wet rubs across the imaged area.

[0149] In the resolution and wet rub resistance testing of this invention, the image areas are of two types: (1) narrow lines in the form of a series of pixels with the width of the lines based on the number of pixels comprising the width, and (2) half tone dots at 150 lines per inch (lpi) halftone screen imaging. Approximate sizes of these image areas are as follows. One pixel lines are 15 microns wide, and 3 pixel lines are 40 microns wide. 2% Dots are 15 microns in diameter, 3% dots are 20 microns in diameter, 4% dots are 25 microns in diameter, 5% dots are 35 microns in diameter, and 10% dots are 60 microns in diameter. The smaller the widths of the pixel lines and the smaller the diameters of the dot sizes that can be achieved and maintained on the plate are the better for printing quality and press run length with acceptable quality. Thus, achieving a 1 pixel wide line image after cleaning and maintaining the 1 pixel wide line image through the wet rub resistance test is the best result for printing quality. Similarly, achieving a 2% dot image or a dot that is about 15 microns in diameter after cleaning and maintaining the 2% dot image through the wet rub resistance test is the best result for printing quality, and much more desirable compared to maintaining only 5% or 10% dots as the best dot images.

[0150] The following summarizes the results:

Plate	Ease of Cleaning	Best Dots Cleaned	Best Dots Wet Rubbed	Banding
"A"	Difficult	2%	3%	Severe
"B"	Good	2%	3%	Moderate
"C"	Washes Easily	2%	3%	Very Slight

[0151] The weight per cent of p-toluenesulfonic acid component based on the combined weight of polymers present in the ablative-absorbing second layer was 5.4 weight per cent for Plate A; 27.2 weight per cent for plate B; and 49.0 weight per cent for Plate C. It can be seen that a large amount of p-toluenesulfonic acid component from the NACURE 2530 significantly improves the ease of cleaning and decreases the amount of diode banding without any noticeable effect upon resolution.

Example 2

[0152] Nitrocellulose-based coatings for the printing members with an ablative-absorbing surface layer were prepared to show the effect of increased p-toluenesulfonic acid. Two coatings were prepared as follows:

Component	Parts (2A)	Parts (2B)
2-Butoxyethanol	93.30	84.90
Nitrocellulose (70% 5-6 sec. RS)	4.58	4.17
CYMEL 303	0.40	0.36
VULCAN VXC 72R	1.32	1.20
NACURE 2530 (25% PTSA)	0.40	9.37

[0153] Plates were made using the aluminum sheet, hydrophilic third layer, and procedures as described in Example 1 except that no ink-accepting first layer was overcoated upon each of the ablative-absorbing layers. Four variations in the cure time of the hydrophilic third layer of from between 30 seconds and 120 seconds at 145 °C were made. Imaging, cleaning, and testing for resolution and wet rub resistance were done as described in Example 1. The imager was a Presstek PEARLSETTER 74 with diodes set to provide about 400 mj/cm². Results on the imaged plates are summarized as follows:

		Example 2A		Example 2B	
Cure Time	Test	PIXEL	DOTS	PIXEL	DOTS
30 sec.	Cleaned	1 line	3%	1 line	2%
	50 Rubs Wet	3 lines	10%	1 line	3%
60 sec.	Cleaned	1 line	5%	1 line	3%
	50 Rubs Wet	3 lines	10%	1 line	4%
90 sec.	Cleaned	1 line	5%	1 line	3%
	50 Rubs Wet	3 lines	10%	1 line	3%
120 sec.	Cleaned	1 line	5%	1 line	3%
	50 Rubs Wet	3 lines	10%	1 line	3%

[0154] The weight per cent of p-toluenesulfonic acid component based on the combined weight of polymers present in the ablative-absorbing layer was 2.8 weight per cent for Example 2A and 71.4 weight per cent for Example 2B. It can be seen that a large amount of p-toluenesulfonic acid component significantly improves the adhesion of nitrocellulose-based coatings for the ablative-absorbing layer with a subsequent improvement in resolution and wet rub resistance.

Example 3

[0155] A nitrocellulose-based coating was prepared as described in Example 1 of U.S. Pat. No. 5,493,971 and was coated with a # 8 wire wound rod upon a cured hydrophilic polyvinyl alcohol-based coated, grained, anodized, and silicated aluminum substrate prepared as described in Example 1 and cured for 120 seconds at 145 °C. A second similar cured hydrophilic polyvinyl alcohol-based coated, grained, anodized and silicated substrate was coated with NACURE 2530 (25% PTSA) using a smooth rod and dried only. This primed surface was then coated with the nitrocellulose-based coating from U.S. Pat. No. 5,493,971 (Example 1) using a #8 wire wound rod and cured for 120 seconds at 145 °C. Imaging, cleaning, and testing for resolution and wet rub resistance were done as described in Example 1. Both plates were imaged on a Presstek PEARLSETTER 74 imager with diodes set to provide about 400 mj/cm². Results are summarized below:

	No NACURE Primer		NACURE Primer Layer	
	Pixel	Dots	Pixel	Dots
Cleaned	1 line	5%	1 line	3%
50 Rubs Wet	3 lines	10%	1 line	3%

[0156] It can be seen that a p-toluenesulfonic acid-based primer layer significantly improves the adhesion of nitrocellulose-based coatings for the ablative-absorbing layer as shown by the improvement in resolution and wet rub resistance.

Example 4

[0157] A nitrocellulose-based coating was prepared as described in Example 1 of U.S. Pat No. 5,493,971 and was coated with a #8 wire wound rod upon a cured hydrophilic polyvinyl alcohol-based coated, grained, anodized, and silicated aluminum substrate prepared as described in Example 1 and cured for 120 seconds at 145 °C. A second similar cured hydrophilic polyvinyl alcohol-based coated, grained, anodized and silicated substrate was coated with a 0.875% solids coating of BACOTE 20 using a #3 wire wound rod and dried only. This primed surface was then coated with the nitrocellulose-based coating from U.S. Pat. No. 5,493,971 (Example 1) using a #8 wire wound rod and cured for 120 seconds at 145 °C. Imaging, cleaning, and testing for resolution and wet rub resistance were done as described in Example 1. Both plates were imaged on a Presstek PEARLSETTER 74 imager with diodes set to provide about 400 mj/cm².

	No BACOTE Primer		BACOTE Primer Layer	
	Pixel	Dots	Pixel	Dots
Cleaned	1 line	5%	1 line	1%
50 Rubs Wet	3 lines	10%	1 line	2%

[0158] It can be seen that a primer layer containing ammonium zirconium carbonate significantly improves the adhesion of nitrocellulose-based coatings with a subsequent improvement in resolution and wet rub resistance.

Example 5

[0159] A lithographic printing plate in accordance with the invention was prepared using a grained and anodized aluminum sheet with a silicate over layer. The aluminum sheet was coated with the hydrophilic third layer as described in Example 1 and cured for 120 seconds at 145 °C. The following ablative-absorbing non-ink accepting second layer was coated on the cured third hydrophilic third layer and cured for 120 seconds at 1.45° C. BYK 333 is a trademark for a surfactant available from Byk-Chemie USA, Wallingford, CT.

Component	Parts
AIRVOL 125 (5% solids in water)	28.61
BACOTE 20 (14% solids in water)	4.16
Glycerol	0.07
TRITON X-100 (10% solids in water)	0.23
BYK 333 (10% solids in water)	0.33
CAB-O-JET 200 (20% solids in water)	33.3
NACURE 2530 (25% PTSA)	23.3

(continued)

Component	Parts
Water	10.0

[0160] The ablative-absorbing layer accepted water and did not accept ink when exposed to the ink and water of a wet lithographic printing system.

[0161] An ink-accepting first layer from a water-based formulation, as described in Example 1, was then overcoated upon the ablative-absorbing second layer. It was cured for 120 seconds at 145 °C.

[0162] Imaging, cleaning, and testing for resolution and wet rub resistance were done as described in Example 1. Plates were imaged on Presstek PEARLSETTER 74, and the laser energy at the plate surface was approximately 500 mj/cm².

[0163] The following summarizes the results:

Ease of Cleaning	Best Dots Cleaned	Best Dots Wet Rubbed	Banding
Washes Easily	1%	2%	None

[0164] The weight per cent of p-toluenesulfonic acid component based on the combined weight of polymers present, including the BACOTE 20 crosslinking agent, was 289.4 weight per cent. It can be seen that a large amount of p-toluenesulfonic acid component combined with a specific polyvinyl alcohol-based formulation provides a non-ink accepting ablative absorbing layer that significantly improves the ease of cleaning and resolution and eliminates diode banding. The NACURE 2530 with its p-toluenesulfonic acid component also provided significant dispersion stability and coatability properties to this formulation.

Example 6

[0165] Lithographic printing plates were prepared using a 5 mil thick polyester film suitable for coating with aqueous coatings. The polyester substrate was coated with the hydrophilic third layer, as described in Example 1 of this invention, and cured for 120 seconds at 145° C. The following ablative-absorbing second layer was coated on the hydrophilic third layer and cured for 120 seconds at 145° C.

Component	Parts (6A)	Parts (6B)
AIRVOL 125 (5% solids in water)	22.0	22.0
TRITON X-100 (10% solids in water)	1.8	1.8
2-Butoxyethanol	1.9	1.9
CYMEL 303	0.70	0.70
CAB-O-JET 200 (20% solids in water)	23.5	23.5
NACLIRE 2530 (25% PTSA)	1.20	5.50
Water	48.9	44.6

[0166] An ink-accepting first layer from a water-based formulation, as described in Example 1, was overcoated upon the second layer and then cured for 120 seconds at 145 °C.

[0167] Imaging, cleaning, and testing for resolution and wet rub resistance were done as described in Example 1. The plate was imaged on a Presstek PEARLSETTER 74, and the laser energy at the plate surface was approximately 600 mj/cm².

[0168] The following summarizes the results:

Plate	Ease of Cleaning	Best Dots Cleaned	Best Dots Wet Rubbed	Banding
6A	Would Not Clean Up	Not Applicable	Not Applicable	Not Applicable
6B	Good	1%	2%	None

[0169] The ablative-absorbing second layer of Plate 6A has 16.7 weight per cent of p-toluenesulfonic acid component based on the total weight of polymers in the second layer. For Plate 6B, the weight per cent of p-toluenesulfonic acid component based on the total weight of polymers in the second layer is 76.4 weight per cent. It can be seen that a large amount of p-toluenesulfonic acid component in the ablative-absorbing second layer of a plate of this invention with a flexible hydrophilic polyester film support significantly improves the ease of cleaning, provides good resolution, and eliminates diode banding. In contrast, a lower amount of p-toluenesulfonic acid component did not clean up after laser imaging and thus was not applicable for evaluating banding and resolution after cleaning and wet rub testing.

Example 7

[0170] Plates were made using the aluminum sheet and hydrophilic layer 104 prepared as described in Example 1.

[0171] The following components were mixed in water to make an 8.3% dispersion to prepare an ablative-absorbing, ink-accepting layer.

Component	Parts *	Source
Polyvinyl Alcohol	2.20	AIRVOL 125
Vinyl Copolymer	2.10	UCAR WBV-110
Hexamethoxymethyl Melamine	1.21	CYMEL 303
Sulfonated Carbon Black	2.48	CAB-O-JET 200
P-Toluenesulfonic Acid	0.30	NACURE 2530 (25% active)

*Parts by weight in dried coating.

This dispersion was applied on top of the hydrophilic barrier coated aluminum sheet with a #4 wire wound rod and dried for 2 minutes at 145 °C.

[0172] The following dispersion was applied to the above coated aluminum sheet with a #4 wire rod and dried for 2 minutes at 145 °C to prepare an ink-accepting, non-ablative-absorbing layer.

Component	Parts *	Source
Aqueous polyurethane dispersion	5.0	WITCOBOND W-240 (30% solid)
Hexamethoxymethylmelamine	1.0	CYMEL 303
Amine blocked p-toluene sulfonic Acid	0.5	Nacure 2530 (25% active)
Water	93.5	

*Parts by hundred in wet coating

Four plates prepared in the above manner were imaged on a Presstek PEARLSETTER 74 containing IR laser diodes emitting energy at 870 nm. The laser spot size was 35 microns. Energy used to image the plates was approximately between 500 and 700 mJ/cm². After imaging, the exposed area of the plate appeared as faint gray contrasted to a black image area. Two exposed plates were cleaned in an Anitec desktop plate processor using water as the cleaning liquid. One was mounted and run on a sheet-fed press, and the second was mounted and run on a web press. One uncleaned exposed plate was mounted directly on the web press and run. The other was mounted directly on the sheet fed press and run. The presses were stopped every 10,000 impressions and the plates cleaned with TRUE BLUE plate cleaner. Press runs were evaluated for speed of rollup (no. of impressions until acceptable printing), ink receptivity, ink discrimination, scumming, wear characteristics, run length, and resolution.

The results are summarized in Table 1.

TABLE 1

	Precleaned	Press type	Rollup	Scumming	Run Length	Resolution
Plate 1	Yes	Web	30	None	120,000	3 - 97 %
Plate 2	No	Web	40	None	120,000+	3 - 97%
Plate 3	Yes	Sheet	5	None	100,000	3 - 97%
Plate 4	No	Sheet	5	None	100,000	3 - 97 %

Example 8

[0173] Lithographic printing plates were prepared using a grained and anodized aluminum sheet with a silicate overlayer. The aluminum sheet was coated with a hydrophilic layer, as in Example 1. The following ablative-absorbing second layer was coated using a #4 wire wound rod on the cured hydrophilic polymeric layer and cured for 120 seconds at 145 °C.

Component	Parts
AIRVOL 125 (5% solids in water)	30.00
WITCOBOND 240 (30% solids in water)	10.00
2-Butoxyethanol	2.50
CYMEL 303	1.25
CAB-O-JET 200 (20% solids in water)	16.50
TRITON X-100 (10% solids in water)	2.40
NACURE 2530 (25% PTSA)	0.80
Water	36.50

An ink-accepting surface layer from a water-based formulation was then overcoated using a #3 wire wound rod upon the second layer. The sample was then cured for 120 seconds at 145 °C. The water-based coating formulation for the ink-accepting surface layer was as follows:

Component	Parts
WITCOBOND W-240 (30% solids in water)	11.4
2-Butoxyethanol	1.0
CYMEL 303	1.2
NACURE 2530 (25% PTSA)	2.4
TRITON X-100 (10% solids in water)	1.0
Water	83.0

[0174] The plate was imaged on a PEARLSETTER 74 as in Example 1. The laser energy at the plate surface was approximately 700 mJ/cm². Plates were cleaned through an Anitec desktop plate processor using water as the cleaning liquid. After cleaning with water, the plates were evaluated for ease of cleaning, diode banding, resolution, and wet rub resistance. After cleaning and applying the wet rub resistance test, Example 8 maintained 1 pixel lines, 2% dots after cleaning, and 3% to 4% dots after 50 wet double rubs. Banding was moderate. The non-image area of the plate was clean.

Example 9

[0175] A lithographic printing plate was prepared using a special grained aluminum. The surface of the aluminum sheet has a peak count in the range of 300 to 450 peaks per linear inch which extend above and below a total bandwidth of 20 micro inches. This aluminum is available from Alcoa, Inc. as SATIN FINISH aluminum. The grained surface is anodized and then provided with a silicate overlayer. The aluminum sheet was coated with a hydrophilic layer, as in Example 1. The following ablative-absorbing surface layer was coated using a #4 wire wound rod on the cured hydrophilic polymeric layer and cured for 120 seconds at 145° C.

EP 1 049 582 B9 (W1B1)

Component	Parts
AIRVOL 125 (5% solids in water)	30.00
WITCO 240 (30% solids in water)	10.00
2-Butoxyethanol	2.50
CYMEL 303	1.25
BONJET BLACK CW-1 (20% solids in water)	6.50
TRITON X-100 (10% solids in water)	2.40
NACURE 2530 (25% PTSA)	0.80
Water	36.50

The plate was imaged on a PEARLSETTER 74 containing IR laser diodes emitting energy at 830 nm. The laser spot size was 28 microns. The laser energy at the plate surface was approximately 700 mj/cm². Plates were cleaned through an Anitec desktop plate processor using water as the cleaning liquid. After cleaning, the plate maintained 1 pixel lines and 2% dots. After applying the wet rub resistance test, the plate maintained 5% dots and three pixel lines. Banding was excellent. The non-image area of the plate was clean.

Example 10

[0176] A second lithographic printing plate was prepared in accordance with the formula and procedure shown in Example 3. An ink-accepting surface layer from a water-based formulation was then overcoated onto layer 102 of this plate using a #3 wire wound rod. The plate was then cured for 120 seconds at 145° C. The water-based coating formulation for the ink-accepting surface layer was as follows:

Component	Parts
WITCOBOND W-240 (30% solids in water)	11.4
2-Butoxyethanol	1.0
CYMEL 303	1.2
NACURE 2530 (25% PTSA)	2.4
TRITON X-100 (10% in water)	1.0
Water	83.0

[0177] The plate was imaged on a PEARLSETTER 74 as in Example 3. Plates were cleaned through an Anitec desktop plate processor using water as the cleaning liquid.

[0178] After cleaning, the plate maintained 1 pixel lines and 2% dots. After applying the wet rub resistance test, the plate maintained 3% dots and one pixel lines. Banding was moderate. The non-image area of the plate required extra cleaning to remove the residual composite layer. This indicated that the plate required slightly higher exposure energy.

Claims

1. A positive-working, wet lithographic printing member imageable by laser radiation, said member comprising:

(a) an ink-accepting surface layer comprising one or more polymers and a sensitizer, said sensitizer layer being **characterised by** absorption of laser radiation and said surface layer being **characterised by** ablative absorption of said laser radiation;

(b) a hydrophilic layer underlying said surface layer, said hydrophilic layer being **characterised by** the absence of ablative absorption of said laser radiation and by being insoluble in water; and,

(c) a substrate,
wherein either:

(d) interposed between said surface layer and said hydrophilic layer is a primer layer comprising an adhesion-promoting agent; said primer layer being **characterised by** the absence of ablative absorption of said laser radiation; or:

(e) said hydrophilic layer comprises a cross-linked, polymeric reaction product of a hydrophilic polymer and a zirconium compound, which may be ammonium zirconyl carbonate.

2. A positive-working, wet lithographic printing member imageable by laser radiation, said member comprising:

- (a) an ink-accepting surface layer comprising one or more polymers and being **characterised by** the absence of ablative absorption of said laser radiation;
- (b) a second layer underlying said surface layer, said second layer comprising one or more polymers and a sensitizer, said sensitizer being **characterised by** absorption of said laser radiation and said second layer being **characterised by** ablative absorption of said laser radiation;
- (c) a hydrophilic third layer underlying said surface layer, said third layer being **characterised by** the absence of ablative absorption of said laser radiation; and,
- (d) a substrate.

3. A positive-working, wet lithographic printing plate member according to claim 2, wherein interposed between said ablation layer and said hydrophilic layer is a primer layer comprising an adhesion-promoting agent said primer layer being **characterised by** the absence of ablative absorption of said laser radiation.

4. A positive-working, wet lithographic printing plate member according to claim 1 (sub-clause d) or claim 2, wherein said primer layer comprises one of i) an organic sulphonic acid component or ii) a zirconium compound.

5. A positive-working, wet lithographic printing plate member according to claim 1 or claim 3, wherein said adhesion-promoting agent comprises a crosslinked, polymeric reaction product of a hydrophilic polymer, which may be a polyvinyl alcohol, and a crosslinking agent, which may be melamine.

6. A positive-working, wet lithographic printing plate member according to claim 5, wherein said primer layer contains a catalyst which may be an organic sulfonic acid component.

7. A positive-working, wet lithographic printing plate member according to claim 4 (sub-clause i)) wherein said organic sulfonic acid component is any one of: a) a component of an amine-blocked organic sulfonic acid; b) present in an amount of 2 to 100% by weight of said primer layer, c) present in an amount of 50 to 100% by weight of said primer layer; or d) present in an amount of 80 to 100% by weight of said primer layer.

8. A positive-working, wet lithographic printing plate member according to claim 4 (subclause ii)) wherein said zirconium compound is ammonium zirconyl carbonate or zirconium propionate.

9. A positive-working, wet lithographic printing plate member according to claim 1 (sub-clause d)) or any one of claims 3 to 8, wherein the thickness of said primer layer is from about 0.01 to about 2 microns or from about 0.01 to about 0.1 microns.

10. A positive-working, wet lithographic printing plate member according to claim 2, wherein the hydrophilic layer comprises a crosslinked, polymeric reaction product of a hydrophilic polymer and a first crosslinking agent.

11. A positive-working, wet lithographic printing plate member according to claim 1 (sub-clause e)) or claim 10, wherein the hydrophilic layer comprises a polymer contained within pores of said porous layer, which polymer may be the same as one or more polymers of the ablation layer and may be a hydrophilic polymer.

12. A positive-working, wet lithographic printing plate member according to claim 1 (sub-clause e)) or claim 10, wherein said hydrophilic layer is a porous layer and comprises a second crosslinking agent contained within pores of said porous layer.

13. A positive-working, wet lithographic printing plate member according to claim 12, wherein the hydrophilic layer comprises a crosslinked, polymeric reaction product of the hydrophilic polymer and said second crosslinking agent, which second crosslinking agent may be melamine.

14. A positive-working, wet lithographic printing plate member according to claim 12, wherein the hydrophilic layer further comprises a catalyst for said second crosslinking agent, which catalyst, which may be an organic sulfonic acid, is contained within pores of said porous layer.

15. A positive-working, wet lithographic printing plate member according to claim 10, wherein said first crosslinking agent is a zirconium compound which may be ammonium zirconyl carbonate.

16. A positive-working, wet lithographic printing plate member according to claim 1 (sub-clause e)) or claim 15, wherein said ammonium zirconyl carbonate is present in an amount greater than 10% or preferably 20 to 50% by weight of said hydrophilic polymer.

17. A positive-working, wet lithographic printing plate member according to claim 1 or any one of claims 10 to 16, wherein said hydrophilic polymer is selected from the group consisting of polyvinyl alcohols such as polyvinyl alcohol, and cellulose.

18. A positive-working, wet lithographic printing plate member according to any one of the preceding claims, wherein the thickness of said hydrophilic layer is from about 1 to about 40 microns or preferably from about 2 to about 25 microns.

19. A positive-working, wet lithographic printing plate member according to claim 1 or claim 2, wherein the ablation layer comprises greater than 13 weight per cent of an organic sulfonic acid component based on the total weight of polymers present in the ablation layer.

20. A positive-working, wet lithographic printing plate member according to claim 19, wherein said organic sulfonic acid component is any one of: a) a component of an amine-blocked organic sulfonic acid; b) an aromatic sulfonic acid; c) p-toluenesulfonic acid; or d) present in an amount of 15-75 weight per cent, or preferably 20-45 weight per cent, based on the total weight of polymers present in said surface layer.

21. A positive-working, wet lithographic printing plate member according to claim 1 or claim 2, wherein said substrate is selected from the group consisting of any one of: a) non-hydrophilic metal substrates, such as aluminium; b) non-metal substrates and non-hydrophilic metal substrates; c) papers and polymeric films; d) the group of polymeric films consisting of polyesters, polycarbonates and polystyrene, preferably polyethylene terephthalate film.

22. A positive-working, wet lithographic printing plate member according to claim 1 or claim 2, wherein said substrate is a hydrophilic metal which may be selected from the group of metals consisting of: aluminium; copper; steel; and chromium, and the metal substrate may be grained, anodized, silicated or a combination thereof.

23. A positive-working, wet lithographic printing plate member according to claim 22 in the case where the hydrophilic metal is aluminium, wherein the aluminium substrate comprises a surface of uniform, non-directional roughness and microscopic depressions which may have a peak count in the range of 300-450 peaks per linear inch (2,54 cm) which may extend above and below a total bandwidth of 20 microinches, (0,508 μ m) which surface is in contact to said hydrophilic layer.

24. A positive-working, wet lithographic printing plate member according to claim 1, 2 or 19, wherein the ablation layer comprises any one of: a) a sulfonated carbon black having sulfonated groups on the surface of carbon black; b) a carboxylated carbon black having carboxyl groups on the surface of said carbon black; c) a carbon black having a surface active hydrogen content of not less than 1.5 mmol/g; or d) a polyvinyl alcohol(s).

25. A positive-working, wet lithographic printing plate member according to claim 1, 2, 16 or 29, comprising one or more polymers in the ablation layer selected from the group consisting of: polyurethanes; cellulose; polycyanoacrylates; epoxy polymers; polyvinyl alcohols; and vinyl polymers, and wherein one or more of said polymers comprises a crosslinked, polymeric reaction product of a polymer and a crosslinking agent which may be melamine.

26. A positive-working, wet lithographic printing plate member according to claim 24 (sub-clause a)) wherein said sulfonated carbon black is CAB-O-JET 200.

27. A positive-working, wet lithographic printing plate member according to claim 24 (sub-clause c)), wherein said carbon black is BONJET BLACK CW-1.

28. A positive-working, wet lithographic printing plate member according to claim 24 (sub-clause d)), wherein said polyvinyl alcohol is present in an amount of 20 to 95 per cent and preferably 25 to 75 per cent by weight of the total weight of polymers present in the ablation layer.

29. A positive-working, wet lithographic printing plate member according to claim 1 or 2, wherein the thickness of said surface layer is from about 0.1 to about 20 microns and preferably from about 0.1 to about 2 microns.

30. A positive-working, wet lithographic printing plate member according to claim 2, wherein said surface layer comprises a crosslinked, polymeric reaction product of a polymer and a crosslinking agent, said surface layer further comprising an organic sulfonic acid component, which may be an amine-blocked organic sulfonic acid.

31. A positive-working, wet lithographic printing plate member according to claim 2, wherein said surface layer is further **characterized by** being not soluble in water or in a cleaning solution.

32. A positive-working, wet lithographic printing plate member according to claim 31, wherein said surface layer is further **characterized by** durability on a wet lithographic printing press.

33. A positive-working, wet lithographic printing plate member according to any one of the preceding claims, wherein the hydrophilic layer is compatible with but not soluble in water.

34. A method of preparing a positive-working, wet lithographic printing member imageable by laser radiation, said method comprising the steps of:

(a) providing a substrate;

(b) forming a hydrophilic layer on said substrate, which hydrophilic layer is **characterised by** the absence of ablative absorption of said laser radiation and by being insoluble in water, and,

(c) forming an ink-accepting surface layer overlying said hydrophilic layer, said surface layer comprising one or more polymers and a sensitizer, said sensitizer being **characterized by** absorption of said laser radiation and said surface layer being **characterized by** ablative absorption of said laser radiation;

wherein either:

(d) said step of forming a hydrophilic layer further comprises forming a primer layer to interpose said surface layer and hydrophilic layer, said primer layer **[deletion(s)]** comprising an adhesion-promoting agent; said primer layer being **characterised by** the absence of ablative absorption of said laser radiation;

or:

(e) said hydrophilic layer comprises a cross-linked, polymeric reaction product of a hydrophilic polymer and a zirconium compound, which may be ammonium zirconyl carbonate.

35. A method of preparing a positive-working, wet lithographic printing member imageable by laser radiation, said method comprising the steps of:

(a) providing a substrate;

(b) forming a hydrophilic layer on said substrate, which hydrophilic layer is **characterized by** the absence of ablative absorption of said laser radiation;

(c) forming an intermediate layer on said hydrophilic layer, said intermediate layer comprising one or more polymers and a sensitizer, said sensitizer being **characterised by** absorption of said laser radiation and said intermediate layer being **characterized by** ablative absorption of said laser radiation; and,

(d) forming an ink-accepting surface layer over said intermediate layer, said ink-accepting layer comprising one or more polymers and being **characterized by** the absence of ablative absorption of said laser radiation.

36. A method of preparing a positive-working, wet lithographic printing member according to claim 35, wherein the hydrophilic layer comprises a crosslinked, polymeric reaction product of a hydrophilic polymer and a first crosslinking agent.

37. A method of preparing a positive-working, wet lithographic printing member according to claim 34 (subclause e)) or claim 36, wherein the step (b) further comprises applying a liquid mixture comprising said hydrophilic polymer, said first crosslinking agent, and a liquid carrier to said substrate and subsequently heating said liquid mixture to remove said liquid carrier and to crosslink said hydrophilic polymer, thereby forming said hydrophilic layer; wherein said liquid carrier comprises greater than 50 weight per cent of water.

38. A method of preparing a positive-working, wet lithographic printing member according to claim 37, wherein step (c) further comprises applying a liquid mixture comprising said one or more polymers, said sensitizer, a second crosslinking agent, and a liquid carrier to said hydrophilic layer and subsequently heating said liquid mixture of step (c) to remove said liquid carrier and to crosslink one or more of said polymers of said ablation layer; wherein said liquid carrier in step (c) comprises greater than 50 weight per cent of water.

39. A method of preparing a positive-working, wet lithographic printing member according to claim 38, wherein, during step (c), some of said liquid mixture of step (c), which may comprise a catalyst of possibly an organic sulfonic acid component, is absorbed into said hydrophilic layer and, upon said subsequent heating to crosslink said ablation layer, said second crosslinking agent reacts with a hydrophilic polymer of said hydrophilic layer.
40. A method of preparing a positive-working, wet lithographic printing member according to claim 35, comprising the step of forming a primer layer on said hydrophilic layer, said primer layer comprising an adhesion-promoting agent said primer layer being **characterised by** the absence of ablative absorption of said laser radiation.
41. A method of preparing a positive-working, wet lithographic printing member according to claim 34 (sub-clause d) or claim 40, wherein said primer layer comprises one of (i) an organic sulphonic acid component or (ii) a zirconium compound.
42. A method of preparing a positive-working, wet lithographic printing member according to claim 34 (sub-clause d)) or claim 40, wherein said adhesion-promoting agent comprises a crosslinked, polymeric reaction product of a hydrophilic polymer, which may be a polyvinyl alcohol, and a crosslinking agent, which may be melamine.
43. A method of preparing a positive-working, wet lithographic printing member according to claim 42, wherein said primer layer contains a catalyst which may be an organic sulfonic acid component
44. A method of preparing a positive-working, wet lithographic printing plate member according to claim 34 (sub-clause d)) or claim 36, wherein said hydrophilic layer is porous and comprises a second crosslinking agent contained within pores of said porous layer.
45. A method of preparing a positive-working, wet lithographic printing plate member according to claim 44, wherein the hydrophilic layer comprises a crosslinked, polymeric reaction product of the hydrophilic polymer and said second crosslinking agent, which second crosslinking agent may be melamine.
46. A method of preparing a positive-working, wet lithographic printing plate member according to claim 36, wherein said first crosslinking agent is a zirconium compound.
47. A method of preparing a positive-working, wet lithographic printing plate member according to claim 34 (sub-clause d)) or claim 36, wherein the ablation layer comprises greater than 13 weight per cent of an organic sulfonic acid component based on the total weight of polymers present in the ablation layer.
48. A method of preparing a positive-working, wet lithographic printing plate member according to claim 34 (sub-clause d)) or claim 36, wherein said substrate is selected from the group consisting of any one of: a) non-hydrophilic metal substrates, such as aluminium; b) non-metal substrates and non-hydrophilic metal substrates; c) papers and polymeric films; d) the group of polymeric films consisting of polyesters, polycarbonates and polystyrene, preferably polyethylene terephthalate film.
49. A method of preparing a positive-working, wet lithographic printing plate member according to claim 34 (sub-clause d)) or claim 36, wherein said substrate is a hydrophilic metal.
50. A method of preparing a positive-working, wet lithographic printing plate member according to claim 34 (sub-clause d)) or claim 36, wherein the ablation layer comprises any one or more of: a) a sulfonated carbon black having sulfonated groups on the surface of carbon black; b) a carboxylated carbon black having carboxyl groups on the surface of said carbon black; c) a carbon black having a surface active hydrogen content of not less than 1.5 mmol/g; or d) a polyvinyl alcohol(s).
51. A method of preparing a positive-working, wet lithographic printing plate member according to claim 35, wherein said surface layer comprises a crosslinked, polymeric reaction product of a polymer and a crosslinking agent.
52. A method of preparing a positive-working, wet lithographic printing plate member according to claim 35, further comprising the step of forming a primer layer on said hydrophilic layer, said primer layer comprising an adhesion-promoting agent and being **characterised by** the absence of ablative absorption of said laser radiation, and the step of applying a liquid mixture comprising said adhesion-promoting agent and a liquid carrier to said hydrophilic layer and subsequently heating said liquid mixture to remove said liquid carrier and to cure said primer layer,

wherein said liquid carrier comprises greater than 50 weight per cent of water.

53. A method of preparing a positive-working, wet lithographic printing plate member according to claim 52, wherein during the step of forming the primer layer, some of said liquid mixture is absorbed into said hydrophilic layer and, upon said subsequent heating to cure said primer layer, said adhesion-promoting agent reacts with a polymer of said hydrophilic layer.

54. A method of preparing a positive-working, wet lithographic printing member according to claim 53, wherein step (c) further comprises applying a liquid mixture comprising said one or more polymers, said sensitizer, and a liquid carrier to said primer layer and subsequently heating said liquid mixture of step (c) to remove said liquid carrier and to cure said intermediate layer, wherein said liquid carrier in step (c) comprises less than 10 weight per cent of water.

55. A positive-working, wet lithographic printing plate member according to claim 44, wherein the hydrophilic layer further comprises a catalyst for said second crosslinking agent, which catalyst may be an organic sulfonic acid.

56. A method of preparing a positive-working, wet lithographic printing plate number according to any one of claims 34 to 55, wherein said hydrophilic layer is not soluble in water or in a cleaning solution.

57. A method of preparing an imaged wet lithographic printing plate, said method comprising the steps of:

(a) providing a wet lithographic printing member according to any one of claims 1, 3 or 9;

(b) exposing said member to a desired imagewise exposure of laser radiation to ablate said surface layer of said member to form a residual layer in the laser-exposed areas of said surface layer of said member to form a residual layer in the laser-exposed areas of said surface layer; and

(c) removing said residual layer with water or a cleaning solution;

wherein said hydrophilic layer is **characterised by** the absence of removal of said hydrophilic layer in said laser-exposed area during steps (b) and (c).

58. A method of preparing an imaged wet lithographic printing plate according to claim 57, wherein said residual layer is in contact to said hydrophilic layer

Patentansprüche

1. Positiv arbeitendes Naßflachdruckteil, das mittels Laserstrahlung bildaufzeichnungsfähig ist, wobei das Teil umfaßt:

(a) eine Druckfarben aufnehmende Oberflächenschicht mit einem oder mehreren Polymeren und einem Sensibilisator, wobei die Sensibilisatorschicht durch Absorption von Laserstrahlung gekennzeichnet ist und die Oberflächenschicht durch Ablationsabsorption der Laserstrahlung gekennzeichnet ist;

(b) eine hydrophile Schicht, die unter der Oberflächenschicht angeordnet ist, wobei die hydrophile Schicht durch das Ausbleiben der Ablationsabsorption der Laserstrahlung und durch Unlöslichkeit in Wasser gekennzeichnet ist; und

(c) ein Substrat,

wobei entweder

(d) zwischen der Oberflächenschicht und der hydrophilen Schicht eine Haftmittelschicht mit einem Haftvermittler angeordnet ist, wobei die Haftmittelschicht durch das Ausbleiben der Ablationsabsorption der Laserstrahlung gekennzeichnet ist;

oder

(e) die hydrophile Schicht ein vernetztes Polymerreaktionsprodukt aus einem hydrophilen Polymer und einer Zirkoniumverbindung umfaßt, die Ammoniumzirconylcarbonat sein kann.

2. Positiv arbeitendes Naßflachdruckteil, das mittels Laserstrahlung bildaufzeichnungsfähig ist, wobei das Teil umfaßt:

- (a) eine Druckfarben aufnehmende Oberflächenschicht mit einem oder mehreren Polymeren, die durch das Ausbleiben der Ablationsabsorption der Laserstrahlung gekennzeichnet ist;
- (b) eine zweite Schicht, die unter der Oberflächenschicht angeordnet ist, wobei die zweite Schicht ein oder mehrere Polymere und einen Sensibilisator umfaßt, wobei der Sensibilisator durch Absorption der Laserstrahlung gekennzeichnet ist und die zweite Schicht durch Ablationsabsorption der Laserstrahlung gekennzeichnet ist;
- (c) eine hydrophile dritte Schicht, die unter der Oberflächenschicht angeordnet ist, wobei die dritte Schicht durch das Ausbleiben der Ablationsabsorption der Laserstrahlung gekennzeichnet ist; und
- (d) ein Substrat.

3. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 2, wobei zwischen der Ablationsschicht und der hydrophilen Schicht eine Haftmittelschicht mit einem Haftvermittler angeordnet ist, wobei die Haftmittelschicht durch das Ausbleiben der Ablationsabsorption der Laserstrahlung gekennzeichnet ist.
4. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 1 (Absatz d) oder Anspruch 2, wobei die Haftmittelschicht entweder i) eine organische Sulfonsäurekomponente oder ii) eine Zirkoniumverbindung umfaßt.
5. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 1 oder 3, wobei der Haftvermittler ein vernetztes Polymerreaktionsprodukt aus einem hydrophilen Polymer, das ein Polyvinylalkohol sein kann, und einem Vernetzungsmittel, das Melamin sein kann, umfaßt.
6. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 5, wobei die Haftmittelschicht einen Katalysator enthält, der eine organische Sulfonsäurekomponente sein kann.
7. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 4 (Absatz i), wobei die organische Sulfonsäurekomponente folgendes sein kann: a) eine Komponente einer aminblockierten organischen Sulfonsäure; b) die mit einem Anteil von 2 bis 100 Gew.-% an der Haftmittelschicht vorhanden ist; c) die mit einem Anteil von 50 bis 100 Gew.-% an der Haftmittelschicht vorhanden ist; oder d) die mit einem Anteil von 80 bis 100 Gew.-% an der Haftmittelschicht vorhanden ist.
8. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 4 (Absatz ii), wobei die Zirkoniumverbindung Ammoniumzirkonylcarbonat oder Zirkoniumpropionat ist.
9. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 1 (Absatz d) oder einem der Ansprüche 3 bis 8, wobei die Dicke der Haftmittelschicht von etwa 0,01 bis etwa 2 µm oder von 0,01 bis etwa 0,1 µm reicht.
10. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 2, wobei die hydrophile Schicht ein vernetztes Polymerreaktionsprodukt aus einem hydrophilen Polymer und einem ersten Vernetzungsmittel umfaßt.
11. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 1 (Absatz e) oder Anspruch 10, wobei die hydrophile Schicht ein Polymer umfaßt, das in Poren der porösen Schicht enthalten ist, wobei das Polymer das gleiche wie ein oder mehrere Polymere der Ablationsschicht sein kann und ein hydrophiles Polymer sein kann.
12. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 1 (Absatz e) oder Anspruch 10, wobei die hydrophile Schicht eine poröse Schicht ist und ein zweites Vernetzungsmittel umfaßt, das in Poren der porösen Schicht enthalten ist.
13. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 12, wobei die hydrophile Schicht ein vernetztes Polymerreaktionsprodukt aus dem hydrophilen Polymer und dem zweiten Vernetzungsmittel umfaßt, wobei das zweite Vernetzungsmittel Melamin sein kann.
14. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 12, wobei die hydrophile Schicht ferner einen Katalysator für das zweite Vernetzungsmittel umfaßt, wobei der Katalysator, der eine organische Sulfonsäure sein kann, in Poren der porösen Schicht enthalten ist.
15. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 10, wobei das erste Vernetzungsmittel eine Zirkoniumverbindung ist, die Ammoniumzirkonylcarbonat sein kann.

16. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 1 (Absatz e) oder Anspruch 15, wobei das Ammoniumzirconylcarbonat mit einem Anteil von mehr als 10 Gew.-% oder vorzugsweise 20 bis 50 Gew.-% an dem hydrophilen Polymer vorhanden ist.
- 5 17. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 1 oder einem der Ansprüche 10 bis 16, wobei das hydrophile Polymer aus der Gruppe gewählt ist, die aus Polyvinylalkoholen, z. B. Polyvinylalkohol, und Cellulosederivaten besteht.
- 10 18. Positiv arbeitendes Naßflachdruckplattenteil nach einem der vorhergehenden Ansprüche, wobei die Dicke der hydrophilen Schicht von etwa 1 bis etwa 40 µm oder vorzugsweise von etwa 2 bis etwa 25 µm reicht.
- 15 19. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 1 oder 2, wobei die Ablationsschicht mehr als 13 Gew.-% einer organischen Sulfonsäurekomponente, bezogen auf das Gesamtgewicht der in der Ablationsschicht vorhandenen Polymere, umfaßt.
- 20 20. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 19, wobei die organische Sulfonsäurekomponente irgendeines von folgendem ist: a) eine Komponente einer aminblockierten organischen Sulfonsäure; b) eine aromatische Sulfonsäure; c) p-Toluolsulfonsäure; oder d) mit einem Anteil von 15 bis 75 Gew.-% oder vorzugsweise 20 bis 45 Gew.-%, bezogen auf das Gesamtgewicht der in der Oberflächenschicht vorhandenen Polymere, vorhanden.
- 25 21. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 1 oder 2, wobei das Substrat aus der Gruppe gewählt ist, die aus irgendeinem von folgendem besteht: a) nichthydrophile Metallsubstrate, z. B. Aluminium; b) Nichtmetallsubstrate und nichthydrophile Metallsubstrate; c) Papiere und Polymerfilme; d) wobei die Gruppe der Polymerfilme aus Polyestern, Polycarbonaten und Polystyrol, vorzugsweise aus Polyethylenterephthalatfilm, besteht.
- 30 22. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 1 oder 2, wobei das Substrat ein hydrophiles Metall ist, das aus der Gruppe von Metallen gewählt sein kann, die aus Aluminium; Kupfer; Stahl; und Chrom besteht, und wobei das Metallsubstrat gekörnt, anodisiert, siliziert, oder eine Kombination aus diesen sein kann.
- 35 23. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 22, sofern das hydrophile Metall Aluminium ist, wobei das Aluminiumsubstrat eine Oberfläche mit gleichmäßiger, ungerichteter Rauigkeit und mikroskopischen Vertiefungen umfaßt, die eine Rauigkeitsspitzenanzahl im Bereich von 300 bis 450 Rauigkeitsspitzen pro Linearzoll (2,54 cm) haben, die sich über und unter eine Gesamtbandbreite von 20 Mikrozoll (0,508 µm) erstrecken, wobei die Oberfläche mit der hydrophilen Schicht in Kontakt ist.
- 40 24. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 1, 2 oder 19, wobei die Ablationsschicht irgendeines von folgendem umfaßt: a) ein sulfoniertes Kohleschwarz mit sulfonierten Gruppen auf der Oberfläche des Kohleschwarzes; b) ein carboxyliertes Kohleschwarz mit Carboxylgruppen auf der Oberfläche des Kohleschwarzes; c) ein Kohleschwarz mit einem oberflächenaktiven Wasserstoffgehalt von nicht weniger als 1,5 mmol/g; oder d) (einen) Polyvinylalkohol(e).
- 45 25. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 1, 2, 16 oder 29 mit einem oder mehreren Polymeren in der Ablationsschicht, die aus der Gruppe gewählt ist, die aus Polyurethanen; Cellulosederivaten; Polycyanoacrylaten; Epoxidpolymeren; Polyvinylalkoholen; und Vinylpolymeren besteht, und wobei eines oder mehrere der Polymere ein vernetztes Polymerreaktionsprodukt aus einem Polymer und einem Vernetzungsmittel umfaßt, das Melamin sein kann.
- 50 26. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 24 (Absatz a), wobei das sulfoniert Kohleschwarz CAB-O-JET 200 ist.
- 55 27. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 24 (Absatz c), wobei das Kohleschwarz BONJET BLACK CW-1 ist.
28. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 24 (Absatz d), wobei der Polyvinylalkohol mit einem Anteil von 20 bis 95 Gew.-% und vorzugsweise 25 bis 75 Gew.-% am Gesamtgewicht der in der Ablationsschicht vorhandenen Polymere vorhanden ist.

29. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 1 oder 2, wobei die Dicke der Oberflächenschicht von etwa 0,1 bis etwa 20 µm und vorzugsweise von etwa 0,1 bis etwa 2 µm reicht.

30. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 2, wobei die Oberflächenschicht ein vernetztes Polymerreaktionsprodukt aus einem Polymer und einem Vernetzungsmittel umfaßt, wobei die Oberflächenschicht ferner eine organische Sulfonsäurekomponente umfaßt, die eine aminblockierte organische Sulfonsäure sein kann.

31. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 2, wobei die Oberflächenschicht ferner **gekennzeichnet ist durch** Unlöslichkeit in Wasser oder in einer Reinigungslösung.

32. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 31, wobei die Oberflächenschicht ferner **gekennzeichnet ist durch** Beständigkeit auf einer Naßflachdruckpresse.

33. Positiv arbeitendes Naßflachdruckplattenteil nach einem der vorhergehenden Ansprüche, wobei die hydrophile Schicht mit Wasser kompatibel, aber nicht in Wasser löslich ist.

34. Verfahren zur Herstellung eines positiv arbeitenden Naßflachdruckteils, das mittels Laserstrahlung bildaufzeichnungsfähig ist, wobei das Verfahren die Schritte aufweist:

(a) Bereitstellen eines Substrats;

(b) Ausbilden einer hydrophilen Schicht auf dem Substrat, wobei die hydrophile Schicht durch das Ausbleiben der Ablationsabsorption der Laserstrahlung und durch Unlöslichkeit in Wasser gekennzeichnet ist; und

(c) Ausbilden einer Druckfarben aufnehmenden Oberflächenschicht, die über der hydrophilen Schicht angeordnet ist, wobei die Oberflächenschicht ein oder mehrere Polymere und einen Sensibilisator umfaßt, wobei der Sensibilisator **gekennzeichnet ist durch** Absorption der Laserstrahlung und die Oberfläche **gekennzeichnet ist durch** Ablationsabsorption der Laserstrahlung;

wobei entweder

(d) der Schritt des Ausbildens einer hydrophilen Schicht ferner den Schritt umfaßt: Ausbilden einer Haftmittelschicht, die zwischen der Oberflächenschicht und der hydrophilen Schicht anzuordnen ist, wobei die Haftmittelschicht einen Haftvermittler umfaßt, wobei die Haftmittelschicht **gekennzeichnet ist durch** das Ausbleiben der Ablationsabsorption der Laserstrahlung;

oder

(e) die hydrophile Schicht ein vernetztes Polymerreaktionsprodukt aus einem hydrophilen Polymer und einer Zirkoniumverbindung umfaßt, die Ammoniumzirkonylcarbonat sein kann.

35. Verfahren zur Herstellung eines positiv arbeitenden Naßflachdruckteils, das mittels Laserstrahlung bildaufzeichnungsfähig ist, wobei das Verfahren die Schritte umfaßt:

(a) Bereitstellen eines Substrats;

(b) Ausbilden einer hydrophilen Schicht auf dem Substrat, wobei die hydrophile Schicht **gekennzeichnet ist durch** das Ausbleiben der Ablationsabsorption der Laserstrahlung;

(c) Ausbilden einer Zwischenschicht auf der hydrophilen Schicht, wobei die Zwischenschicht ein oder mehrere Polymere und einen Sensibilisator umfaßt, wobei der Sensibilisator **gekennzeichnet ist durch** Absorption der Laserstrahlung und die Zwischenschicht **gekennzeichnet ist durch** Ablationsabsorption der Laserstrahlung; und

(d) Ausbilden einer Druckfarben aufnehmenden Oberflächenschicht über der Zwischenschicht, wobei die Druckfarben aufnehmende Schicht ein oder mehrere Polymere umfaßt und **gekennzeichnet ist durch** das Ausbleiben der Ablationsabsorption der Laserstrahlung.

36. Verfahren zur Herstellung eines positiv arbeitenden Naßflachdruckteils nach Anspruch 35, wobei die hydrophile Schicht ein vernetztes Polymerreaktionsprodukt aus einem hydrophilen Polymer und einem ersten Vernetzungsmittel umfaßt.

37. Verfahren zur Herstellung eines positiv arbeitenden Naßflachdruckteils nach Anspruch 34 (Absatz e) oder Anspruch 36, wobei der Schritt (b) ferner den Schritt umfaßt: Aufbringen eines flüssigen Gemischs mit dem hydrophilen Polymer, dem ersten Vernetzungsmittel und einem flüssigen Träger auf das Substrat und anschließendes Erwärmen des flüssigen Gemischs, um den flüssigen Träger zu entfernen und das hydrophile Polymer zu vernetzen.

zen, wodurch die hydrophile Schicht ausgebildet wird; wobei der flüssige Träger mehr als 50 Gew.-% Wasser umfaßt.

38. Verfahren zur Herstellung eines positiv arbeitenden Naßflachdruckteils nach Anspruch 37, wobei der Schritt (c) ferner den Schritt umfaßt: Aufbringen eines flüssigen Gemischs mit dem einen oder mehreren Polymeren, dem Sensibilisator, einem zweiten Vernetzungsmittel und einem flüssigen Träger auf die hydrophile Schicht und anschließendes Erwärmen des flüssigen Gemischs aus dem Schritt (c), um den flüssigen Träger zu entfernen und eines oder mehrere der Polymere der Ablationsschicht zu vernetzen; wobei der flüssige Träger im Schritt (c) mehr als 50 Gew.-% Wasser umfaßt.

39. Verfahren zur Herstellung eines positiv arbeitenden Naßflachdruckteils nach Anspruch 38, wobei während des Schrittes (c) ein Teil des flüssigen Gemischs aus dem Schritt (c), das einen Katalysator möglicherweise aus einer organischen Sulfonsäurekomponente umfassen kann, in der hydrophilen Schicht absorbiert wird und nach der anschließenden Erwärmung zur Vernetzung der Ablationsschicht das zweite Vernetzungsmittel mit einem hydrophilen Polymer der hydrophilen Schicht reagiert.

40. Verfahren zur Herstellung eines positiv arbeitenden Naßflachdruckteils nach Anspruch 35, mit dem Schritt: Ausbilden einer Haftmittelschicht auf der hydrophilen Schicht, wobei die Haftmittelschicht einen Haftvermittler umfaßt wobei die Haftmittelschicht **gekennzeichnet ist durch** das Ausbleiben der Ablationsabsorption der Laserstrahlung.

41. Verfahren zur Herstellung eines positiv arbeitenden Naßflachdruckteils nach Anspruch 34 (Absatz d) oder Anspruch 40, wobei die Haftmittelschicht entweder i) eine organische Sulfonsäurekomponente oder ii) eine Zirkoniumverbindung enthält.

42. Verfahren zur Herstellung eines positiv arbeitenden Naßflachdruckteils nach Anspruch 34 (Absatz d) oder Anspruch 40, wobei das Haftvermittler ein vernetztes Polymerreaktionsprodukt aus einem hydrophilen Polymer, das ein Polyvinylalkohol sein kann, und aus einem Vernetzungsmittel ist, das Melamin sein kann.

43. Verfahren zur Herstellung eines positiv arbeitenden Naßflachdruckteils nach Anspruch 42, wobei die Haftmittelschicht einen Katalysator enthält, der eine organische Sulfonsäurekomponente sein kann.

44. Verfahren zur Herstellung eines positiv arbeitenden Naßflachdruckplattenteils nach Anspruch 34 (Absatz d) oder Anspruch 36, wobei die hydrophile Schicht porös ist und ein zweites Vernetzungsmittel umfaßt, das in Poren der porösen Schicht enthalten ist.

45. Verfahren zur Herstellung eines positiv arbeitenden Naßflachdruckplattenteils nach Anspruch 44, wobei die hydrophile Schicht ein vernetztes Polymerreaktionsprodukt aus dem hydrophilen Polymer und dem zweiten Vernetzungsmittel umfaßt, wobei das zweite Vernetzungsmittel Melamin sein kann.

46. Verfahren zur Herstellung eines positiv arbeitenden Naßflachdruckplattenteils nach Anspruch 36, wobei das erste Vernetzungsmittel eine Zirkoniumverbindung ist.

47. Verfahren zur Herstellung eines positiv arbeitenden Naßflachdruckplattenteils nach Anspruch 34 (Absatz d) oder Anspruch 36, wobei die Ablationsschicht mehr als 13 Gew.-% einer organischen Sulfonsäurekomponente, bezogen auf das Gesamtgewicht der in der Ablationsschicht vorhandenen Polymere, umfaßt.

48. Verfahren zur Herstellung eines positiv arbeitenden Naßflachdruckplattenteils nach Anspruch 34 (Absatz d) oder Anspruch 36, wobei das Substrat aus der Gruppe gewählt ist, die aus irgendeinem von folgendem besteht: a) nichthydrophile Metallsubstrate, z. B. Aluminium; b) Nichtmetallsubstrate und nichthydrophile Metallsubstrate; c) Papiere und Polymerfilme; d) die Gruppe aus Polymerfilmen, die aus Polyestern, Polycarbonaten und Polystyrol, vorzugsweise Polyethylenterephthalatfilm, besteht.

49. Verfahren zur Herstellung eines positiv arbeitenden Naßflachdruckplattenteils nach Anspruch 34 (Absatz d) oder Anspruch 36, wobei das Substrat ein hydrophiles Metall ist.

50. Verfahren zur Herstellung eines positiv arbeitenden Naßflachdruckplattenteils nach Anspruch 34 (Absatz d) oder Anspruch 36, wobei die Ablationsschicht irgendeines oder mehreres von folgendem umfaßt: a) ein sulfoniertes

Kohleschwarz mit sulfonierten Gruppen auf der Oberfläche des Kohleschwarzes; b) ein carboxyliertes Kohleschwarz mit Carboxylgruppen auf der Oberfläche des Kohleschwarzes; c) ein Kohleschwarz mit einem oberflächenaktiven Wasserstoffgehalt von nicht weniger als 1,5 mmol/g; oder d) (ein) Polyvinylalkohol(e).

51. Verfahren zur Herstellung eines positiv arbeitenden Naßflachdruckplattenteils nach Anspruch 35, wobei die Oberflächenschicht ein vernetztes Polymerreaktionsprodukt aus einem Polymer und einem Vernetzungsmittel umfaßt.

52. Verfahren zur Herstellung eines positiv arbeitenden Naßflachdruckplattenteils nach Anspruch 35, ferner mit dem folgenden Schritt: Ausbilden einer Haftmittelschicht auf der hydrophilen Schicht, wobei die Haftmittelschicht einen Haftvermittler umfaßt und **gekennzeichnet ist durch** das Ausbleiben der Ablationsabsorption der Laserstrahlung, und dem folgenden Schritt: Aufbringen eines flüssigen Gemischs mit dem Haftvermittler und einem flüssigen Träger auf die hydrophile Schicht und anschließendes Erwärmen der flüssigen Mischung, um den flüssigen Träger zu entfernen und die Haftmittelschicht zu härten, wobei der flüssige Träger mehr als 50 Gew.-% Wasser umfaßt.

53. Verfahren zur Herstellung eines positiv arbeitenden Naßflachdruckplattenteils nach Anspruch 52, wobei während des Schritts des Ausbildens der Haftmittelschicht ein Teil des flüssigen Gemischs in der hydrophilen Schicht absorbiert wird und nach der anschließenden Erwärmung zur Härtung der Haftmittelschicht der Haftvermittler mit einem Polymer der hydrophilen Schicht reagiert.

54. Verfahren zur Herstellung eines positiv arbeitenden Naßflachdruckplattenteils nach Anspruch 53, wobei der Schritt (c) ferner den folgenden Schritt umfaßt: Aufbringen eines flüssigen Gemischs mit dem einen oder mehreren Polymeren, dem Sensibilisator und einem flüssigen Träger auf die Haftmittelschicht und anschließendes Erwärmen des flüssigen Gemischs aus dem Schritt (c), um den flüssigen Träger zu entfernen und die Zwischenschicht zu härten, wobei der flüssige Träger in Schritt (c) weniger als 10 Gew.-% Wasser umfaßt.

55. Positiv arbeitendes Naßflachdruckplattenteil nach Anspruch 44, wobei die hydrophile Schicht ferner einen Katalysator für das zweite Vernetzungsmittel umfaßt, wobei der Katalysator eine organische Sulfonsäure sein kann.

56. Verfahren zur Herstellung eines positiv arbeitenden Naßflachdruckplattenteils nach einem der Ansprüche 34 bis 55, wobei die hydrophile Schicht weder in Wasser noch in einer Reinigungslösung löslich ist.

57. Verfahren zur Herstellung einer mit einem Bild versehenen Naßflachdruckplatte, wobei das Verfahren die folgenden Schritte aufweist:

- (a) Bereitstellen eines Naßflachdruckteils nach einem der Ansprüche 1, 3 oder 9;
- (b) Bewirken, daß das Teil einer gewünschten bildweisen Einwirkung mittels Laserstrahlung ausgesetzt wird, um die Oberflächenschicht des Teils zu abladien, um eine Restschicht in den laserbestrahlten Bereichen der Oberflächenschicht des Teils auszubilden, um eine Restschicht in den laserbestrahlten Bereichen der Oberflächenschicht auszubilden; und
- (c) Entfernen der Restschicht mit Wasser oder einer Reinigungslösung;

wobei die hydrophile Schicht **gekennzeichnet ist durch** das Ausbleiben der Entfernung der hydrophilen Schicht in dem laserbestrahlten Bereich während der Schritte (b) und (c).

58. Verfahren zur Herstellung einer mit einem Bild versehenen Naßflachdruckplatte nach Anspruch 57, wobei die Restschicht mit der hydrophilen Schicht in Kontakt ist.

Revendications

1. Élément d'impression lithographique par voie humide à travail positif susceptible d'une formation d'image par rayonnement laser, ledit élément comprenant:

- (a) une couche de surface d'acceptation d'encre qui comprend un ou plusieurs polymères et un agent de sensibilisation, ladite couche d'agent de sensibilisation étant **caractérisée par** l'absorption du rayonnement laser et ladite couche de surface étant **caractérisée par** l'absorption par ablation dudit rayonnement laser;
- (b) une couche hydrophile qui s'étend au-dessous de ladite couche de surface, ladite couche hydrophile étant **caractérisée par** l'absence d'absorption par ablation dudit rayonnement laser et étant insoluble dans l'eau; et

(c) un substrat,

dans lequel soit:

(d) interposée entre ladite couche de surface et ladite couche hydrophile, il y a une couche d'agent d'amorçage qui comprend un agent de stimulation d'adhérence, ladite couche d'agent d'amorçage étant **caractérisée par** l'absence d'absorption par ablation dudit rayonnement laser;

soit:

(e) ladite couche hydrophile comprend un produit de réaction polymérique réticulé constitué par un polymère hydrophile et par un composé de zirconium qui peut être du carbonate de zirconyle d'ammonium.

2. Élément d'impression lithographique par voie humide à travail positif susceptible d'une formation d'image par rayonnement laser, ledit élément comprenant:

(a) une couche de surface d'acceptation d'encre qui comprend un ou plusieurs polymères et qui est **caractérisée par** l'absence d'absorption par ablation dudit rayonnement laser;

(b) une seconde couche qui s'étend au-dessous de ladite couche de surface, ladite seconde couche comprenant un ou plusieurs polymères et un agent de sensibilisation, ledit agent de sensibilisation étant **caractérisé par** l'absorption dudit rayonnement laser et ladite seconde couche étant **caractérisée par** l'absorption par ablation dudit rayonnement laser;

(c) une troisième couche hydrophile qui s'étend au-dessous de ladite couche de surface, ladite troisième couche étant **caractérisée par** l'absence d'absorption par ablation dudit rayonnement laser; et

(d) un substrat.

3. Élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 2, dans laquelle, en interposition entre ladite couche d'ablation et ladite couche hydrophile, il y a une couche d'agent d'amorçage qui comprend un agent de stimulation d'adhérence, ladite couche d'agent d'amorçage étant **caractérisée par** l'absence d'absorption par ablation dudit rayonnement laser.

4. Élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 1 (sous-clause d)) ou selon la revendication 2, dans lequel ladite couche d'agent d'amorçage comprend soit i) un composant d'acide sulfonique organique, soit ii) un composé de zirconium.

5. Élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 1 ou 3, dans lequel ledit agent de stimulation d'adhérence comprend un produit de réaction polymérique réticulé constitué par un polymère hydrophile qui peut être un alcool polyvinylique et par un agent de réticulation qui peut être de la mélamine.

6. Élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 5, dans lequel ladite couche d'agent d'amorçage contient un catalyseur qui peut être un composant d'acide sulfonique organique.

7. Élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 4 (sous-clause i)), dans lequel ledit composant d'acide sulfonique organique est n'importe lequel pris parmi: a) un composant d'un acide sulfonique organique bloqué par amine; b) présent selon une quantité de 2% en poids à 100% en poids de ladite couche d'agent d'amorçage; c) présent selon une quantité de 50% en poids à 100% en poids de ladite couche d'agent d'amorçage; ou d) présent selon une quantité de 80% en poids à 100% en poids de ladite couche d'agent d'amorçage.

8. Élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 4 (sous-clause ii)), dans lequel ledit composé de zirconium est un carbonate de zirconyle d'ammonium ou un propionate de zirconium.

9. Élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 1 (sous-clause d)) ou selon l'une quelconque des revendications 3 à 8, dans lequel l'épaisseur de ladite couche d'agent d'amorçage est comprise entre environ 0,01 micromètre et environ 2 micromètres ou entre environ 0,01 micromètre et environ 0,1 micromètre.

10. Élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 2, dans lequel la couche hydrophile comprend un produit de réaction polymérique réticulé constitué par un polymère hy-

drophile et par un premier agent de réticulation.

- 5 11. Elément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 1 (sous-clause e)) ou selon la revendication 10, dans lequel la couche hydrophile comprend un polymère qui est contenu à l'intérieur de pores de ladite couche poreuse, lequel polymère peut être le même que un ou plusieurs polymères de la couche d'ablation et peut être un polymère hydrophile.
- 10 12. Elément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 1, (sous-clause e)) ou selon la revendication 10, dans lequel ladite couche hydrophile est une couche poreuse et elle comprend un second agent de réticulation qui est contenu à l'intérieur de pores de ladite couche poreuse.
- 15 13. Elément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 12, dans lequel la couche hydrophile comprend un produit de réaction polymérique réticulé constitué par le polymère hydrophile et par ledit second agent de réticulation, lequel second agent de réticulation peut être de la mélamine.
- 20 14. Elément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 12, dans lequel la couche hydrophile comprend en outre un catalyseur pour ledit second agent de réticulation, lequel catalyseur, qui peut être un acide sulfonique organique, est contenu à l'intérieur de pores de ladite couche poreuse.
- 25 15. Elément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 10, dans lequel ledit premier agent de réticulation est un composé de zirconium qui peut être du carbonate de zirconyle d'ammonium.
- 30 16. Elément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 1 (sous-clause e)) ou selon la revendication 15, dans lequel ledit carbonate de zirconyle d'ammonium est présent selon une quantité supérieure à 10% en poids ou de préférence selon une quantité comprise entre 20% en poids et 50% en poids dudit polymère hydrophile.
- 35 17. Elément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 1 ou selon l'une quelconque des revendications 10 à 16, dans lequel ledit polymère hydrophile est choisi parmi le groupe comprenant des alcools polyvinyliques, tels qu'un alcool polyvinylique, et des celluloses.
- 40 18. Elément de plaque d'impression lithographique par voie humide à travail positif selon l'une quelconque des revendications précédentes, dans lequel l'épaisseur de ladite couche hydrophile est comprise entre environ 1 micromètre et environ 40 micromètres ou de préférence, entre environ 2 micromètres et environ 25 micromètres.
- 45 19. Elément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 1 ou 2, dans lequel la couche d'ablation comprend plus de 13% en poids d'un composant d'acide sulfonique organique sur la base du poids total des polymères présents dans la couche d'ablation.
- 50 20. Elément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 19, dans lequel ledit composant d'acide sulfonique organique est n'importe lequel pris parmi: a) un composant d'un acide sulfonique organique bloqué par amine; b) un acide sulfonique aromatique; c) un acide p-toluène sulfonique; ou d) présent selon une quantité de 15% en poids à 75% en poids ou de préférence, de 20% en poids à 45% en poids, sur la base du poids total des polymères présents dans ladite couche de surface.
- 55 21. Elément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 1 ou 2, dans lequel ledit substrat est choisi parmi le groupe comprenant: a) des substrats métalliques non hydrophiles tels que l'aluminium; b) des substrats non métalliques et des substrats métalliques non hydrophiles; c) des papiers et des films polymériques; d) le groupe de films polymériques comprenant des polyesters, des polycarbonates et du polystyrène, de préférence un film en téréphtalate de polyéthylène.
22. Elément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 1 ou 2, dans lequel ledit substrat est un métal hydrophile qui peut être choisi parmi le groupe de métaux comprenant: aluminium; cuivre; acier; et chrome, et le substrat métallique peut être sous forme de grains, anodisé, silicaté ou une combinaison afférente.
23. Elément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 22 dans le

cas où le métal hydrophile est de l'aluminium, dans lequel le substrat en aluminium comprend une surface d'une rugosité non directionnelle uniforme et des dépressions microscopiques qui peuvent présenter un comptage de crêtes dans la plage de 300 à 450 crêtes par pouce linéaire (2,54 centimètres), lesquelles crêtes peuvent s'étendre au-dessus et au-dessous d'une largeur de bande ou bande passante totale de 20 micropouces (0,508 micromètre), laquelle surface est en contact avec ladite couche hydrophile.

24. Élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 1, 2 ou 19, dans lequel la couche d'ablation comprend un composé pris parmi: a) du noir de charbon sulfoné comportant des groupes sulfonés sur la surface du noir de charbon; b) du noir de charbon carboxylé comportant des groupes carboxyles sur la surface dudit noir de charbon; c) du noir de charbon présentant une teneur en hydrogène actif en surface non inférieure à 1,5 millimoles/gramme ou d) un alcool ou des alcools polyvinyliques.

25. Élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 1, 2, 16 ou 29, comprenant un ou plusieurs polymères dans la couche d'ablation choisis parmi le groupe comprenant: des polyuréthanes; des celluloses; des polycyanoacrylates; des polymères époxy; des alcools polyvinyliques; et des polymères vinyliques, et dans lequel un ou plusieurs desdits polymères comprennent un produit de réaction polymérique réticulé constitué par un polymère et par un agent de réticulation qui peut être de la mélamine.

26. Élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 24 (sous-clause a)), dans lequel ledit noir de charbon sulfoné est CAB-O-JET 200.

27. Élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 24 (sous-clause c)), dans lequel ledit noir de charbon est BONJET BLACK CW-1.

28. Élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 24 (sous-clause d)), dans lequel ledit alcool polyvinylique est présent selon une quantité de 20% en poids à 95% en poids et de préférence, de 25% en poids à 75% en poids du poids total des polymères présents dans la couche d'ablation.

29. Élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 1 ou 2, dans lequel l'épaisseur de ladite couche de surface est comprise entre environ 0,1 micromètre et environ 20 micromètres et de préférence, entre environ 0,1 micromètre et environ 2 micromètres.

30. Élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 2, dans lequel ladite couche de surface comprend un produit de réaction polymérique réticulé qui est constitué par un polymère et par un agent de réticulation, ladite couche de surface comprenant en outre un composant d'acide sulfonique organique, qui peut être un acide sulfonique organique bloqué par amine.

31. Élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 2, dans lequel ladite couche de surface est en outre **caractérisée par le fait qu'elle** n'est pas soluble dans l'eau ou dans une solution de nettoyage.

32. Élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 31, dans lequel ladite couche de surface est en outre **caractérisée par** sa durée de vie sur une presse d'impression lithographique par voie humide.

33. Élément de plaque d'impression lithographique par voie humide à travail positif selon l'une quelconque des revendications précédentes, dans lequel la couche hydrophile est compatible avec l'eau mais n'est pas soluble dans l'eau.

34. Procédé de préparation d'un élément d'impression lithographique par voie humide à travail positif susceptible d'une formation d'image au moyen d'un rayonnement laser, ledit procédé comprenant les étapes de:

a) fourniture d'un substrat;

b) formation d'une couche hydrophile sur ledit substrat, laquelle couche hydrophile est **caractérisée par** l'absence d'absorption par ablation dudit rayonnement laser et par le fait qu'elle est insoluble dans l'eau; et

c) formation d'une couche de surface d'acceptation d'encre qui s'étend au-dessous de ladite couche hydro-

phile, ladite couche de surface comprenant un ou plusieurs polymères et un agent de sensibilisation, ledit agent de sensibilisation étant **caractérisé par** l'absorption dudit rayonnement laser et ladite couche de surface étant **caractérisée par** l'absorption par ablation dudit rayonnement laser, dans lequel soit:

d) ladite étape de formation d'une couche hydrophile comprend en outre la formation d'une couche d'agent d'amorçage pour réaliser une interposition entre ladite couche de surface et ladite couche hydrophile, ladite couche d'agent d'amorçage comprenant un agent de stimulation d'adhérence, ladite couche d'agent d'amorçage étant **caractérisée par** l'absence d'absorption par ablation dudit rayonnement laser;

e) ladite couche hydrophile comprend un produit de réaction polymérique réticulé constitué par un polymère hydrophile et par un composé de zirconium qui peut être du carbonate de zirconyle d'ammonium.

35. Procédé de préparation d'un élément d'impression lithographique par voie humide à travail positif susceptible d'une formation d'image au moyen d'un rayonnement laser, ledit procédé comprenant les étapes de:

a) fourniture d'un substrat;

b) formation d'une couche hydrophile sur ledit substrat, laquelle couche hydrophile est **caractérisée par** l'absence d'absorption par ablation dudit rayonnement laser;

(c) formation d'une couche intermédiaire sur ladite couche hydrophile, ladite couche intermédiaire comprenant un ou plusieurs polymères et un agent de sensibilisation, ledit agent de sensibilisation étant **caractérisé par** l'absorption dudit rayonnement laser et ladite couche intermédiaire étant **caractérisée par** l'absorption par ablation dudit rayonnement laser;

d) formation d'une couche de surface d'acceptation d'encre au-dessus de ladite couche intermédiaire, ladite couche d'acceptation d'encre comprenant un ou plusieurs polymères et étant **caractérisée par** l'absence d'absorption par ablation dudit rayonnement laser.

36. Procédé de préparation d'un élément d'impression lithographique par voie humide à travail positif selon la revendication 35, dans lequel la couche hydrophile comprend un produit de réaction polymérique réticulé constitué par un polymère hydrophile et par un premier agent de réticulation.

37. Procédé de préparation d'un élément d'impression lithographique par voie humide à travail positif selon la revendication 34 (sous-clause e)) ou selon la revendication 36, dans lequel l'étape (b) comprend en outre l'application d'un mélange de liquides comprenant ledit polymère hydrophile, ledit premier agent de réticulation et un support de liquide sur ledit substrat et le chauffage ensuite dudit mélange de liquides afin d'enlever ledit support de liquide et afin de réticuler ledit polymère hydrophile, d'où ainsi la formation de ladite couche hydrophile; dans lequel ledit support de liquide comprend de l'eau selon un pourcentage supérieur à 50% en poids.

38. Procédé de préparation d'un élément d'impression lithographique par voie humide à travail positif selon la revendication 37, dans lequel l'étape (c) comprend en outre l'application d'un mélange de liquides comprenant lesdits un ou plusieurs polymères, ledit agent de sensibilisation, un second agent de réticulation et un support de liquide sur ladite couche hydrophile et le chauffage ensuite dudit mélange de liquides de l'étape (c) pour enlever ledit support de liquide et pour réticuler un ou plusieurs desdits polymères de ladite couche d'ablation; dans lequel ledit support de liquide de l'étape (c) comprend de l'eau selon un pourcentage supérieur à 50% en poids.

39. Procédé de préparation d'un élément d'impression lithographique par voie humide à travail positif selon la revendication 38, dans lequel, pendant l'étape (c), une certaine quantité dudit mélange de liquides de l'étape (c), qui peut comprendre un catalyseur d'éventuellement un composant d'acide sulfonique organique, est absorbée dans ladite couche hydrophile et, suite audit chauffage qui suit pour réticuler ladite couche d'ablation, ledit second agent de réticulation réagit avec un polymère hydrophile de ladite couche hydrophile.

40. Procédé de préparation d'un élément d'impression lithographique par voie humide à travail positif selon la revendication 35, comprenant l'étape de formation d'une couche d'agent d'amorçage sur ladite couche hydrophile, ladite couche d'agent d'amorçage comprenant un agent de stimulation d'adhérence; ladite couche d'agent d'amorçage

étant **caractérisée par** l'absence d'absorption par ablation dudit rayonnement laser.

- 5 41. Procédé de préparation d'un élément d'impression lithographique par voie humide à travail positif selon la revendication 34 (sous-clause d)) ou selon la revendication 40, dans lequel ladite couche d'agent d'amorçage comprend soit i) un composant d'acide sulfonique organique, soit ii) un composé de zirconium.
- 10 42. Procédé de préparation d'un élément d'impression lithographique par voie humide à travail positif selon la revendication 34 (sous-clause d)) ou selon la revendication 40, dans lequel ledit agent de stimulation d'adhérence comprend un produit de réaction polymérique réticulé constitué par un polymère hydrophile qui peut être un alcool polyvinylique et par un agent de réticulation qui peut être de la mélamine.
- 15 43. Procédé de préparation d'un élément d'impression lithographique par voie humide à travail positif selon la revendication 42, dans lequel ladite couche d'agent d'amorçage contient un catalyseur qui peut être un composant d'acide sulfonique organique.
- 20 44. Procédé de préparation d'un élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 34 (sous-clause d)) ou selon la revendication 36, dans lequel ladite couche hydrophile est poreuse et comprend un second agent de réticulation qui est contenu à l'intérieur de pores de ladite couche poreuse.
- 25 45. Procédé de préparation d'un élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 44, dans lequel la couche hydrophile comprend un produit de réaction polymérique réticulé constitué par le polymère hydrophile et par ledit second agent de réticulation, lequel second agent de réticulation peut être de la mélamine.
- 30 46. Procédé de préparation d'un élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 36, dans lequel ledit premier agent de réticulation est un composé de zirconium.
- 35 47. Procédé de préparation d'un élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 34 (sous-clause d)) ou selon la revendication 36, dans lequel la couche d'ablation comprend un composant d'acide sulfonique organique selon une quantité supérieure à 13% en poids sur la base du poids total des polymères présents dans la couche d'ablation.
- 40 48. Procédé de préparation d'un élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 34 (sous-clause d)) ou selon la revendication 36, dans lequel ledit substrat est choisi parmi le groupe comprenant: a) des substrats métalliques non hydrophiles tels qu'en aluminium; b) des substrats non métalliques et des substrats métalliques non hydrophiles; c) des papiers et des films polymériques; d) le groupe de films polymériques comprenant des polyesters, des polycarbonates et du polystyrène, de préférence un film en téréphtalate de polyéthylène.
- 45 49. Procédé de préparation d'un élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 34 (sous-clause d)) ou selon la revendication 36, dans lequel ledit substrat est un métal hydrophile.
- 50 50. Procédé de préparation d'un élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 34 (sous-clause d)) ou selon la revendication 36, dans lequel la couche d'ablation comprend un composant pris parmi: a) du noir de charbon sulfoné comportant des groupes sulfonés sur la surface du noir de charbon; b) du noir de charbon carboxylé comportant des groupes carboxyle sur la surface dudit noir de charbon; c) du noir de charbon présentant une teneur en hydrogène actif en surface non inférieure à 1,5 millimoles/gramme ou d) un alcool ou des alcools polyvinyliques.
- 55 51. Procédé de préparation d'un élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 35, dans lequel ladite couche de surface comprend un produit de réaction polymérique réticulé constitué par un polymère et par un agent de réticulation.
52. Procédé de préparation d'un élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 35, comprenant en outre l'étape de formation d'une couche d'agent d'amorçage sur ladite couche hydrophile, ladite couche d'agent d'amorçage comprenant un agent de stimulation d'adhérence et étant **caractérisée par** l'absence d'une absorption par ablation dudit rayonnement laser, et l'étape d'application d'un mélange de liquides comprenant ledit agent de stimulation d'adhérence et un support de liquide sur ladite couche hydrophile

et le chauffage ensuite dudit mélange de liquides afin d'enlever ledit support de liquide et afin de durcir ladite couche d'agent d'amorçage, dans lequel ledit support de liquide comprend une quantité d'eau supérieure à 50% en poids.

5 53. Procédé de préparation d'un élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 52, dans lequel, pendant l'étape de formation de la couche d'agent d'amorçage, une certaine part dudit mélange de liquides est absorbée dans ladite couche hydrophile et, suite audit chauffage qui suit pour durcir ladite couche d'agent d'amorçage, ledit agent de stimulation d'adhérence réagit avec un polymère de ladite couche hydrophile.

10 54. Procédé de préparation d'un élément d'impression lithographique par voie humide à travail positif selon la revendication 53, dans lequel l'étape (c) comprend en outre l'application d'un mélange de liquides comprenant lesdits un ou plusieurs polymères, ledit agent de sensibilisation et un support de liquide sur ladite couche d'agent d'amorçage et le chauffage ensuite dudit mélange de liquides de l'étape (c) afin d'enlever ledit support de liquide et afin de durcir ladite couche intermédiaire, dans lequel ledit support de liquide au niveau de l'étape (c) comprend une quantité d'eau inférieure à 10% en poids.

15 55. Élément de plaque d'impression lithographique par voie humide à travail positif selon la revendication 44, dans lequel la couche hydrophile comprend en outre un catalyseur pour ledit second agent de réticulation, lequel catalyseur peut être un acide sulfonique organique.

20 56. Procédé de préparation d'un élément de plaque d'impression lithographique par voie humide à travail positif selon l'une quelconque des revendications 34 à 55, dans lequel ladite couche hydrophile n'est pas soluble dans l'eau ou dans une solution de nettoyage.

25 57. Procédé de préparation d'une plaque d'impression lithographique par voie humide imagée, ledit procédé comprenant les étapes de:

30 a) fourniture d'un élément d'impression lithographique par voie humide selon l'une quelconque des revendications 1, 3 ou 9;

35 b) exposition dudit élément à une exposition pour image souhaitée par un rayonnement laser afin de réaliser une ablation de ladite couche de surface dudit élément afin de former une couche résiduelle dans les zones exposées par laser de ladite couche de surface dudit élément afin de former une couche résiduelle dans les zones exposées par laser de ladite couche de surface; et

c) enlèvement de ladite couche résiduelle à l'aide d'eau ou d'une solution de nettoyage,

40 dans lequel ladite couche hydrophile est **caractérisée par** l'absence d'enlèvement de ladite couche hydrophile dans ladite zone exposée par laser pendant les étapes (b) et (c).

45 58. Procédé de préparation d'une plaque d'impression lithographique par voie humide imagée selon la revendication 57, dans lequel ladite couche résiduelle est en contact avec ladite couche hydrophile.

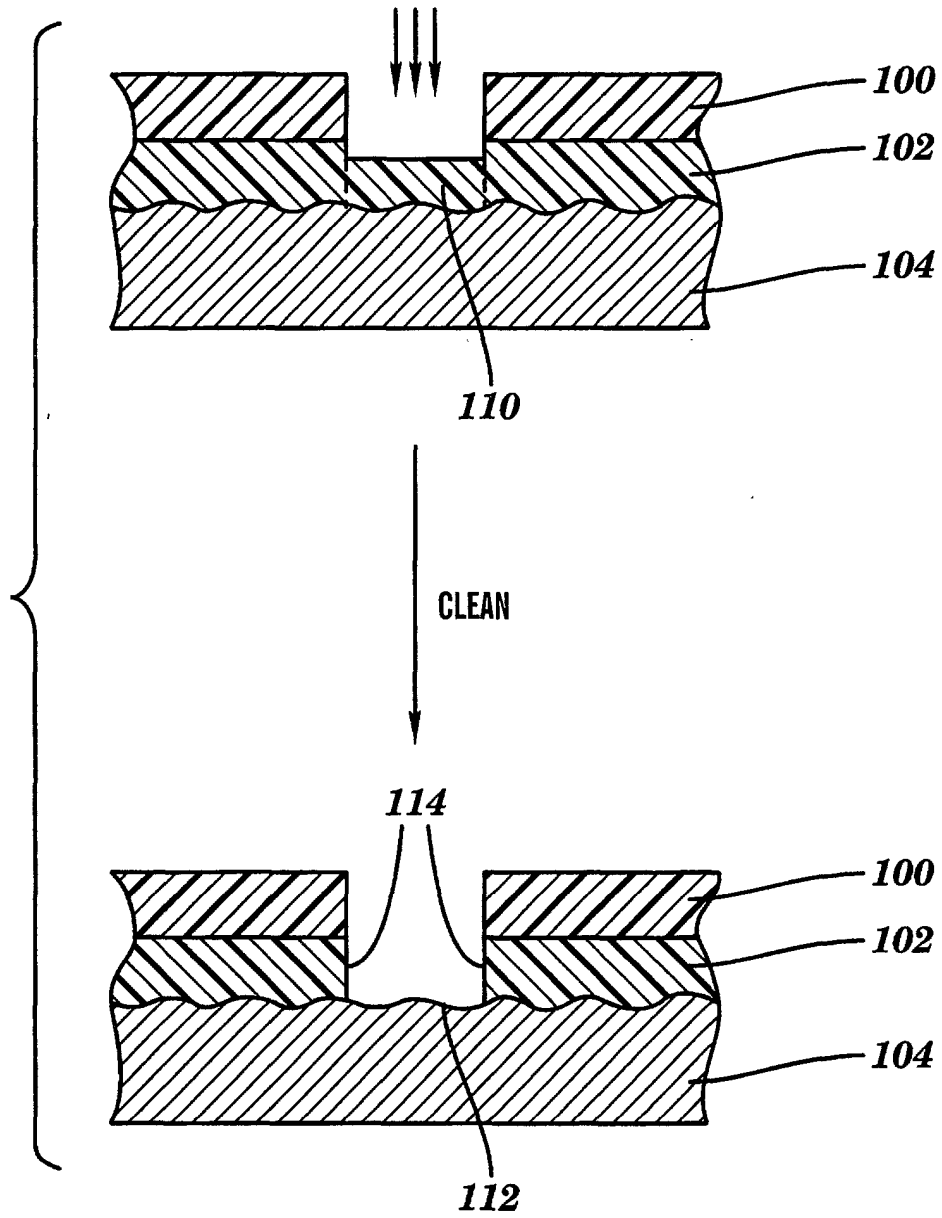


FIG. 1
PRIOR ART

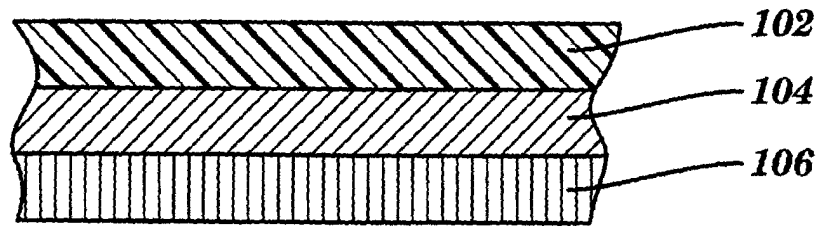


FIG. 2

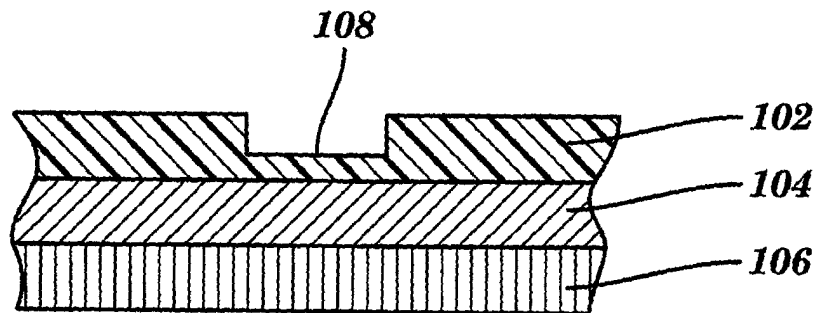


FIG. 3A

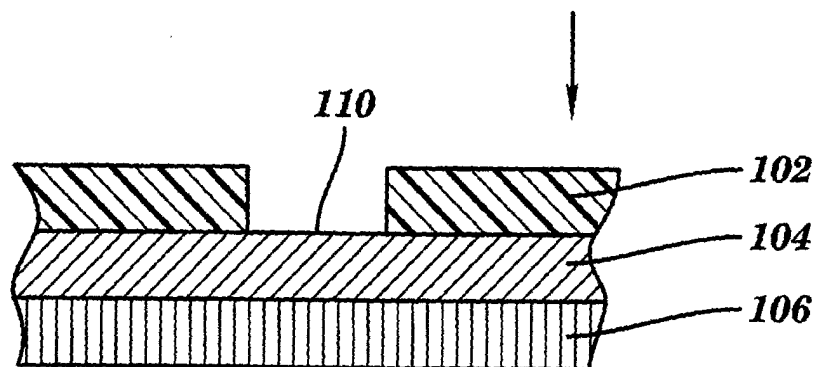


FIG. 3B

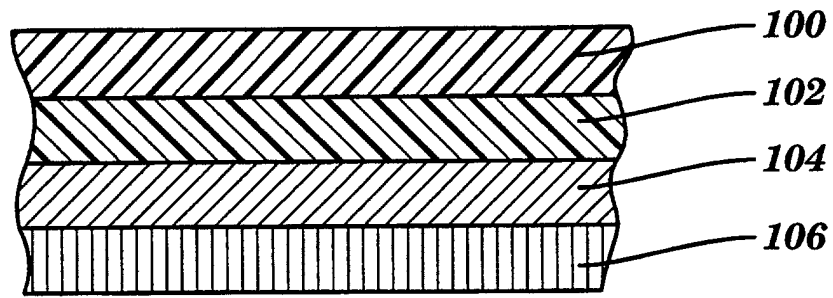


FIG. 4

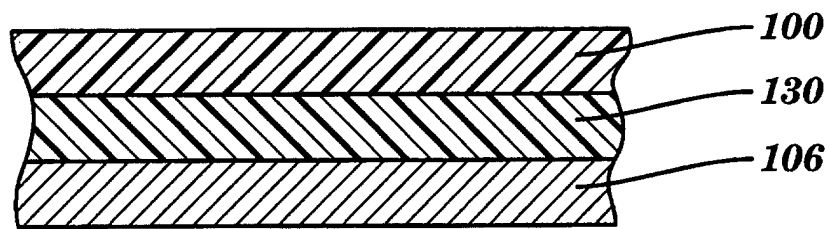


FIG. 5

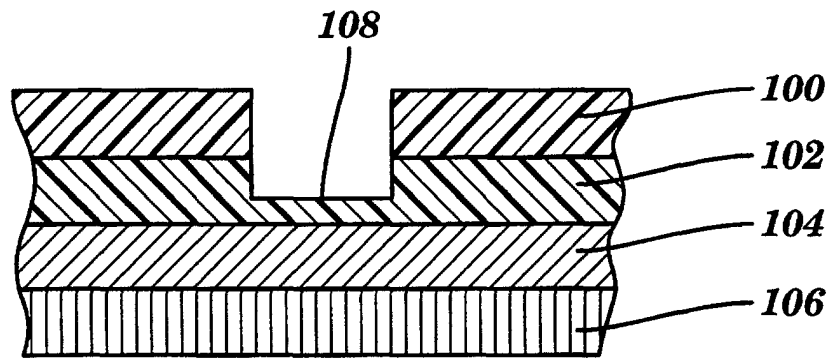


FIG. 6A

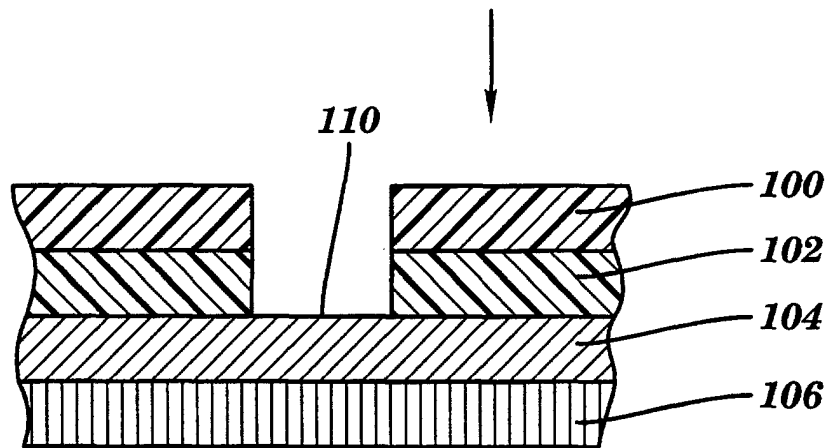


FIG. 6B

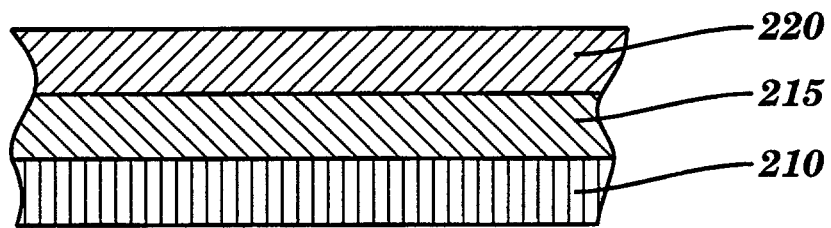


FIG. 7

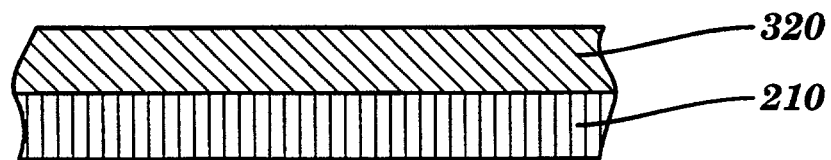


FIG. 8