



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
27.12.2000 Bulletin 2000/52

(51) Int Cl.7: **A47L 13/18**, A47L 13/19,
A47L 25/08

(21) Application number: **99870118.9**

(22) Date of filing: **07.06.1999**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(71) Applicant: **THE PROCTER & GAMBLE COMPANY**
Cincinnati, Ohio 45202 (US)

(72) Inventors:
• **Pace, Luigi**
80067 Sorrento (IT)
• **Scartozzi, Margherita**
00166 Rome (IT)

(74) Representative:
Morelle, Evelyne Charlotte Isabelle et al
BVBA Procter & Gamble Europe Sprl,
Temselaan 100
1853 Strombeek-Bever (BE)

(54) **Process of cleaning a carpet with a glove**

(57) The present invention relates to a process of cleaning a carpet comprising the steps of applying a liquid carpet cleaning composition onto a carpet and contacting said carpet with a glove comprising at least two

layers; the first layer being capable of capillarity and a second layer which is impermeable to said carpet cleaning composition wherein the second layer is located between the first layer and the cavity formed by the glove.

DescriptionTechnical Field

5 **[0001]** The present invention relates to a process of cleaning a carpet with a liquid carpet cleaning composition using a glove. More particularly, the present invention relates to a process of cleaning a carpet comprising the steps of applying a liquid carpet cleaning composition onto the carpet and contacting the carpet with a glove comprising at least two layers.

10 Background of the Invention

[0002] Carpets produced from synthetic or natural fibers and mixtures thereof are commonly used in residential and commercial applications as a floor covering.

[0003] Various types of fibers can be used in making carpets such as polyamide fibers, polyester fibers as well as wool, cotton or even silk in the case of rugs.

15 **[0004]** However, carpets irrespective of whether they are made from natural or synthetic fibers are all prone to soiling and staining when contacted with many household items. Food, grease, oils, beverages in particular such as coffee, tea and soft drinks especially those containing acidic dyes can cause unsightly, often dark stains on carpets. Also fibers may become soiled as a result of dirt particles, clay, dust, i.e., particulate soils in general, coming into contact with and adhering to the fibers of the carpet. These stains and soils often appear in the form of localized spots ("spot stains") and tend to accumulate particularly in the so called "high traffic areas" such as near doors as a result of intensive use of the carpets in such areas.

[0005] Liquid compositions for treating carpets are already known in the art. For example as disclosed in EP-A-0 629 694.

25 **[0006]** However, it is understood that such compositions are not fully satisfactory from a consumer viewpoint. In particular, it is well known from consumer research that consumers are looking for improved cleaning performance on spot stains, especially in high traffic areas.

[0007] Thus, the objective of the present invention is to provide a process of cleaning a carpet which provides cleaning performance benefits on various types of spot stains including particulate spot stains, greasy spot stains, bleachable spot stains and/or enzymatic spot stains.

30 **[0008]** It has now been found that the above objective can be met by a process of cleaning a carpet using a glove type implement and a liquid cleaning composition.

[0009] An advantage of the process of cleaning a carpet according to the present invention is that said process provides an easy and fast way for a user to clean spot stains on a carpet, while providing excellent overall cleaning performance. More advantageously, the process of cleaning carpets according to the present invention provides excellent cleaning performance, when used to clean localized carpet stains, i.e., spot stains.

35 **[0010]** Advantageously, excellent cleaning performance is obtained on different types of spot-stains and soils, including enzymatic stains as well as particulate stains and/or greasy stains, especially in highly soiled, so called "high traffic areas".

40 **[0011]** Another advantage of the present invention is that said process allows the absorption from the carpet of the liquid cleaning composition including emulsified dirt as well as excess liquid cleaning composition resulting in prevention of carpet resoiling and reduction of drying time.

[0012] Advantageously, the process of the present invention allows to protect the hands of a user performing said process from the liquid cleaning composition that can be irritant to the user's skin.

45 **[0013]** A further advantage of the present invention is that the process of cleaning carpets herein is applicable to all carpet types, especially delicate natural fibers. The present invention is also suitable to be used to clean hard wearing textiles and fabrics, e.g., upholstery, rugs, curtains.

[0014] Yet another advantage of the process of cleaning carpets of the present invention is that they may be applied directly on the carpet without causing damage to the carpet. In particular, the compositions used in the present process are safe to all known carpet dyes, even well known particularly sensitive natural dyes.

Background art

55 **[0015]** US 4,980,943 discloses a cleaning glove which includes a glove base having a side to which there is attached a primary layer of a tufted blended yarn tufted to the glove base and one or more fibrous bristle portions or strips. However, said primary layer is not capable of capillarity.

[0016] CH 682207 discloses a dish washing glove consisting essentially of a sponge material. However, no glove having an impermeable second layer as well as no carpet cleaning application for said dish washing glove is disclosed

therein.

[0017] WO 94/24636 discloses a jacket consisting essentially of spongy cloth used for cleaning a carpet. However, no impermeable layer is disclosed therein.

[0018] EP-A-0 753 280 discloses a hard surface cleaning glove. However, no glove having an impermeable second layer as well as no carpet cleaning application for said hard surface cleaning glove is disclosed therein.

Summary of the Invention

[0019] The present invention encompasses a process comprising the steps of applying a liquid carpet cleaning composition onto a carpet and contacting said carpet with a glove comprising at least two layers; the first layer being capable of capillarity and a second layer which is impermeable to said carpet cleaning composition wherein the second layer is located between the first layer and the cavity formed by the glove.

[0020] In another preferred embodiment said liquid carpet cleaning composition comprises an ingredient selected from the group consisting of a peroxygen bleach, a surfactant, a volatile organic compound, an anti-resoiling agent, and a mixture thereof.

Detailed Description of the Invention

Process of cleaning a carpet

[0021] The present invention encompasses a process of cleaning a carpet, said process comprising the steps of applying a liquid carpet cleaning composition onto the carpet and contacting the carpet with a glove as described herein.

[0022] Preferably said cleaning composition is directly applied onto said carpet prior to contacting said carpet with said glove, applied onto said glove prior to contacting said carpet with said glove and/or applied onto said glove at the time of manufacture.

[0023] In a preferred embodiment of the present application, said process comprises the steps of contacting parts of the carpet, more preferably soiled parts of the carpet, more preferably spot stains on the carpet, with said composition. In another preferred embodiment said process, after contacting said carpet with said glove, further comprises the step of imparting mechanical action to the carpet using said glove. By "mechanical action" it is meant herein, agitation of the glove on the carpet, as for example rubbing the carpet using the glove. Preferably, said process additionally comprises the step of leaving said composition to substantially dry on the carpet. More preferably said process of cleaning a carpet further comprises the step of removing said composition, even more preferably said process of cleaning a carpet further comprises the step of removing said composition in combination with soil particles.

[0024] In another preferred embodiment of the present invention a liquid composition according to the present invention is applied onto the carpet and/or onto the glove prior to contacting said carpet with said glove by using a dispensing device, preferably a spray dispenser. Said spray dispenser is preferably a container that has at least one aperture through which the composition is dispensed to produce a spray of droplets.

[0025] Such a spray dispenser may comprise a means for delivering the composition by a pump ("pump spray dispenser") or may be operated by any source of pressurised gas such as an aerosol-can or a pressurizer. Pump spray dispensers may be manually operated or electrically operated. Said spray dispensers are particularly preferable if a high amount of product has to be applied onto heavily stained areas of the carpet as they facilitate the ease of use by the consumer. Said spray dispensers ensure that a high amount of product is applied onto said heavily stained areas of the carpet.

[0026] Preferred spray dispensers herein are manually or electrically operated pump spray dispensers. Typical manually operated pump spray dispensers include push button operated or trigger operated pump spray dispenser. A preferred spray dispenser herein is a container wherein the means for delivering the composition comprises an electrically driven pump and a spray arm. Said spray arm is either extended or extendible and has at least one aperture so that in operation, the composition is pumped by said electrically driven pump from the container, through the spray arm to the aperture from which it is dispensed. It is preferred that the spray arm communicates with the container by means of a flexible connector. The spray arm may have at least one aperture located along its length. The spray arm makes it easier to control where the composition is sprayed, thereby increasing the accuracy with which the composition is applied. The electrically driven pump may be, for example, a gear pump, an impeller pump, a piston pump, a screw pump, a peristaltic pump, a diaphragm pump, or any other miniature pump. In a highly preferred embodiment the electrically driven pump for use herein is a gear pump with a typical speed between 6000 rpm and 12000 rpm. The electrically driven pump is driven by a means which typically produces a torque of between 1 and 20 mN.m such as an electric motor. The electric motor must in turn be provided with a power source. The power source may be either mains electricity (optionally via transformer), or it may be a throw-away battery or rechargeable battery. The spray arm may be rigidly extended. However such a spray arm can be difficult to store, and the spray arm is preferably extensible

either by means of telescopic or foldable configuration.

[0027] The amount of the compositions for the cleaning of carpets according to the present invention applied will depend on the severity of the stain or soil. In the case of stubborn stains more than one application may be required to ensure complete removal of the stain.

[0028] The area to be cleaned by applying the compositions according to the present invention may be of any size. Indeed, parts of the carpets, a complete section and/or the whole carpet may be treated with the composition for treating of a carpet according to the present invention.

[0029] In a preferred embodiment, the composition applied to the carpet is left to substantially dry. Typically, the composition is left to dry on the carpet for less than 2 hours, preferably less than 1 hour, more preferably less than 40 minutes, even more preferably from 1 to 30 minutes and most preferably from 1 to 20 minutes.

[0030] Preferably the step of leaving the composition to dry onto the carpet (drying step) can either be an "active drying step" or a "passive drying step". By "active drying step" it is meant herein, performing an additional action to facilitate the evaporation of the volatile ingredients of the liquid composition as disclosed herein, preferably by heating the carpet and/or the liquid composition applied thereon, preferably heating by means of application of hot air, infrared radiation and the like. By "passive drying step" it is meant herein, evaporation of the volatile ingredients of the liquid composition as disclosed herein without performing further action.

[0031] By "substantially dry" it is meant herein the stage where at least 40%, preferably at least 60% of the initial amount of composition dispensed onto the carpet is lost due to evaporation.

[0032] The step of leaving the composition to dry on the carpet is of course performed under "normal temperature" and "normal humidity conditions". By "normal temperature conditions" it is meant herein, from 15° C to 25° C, preferably from 20° C to 25° C. By "normal humidity conditions" it is meant herein, from 40 %RH (%-relative humidity) to 80 %RH, preferably from 50 %RH to 65 %RH.

[0033] Indeed, said composition may be left to substantially dry until said composition combined with dirt forms substantially dry residues. Preferably, said composition more preferably said substantially dry residues, are then removed from the carpet. Even more preferably said substantially dry residues are removed mechanically, as for example by beating, sweeping or brushing, and/or by vacuum cleaning. This may be carried out with the help of any commercially available vacuum cleaners like for instance a standard Hoover® 1300W vacuuming machine.

[0034] According to the present invention the process herein may be used for the removal of stains and soils from carpets or hard wearing textiles and fabrics, e.g., upholstery rugs, curtains. In addition the process according to the present invention may be used to hygienise, disinfect and/or exterminate microinsects from carpets or hard wearing textiles and fabrics, e.g., upholstery, rugs, curtains.

Glove

[0035] As an essential feature, the process according to the present invention requires that a carpet to be cleaned is contacted with a glove.

[0036] By "glove" it is meant herein, a pocket, pouch or mitt having an envelope-type configuration and/or a body intended to be worn on a user's hand and/or over a mechanical device, as for example a brush, broom or the like. Said glove may have individual pockets for each finger of the user's hand or have pockets for two or more fingers. Furthermore, said glove has an opening for the user's hand or a mechanical device.

[0037] In a preferred embodiment, said glove has a basic rectangular shape, preferably with rounded corners, with an opening for the user's hand on one of the short sides.

[0038] In another preferred embodiment, said glove has a circular shape with an opening for the user's hand.

[0039] In still another preferred embodiment, said glove has at least two individual pockets, preferably five individual pockets, for the fingers of a user's hand and an opening for the user's hand.

[0040] Said glove comprises at least two layers, the first layer being capable of capillarity and a second layer impermeable to said carpet cleaning composition wherein the second layer is located between the first layer and the cavity formed by the glove.

[0041] By "cavity formed by the glove" it is meant herein, the inner space provided by the glove's envelope shape to fit a user's hand and/or a mechanical device, as for example a brush, broom or the like.

[0042] By "capillarity" it is meant herein, that the first layer of said glove is capable of the phenomenon commonly known as capillarity. This means, that the first layer is capable of exerting a driving force on a liquid coming into contact with said first layer. This force exerted on said liquid due to the capillarity has to be higher than the sum of other forces acting on said liquid, in order that the liquid be transferred, preferably from the carpet, into the first layer. Other forces acting on said liquid may be, for example, gravity force, electrostatic forces and/or capillary forces of carpet fibers. Said other forces tend to act against the capillarity force of the first layer.

[0043] Preferably, said first layer is made of a material having a low surface energy. By "low surface energy" it is meant herein, that the material being capable of capillarity additionally has the capability of being wetted by lipophilic

liquids, such as oils, grease and the like. In particular, the capability of being wetted by lipophilic liquids allows the material to exert a driving force on lipophilic liquids. This means that such lipophilic liquids are particularly well absorbed by said material. The material having a low surface energy shows an affinity for greasy/oily substances making up greasy/oily spot stains and hence is particularly suitable to remove grease/oily stains from carpets.

[0044] Preferably, said material has a water-absorbing capacity of at least 200% of its own weight. More preferably, said material has a water-absorbing capacity of at least 500% of its own weight. More preferably, said material has a water-absorbing capacity of at least 700% of its own weight. Even more preferably, said material has a water-absorbing capacity of at least 1000% of its own weight. Most preferably, said material has a water-absorbing capacity of at least 1200% of its own weight.

[0045] Preferably, said material has a lipophilic liquid-absorbing capacity of at least 200% of its own weight. More preferably, said material has a lipophilic liquid-absorbing capacity of at least 500% of its own weight. More preferably, said material has a lipophilic liquid-absorbing capacity of at least 700% of its own weight. Even more preferably, said material has a lipophilic liquid-absorbing capacity of at least 1000% of its own weight. Most preferably, said material has a lipophilic liquid-absorbing capacity of at least 1200% of its own weight.

[0046] By "absorbing capacity" it is meant herein, the amount of liquid a material can hold in comparison to its own weight.

[0047] In a highly preferred embodiment, said first layer is made of a spongy cloth.

[0048] Preferably, said first layer is made of a material selected from the group consisting of synthetic rubber, polyurethane, polyester, polyether, cellulose based material, acrylic-styrene co-polymers and mixtures thereof. More preferably, said first layer is made of synthetic rubber.

[0049] The second layer is impermeable for the carpet cleaning composition employed in the process according to the present invention. By "impermeable" it is meant herein, that said composition can not penetrate through said second layer.

[0050] Preferably, said second layer is made of a material selected from the group consisting of polypropylene, natural rubber, latex and mixtures thereof. More preferably, said second layer is made of polypropylene.

[0051] In another preferred embodiment, said first layer may be covered with or replaced by an abrasive layer, a brush, bristle or the like on one of the outer sides of said glove. Preferably, the two sides forming the outer part of the glove are made of two different materials being capable of capillarity.

[0052] In yet another preferred embodiment, said glove further comprises additional layers located on top of the first layer, in between the first and the second layer and/or between the second layer and the cavity formed by the glove.

[0053] Said glove may comprise an additional layer comprising a material protecting the user's hand from the impermeable second layer. This may be necessary due to allergic reaction of the user's hand when coming into contact with the impermeable second layer (e.g., due to a latex allergy). Preferably, said additional layer comprising a material protecting the user's hand is made of cotton, other natural fibers or mixtures thereof.

[0054] Preferably, said additional layer comprising a material protecting the user's hand is located between the second layer and the cavity formed by the glove. More preferably, said additional layer comprising a material protecting the user's hand is the innermost layer of said glove.

[0055] It has now been found that an improved cleaning of spot satins can be observed due to the contact between a carpet to be cleaned and a cleaning glove as described herein. Said contact, preferably the application of mechanical action, allows the liquid cleaning composition to better penetrate into the carpet fibers and thus improves the chemical cleaning action of said composition. In addition, said contact loosens the dirt particles forming the spot stain. Furthermore, the process according to the present invention allows the user of said process to apply a uniform pressure to the area to be cleaned.

[0056] It has also been found, that said process allows the absorption of the liquid cleaning composition including emulsified dirt as well as excess liquid cleaning composition from the carpet into the first layer of said glove resulting in prevention of carpet resoiling and reduction of drying time. This is due to the presence of said first layer being capable of capillarity. Indeed, said first layer, preferably made of a spongy cloth, is capable of absorbing the liquid cleaning composition including emulsified dirt as well as excess liquid cleaning composition. This prevents the liquid cleaning composition including emulsified dirt to redeposit on the carpet which would cause carpet resoiling. Furthermore, said adsorption allows to take up excess cleaning composition resulting in a faster drying time.

[0057] The chemistry of the cleaning composition employed in the process according to the present invention may be irritant to human skin. Especially, a peroxygen bleach, when present, a volatile organic compound, when present, and/or a surfactant, when present, may cause skin irritation. Indeed, the process of the present invention allows to protect the hands of a user performing said process from the liquid cleaning composition that can be irritant to the user's skin due to the presence of the impermeable layer protecting the user's hand.

The composition

[0058] The compositions of the present invention are formulated as liquid compositions. Preferred compositions herein are aqueous compositions and therefore, preferably comprise water more preferably in an amount of from 60% to 98%, even more preferably of from 80% to 97% and most preferably 85% to 97% by weight of the total composition.

[0059] The pH of the liquid compositions according to the present invention may typically be from 1 to 14. In a preferred embodiment, the recommended pH range is from 1 to 10, preferably from pH 2 to 8, more preferably from pH 3 to 7, even more preferably from pH 3.5 to 7 and most preferably from 3.5 to 6.5.

[0060] Indeed, it has been surprisingly found that cleaning performance is further improved at these preferred pH ranges. Also these preferred pH ranges contribute to the stability of hydrogen peroxide, when present. Accordingly, the compositions herein may further comprise an acid or base to adjust pH as appropriate.

[0061] Preferred acids herein are organic or inorganic acids or mixtures thereof. Preferred organic acids are acetic acid, or citric acid or a mixture thereof. Preferred inorganic acids are sulfuric acid or phosphoric acid or a mixture thereof. A particularly preferred acid to be used herein is an inorganic acid and most preferred is sulfuric acid.

[0062] Typical levels of such acids, when present, are of from 0.01% to 1.0%, preferably from 0.05% to 0.8% and more preferably from 0.1% to 0.5% by weight of the total composition.

[0063] The bases to be used herein can be organic or inorganic bases. Suitable bases for use herein are the caustic alkalis, such as sodium hydroxide, potassium hydroxide and/or lithium hydroxide, and/or the alkali metal oxides such, as sodium and/or potassium oxide or mixtures thereof. A preferred base is a caustic alkali, more preferably sodium hydroxide and/or potassium hydroxide.

[0064] Other suitable bases include ammonia, ammonium carbonate and hydrogen carbonate.

[0065] Typical levels of such bases, when present, are of from 0.01% to 1.0%, preferably from 0.05% to 0.8% and more preferably from 0.1% to 0.5% by weight of the total composition.

Optional ingredientsPeroxygen bleach

[0066] As an optional but highly preferred ingredient the compositions according to the present invention may comprise a peroxygen bleach.

[0067] Suitable peroxygen bleaches to be used herein are selected from the group consisting of: hydrogen peroxide; water soluble sources of hydrogen peroxide; organic or inorganic peracids; hydroperoxides; diacyl peroxides; and mixtures thereof.

[0068] As used herein a hydrogen peroxide source refers to any compound that produces perhydroxyl ions when said compound is in contact with water. Suitable water-soluble sources of hydrogen peroxide for use herein are selected from the group consisting of percarbonates, perborates and persilicates and mixtures thereof.

[0069] Suitable diacyl peroxides for use herein are selected from the group consisting of aliphatic, aromatic and aliphatic-aromatic diacyl peroxides, and mixtures thereof.

[0070] Suitable aliphatic diacyl peroxides for use herein are dilauroyl peroxide, didecanoyl peroxide, dimyristoyl peroxide, or mixtures thereof. A suitable aromatic diacyl peroxide for use herein is for example benzoyl peroxide. A suitable aliphatic-aromatic diacyl peroxide for use herein is for example lauroyl benzoyl peroxide. Such diacyl peroxides have the advantage to be particularly safe to carpets and carpet dyes while delivering excellent bleaching performance.

[0071] Suitable organic or inorganic peracids for use herein are selected from the group consisting of: persulphates such as monopersulfate; peroxyacids such as diperoxydodecandioic acid (DPDA); magnesium perphthalic acid; perlauroic acid; perbenzoic and alkylperbenzoic acids; and mixtures thereof.

[0072] Suitable hydroperoxides for use herein are selected from the group consisting of tert-butyl hydroperoxide, cumyl hydroperoxide, 2,4,4-trimethylpentyl-2-hydroperoxide, di-isopropylbenzene-monohydroperoxide, tert-amyl hydroperoxide and 2,5-dimethyl-hexane-2,5-dihydroperoxide and mixtures thereof. Such hydroperoxides have the advantage to be particularly safe to carpets and carpet dyes while delivering excellent bleaching performance.

[0073] Preferred peroxygen bleaches herein are selected from the group consisting of: hydrogen peroxide; water soluble sources of hydrogen peroxide; organic or inorganic peracids; hydroperoxides; and diacyl peroxides; and mixtures thereof. More preferred peroxygen bleaches herein are selected from the group consisting of hydrogen peroxide, water soluble sources of hydrogen peroxide and diacyl peroxides and mixtures thereof. Even more preferred peroxygen bleaches herein are selected from the group consisting of hydrogen peroxide, water soluble sources of hydrogen peroxide, aliphatic diacyl peroxides, aromatic diacyl peroxides and aliphatic-aromatic diacyl peroxides and mixtures thereof. Most preferred peroxygen bleaches herein are hydrogen peroxide, water soluble sources of hydrogen peroxide or mixtures thereof.

[0074] Typically, the liquid compositions herein comprise from 0.01% to 20%, preferably from 0.5 % to 10%, and

more preferably from 1% to 7% by weight of the total composition of a peroxygen bleach, or mixtures thereof.

[0075] The presence of a peroxygen bleach in preferred compositions when employed in the process of cleaning a carpet according to the present invention contributes to the excellent cleaning and sanitizing performance on various types of soils including on spot stains like bleachable stains (e.g., coffee, beverage, food) of the compositions of the present invention.

[0076] By "bleachable stains" it is meant herein any soils or stains containing ingredients sensitive to bleach that can be found on any carpet, e.g., coffee or tea.

Surfactants

[0077] Preferred compositions according to the present invention typically comprise a surfactant or a mixture thereof.


[0078] Typically, the compositions herein may comprise up to 50%, preferably from 0.1% to 20%, more preferably from 0.5% to 10% and most preferably from 1% to 5% by weight of the total composition of a surfactant.

[0079] Such surfactants may be selected from those well known in the art including anionic, nonionic, zwitterionic, amphoteric and cationic surfactants and mixtures thereof.

[0080] Particularly suitable surfactants to be used herein are anionic surfactants. Said anionic surfactants are preferred herein as they further contribute to the outstanding stain removal performance of the compositions of the present invention on various types of stains. Moreover they do not stick on carpet, thereby reducing resoiling.

[0081] Suitable anionic surfactants include sulfosuccinate surfactants, sulfosuccinamate surfactants, sulfosuccinamide surfactants, alkyl carboxylate surfactants, sarcosinate surfactants, alkyl sulfate surfactants, alkyl sulphonate surfactants, alkyl glycerol sulfate surfactants, alkyl glycerol sulphonate surfactants and mixtures thereof.

[0082] Suitable sulfosuccinate surfactants are according to the formula

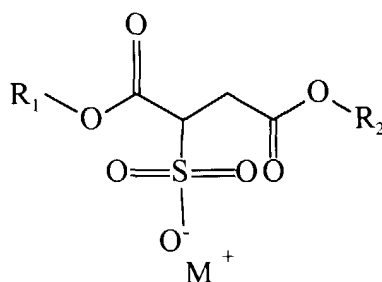

wherein : R_1 is hydrogen or a hydrocarbon group selected from the group consisting of straight or branched alkyl radicals containing from 6 to 20 carbon atoms, preferably 8 to 18 carbon atoms, more preferably 10 to 16 carbon atoms, and alkyl phenyl radicals containing from 6 to 18 carbon atoms in the alkyl group; R_2 is a hydrocarbon group selected from the group consisting of straight or branched alkyl radicals containing from 6 to 20 carbon atoms, preferably 8 to 18 carbon atoms, more preferably 10 to 16 carbon atoms, and alkyl phenyl radicals containing from 6 to 18 carbon atoms in the alkyl group; and M is hydrogen or a cationic moiety, e.g., an alkali metal cation (e.g., sodium, potassium, lithium, calcium, magnesium and the like) or ammonium or substituted ammonium (e.g., methyl-, dimethyl-, and trimethyl ammonium cations and quaternary ammonium cations, such as tetramethyl-ammonium and dimethyl piperdinium cations and quaternary ammonium cations derived from alkylamines such as ethylamine, diethylamine, triethylamine, and mixtures thereof, and the like).

[0083] Such sulfosuccinate surfactants are commercially available under the tradenames Aerosol® from Cytec, Anionyx® from Stepan, Arylene® from Hart, Setacin® from Zschimmer & Schwarz, Mackanate® from McIntyre and Monawet® from Mona Industries.

[0084] Suitable alkyl sulphonate surfactants for use herein include water-soluble salts or acids of the formula RSO_3M wherein R is a C_6 - C_{20} linear or branched, saturated or unsaturated alkyl group, preferably a C_8 - C_{18} alkyl group and more preferably a C_{10} - C_{16} alkyl group, and M is H or a cation, e.g., an alkali metal cation (e.g., sodium, potassium, lithium), or ammonium or substituted ammonium (e.g., methyl-, dimethyl-, and trimethyl ammonium cations and quaternary ammonium cations, such as tetramethyl-ammonium and dimethyl piperdinium cations and quaternary ammonium cations derived from alkylamines such as ethylamine, diethylamine, triethylamine, and mixtures thereof, and the like).

[0085] An example of a C_{14} - C_{16} alkyl sulphonate is Hostapur® SAS available from Hoechst.

[0086] Suitable alkyl sulphate surfactants for use herein are according to the formula $\text{R}_1\text{SO}_4\text{M}$ wherein R_1 represents a hydrocarbon group selected from the group consisting of straight or branched alkyl radicals containing from 6 to 20, preferably 8 to 18, more preferably 10 to 16, carbon atoms and alkyl phenyl radicals containing from 6 to 18 carbon


atoms in the alkyl group. M is H or a cation, e.g., an alkali metal cation (e.g., sodium, potassium, lithium, calcium, magnesium and the like) or ammonium or substituted ammonium (e.g., methyl-, dimethyl-, and trimethyl ammonium cations and quaternary ammonium cations, such as tetramethyl-ammonium and dimethyl piperdinium cations and quaternary ammonium cations derived from alkylamines such as ethylamine, diethylamine, triethylamine, and mixtures thereof, and the like).

[0087] By "linear alkyl sulphate or sulphonate" it is meant herein a non-substituted alkyl sulphate or sulphonate wherein the alkyl chain comprises from 6 to 20 carbon atoms, preferably from 8 to 18 carbon atoms, and more preferably from 10 to 16 carbon atoms, and wherein this alkyl chain is sulphated or sulphonated at one terminus.

[0088] By "branched sulphonate or sulphate", it is meant herein an alkyl chain having from 6 to 20 total carbon atoms, preferably from 8 to 18 total carbon atoms, and more preferably from 10 to 16 total carbon atoms, wherein the main alkyl chain is substituted by at least another alkyl chain, and wherein the alkyl chain is sulphated or sulphonated at one terminus.


[0089] Particularly preferred branched alkyl sulphates to be used herein are those containing from 10 to 14 total carbon atoms like Isalchem 123 AS®. Isalchem 123 AS® commercially available from Enichem is a C₁₂₋₁₃ surfactant which is 94% branched. This material can be described as CH₃-(CH₂)_m-CH(CH₂OSO₃Na)-(CH₂)_n-CH₃ where n+m=8-9. Also preferred alkyl sulphates are the alkyl sulphates where the alkyl chain comprises a total of 12 carbon atoms, i.e., sodium 2-butyl octyl sulphate. Such alkyl sulphate is commercially available from Condea under the trade name Isofol® 12S. Particularly suitable linear alkyl sulphonates include C12-C16 paraffin sulphonate like Hostapur® SAS commercially available from Hoechst.

[0090] Suitable sulfosuccinamate surfactants for use herein are according to the formula

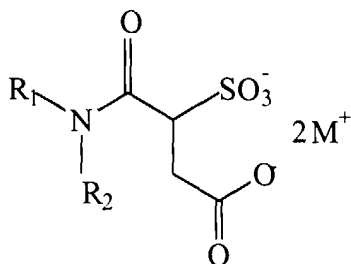

wherein R₁ and R₂ each independently represent a hydrocarbon group selected from the group consisting of straight or branched alkyl radicals containing from 6 to 20, preferably 8 to 18, more preferably 10 to 16, carbon atoms and alkyl phenyl radicals containing from 6 to 18 carbon atoms in the alkyl group. M is H or a cation, e.g., an alkali metal cation (e.g., sodium, potassium, lithium, calcium, magnesium and the like) or ammonium or substituted ammonium (e.g., methyl-, dimethyl-, and trimethyl ammonium cations and quaternary ammonium cations, such as tetramethyl-ammonium and dimethyl piperdinium cations and quaternary ammonium cations derived from alkylamines such as ethylamine, diethylamine, triethylamine, and mixtures thereof, and the like).

[0091] Suitable sulfosuccinamide surfactants for use herein are according to the formula




wherein R₁ and R₂ each independently represent a hydrocarbon group selected from the group consisting of straight or branched alkyl radicals containing from 6 to 20, preferably 8 to 18, more preferably 10 to 16, carbon atoms and alkyl phenyl radicals containing from 6 to 18 carbon atoms in the alkyl group. M is H or a cation, e.g., an alkali metal cation (e.g., sodium, potassium, lithium, calcium, magnesium and the like) or ammonium or substituted ammonium (e.g., methyl-, dimethyl-, and trimethyl ammonium cations and quaternary ammonium cations, such as tetramethyl-ammonium and dimethyl piperdinium cations and quaternary ammonium cations derived from alkylamines such as ethyl-

amine, diethylamine, triethylamine, and mixtures thereof, and the like).

[0092] Suitable alkyl carboxylate surfactants for use herein are according to the formula RCO_2M wherein : R represents a hydrocarbon group selected from the group consisting of straight or branched alkyl radicals containing from 6 to 20, preferably 8 to 18, more preferably 10 to 16, carbon atoms and alkyl phenyl radicals containing from 6 to 18 carbon atoms in the alkyl group. M is H or a cation, e.g., an alkali metal cation (e.g., sodium, potassium, lithium, calcium, magnesium and the like) or ammonium or substituted ammonium (e.g., methyl-, dimethyl-, and trimethyl ammonium cations and quaternary ammonium cations, such as tetramethyl-ammonium and dimethyl piperdinium cations and quaternary ammonium cations derived from alkylamines such as ethylamine, diethylamine, triethylamine, and mixtures thereof, and the like).

[0093] Suitable sarcosinate surfactants to be used herein include acyl sarcosinate or mixtures thereof, in its acid and/or salt form, preferably long chain acyl sarcosinates having the following formula:



wherein M is hydrogen or a cationic moiety and wherein R is an alkyl group of from 11 to 15 carbon atoms, preferably of from 11 to 13 carbon atoms. Preferred M are hydrogen and alkali metal salts, especially sodium and potassium. Said acyl sarcosinate surfactants are derived from natural fatty acids and the amino-acid sarcosine (N-methyl glycine). They are suitable to be used as aqueous solution of their salt or in their acidic form as powder. Being derivatives of natural fatty acids, said acyl sarcosinates are rapidly and completely biodegradable and have good skin compatibility.

[0094] Accordingly, particularly preferred long chain acyl sarcosinates to be used herein include C_{12} acyl sarcosinate, i.e., an acyl sarcosinate according to the above formula wherein M is hydrogen and R is an alkyl group of 11 carbon atom, sodium N-lauroyl sarcosinate, i.e., an acyl sarcosinate according to the above formula wherein M is sodium and R is an alkyl group of 11 carbon atom, and C_{14} acyl sarcosinate (i.e., an acyl sarcosinate according to the above formula wherein M is hydrogen and R is an alkyl group of 13 carbon atoms). , sodium N-lauroyl sarcosinate is commercially available, for example, as Hamposyl L-30® supplied by Hampshire or Crodasinic LS30® supplied by Croda. C_{14} acyl sarcosinate is commercially available, for example, as Hamposyl M-30® supplied by Hampshire or Crodasinic MS30® supplied by Croda.

[0095] Suitable nonionic surfactants include amine oxide surfactants. Suitable amine oxide surfactants are according to the formula $\text{R}_1\text{R}_2\text{R}_3\text{NO}$, wherein each of R_1 , R_2 and R_3 is independently a saturated substituted or unsubstituted, linear or branched alkyl groups of from 1 to 30 carbon atoms, preferably of from 1 to 20 carbon atoms, and mixtures thereof.


[0096] Particularly preferred amine oxide surfactants to be used according to the present invention are amine oxide surfactants having the following formula $\text{R}_1\text{R}_2\text{R}_3\text{NO}$ wherein R_1 is a saturated linear or branched alkyl group of from 1 to 30 carbon atoms, preferably of from 6 to 20 carbon atoms, more preferably of from 6 to 16 carbon atoms, and wherein R_2 and R_3 are independently substituted or unsubstituted, linear or branched alkyl groups of from 1 to 4 carbon atoms, preferably of from 1 to 3 carbon atoms, and more preferably are methyl groups. Preferred amine oxide surfactants used herein are pure-cut amine oxide surfactants, i.e., a pure single amine oxide surfactant, e.g. C_8 N,N-dimethyl amine oxide, as opposed to mixtures of amine oxide surfactants of different chain lengths

[0097] Suitable amine oxide surfactants for use herein are for instance pure cut C_8 amine oxide, pure cut C_{10} amine oxide, pure cut C_{14} amine oxide, natural blend C_8 - C_{10} amine oxides as well as natural blend C_{12} - C_{16} amine oxides. Such amine oxide surfactants may be commercially available from Hoechst or Stephan.

[0098] Suitable nonionic surfactants for use herein also include any ethoxylated C_6 - C_{24} fatty alcohol nonionic surfactant, alkyl propoxylates and mixtures thereof, fatty acid C_6 - C_{24} alkanolamides, C_6 - C_{20} polyethylglycol ethers, polyethylene glycol with molecular weight 1000 to 80000 and glucose amides, alkyl pyrrolidones.

[0099] Suitable cationic surfactants for use herein include quaternary ammonium compounds of the formula $\text{R}_1\text{R}_2\text{R}_3\text{R}_4\text{N}^+$ where R_1 , R_2 and R_3 are methyl groups, and R_4 is a C_{12-15} alkyl group, or where R_1 is an ethyl or hydroxy ethyl group, R_2 and R_3 are methyl groups and R_4 is a C_{12-15} alkyl group.

[0100] Suitable zwitterionic surfactants are zwitterionic betaine surfactants. Suitable zwitterionic betaine surfactants for use herein contain both a cationic hydrophilic group, i.e., a quaternary ammonium group, and anionic hydrophilic group on the same molecule at a relatively wide range of pH's. The typical anionic hydrophilic groups are carboxylates and sulphonates, although other groups like sulfates, phosphonates, and the like can be used. A generic formula for the zwitterionic betaine surfactant to be used herein is :



wherein R_1 is a hydrophobic group; R_2 is hydrogen, C_1 - C_6 alkyl, hydroxy alkyl or other substituted C_1 - C_6 alkyl group; R_3 is C_1 - C_6 alkyl, hydroxy alkyl or other substituted C_1 - C_6 alkyl group which can also be joined to R_2 to form ring structures with the N, or a C_1 - C_6 sulphonate group; R_4 is a moiety joining the cationic nitrogen atom to the hydrophilic group and is typically an alkylene, hydroxy alkylene, or polyalkoxy group containing from 1 to 10 carbon atoms; and X is the hydrophilic group, which is a carboxylate or sulphonate group.

[0101] Preferred hydrophobic groups R_1 are aliphatic or aromatic, saturated or unsaturated, substituted or unsubstituted hydrocarbon chains that can contain linking groups such as amido groups, ester groups. More preferred R_1 is an alkyl group containing from 1 to 24, preferably from 8 to 18, and more preferably from 10 to 16 carbon atoms. These simple alkyl groups are preferred for cost and stability reasons. However, the hydrophobic group R_1 can also be an amido radical of the formula $R_a-C(O)-NH-(C(R_b)_2)_m$, wherein R_a is an aliphatic or aromatic, saturated or unsaturated, substituted or unsubstituted hydrocarbon chain, preferably an alkyl group containing from 8 up to 20, preferably up to 18, more preferably up to 16 carbon atoms, R_b is selected from the group consisting of hydrogen and hydroxy groups, and m is from 1 to 4, preferably from 2 to 3, more preferably 3, with no more than one hydroxy group in any $(C(R_b)_2)_m$ moiety.

[0102] Preferred R_2 is hydrogen, or a C_1 - C_3 alkyl and more preferably methyl. Preferred R_3 is C_1 - C_4 sulphonate group, or a C_1 - C_3 alkyl and more preferably methyl. Preferred R_4 is $(CH_2)_n$ wherein n is an integer from 1 to 10, preferably from 1 to 6, more preferably is from 1 to 3.

[0103] Some common examples of betaine/sulphobetaine are described in U.S. Pat. Nos. 2,082,275, 2,702,279 and 2,255,082, incorporated herein by reference.

[0104] Examples of particularly suitable alkyl dimethyl betaines include coconut-dimethyl betaine, lauryl dimethyl betaine, decyl dimethyl betaine, 2-(N-decyl-N, N-dimethyl-ammonia)acetate, 2-(N-coco N, N-dimethylammonio) acetate, myristyl dimethyl betaine, palmityl dimethyl betaine, cetyl dimethyl betaine, stearyl dimethyl betaine. For example Coconut dimethyl betaine is commercially available from Seppic under the trade name of Amonyl 265®. Lauryl betaine is commercially available from Albright & Wilson under the trade name Empigen BB/L®.

[0105] Examples of amidobetaines include cocoamidoethylbetaine, cocoamidopropyl betaine or C_{10} - C_{14} fatty acylamidopropylene(hydropropylene)sulfobetaine. For example C_{10} - C_{14} fatty acylamidopropylene(hydropropylene)sulfobetaine is commercially available from Sherex Company under the trade name "Varion CAS® sulfobetaine".

[0106] A further example of betaine is Lauryl-immuno-dipropionate commercially available from Rhone-Poulenc under the trade name Mirataine H2C-HA®.

[0107] A preferred surfactant for use herein is an anionic surfactant or a zwitterionic surfactant or a mixture thereof, a more preferred surfactant is a sulfosuccinate surfactant, sulfosuccinamate surfactant, sulfosuccinamide surfactant, carboxylate surfactant, sarcosinate surfactant, alkyl sulfate surfactant, alkyl sulphonate surfactant, alkyl glycerol sulfate surfactant and alkyl glycerol sulphonate surfactant or a zwitterionic betaine surfactant and mixtures thereof.

[0108] In a preferred embodiment a preferred surfactant for use herein is a sarcosinate surfactant, an alkyl sulphonate surfactant, an alkyl sulphate surfactant, or a zwitterionic betaine surfactant and mixtures thereof, and the most preferred surfactant herein is an alkyl sarcosinate surfactant.

[0109] In another preferred a preferred surfactant for use herein is a mixture of a sulfosuccinate surfactant and a second anionic surfactant. More preferably, said surfactant is a mixture of a sulfosuccinate surfactant and a sulphate surfactant. Most preferably, said surfactant is a sulfosuccinate surfactant.

[0110] The presence of a surfactant in preferred compositions when employed in the process of cleaning a carpet according to the present invention contributes to the excellent cleaning performance on various types of soils including diffuse soils (e.g., particulate and/or greasy soils) that tend to accumulate in the so called "high traffic areas" but also in delivering good cleaning performance on other types of stains or soils, i.e., enzymatic stains like blood.


[0111] By "high traffic areas" it is meant herein areas with an intensive use of the carpets in such areas as for example near doors.

[0112] By "particulate stains" it is meant herein any soils or stains of particulate nature that can be found on any carpet, e.g. clay, dirt, dust, mud, concrete and the like.

[0113] By "greasy/oily stains" it is meant herein any soils or stains of greasy/oily nature that can be found on any carpet, e.g., make-up, lipstick, dirty motor oil and mineral oil, greasy food like mayonnaise and spaghetti sauce.


[0114] By "enzymatic stains" it is meant herein any soils or stains of enzymatic nature that can be found on any carpet, e.g., grass.

[0115] The cleaning performance of a given composition on a soiled carpet may be evaluated by the following test method: A liquid composition according to the present invention is first applied, preferably sprayed, onto the stained portion of a carpet, left to act thereon from 1 to 60 minutes, preferably 30 minutes, after which the carpet is vacuum cleaned using any commercially available vacuum cleaners like for instance a standard Hoover® 1300W vacuuming

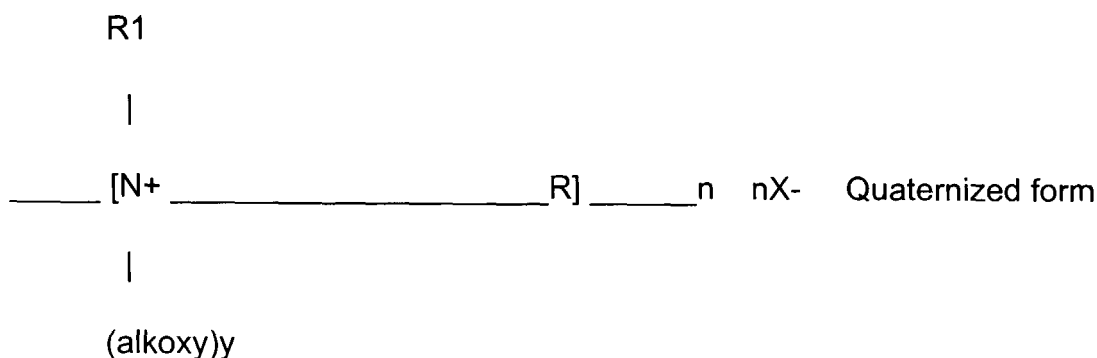

wherein R is a hydrocarbyl group, usually of 2-6 carbon atoms; R₁ may be a C₁-C₂₀ hydrocarbon; the alkoxy groups are ethoxy, propoxy, and the like, and y is from 2 to 30, most preferably from 7 to 20; n is an integer of at least 2, preferably from 2 to 40, most preferably from 2 to 5; and X⁻ is an anion such as halide or methylsulfate, resulting from the quaternization reaction.

[0123] The most highly preferred polyamines for use herein are the so-called ethoxylated polyethylene amines, i.e., the polymerized reaction product of ethylene oxide with ethyleneimine, having the general formula :

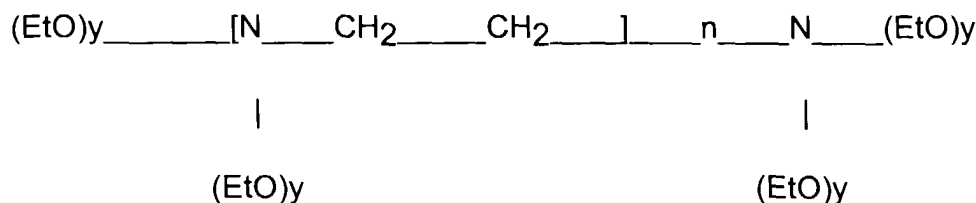

wherein y is from 2 to 50, preferably from 5 to 30, and n is from 1 to 40, preferably from 2 to 40. Particularly preferred for use herein is an ethoxylated polyethylene amine, in particular an ethoxylated polyethylene amine wherein n=2 and y=20, and an ethoxylated polyethylene amine wherein n=40 and y=7.


[0124] Suitable ethoxylated polyethylene amines are commercially available from Nippon Shokubai CO., LTD under the product names ESP-0620A® (ethoxylated polyethylene amine wherein n=2 and y=20) or from BASF under the product names ES-8165 and from BASF under the product name LUTENSIT K - 187/50® (ethoxylated polyethylene amine wherein n=40 and Y=7).

[0125] Suitable anti-resoiling polymers also include polyamine N-oxide polymers.

[0126] Suitable polyamine N-oxide polymers for use herein are according to the following formula : R-A_x-P; containing at least one N-oxide group (N-O group);

wherein : P is a polymerizable unit to which an N-O group can be attached and/or the N-O group can form part of the polymerizable unit;


A is one of the following structures:



x is 0 or 1;

and R is an aliphatic, ethoxylated aliphatic, aromatic, heterocyclic or alicyclic group or any combination thereof to which the N-O group can be attached to R or the nitrogen of the N-O group is part of R.

[0127] By "N-O group" it is meant one of the following general structures:

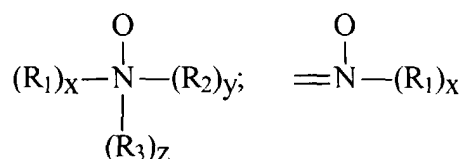

wherein R_1 , R_2 , R_3 are aliphatic, aromatic, heterocyclic or alicyclic groups or combinations thereof; x , y and z are 0 or 1; and the nitrogen of the N-O group can be attached or form part of any of the aforementioned groups.

[0128] Any polymerizable unit P can be used as long as the amine oxide polymer formed is water-soluble and provides the carpet cleaning composition with carpet cleaning and/or carpet anti-resoiling benefits. Preferred polymerizable unit P are vinyl, alkenes, esters, ethers, amides, imides, acrylates and mixtures thereof. A more preferred polymerizable unit P is vinyl.

[0129] Preferred polyamine N-oxide polymers are those wherein R is a heterocyclic group such as pyridine, pyrrole, imidazole, or a derivative thereof, to which the nitrogen of the N-O group can be attached or the N-O group is part of these groups. Most preferred polyamine N-oxide polymers are those wherein R is a pyridine.

[0130] The polyamine N-oxide polymer can be obtained in almost any degree of polymerization. Typically, the average molecular weight is within the range of 1,000 to 100,000; more preferred 5,000 to 100,000; most preferred 5,000 to 25,000.


[0131] Suitable polyamine N-oxide polymer are polyvinyl pyridine-N-oxide polymers wherein : the polymerizable unit P is vinyl; $x=0$; and R is pyridine wherein the nitrogen of the N-O group is part of.

[0132] Suitable poly vinyl pyridine-N-oxide polymers are commercially available from Hoechst under the trade name of Hoe S 4268®, and from Reilly Industries Inc. under the trade name of PVNO.

[0133] Furthermore, suitable anti-resoiling polymers include N-vinyl polymer.

[0134] Suitable N-vinyl polymers include polyvinyl pyrrolidone polymers, co-polymers of N-vinylpyrrolidone and N-vinylimidazole, co-polymers of N-vinylpyrrolidone and acrylic acid, and mixtures thereof.

[0135] Suitable co-polymers of N-vinylpyrrolidone and N-vinylimidazole polymers (referred to as a class as "PVPVI") are according to the formula :

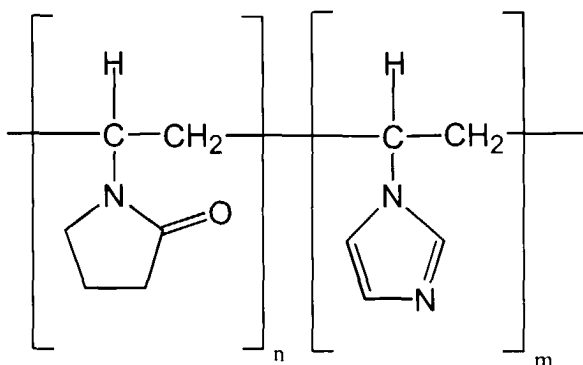

in which n is between 50 and 500 and preferably between 80 and 200 and m is between 50 and 500 and preferably between 80 and 200.


[0136] Preferably the PVPVI has an average molecular weight range from 1,000 to 100,000, more preferably from 5,000 to 100,000, and most preferably from 5,000 to 20,000. (The average molecular weight range is determined by light scattering as described in Barth, et al., Chemical Analysis, Vol 113. "Modern Methods of Polymer Characterization", the disclosures of which are incorporated herein by reference.)

[0137] The PVPVI co-polymers typically have a molar ratio of N-vinylimidazole to N-vinylpyrrolidone from 1:1 to 0.2:1, more preferably from 0.8:1 to 0.3:1, most preferably from 0.6:1 to 0.4:1. These co-polymers can be either linear or branched.

[0138] Suitable co-polymers of N-vinylpyrrolidone and N-vinylimidazole are commercially available from BASF, under the trade name of Sokalan® PG55.

[0139] Suitable polyvinylpyrrolidone ("PVP") for use herein are homopolymers of N-vinylpyrrolidone having the fol-


lowing repeating monomer:

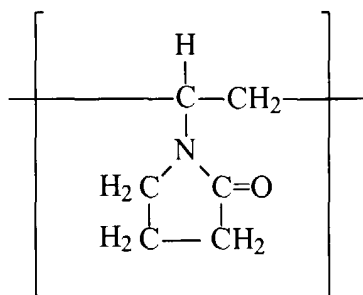

[0140] Preferred vinylpyrrolidone homopolymers for use herein have an average molecular weight of from 1,000 to 100,000, preferably from 5,000 to 100,000, and more preferably from 5,000 to 20,000.

[0141] Suitable vinylpyrrolidone homopolymers are commercially available from BASF under the trade names Luviskol® K15 (viscosity molecular weight of 10,000), Luviskol® K25 (viscosity molecular weight of 24,000), Luviskol® K30 (viscosity molecular weight of 40,000), and other vinylpyrrolidone homopolymers known to persons skilled in the detergent field (see for example EP-A-262,897 and EP-A-256,696).

[0142] Suitable co-polymers of N-vinylpyrrolidone and acrylic acid (referred to as a class as "PV/AA") are according to the formula :

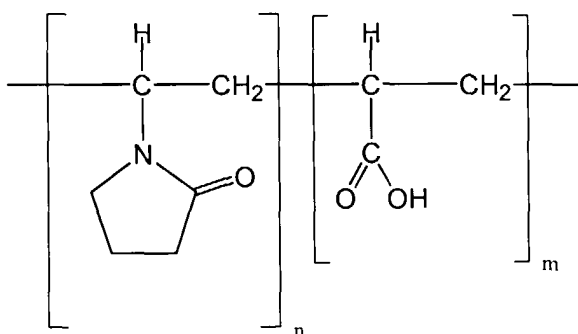

in which n is between 50 and 1000 and preferably between 100 and 200 and m is between 150 and 3000 and preferably between 300 and 600.

[0143] Preferably the PV/AA have an average molecular weight range from 1,000 to 100,000, more preferably from 5,000 to 100,000, and most preferably from 5,000 to 25,000.

[0144] Suitable co-polymers of N-vinylpyrrolidone and acrylic acid are commercially available from BASF under the trade name Sokalan® PG 310.

[0145] Preferred N-vinyl polymers are polyvinyl pyrrolidone polymers, co-polymers of N-vinylpyrrolidone and N-vinylimidazole, co-polymers of N-vinylpyrrolidone and acrylic acid, and mixtures thereof, even more preferred are polyvinyl pyrrolidone polymers.

[0146] Suitable anti-resoiling polymers also include soil suspending polycarboxylate polymers.

[0147] Any soil suspending polycarboxylate polymer known to those skilled in the art can be used according to the present invention such as homo- or co-polymeric polycarboxylic acids or their salts including polyacrylates and copolymers of maleic anhydride or/and acrylic acid and the like. Indeed, such soil suspending polycarboxylate polymers can be prepared by polymerizing or copolymerizing suitable unsaturated monomers, preferably in their acid form. Unsaturated monomeric acids that can be polymerized to form suitable polymeric polycarboxylates include acrylic acid, maleic acid (or maleic anhydride), fumaric acid, itaconic acid, aconitic acid, mesaconic acid, citraconic acid and methylenemalononic acid. The presence in the polymeric polycarboxylates herein of monomeric segments, containing no carboxylate radicals such as vinylmethyl ether, styrene, ethylene, etc. is suitable provided that such segments do not constitute more than 40% by weight.

[0148] Particularly suitable polymeric polycarboxylates to be used herein can be derived from acrylic acid. Such acrylic acid-based polymers which are useful herein are the water-soluble salts of polymerized acrylic acid. The average

molecular weight of such polymers in the acid form preferably ranges from 2,000 to 10,000, more preferably from 4,000 to 7,000 and most preferably from 4,000 to 5,000. Water-soluble salts of such acrylic acid polymers can include, for example, the alkali metal, ammonium and substituted ammonium salts. Soluble polymers of this type are known materials. Use of polyacrylates of this type in detergent compositions has been disclosed, for example, in Diehl, U.S. Patent 3,308,067, issued March 7, 1967.

[0149] Acrylic/maleic-based copolymers may also be used as a preferred soil suspending polycarboxylic polymer. Such materials include the water-soluble salts of copolymers of acrylic acid and maleic acid. The average molecular weight of such copolymers in the acid form preferably ranges from 2,000 to 100,000, more preferably from 5,000 to 75,000, most preferably from 7,000 to 65,000. The ratio of acrylate to maleate segments in such copolymers will generally range from 30:1 to 1:1, more preferably from 10:1 to 2:1. Water-soluble salts of such acrylic acid/maleic acid copolymers can include, for example, the alkali metal, ammonium and substituted ammonium salts. Soluble acrylate/maleate copolymers of this type are known materials which are described in European Patent Application No. 66915, published December 15, 1982. Particularly preferred is a copolymer of maleic / acrylic acid with an average molecular weight of 70,000. Such copolymers are commercially available from BASF under the trade name SOKALAN® CP5.

[0150] Other suitable anti-resoiling polymers include those anti-resoiling polymers having: (a) one or more nonionic hydrophile components consisting essentially of (i) polyoxyethylene segments with a degree of polymerization of at least 2, or (ii) oxypropylene or polyoxypropylene segments with a degree of polymerization of from 2 to 10, wherein said hydrophile segment does not encompass any oxypropylene unit unless it is bonded to adjacent moieties at each end by ether linkages, or (iii) a mixture of oxyalkylene units comprising oxyethylene and from 1 to about 30 oxypropylene units wherein said mixture contains a sufficient amount of oxyethylene units such that the hydrophile component has hydrophilicity great enough to increase the hydrophilicity of conventional polyester synthetic fiber surfaces upon deposit of the soil release agent on such surface, said hydrophile segments preferably comprising at least about 25% oxyethylene units and more preferably, especially for such components having about 20 to 30 oxypropylene units, at least about 50% oxyethylene units; or (b) one or more hydrophobe components comprising (i) C₃ oxyalkylene terephthalate segments, wherein, if said hydrophobe components also comprise oxyethylene terephthalate, the ratio of oxyethylene terephthalate: C₃ oxyalkylene terephthalate units is about 2:1 or lower, (ii) C₄-C₆ alkylene or oxy C₄-C₆ alkylene segments, or mixtures therein, (iii) poly (vinyl ester) segments, preferably polyvinyl acetate, having a degree of polymerization of at least 2, or (iv) C₁-C₄ alkyl ether or C₄ hydroxyalkyl ether substituents, or mixtures therein, wherein said substituents are present in the form of C₁-C₄ alkyl ether or C₄ hydroxyalkyl ether cellulose derivatives, or mixtures therein, and such cellulose derivatives are amphiphilic, whereby they have a sufficient level of C₁-C₄ alkyl ether and/or C₄ hydroxyalkyl ether units to deposit upon conventional polyester synthetic fiber surfaces and retain a sufficient level of hydroxyls, once adhered to such conventional synthetic fiber surface, to increase fiber surface hydrophilicity, or a combination of (a) and (b).

[0151] Typically, the polyoxyethylene segments of (a)(i) will have a degree of polymerization of from about 1 to about 200, although higher levels can be used, preferably from 3 to about 150, more preferably from 6 to about 100. Suitable oxy C₄-C₆ alkylene hydrophobe segments include, but are not limited to, end-caps of polymeric soil release agents such as MO₃S(CH₂)_nOCH₂CH₂O-, where M is sodium and n is an integer from 4-6, as disclosed in U.S. Patent 4,721,580, issued January 26, 1988 to Gosselink.

[0152] Anti-resoiling polymers useful in the present invention also include cellulosic derivatives such as hydroxyether cellulosic polymers, co-polymeric blocks of ethylene terephthalate or propylene terephthalate with polyethylene oxide or polypropylene oxide terephthalate, and the like. Such anti-resoiling polymers are commercially available and include hydroxyethers of cellulose such as METHOCEL® (Dow). Cellulosic anti-resoiling polymers for use herein also include those selected from the group consisting of C₁-C₄ alkyl and C₄ hydroxyalkyl cellulose; see U.S. Patent 4,000,093, issued December 28, 1976 to Nicol, et al.

[0153] Anti-resoiling polymers characterised by poly(vinyl ester) hydrophobe segments include graft co-polymers of poly(vinyl ester), e.g., C₁-C₆ vinyl esters, preferably poly(vinyl acetate) grafted onto polyalkylene oxide backbones, such as polyethylene oxide backbones. See European Patent Application 0 219 048, published April 22, 1987 by Kud, et al. Commercially available anti-resoiling polymers of this kind include the SOKALAN® type of material, e.g., SOKALAN HP-22®, available from BASF.

[0154] One type of preferred anti-resoiling polymers is a co-polymer having random blocks of ethylene terephthalate and polyethylene oxide (PEO) terephthalate. The molecular weight of these anti-resoiling polymers is in the range of from about 25,000 to about 55,000. See U.S. Patent 3,959,230 to Hays, issued May 25, 1976 and U.S. Patent 3,893,929 to Basadur issued July 8, 1975.

[0155] Another preferred anti-resoiling polymers is a polyester with repeat units of ethylene terephthalate units which contains 10-15% by weight of ethylene terephthalate units together with 90-80% by weight of polyoxyethylene terephthalate units, derived from a polyoxyethylene glycol of average molecular weight 300-5,000. Examples of this polymer include the commercially available material ZELCON 5126® (from Dupont) and MILEASE T® (from ICI). See also U.S. Patent 4,702,857, issued October 27, 1987 to Gosselink.

[0156] Another preferred anti-resoiling polymers agent is a sulfonated product of a substantially linear ester oligomer comprised of an oligomeric ester backbone of terephthaloyl and oxyalkyleneoxy repeat units and terminal moieties covalently attached to the backbone. These anti-resoiling polymers are fully described in U.S. Patent 4,968,451, issued November 6, 1990 to J.J. Scheibel and E.P. Gosselink. Other suitable anti-resoiling polymers include the terephthalate polyesters of U.S. Patent 4,711,730, issued December 8, 1987 to Gosselink et al, the anionic end-capped oligomeric esters of U.S. Patent 4,721,580, issued January 26, 1988 to Gosselink, and the block polyester oligomeric compounds of U.S. Patent 4,702,857, issued October 27, 1987 to Gosselink.

[0157] Preferred anti-resoiling polymers also include the soil release agents of U.S. Patent 4,877,896, issued October 31, 1989 to Maldonado et al, which discloses anionic, especially sulfoaroyl, end-capped terephthalate esters.

[0158] Still another preferred anti-resoiling agent is an oligomer with repeat units of terephthaloyl units, sulfoisoterephthaloyl units, oxyethyleneoxy and oxy-1,2-propylene units. The repeat units form the backbone of the oligomer and are preferably terminated with modified isethionate end-caps. A particularly preferred anti-resoiling agent of this type comprises about one sulfoisophthaloyl unit, 5 terephthaloyl units, oxyethyleneoxy and oxy-1,2-propyleneoxy units in a ratio of from about 1.7 to about 1.8, and two end-cap units of sodium 2-(2-hydroxyethoxy)-ethanesulfonate. Said anti-resoiling agent also comprises from about 0.5% to about 20%, by weight of the oligomer, of a crystalline-reducing stabilizer, preferably selected from the group consisting of xylene sulfonate, cumene sulfonate, toluene sulfonate, and mixtures thereof. See U.S. Pat. No. 5,415,807, issued May 16, 1995, to Gosselink et al.

[0159] The liquid compositions may comprise from 0.01% to 10%, preferably from 0.01% to 5%, and more preferably from 0.05% to 2% by weight of the total composition of a further anti-resoiling agent.

[0160] A preferred anti-resoiling agent is an anti-resoiling polymer. A more preferred anti-resoiling agent is a poly (vinyl methyl ether / maleic acid) copolymer, a soil suspending polyamine polymer, a poly vinyl pyridine-N-oxide polymer or a mixture thereof. An even more preferred anti-resoiling agent is a poly (vinyl methyl ether / maleic acid) copolymer, an alkoxyated polyamine polymer, a poly vinyl pyridine-N-oxide polymer or a mixture thereof. The most preferred anti-resoiling agent useful in the compositions herein are selected from the group consisting of : a poly (vinyl methyl ether / maleic acid) copolymer; an ethoxylated polyethylene amine according to the formula as described above wherein $n=2$ and $y=20$; an ethoxylated polyethylene amine according to the formula as described herein wherein $n=40$ and $y=7$; a poly vinyl pyridine-N-oxide polymer; and mixtures thereof.

Volatile organic compounds

[0161] As an optional but highly preferred ingredient the compositions according to the present invention may comprise a volatile organic compound (VOC) or a mixture thereof.

[0162] Typically, the compositions herein may comprise up to 90%, preferably from 0.1% to 20%, more preferably from 0.5% to 10% and most preferably from 1% to 5% by weight of the total composition of a volatile organic compound or a mixture thereof.

[0163] Suitable volatile organic compounds for use herein are selected from the group consisting of : an aliphatic and/or aromatic alcohol; a glycol ether and/or a derivative thereof; a polyol; and a mixture thereof.

[0164] Suitable aromatic alcohols to be used herein are according to the formula R_1-OH wherein R_1 is an alkyl substituted or non-alkyl substituted aryl group of from 1 to 20 carbon atoms, preferably from 2 to 15 and more preferably from 2 to 10. A suitable aromatic alcohol to be used herein is benzyl alcohol.

[0165] Suitable aliphatic alcohols to be used herein are according to the formula R_2-OH wherein R_2 is a linear or branched saturated or unsaturated hydrocarbon chain of from 1 to 20 carbon atoms, preferably from 1 to 10 and more preferably from 2 to 6. Highly preferred herein are aliphatic alcohols with 2 to 4 carbon atoms and most preferably 4 carbon atoms, or mixtures thereof. Suitable aliphatic alcohols to be used herein include linear alcohol like 2-octanol, decanol, isopropyl alcohol, propyl alcohol, ethanol and/or methanol. Highly preferred herein are ethanol, isopropyl alcohol or a mixture thereof.

[0166] Ethanol may be commercially available from Eridania Italia under its chemical name.

[0167] Isopropanol may be commercially available from Merck/BDH Italia under its chemical name.

[0168] Suitable glycol ethers and/or derivatives thereof to be used herein include monoglycol ethers and/or derivatives thereof, polyglycol ethers and/or derivatives thereof and mixtures thereof.

[0169] Suitable monoglycol ethers and derivatives thereof to be used herein include n-butoxypropanol (n-BP), water-soluble CELLOSOLVE® solvents or mixtures thereof. Preferred Cellosolve® solvents include propoxy ethyl acetate salt (i.e., Propyl Cellosolve acetate salt®), ethanol-2-butoxy phosphate salt (i.e., Butyl Cellosolve phosphate salt®), 2-(Hexyloxy)ethanol (i.e., 2-hexyl Cellosolve®), 2-ethoxy ethanol (i.e., 2-ethyl Cellosolve®), 2-butoxyethanol (i.e., 2-butyl Cellosolve®) or mixtures thereof.

[0170] Suitable polyglycol ethers and derivatives thereof to be used herein include n-butoxypropoxypropanol (n-BPP), butyl triglycol ether (BTGE), butyl diglycol ether (BDGE), water-soluble CARBITOL® solvents or mixtures thereof.

[0171] Preferred water-soluble CARBITOL® solvents are compounds of the 2-(2-alkoxyethoxy)ethanol class, 2-

(2-alkoxyethoxy)propanol class and/or 2-(2-alkoxyethoxy)butanol class wherein the alkoxy group is derived from ethyl, propyl or butyl. A preferred water-soluble carbitol is 2-(2-butoxyethoxy)ethanol also known as butyl carbitol®.

[0172] Preferred glycol ethers and/or derivatives thereof are 2-ethoxyethanol, 2-butoxyethanol, n-butoxypropoxypropanol, butyl carbitol® or mixtures thereof.

[0173] Suitable polyol solvents to be used herein are the polyols having at least 2 hydroxyl groups (-OH) like diols. Suitable diols to be used herein include 2-ethyl-1,3-hexanediol, 2,2,4-trimethyl-1,3-pentanediol, methyl-2,4 pentanediol or mixture thereof.

[0174] The volatile organic compounds, when present, further contribute to the excellent overall cleaning performance of the present invention. Additionally, their addition in the compositions herein also enhances the sanitising properties of the compositions.

Other optional ingredients


[0175] The compositions herein may further comprise conventional carpet cleaning ingredients. Preferably, the compositions herein may comprises a number of additional compounds selected from the group consisting of stabilising agents, chelating agents, builder systems, radical scavengers, perfumes, dyes, suds suppressing agents, enzymes, photobleaching agents, bleach activators and other minors and mixtures thereof.

[0176] In a preferred embodiment, the compositions herein may further comprises a number of additional compounds selected from the group consisting of stabilising agents, chelating agents, builder systems, radical scavengers, perfumes, dyes, suds suppressing agents, enzymes, photobleaching agents, bleach activators and other minors and mixtures thereof.

Stabilizing agents

[0177] The compositions of the present invention may further comprise a stabilizing agent selected from the group consisting of hydroxy pyridine N-oxides or derivatives thereof and mixtures thereof.

[0178] Suitable hydroxy pyridine N-oxides or derivatives thereof are according to the following formula:



wherein X is nitrogen, Y is one of the following groups oxygen, -CHO, -OH, -(CH₂)_n-COOH, wherein n is an integer of from 0 to 20, preferably of from 0 to 10 and more preferably is 0, and wherein Y is preferably oxygen. Accordingly particularly preferred hydroxy pyridine N-oxides or derivatives thereof to be used herein is 2-hydroxy pyridine N-oxide.

[0179] Hydroxy pyridine N-oxides or derivatives thereof may be commercially available from Sigma.

[0180] Typically, the compositions herein may comprise up to 2%, preferably from 0.001% to 1% and more preferably from 0.001% to 0.5% by weight of the total composition of a hydroxy pyridine N-oxide or derivatives thereof or mixtures thereof.

Chelating agents

[0181] The compositions of the present invention may further comprise a chelating agent.

[0182] Suitable chelating agents are those known to those skilled in the art. Particularly suitable chelating agents include for examples phosphonate chelating agents, polyfunctionally-substituted aromatic chelating agents, amino carboxylate chelating agents, other chelating agents like ethylene diamine N,N'-disuccinic acid and mixtures thereof.

[0183] Typically, the compositions herein may comprise up to 4%, preferably from 0.001% to 1%, and more preferably from 0.001% to 0.5% by weight of the total composition of a chelating agent.

[0184] Suitable phosphonate chelating agents to be used herein may include ethydrionic acid, alkali metal ethane 1-hydroxy diphosphonates as well as amino phosphonate compounds, including amino alkylene poly (alkylene phosphonate), alkali metal ethane 1-hydroxy diphosphonates, nitrilo trimethylene phosphonates, ethylene diamine tetra methylene phosphonates, and diethylene triamine penta methylene phosphonates. The phosphonate compounds may be present either in their acid form or as salts of different cations on some or all of their acid functionalities. Preferred


phosphonate chelating agents to be used herein are diethylene triamine penta methylene phosphonates (DETPMP). Such phosphonate chelating agents are commercially available from Monsanto under the trade name DEQUEST®.

[0185] Polyfunctionally-substituted aromatic chelating agents may also be useful in the compositions herein. See U. S. patent 3,812,044, issued May 21, 1974, to Connor et al. Preferred compounds of this type in acid form are dihydroxydisulphobenzenes such as 1,2-dihydroxy -3,5-disulphobenzene.

[0186] A preferred biodegradable chelating agent for use herein is ethylene diamine N,N'- disuccinic acid, or alkali metal, or alkaline earth, ammonium or substituted ammonium salts thereof or mixtures thereof. Ethylenediamine N,N'- disuccinic acids, especially the (S,S) isomer, have been extensively described in US patent 4, 704, 233, November 3, 1987. to Hartman and Perkins. Ethylenediamine N,N'- disuccinic acid is, for instance, commercially available under the tradename ssEDDS® from Palmer Research Laboratories.

[0187] Suitable amino carboxylate chelating agents to be used herein include ethylene diamine tetra acetates, diethylene triamine pentaacetates, diethylene triamine pentaacetate (DTPA), N-hydroxyethylethylenediamine triacetates, nitrilotriacetates, ethylenediamine tetrapropionates, triethylenetetraaminehexaacetates, ethanoldiglycines, propylene diamine tetracetic acid (PDTA) and methyl glycine di-acetic acid (MGDA), both in their acid form, or in their alkali metal, ammonium, and substituted ammonium salt forms. A particularly suitable amino carboxylate to be used herein is diethylene triamine penta acetic acid (DTPA).

[0188] Other suitable chelating agents to be used herein include salicylic acid or derivatives thereof, or mixtures thereof according to the following formula:



wherein X is carbon, Y is one of the following groups -CHO, -OH, -(CH₂)_n-COOH, and preferably is -(CH₂)_n-COOH, and wherein n is an integer of from 0 to 20, preferably of from 0 to 10 and more preferably is 0. Salicylic acid and derivatives thereof may be used herein either in their acid form or in their salts form as for example sodium salts.

[0189] Salicylic acid is particularly preferred herein and may be commercially available from Rhone Poulenc.

Bleach activators

[0190] In an embodiment of the present invention where the compositions herein comprise a peroxygen bleach, preferably hydrogen peroxide, said compositions may further comprise a bleach activator, as an optional inredient.

[0191] By "bleach activator", it is meant herein a compound which reacts with the peroxygen bleach, preferably hydrogen peroxide, to form a peracid. The peracid thus formed constitutes the activated bleach.

[0192] Suitable bleach activators to be used herein include those belonging to the class of esters, amides, imides, or anhydrides. Examples of suitable compounds of this type are disclosed in British Patent GB 1 586 769 and GB 2 143 231 and a method for their formation into a prilled form is described in European Published Patent Application EP-A-62 523. Suitable examples of such compounds to be used herein are tetracetyl ethylene diamine (TAED), sodium 3,5,5 trimethyl hexanoyloxybenzene sulphonate, diperoxy dodecanoic acid as described for instance in US 4 818 425 and nonylamide of peroxyadipic acid as described for instance in US 4 259 201 and n-nonanoyloxybenzenesulphonate (NOBS). Also suitable are N-acyl caprolactam selected from the group consisting of substituted or unsubstituted benzoyl caprolactam, octanoyl caprolactam, nonanoyl caprolactam, hexanoyl caprolactam, decanoyl caprolactam, undecenoyl caprolactam, formyl caprolactam, acetyl caprolactam, propanoyl caprolactam, butanoyl caprolactam pentanoyl caprolactam or mixtures thereof. A particular family of bleach activators of interest was disclosed in EP 624 154, and particularly preferred in that family is acetyl triethyl citrate (ATC). Acetyl triethyl citrate has the advantage that it is environmentally friendly as it eventually degrades into citric acid and alcohol. Furthermore, acetyl triethyl citrate has a good hydrolytical stability in the composition upon storage and it is an efficient bleach activator.

[0193] The compositions according to the present invention may comprise up to 30%, preferably from 1% to 20%, and more preferably from 2% to 10% by weight of the total composition of a bleach activator.

Builders

[0194] The compositions according to the present invention may further comprise a builder system. Any conventional

builder system known in the art is suitable for use herein. Suitable builders for use herein include derivatives of succinic acid of the formula $R-CH(COOH)CH_2(COOH)$ wherein R is C_{10-20} alkyl or alkenyl, preferably C_{12-16} alkyl or alkenyl, or wherein R can be substituted with hydroxyl, sulfo sulfoxyl or sulphone substituents. Specific examples include lauryl succinate, myristyl succinate, palmityl succinate, 2-dodecenylsuccinate, 2-tetradecenyl succinate. Succinate

builders are preferably used in the form of their water-soluble salts, including sodium, potassium, ammonium and alkanolammonium salts.

[0195] Other suitable builders are oxodisuccinates and mixtures of tartrate monosuccinic and tartrate disuccinic acid such as described in US 4,663,071.

[0196] Further suitable builders for use herein are fatty acid builders including saturated or unsaturated C_{10-18} fatty acids, as well as the corresponding soaps. Preferred saturated species have from 12 to 16 carbon atoms in the alkyl chain. The preferred unsaturated fatty acid is oleic acid.

[0197] The compositions herein may comprise up to 10%, preferably from 1% to 7% by weight of the total composition of a builder system.

Radical scavengers

[0198] The compositions herein may comprise a radical scavenger as another optional ingredient. Suitable radical scavengers for use herein include the well-known substituted mono and di hydroxy benzenes and derivatives thereof, alkyl- and aryl carboxylates and mixtures thereof. Preferred radical scavengers for use herein include di-tert-butyl hydroxy toluene (BHT), p-hydroxy-toluene, hydroquinone (HQ), di-tert-butyl hydroquinone (DTBHQ), mono-tert-butyl hydroquinone (MTBHQ), tert-butyl-hydroxy anysole (BHA), p-hydroxy-ansol, benzoic acid, 2,5-dihydroxy benzoic acid, 2,5-dihydroxyterephthalic acid, toluic acid, catechol, t-butyl catechol, 4-allyl-catechol, 4-acetyl catechol, 2-methoxy-phenol, 2-ethoxy-phenol, 2-methoxy-4-(2-propenyl)phenol, 3,4-dihydroxy benzaldehyde, 2,3-dihydroxy benzaldehyde, benzylamine, 1,1,3-tris(2-methyl-4-hydroxy-5-t-butylphenyl) butane, tert-butyl-hydroxy-anyline, p-hydroxy anyline as well as n-propyl-gallate. Highly preferred for use herein is di-tert-butyl hydroxy toluene, which is for example commercially available from SHELL under the trade name IONOL CP® and/or tert-butyl-hydroxy anysole and/or propyl gallate. These radical scavengers further contribute to the stability of the compositions herein.

[0199] Typically, the compositions according to the present invention may comprise up to 5%, preferably from 0.002% to 1.5% by weight and more preferably from 0.002% to 0.5% by weight of the total composition of a radical scavenger.

Claims

1. A process of cleaning a carpet comprising the steps of applying a liquid carpet cleaning composition onto a carpet and contacting said carpet with a glove comprising at least two layers; the first layer being capable of capillarity and a second layer which is impermeable to said carpet cleaning composition wherein the second layer is located between the first layer and the cavity formed by the glove.
2. A process of cleaning a carpet according to claim 1, wherein said cleaning composition is directly applied onto said carpet prior to contacting said carpet with said glove, applied onto said glove prior to contacting said carpet with said glove and/or applied onto said glove at the time of manufacture.
3. A process of cleaning a carpet according to any of the preceding claims, wherein said process after contacting said carpet with said glove further comprises the step of imparting mechanical action to the carpet using said glove.
4. A process of cleaning a carpet according to any of the preceding claims, wherein said first layer is made of a spongy cloth.
5. A process of cleaning a carpet according to any of the preceding claims, wherein said first layer is made of a material selected from the group consisting of synthetic rubber, polyurethane, polyester, polyether, cellulose based material, acrylic-styrene co-polymers and mixtures thereof.
6. A process of cleaning a carpet according to any of the preceding claims, wherein said first layer is made of a material having a low surface energy.
7. A process of cleaning a carpet according to any of the preceding claims, wherein said second layer is made of a material selected from the group consisting of polypropylene, natural rubber, latex and mixtures thereof.

8. A process of cleaning a carpet according to any of the preceding claims, wherein said glove further comprises additional layers located on top of the first layer, in between the first and the second layer and/or between the second layer and the cavity formed by the glove.

5 9. A process of cleaning a carpet according to claim 8, wherein said glove comprises an additional layer comprising a material protecting the user's hand from the impermeable second layer.

10 10. A process of cleaning a carpet according to any of the preceding claims, wherein said liquid carpet cleaning composition comprises an ingredient selected from the group consisting of a peroxygen bleach, a surfactant, a volatile organic compound, an anti-resoiling agent, and a mixture thereof.

15

20

25

30

35

40

45

50

55



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 87 0118

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	GB 2 061 709 A (BEECHAM-WALTERS J E) 20 May 1981 (1981-05-20) * abstract * * page 1, line 33 - line 41 * * page 1, line 66 - line 68 * * page 1, line 78 - line 81 * * page 1, line 122 - page 2, line 2 * * page 2, line 7 - line 12 * * page 2, line 24 - line 29 * * claim 9 *	1-6,9,10	A47L13/18 A47L13/19 A47L25/08
Y	EP 0 546 426 A (BURKHARDT M) 16 June 1993 (1993-06-16) * abstract * * column 1, line 18 - line 26 * * column 2, line 7 - line 34 * * figures *	1-6,9,10	
A,D	US 4 980 943 A (BARBER J E) 1 January 1991 (1991-01-01) * abstract * * column 1, line 63 - column 2, line 28 * * column 3, line 12 - line 27 * * column 3, line 47 - line 56 * * figures 1-3 *	1-9	TECHNICAL FIELDS SEARCHED (Int.Cl.7) A47L
A,D	CH 682 207 A (ZOHREH T) 13 August 1993 (1993-08-13) * abstract * * column 1, line 60 - column 2, line 16 * * figure 1 *	1-9	
A,D	WO 94 23636 A (HENKEL ECOLAB & CO OGH ET AL) 27 October 1994 (1994-10-27) * abstract; figures *	1	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 14 December 1999	Examiner Cabral Matos, A
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/82 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 87 0118

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A,D	EP 0 753 280 A (MELITTA HAUSHALTSPRODUKTE GMBH & CO.) 15 January 1997 (1997-01-15) * abstract; figure 1 *	1	
A	PATENT ABSTRACTS OF JAPAN vol. 1997, no. 09, 30 September 1997 (1997-09-30) & JP 09 122057 A (SONODA MATSUO), 13 May 1997 (1997-05-13) * abstract *	7-9	
A,D	EP 0 629 694 A (PROCTER & GAMBLE) 21 December 1994 (1994-12-21) * abstract *	10	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 14 December 1999	Examiner Cabra1 Matos, A
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03 82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 87 0118

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

14-12-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 2061709 A	20-05-1981	NONE	
EP 0546426 A	16-06-1993	DE 9115222 U AT 149081 T DE 59208071 D NO 924699 A	06-02-1992 15-03-1997 03-04-1997 08-06-1993
US 4980943 A	01-01-1991	NONE	
CH 682207 A	13-08-1993	NONE	
WO 9423636 A	27-10-1994	DE 4312522 A EP 0693895 A JP 8509140 T	20-10-1994 31-01-1996 01-10-1996
EP 0753280 A	15-01-1997	DE 29511307 U AT 183372 T DE 59602773 D NO 962945 A	14-09-1995 15-09-1999 23-09-1999 14-01-1997
JP 09122057 A	13-05-1997	NONE	
EP 0629694 A	21-12-1994	EP 0629691 A EP 0629690 A SG 52309 A SG 55157 A AU 688356 B AU 7403494 A CA 2168769 A WO 9504127 A ZA 9405772 A AT 174955 T AU 5589194 A AU 693793 B AU 6961594 A BR 9406802 A CN 1127521 A DE 69321711 D DE 69321711 T DE 69322744 D DE 69322744 T EP 0598693 A ES 2121983 T ES 2125322 T JP 8511575 T NZ 267342 A	21-12-1994 21-12-1994 28-09-1998 21-12-1998 12-03-1998 28-02-1995 09-02-1995 09-02-1995 14-03-1995 15-01-1999 08-06-1994 09-07-1998 03-01-1995 19-03-1996 24-07-1996 26-11-1998 10-06-1999 04-02-1999 22-07-1999 25-05-1994 16-12-1998 01-03-1999 03-12-1996 26-01-1998

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 87 0118

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

14-12-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0629694 A		PL 311878 A	18-03-1998
		WO 9411099 A	26-05-1994
		WO 9429415 A	22-12-1994
		AT 186324 T	15-11-1999
		AU 695213 B	06-08-1998
		AU 7202894 A	03-01-1995
		BR 9406811 A	23-07-1996
		CA 2164820 A	22-12-1994
		CN 1127520 A	24-07-1996
		DE 69326941 D	09-12-1999
		JP 9500154 T	07-01-1997
		NZ 268724 A	19-12-1997
		PL 311879 A	18-03-1996
		WO 9429414 A	22-12-1994
