



(11) **EP 1 066 920 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
07.02.2007 Bulletin 2007/06

(51) Int Cl.:
B24B 23/02 ^(2006.01) **B24B 55/00** ^(2006.01)
F01B 25/06 ^(2006.01)

(21) Application number: **00113792.6**

(22) Date of filing: **29.06.2000**

(54) **Air tool provided with safety device**

Pressluft angetriebenes Werkzeug mit Sicherheitsvorrichtung

Outil à air comprimé muni d'un dispositif de sécurité

(84) Designated Contracting States:
DE FR GB SE

(30) Priority: **29.06.1999 JP 18380099**

(43) Date of publication of application:
10.01.2001 Bulletin 2001/02

(73) Proprietor: **Fuji Air Tools Co., Ltd.**
Osaka-shi,
Osaka 537-0003 (JP)

(72) Inventor: **Tomioka, Isao,**
c/o Fuji Air Tools Co., Ltd.
Osaka-shi,
Osaka (JP)

(74) Representative: **Strehl Schübel-Hopf & Partner**
Maximilianstrasse 54
80538 München (DE)

(56) References cited:
US-A- 3 918 213 **US-A- 3 932 071**
US-A- 4 222 702 **US-A- 4 265 604**
US-A- 4 729 436

- **PATENT ABSTRACTS OF JAPAN** vol. 004, no. 128
(M-031), 9 September 1980 (1980-09-09) & JP 55
084802 A (URIYUU SEISAKU KK), 26 June 1980
(1980-06-26)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 066 920 B1

Description

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

[0001] The present invention relates to an air tool provided with a safety device such as an air grinder or the like, (see for example US-A-4 729 436).

DESCRIPTION OF THE PRIOR ART

[0002] Conventionally, in an air grinder having an abrasive member, in order to prevent an over speed, reduce an air consumption amount at a time of no load or make a number of rotation at a time of maximum horse power close to a number of rotation at the no load time, a speed adjusting apparatus capable of controlling a number of rotation is mounted.

[0003] Fig. 4 is a plan cross sectional view showing a whole structure of the air grinder, and Fig. 5 is a schematic view of the speed adjusting apparatus and a periphery thereof. At first, the speed adjusting apparatus 30 provided in a main body casing 28 is constituted by a rotary member 31 provided with a flange portion mainly in a center portion on a side surface of a cylinder, a speed adjusting valve body 36 provided with a flange portion in a bottom portion on the side surface of the cylinder, and a speed adjusting weight 32 formed substantially in an L shape as seen from a side view. As shown in Figs. 4 and 5, a valve seat 38 is interposed in an air passage 29 formed within the main body casing 28, and an air motor 40 is rotated and driven by an air supplied from the air passage 29 mentioned above. The rotary member 31 is directly connected to an output shaft 41 of the air motor 40, whereby the structure is made such that a rotation of the air motor 40 is directly transferred to the rotary member 31 mentioned above. Further, the speed adjusting valve body 36 is fitted to an outer side of the rotary member 31 in such a manner as to slide in an axial direction along the side surface of the rotary member 31, and the speed adjusting valve body 36 and the valve seat 38 of the air passage 29 are arranged so as to oppose to each other.

[0004] Spring receivers 39 and 39 are protruded outward in a diametrical direction on both opposing side surfaces disposed above the rotary member 31, and the respective spring receivers 39 and 39 are introduced to an external portion via axial long holes pierced on both opposing side surfaces above the speed adjusting valve body 36. Further, a speed adjusting valve spring 37 is interposed between the spring receiver 39 and the flange portion of the speed adjusting valve body 36, whereby the speed adjusting valve body 36 is urged in a direction being moved apart from the valve seat 38.

[0005] Further, the speed adjusting weights 32 and 32 formed substantially in an L shape as seen from a side view are supported at opposing positions in the flange

portion of the rotary member 31 mentioned above so as to be tilted due to a centrifugal force caused by a rotation of the rotary member 31. The speed adjusting weight 32 is constituted by a weight portion 33 for making it possible to tilt inward and outward in an axial direction around a pin 34 corresponding to a supporting point inserted to a pin hole, and a lever portion 35 for pressing up the speed adjusting valve body 36 in accordance with a tilting motion thereof. Further, in this case, the lever portion 35 of the speed adjusting weight 32 mentioned above is arranged so as to be brought into contact with the lower side of the flange portion of the speed adjusting valve body 36.

[0006] Next, a description will be given of an operating state of the speed adjusting apparatus 30 mentioned above. At first, as shown in Fig. 5A, at the no load time, a centrifugal force is applied to the speed adjusting weight 32 due to the rotation of the air motor 40, the weight portion 33 is tilted outward around the pin 34 corresponding to a supporting point inserted to the pin hole, and the lever portion 35 being in contact with the flange portion of the speed adjusting valve body 36 applies a force in a direction of pressing up the speed adjusting valve body 36, that is, a direction of moving close to the valve seat 38 mentioned above. When a thrust by the speed adjusting weight 32 becomes larger than an urging force of the speed adjusting valve spring 37, the speed adjusting valve body 36 is pressed upward, thereby making an opening degree of the passage of the valve seat 38 arranged at a position opposing to the speed adjusting valve body 36 small. As a result, an amount of air supplied from the air passage 29 is limited, and a number of rotation is reduced.

[0007] Further, as shown in Fig. 5B, a load is applied to an abrasive member such as a grindstone or the like and a number of rotation of the air motor 40 is reduced, whereby the centrifugal force applied to the speed adjusting weight 32 becomes gradually reduced, and accordingly, the thrust applied in a direction of pressing up the speed adjusting valve body 36 becomes small. Accordingly, the speed adjusting valve body 36 pressed upward is pressed back downward, that is, a direction of moving apart from the valve seat 38 due to the urging force of the speed adjusting valve spring 37 at this time, thereby increasing the opening degree of the passage thereof. As a result, an amount of air supplied from the air passage 29 is increased, and an output of the air motor 40 is increased, whereby the number of rotation is increased. As mentioned above, the structure is made such that the number of rotation can be automatically adjusted by using the speed adjusting apparatus 30.

[0008] However, in the case that the speed adjusting apparatus 30 mentioned above does not normally operate for some reasons, for example, because of foreign materials mixed in the speed adjusting apparatus 30, there is a case that an over speed is caused and the case is very dangerous. Further, in the conventional days, in order to prevent the danger mentioned above, it is an

only way to check a safety by performing a periodical inspection.

SUMMARY OF THE INVENTION

[0009] The present invention is made so as to solve the conventional disadvantages mentioned above, and an object of the present invention is to provide an air tool provided with a safety device structured such as to automatically reduce a number of rotation and lock with keeping the state by a lock mechanism so as to inhibit a normal use in the case that a rotation generated by an air motor of the air tool such as the air grinder or the like becomes over a predetermined number of rotation.

[0010] Then, in accordance with a first aspect of the present invention, there is provided an air tool provided with a safety device comprising:

- a main body casing 22;
- an air passage 23 formed within the main body casing 22;
- an air motor 26 rotated by an air supplied from the air passage 23;
- a valve seat 24 interposed in the air passage 23;
- a safety valve body 4 arranged in such a manner as to change an opening degree of the passage by moving in a direction of moving close to and apart from the valve seat 24;
- first urging means 6 for urging the safety valve body 4 in a direction of moving close to the valve seat 24;
- a rotary member 2 rotating in interlocking with an output shaft 25 of the air motor 26 ;
- a safety valve stopper 16 mounted to the rotary member 2 so as to be displaced outward in a diametrical direction due to a centrifugal force generated by a rotation of the rotary member 2; and
- second urging means 20 for urging the safety valve stopper 16 in a direction inverse to a direction in which the centrifugal force is applied,

wherein a lock mechanism for locking a motion of the safety valve body 4 in a steady operation state where the safety valve body 4 is held apart from the valve seat 24 against an urging force of the first urging means 6 so as to give an increase opening degree of the passage, disengaging the lock so as to move the safety valve body 4 in a direction of moving close to the valve seat 24 by the first urging means 6, thereby reducing the opening degree of the passage when a number of rotation of the output shaft 25 of the air motor 26 is increased to be over a predetermined number of rotation and the safety valve stopper 16 moves against the urging force of the second urging means 20 due to the centrifugal force, and again locking the motion of the safety valve body 4 in this state is provided between the safety valve body 4 and the safety valve stopper 16.

[0011] In accordance with the air tool provided with the safety device described in the first aspect mentioned

above, in the case that the number of rotation of the output shaft 25 of the air motor 26 becomes over the predetermined number of rotation, for example, 10 to 15 % of a safety rotation range, the safety valve stopper 16 locking the motion of the safety valve body 4 mentioned above moves against the urging force of the second urging means 20 due to the centrifugal force so as to disengage the lock, and the safety valve body 4 mentioned above moves close to the valve seat 24 due to the urging force of the first urging means 6 so as to reduce the opening degree of the passage of the valve seat 24 mentioned above, thereby limiting an amount of air supplied from the air passage 23. Then, with keeping the state mentioned above, the safety valve stopper 16 again locks the motion of the safety valve body 4 mentioned above.

[0012] Further, in accordance with a second aspect of the present invention, there is provided an air tool provided with a safety device, further comprising air supply means for supplying a little amount of air from the air passage 23 in a state that the safety valve body 4 is again locked by the lock mechanism.

[0013] In accordance with the air tool provided with the safety device described in the second aspect, an abrasive member such as a grindstone or the like is prevented from being disengaged or cracked due to a sudden stop of rotation by continuously supplying a little amount of air from the air passage 23 so as to continue a low speed rotation.

[0014] Further, in accordance with a third aspect of the present invention, there is provided an air tool provided with a safety device, wherein the rotary member 2 is directly connected to the output shaft 25 of the air motor 26, and the safety valve body 4 is supported to the rotary member 2 so as to be coaxial with a rotational axis thereof.

[0015] In accordance with the air tool provided with the safety device described in the third aspect, since the rotary member 2 and the safety valve body 4 are provided in coaxial with the output shaft 25 of the air motor 26, it is possible to make the structure compact.

[0016] In accordance with a fourth aspect of the present invention, there is provided an air tool provided with a safety device, wherein the air tool provided with the safety device as recited in the third aspect further comprises:

- a speed adjusting valve body 7 arranged in such a manner as to slide substantially in a coaxial manner;
- third urging means 11 for urging the speed adjusting valve body 7 in a direction of moving apart from the valve seat 24; and
- a speed adjusting weight 12 supported to the rotary member 2 in such a manner as to be displaced due to a centrifugal force caused by the rotation of the rotary member 2, and

wherein an interlocking mechanism for reducing the opening degree of the passage by moving the speed ad-

justing valve body 7 close to the valve seat 24 due to a displacement of the speed adjusting weight 12 is provided between the speed adjusting valve body 7 and the speed adjusting weight 12.

[0017] In accordance with the air tool provided with the safety device described in the fourth aspect, since the speed adjusting apparatus capable of automatically controlling the number of rotation in a coaxial manner with the safety device is mounted, it is possible to construct the safety device and the speed adjusting apparatus compact.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018]

Fig. 1 is a side elevational cross sectional view of an air grinder provided with a safety device in accordance with the present embodiment at a time of a steady operation;

Fig. 2 is a side elevational cross sectional view showing an operating state of the air grinder provided with the safety device in accordance with the present embodiment at a time of a trouble;

Fig. 3 is a plan cross sectional view showing a whole structure of an air grinder;

Fig. 4 is a plan cross sectional view showing a whole structure of a conventional air grinder; and

Figs. 5A and 5B are side elevational cross sectional views showing a summary of a speed adjusting apparatus, in which Fig. 5A shows an operating state at a time when no load is applied, and Fig. 5b shows an operating state at a time when a load is applied.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0019] Next, a description will be in detail given of a particular embodiment of an air tool provided with a safety device in accordance with the present invention with reference to the accompanying drawings.

[0020] Fig. 1 is a side elevational cross sectional view showing a schematic structure of a safety device provided with a speed adjusting function in an air grinder at a time of a steady operation, Fig. 2 is a side elevational cross sectional view showing a schematic structure at a time when the safety device is operated, and Fig. 3 is a plan cross sectional view showing a whole structure of the air grinder. As shown in Fig. 1, a safety device 1 provided within a main body casing 22 is mainly constituted by a rotary member 2 provided with a flange portion 3 in a center portion on a side surface of a cylindrical portion 2a formed in a cylindrical shape with a bottom, a safety valve body 4 provided with a flange portion 5 in a bottom portion on a side surface of a cylindrical portion 4b formed in a cylindrical shape and having a closed top portion 4a, a speed adjusting valve body 7 provided with a flange portion 8 in a bottom portion on a side surface

of a cylindrical portion 7a, a speed adjusting weight 12 formed in an L shape as seen from a side view, and a safety valve stopper 16 formed substantially in an E shape in a cross section.

[0021] As shown in Figs. 1 and 3, a valve seat 24 is interposed in an air passage 23 formed within a main body casing 22, and an air motor 26 is rotated and driven by an air supplied from the air passage 23 mentioned above. Further, the rotary member 2 is directly connected to an output shaft 25 of a rear end side of the air motor 26, whereby the structure is made such that a rotation of the air motor 26 is directly transferred to the rotary member 2. Further, as shown in Fig. 1, the cylindrical portion 4b of the safety valve body 4 is fitted to a portion above the flange 3 in an outer side of the cylindrical portion 2a of the rotary member 2 so as to slide in an axial direction. Further, the cylindrical portion 7a of the speed adjusting valve body 7 is fitted to an outside portion of the cylindrical portion 4b of the safety valve body 4 so as to slide in an axial direction, and the speed adjusting valve body 7 and the safety valve body 4 are both arranged so as to oppose to the valve seat 24. Further, a little gap is provided between the cylindrical portion 4b of the safety valve body 4 and the cylindrical portion 7a of the speed adjusting valve body 7, whereby the structure is made such that a little amount of air can be supplied to the air motor 26 from the gap even in a state that the safety valve body 4 and the speed adjusting valve body 7 close the valve seat 24. Further, a safety valve spring 6 corresponding to first urging means is interposed inside the cylindrical portions 2a and 4a of the rotary member 2 and the safety valve body 4, whereby the safety valve body 4 is urged in a direction of moving close to the valve seat 24. In this case, in Fig. 3, reference numeral 50 denotes an output shaft in a front end side of the air motor 26, reference numerals 51 and 52 denote a bevel gear, reference numeral 53 denotes a grip portion, and reference numeral 54 denotes a muffler chamber for exhaust gas, respectively.

[0022] A guide portion 19 formed in a C shape in cross section is mounted to one end of the flange portion 3 of the rotary member 2. The safety valve stopper 16 formed substantially in an E shape in cross section is mounted to the guide portion 19, and can be slid outward in a diametrical direction thereof due to a centrifugal force caused by a rotation of the rotary member 2. The safety valve stopper 16 is formed substantially in an E shape in cross section by respectively providing grooves 17 and 18 corresponding to a width of the flange portion 5 of the safety valve body 4 in an upper portion and a lower portion on one side surface of a rectangular parallelepiped, that is, a surface opposing to the flange portion 5 of the safety valve body 4, and is formed so that one end of the flange portion 5 of the safety valve body 4 can be fitted into the grooves 17 and 18. Then, in the case of the present embodiment, a lock mechanism is constituted by the flange portion 5 of the safety valve body 4 and the grooves 17 and 18. Further, a hole with a bottom 21 is provided on

a side surface opposite to the grooves 17 and 18, and a safety valve stopper spring 20 corresponding to second urging means is interposed within the hole 21. Then, the safety valve stopper spring 20 urges the safety valve stopper 16 inward in a diametrical direction, that is, in a direction opposite to a direction in which the centrifugal force is applied.

[0023] Further, spring receivers 10 and 10 are protruded outward in a diametrical direction on both of opposing side surfaces above the cylindrical portion 4b of the safety valve body 4, and the respective spring receivers 10 and 10 are introduced to an external portion via axial long holes 9 and 9 pierced on both of opposing side surfaces above the cylindrical portion 7a of the speed adjusting valve body 7. Then, a speed adjusting valve spring 11 corresponding to third urging means is interposed between the spring receiver 10 and the flange portion 8 of the speed adjusting valve body 7, whereby the speed adjusting valve body 7 is urged in a direction of being moved apart from the valve seat 24.

[0024] Further, the speed adjusting weights 12 and 12 formed substantially in an L shape as seen from a side view are supported in the flange portion 3 of the rotary member 2 so as to be tilted due to a centrifugal force caused by a rotation of the rotary member 2. The speed adjusting weight 12 is constituted by a weight portion 14 for making it possible to tilt inward and outward in an axial direction around a pin 13 corresponding to a supporting point inserted to a pin hole, and a lever portion 15 for moving the speed adjusting valve body 7 close to the valve seat 24 in accordance with a tilting motion thereof. That is, the speed adjusting weights 12 are positioned between a pair of support members respectively formed at opposing portions on the flange portion 3 of the rotary member 2 and are supported by the pin 13 so as to be tilted. Further, in this case, the flange portion 8 of the speed adjusting valve body 7 and the lever portion 15 of the speed adjusting weight 12 arranged so as to be brought into contact with the lower side of the flange portion constitute an interlocking mechanism for adjusting an opening degree of the passage of the valve seat 24.

[0025] Next, a description will be given of an operating state of the safety device in a steady time. As shown in Fig. 1, in the case that no load is applied to a grindstone corresponding to the abrasive member, a centrifugal force is applied to the speed adjusting weight 12 due to the rotation of the air motor 26, the weight portion 14 is tilted outward around the pin 13 corresponding to a supporting point inserted to the pin hole, and the lever portion 15 being in contact with the flange portion 8 of the speed adjusting valve body 7 applies a force in a direction of pressing up the speed adjusting valve body 7, that is, a direction of moving close to the valve seat 24. When a thrust by the speed adjusting weight 12 becomes larger than an urging force of the speed adjusting valve spring 11 for intending to move apart from the valve seat 24, the speed adjusting valve body 7 is pressed upward while being slid along the side surface of the safety valve body

4, thereby closing the valve seat 24 arranged at a position opposing to the speed adjusting valve body 7 and making an opening degree of the passage small. As a result, an amount of air supplied from the air passage 23 is limited, and a number of rotation is reduced.

[0026] Further, a load is applied to the grindstone corresponding to the abrasive member and a number of rotation of the air motor 26 is reduced, whereby the centrifugal force applied to the speed adjusting weight 12 becomes gradually reduced, and accordingly, the thrust of the speed adjusting weight 12 applied in a direction of pressing upward the speed adjusting valve body 7 becomes small. Accordingly, the speed adjusting valve body 7 pressed upward is pressed back downward, that is, a direction of moving apart from the valve seat 24 due to the urging force of the speed adjusting valve spring 11 at this time, thereby increasing the opening degree of the passage thereof. As a result, an amount of air supplied from the air passage 28 is increased, and an output of the air motor 26 is increased, whereby the number of rotation is increased.

[0027] At a time of the steady operation mentioned above, since one end of the flange portion 5 in the safety valve body 4 is always fitted into the groove 18 in the lower portion of the safety valve stopper 16 so as to lock the motion of the safety valve body 4, the safety valve body 4 does not move in a vertical direction together with the speed adjusting valve body 7 due to the thrust caused by the tilting motion of the speed adjusting weight 12 and the urging force of the speed adjusting valve spring.

[0028] Next, a description will be given of an operation state of the safety device in the case that the number of rotation of the output shaft 25 of the air motor 26 is over the predetermined number of rotation for some reasons such as a trouble or the like at the steady operation time mentioned above. As shown in Fig. 2, in the case that the number of rotation of the output shaft 25 of the air motor 26 becomes over a set number of rotation, for example, 10 to 15 % of a safety rotation range, the centrifugal force applied to the safety valve stopper 16 is increased. Accordingly, the safety valve stopper 16 slides outward in a diametrical direction on the guide portion 19 of the rotary member 2 against the urging force of the safety valve stopper spring 20. As a result, the flange portion 5 of the safety valve body 4 is released from the groove 18 in the lower portion of the safety valve stopper 16, whereby the lock mechanism locking the motion of the safety valve body 4 is disengaged, and the safety valve body 4 is pressed upward, that is, a direction of moving close to the valve seat 24 due to the urging force of the safety valve spring 6 so as to close the valve seat 24. At this time, the speed adjusting valve body 7 disposed in the outer side is also pressed upward together with the safety valve body 4 so as to close the valve seat 24, however, since a fixed gap is provided between the safety valve body 4 and the speed adjusting valve body 7, a little amount of air is supplied to the air motor 26 from the gap.

[0029] In this case, the groove 17 disposed in the upper portion of the safety valve stopper 16 is provided at a position opposing to the flange portion 5 at a time when the safety valve body 4 is in a state of being pressed upward. Accordingly, the structure is made such that when the amount of air supplied due to compression of the opening degree of the passage is limited and the centrifugal force is reduced, the safety valve stopper 16 is again pressed back inward in a diametrical direction while sliding on the guide portion 19 due to the urging force of the safety valve stopper spring 20, and the flange portion 5 of the safety valve body 4 in a state of being close to the valve seat 24 is fitted into the groove 17 disposed in the upper portion thereof, thereby locking the motion of the safety valve body 4 with keeping the state.

[0030] At this time, since the lock is performed by fitting into the groove 17, the safety valve body 4 and the speed adjusting valve body 7 are prevented from being again pressed back due to the pressure of the air supplied to the safety valve body 4 from the air passage 23. The structure is made such that when the motion of the safety valve body 4 is once locked by the lock mechanism in the manner as mentioned above, the apparatus can be again operated only by disjoining the apparatus so as to repair. Accordingly, it is possible to prevent the operation from being continued in a dangerous state, thereby improving a safety.

[0031] Further, since a certain amount of air can be supplied from the little gap provided between the safety valve body 4 and the speed adjusting valve body 7, the rotation is not suddenly stopped even when the safety device is operated, so that the structure is made such that the number of rotation is maintained to about 20 to 25 % of the set number of rotation, that is, about 1500 to 2000 rotation per minute. Since the rotation is not completely stopped as mentioned above, it is possible to prevent the grindstone from being disengaged and cracked due to the sudden stop of rotation.

[0032] Further, since the rotary member 2, the safety valve body 4 and the speed adjusting valve body 7 are provided so as to be coaxial with the output shaft 25 of the air motor 26 as mentioned above, it is possible to compactly construct the safety apparatus and the speed adjusting apparatus with substantially the same size as that of the conventional speed adjusting apparatus.

[0033] As mentioned above, the description is given of the embodiment of the air tool provided with the safety device in accordance with the present invention, however, the present invention is not limited to the embodiment mentioned above, and can be variously modified.

[0034] That is, in the embodiment mentioned above, the structure is made such that as means for supplying a certain amount of air at a time when the safety apparatus is operated so as to maintain a rotation at a degree of 20 to 25 % of the set number of rotation, a little gap is provided between the safety valve body 4 and the speed adjusting valve body 7, whereby the air can be supplied therefrom at a certain amount, however, the structure

may be made such that an air hole for supplying air is pierced at a part of the wall forming the valve seat 24, thereby controlling the amount of air. Further, the structure may be made such that the size relations between the respective elements are selected so that a little gap is formed between the safety valve body 4 and the speed adjusting valve body 7, and the valve seat 24 when the safety valve body 4 and the speed adjusting valve body 7 are integrally lifted upward, thereby communicating a certain amount of air therefrom and controlling the number of rotation.

[0035] Further, in the embodiment mentioned above, the safety valve stopper 16 provided with the E-shaped grooves 17 and 18, and the flange portion 5 of the safety valve body 4 are employed as the lock mechanism for locking the motion of the safety valve body 4 when the safety device is operated, however, the structure may be made such that in the inverse manner to the manner mentioned above, a protruding portion is provided in the safety valve stopper 16 and a groove corresponding thereto is provided in the safety valve body 4, thereby being fitted to each other. Further, the structure may be made such that a weight formed substantially in an L shape in a side view and being capable of tilting inward and outward due to a centrifugal force, such as the speed adjusting weight 12 mentioned above is independently provided, is arranged so that the lever portion thereof is brought into contact with the upper side of the flange portion 5 of the safety valve body 4 mentioned above at a time of the steady operation so as to lock the motion of the safety valve body 4 mentioned above, and is arranged so that in the case that the number of rotation is over the set number of rotation, the weight is tilted outward due to an increase of the centrifugal force and the lock is disengaged, the safety valve body 4 is lifted upward so as to close the valve seat 24, the weight is again tilted inward by the urging means with keeping this state and the lever portion thereof is brought into contact with the lower side of the flange portion 5 of the safety valve body 4, thereby locking the motion of the safety valve body 4.

[0036] As mentioned above, in accordance with the air tool provided with the safety device as described in the first aspect, since the structure is made such that the apparatus can be again operated only after dissolving the apparatus and performing any repair when the number of rotation of the output shaft of the air motor becomes over the predetermined number of rotation, the safety device is operated and the motion of the safety valve body is locked by the lock mechanism, it is possible to prevent the operation from being continued with keeping a dangerous state, thereby improving a safety.

[0037] Further, in accordance with the air tool provided with the safety device described in the second aspect, an abrasive member such as a grindstone or the like is prevented from being disengaged or cracked due to a sudden stop of rotation by continuously supplying a little amount of air from the air passage so as to continue a low speed rotation, thereby further improving a safety.

[0038] Further, in accordance with the air tool provided with the safety device described in the third aspect, since the rotary member and the safety valve body are provided in coaxial with the output shaft of the air motor, it is possible to make the structure compact.

[0039] In accordance with the air tool provided with the safety device described in the fourth aspect, since the speed adjusting apparatus capable of automatically controlling the number of rotation in a coaxial manner with the safety device is mounted, it is possible to construct the safety device and the speed adjusting apparatus compact.

Claims

1. An air tool provided with a safety device comprising:

a main body casing (22);
 an air passage (28) formed within said main body casing (22);
 an air motor (26) rotated by an air supplied from said air passage (23);
 a valve seat (24) interposed in said air passage (23);
 a safety valve body (4) arranged in such a manner as to change an opening degree of the passage by moving closer to and further apart from said valve seat (24);

characterised by :

first urging means (6) for urging said safety valve body (4) closer to said valve seat (24);
 a rotary member (2) rotating in interlocking with an output shaft (25) of said air motor (26);
 a safety valve stopper (16) mounted to said rotary member (2) so as to be displaced outward in a diametrical direction due to a centrifugal force generated by a rotation of said rotary member (2); and
 second urging means (20) for urging said safety valve stopper (16) in a direction inverse to a direction in which the centrifugal force is applied,

wherein a lock mechanism for locking a motion of said safety valve body (4) in a steady operation state where said safety valve body (4) is held apart from the valve seat (24) against an urging force of said first urging means (6) so as to give an increased opening degree of the passage, disengaging said lock so as to move said safety valve body (4) close or to said valve seat (24) by said first urging means (6), thereby reducing the opening degree of the passage when a rotational speed of the output shaft (25) of the air motor (26) is increased to be over a predetermined rotational speed and said safety valve stopper (16) moves against the urging force of the

second urging means (20) due to the centrifugal force, and again locking the motion of said safety valve body (4) in this state is provided between said safety valve body (4) and the safety valve stopper (16).

2. An air tool provided with a safety device as claimed in claim 1, further comprising air supply means for supplying a little amount of air from the air passage (23) in a state that said safety valve body (4) is again locked by said lock mechanism.

3. An air tool provided with a safety device as claimed in claim 1, wherein said rotary member (2) is directly connected to the output shaft (25) of the air motor (26), and said safety valve body (4) is supported to said rotary member (2) so as to be coaxial with a rotational axis thereof.

4. An air tool provided with a safety device as claimed in claim 3 further comprising:

a speed adjusting valve body (7) arranged in such a manner as to slide substantially in a coaxial manner;
 third urging means (11) for urging said speed adjusting valve body (7) further apart from said valve seat (24); and
 a speed adjusting weight (12) supported to said rotary member (2) in such a manner as to be displaced due to a centrifugal force caused by the rotation of said rotary member (2), and

wherein an interlocking mechanism for reducing the opening degree of the passage by moving said speed adjusting valve body (7) close to said valve seat (24) due to a displacement of said speed adjusting weight (12) is provided between said speed adjusting valve body (7) and said speed adjusting weight (12).

Patentansprüche

1. Mit Sicherheitsvorrichtung versehenes Druckluftwerkzeug, aufweisend:

ein Hauptkörpergehäuse (22),
 eine innerhalb des Hauptkörpergehäuses (22) ausgebildete Luftleitung (23),
 einen Luftmotor (26), der von von der Luftleitung (23) zugeführter Luft gedreht wird,
 einen in der Luftleitung (23) eingefügten Ventilsitz (24),
 einen Sicherheitsventilkörper (4), der so angeordnet ist, daß er durch Bewegung dichter zum Ventilsitz (24) hin und weiter von ihm weg den Öffnungsgrad der Leitung ändert,

gekennzeichnet durch

eine erste Spanneinrichtung (6), um den Sicherheitsventilkörper (4) dichter zum Ventilsitz hin (24) zu drängen,

ein Drehelement (2), das sich gekoppelt mit einer Ausgangswelle (25) des Luftmotors (26) dreht, einen Sicherheitsventilstopper (16), der so am Drehelement (2) angebracht ist, daß er aufgrund der **durch** Drehung des Drehelements (2) erzeugten Zentrifugalkraft in Durchmesserrichtung nach außen verschoben wird, und

eine zweite Spanneinrichtung (20), um den Sicherheitsventilstopper (16) in zur Richtung, in die die Zentrifugalkraft wirkt, entgegengesetzte Richtung zu drängen,

wobei zwischen dem Sicherheitsventilkörper (4) und dem Sicherheitsventilstopper (16) ein Sperrmechanismus vorgesehen ist, um eine Bewegung des Sicherheitsventilkörpers (4) in einem gleichmäßigen Betriebszustand zu sperren, wobei der Sicherheitsventilkörper (4) gegen die drängende Kraft der ersten Spanneinrichtung (6) unter einem vergrößerten Öffnungsgrad der Leitung vom Ventilsitz (24) weg gehalten wird, die Sperre zu lösen, so daß der Sicherheitsventilkörper (4) von der ersten Spanneinrichtung (6) dichter zum Ventilsitz (24) hin bewegt und **dadurch** der Öffnungsgrad der Leitung verringert wird, wenn sich die Drehzahl der Ausgangswelle (25) des Luftmotors (26) über eine vorbestimmte Drehzahl hinaus erhöht und sich der Sicherheitsventilstopper (16) aufgrund der Zentrifugalkraft gegen die drängende Kraft der zweiten Spanneinrichtung (20) bewegt, und die Bewegung des Sicherheitsventilkörpers (4) in dieser Stellung wieder zu sperren.

2. Werkzeug nach Anspruch 1, mit einer Luftzufuhreinrichtung zur Zufuhr einer geringen Luftmenge aus der Luftleitung (23) in dem Zustand, in dem der Sicherheitsventilkörper (4) vom Sperrmechanismus wieder gesperrt ist.

3. Werkzeug nach Anspruch 1, wobei das Drehelement (2) direkt mit der Ausgangswelle (25) des Luftmotors (26) verbunden ist und der Sicherheitsventilkörper (4) vom Drehelement (2) koaxial zu dessen Drehachse gehalten wird.

4. Werkzeug nach Anspruch 3, aufweisend:

einen im wesentlichen koaxial verschiebbaren Geschwindigkeitseinstellventilkörper (7), eine dritte Spanneinrichtung (11) zum Drängen des Geschwindigkeitseinstellventilkörpers (7) weiter vom Ventilsitz (24) weg, und ein Geschwindigkeitseinstellgewicht (12), das vom Drehelement (2) so gehalten wird, daß es aufgrund der von dessen Drehung verursachten Zentrifugalkraft verschoben wird,

wobei zwischen dem Geschwindigkeitseinstellventilkörper (7) und dem Geschwindigkeitseinstellgewicht (12) ein Koppelmechanismus vorgesehen ist, um durch Bewegen des Geschwindigkeitseinstellventilkörpers (7) dicht zum Ventilsitz (24) aufgrund einer Verschiebung des Geschwindigkeitseinstellgewichts (12) den Öffnungsgrad der Leitung zu verringern.

Revendications

1. Outil à air comprimé doté d'un dispositif de sécurité comprenant :

un carter de corps principal (22) ;
un passage d'air (23) formé à l'intérieur dudit carter de corps principal (22) ;
un moteur pneumatique (26) entraîné en rotation par un air alimenté par ledit passage d'air (23) ;
un siège de soupape (24) interposé dans ledit passage d'air (23) ;
un corps de soupape de sécurité (4) agencé afin de changer un degré d'ouverture du passage en se rapprochant ou en s'éloignant dudit siège de soupape (24) ;

caractérisé par :

des premiers moyens de poussée (6) pour pousser ledit corps de soupape de sécurité (4) plus près dudit siège de soupape (24) ;
un élément rotatif (2) solidaire en rotation avec un arbre de sortie (25) dudit moteur pneumatique (26) ;
une butée de soupape de sécurité (16) montée sur ledit élément rotatif (2) afin d'être déplacée vers l'extérieur dans une direction diamétrale due à une force centrifuge générée par une rotation dudit élément rotatif (2) ; et
des seconds moyens de poussée (20) pour pousser ladite butée de soupape de sécurité (16) dans une direction inverse à la direction dans laquelle la force centrifuge est appliquée ;

dans lequel un mécanisme de blocage pour bloquer un mouvement dudit corps de soupape de sécurité (4) dans un état de fonctionnement stable dans lequel ledit corps de soupape de sécurité (4) est maintenu à distance du siège de soupape (24) contre une force de poussée desdits premiers moyens de poussée (6) afin de donner un degré d'ouverture accru du passage, dégageant ledit blocage afin de rapprocher ledit corps de soupape de sécurité (4) dudit siège de soupape (24) par lesdits premiers moyens de poussée (6), réduisant ainsi le degré d'ouverture du passage lorsque une vitesse de rotation de l'arbre

de sortie (25) du moteur pneumatique (26) est augmentée afin d'être supérieure à une vitesse de rotation prédéterminée et ladite butée de soupape de sécurité (16) se déplace contre la force de poussée des seconds moyens de poussée (20) due à la force centrifuge, et à nouveau, le blocage du mouvement dudit corps de soupape de sécurité (4) dans cet état est prévu entre ledit corps de soupape de sécurité (4) et ladite butée de soupape de sécurité (16).

5

10

2. Outil à air comprimé doté d'un dispositif de sécurité selon la revendication 1, comprenant en outre des moyens d'alimentation d'air pour alimenter une petite quantité d'air par le passage d'air (23) dans un état dans lequel ledit corps de soupape de sécurité (4) est à nouveau bloqué par ledit mécanisme de blocage.

15

3. Outil à air comprimé doté d'un dispositif de sécurité selon la revendication 1, dans lequel ledit élément rotatif (2) est raccordé directement à l'arbre de sortie (25) du moteur pneumatique (26) et ledit corps de soupape de sécurité (4) est supporté sur ledit élément rotatif (2) afin d'être coaxial avec son axe de rotation.

20

25

4. Outil à air comprimé doté d'un dispositif de sécurité selon la revendication 3, comprenant en outre :

un corps de soupape (7) de réglage de vitesse agencé afin de coulisser sensiblement de manière coaxiale ;
des troisièmes moyens de poussée (11) pour pousser ledit corps de soupape (7) de réglage de vitesse davantage à l'écart dudit siège de soupape (24) ; et
un poids de réglage de vitesse (12) supporté sur ledit élément rotatif (2) afin d'être déplacé du fait d'une force centrifuge provoquée par la rotation dudit élément rotatif (2), et

30

35

40

dans lequel un mécanisme de verrouillage pour réduire le degré d'ouverture du passage en rapprochant ledit corps de soupape (7) de réglage de vitesse dudit siège de soupape (24) du fait d'un déplacement dudit poids de réglage de vitesse (12) est prévu entre ledit corps de soupape (7) de réglage de vitesse et ledit poids de réglage de vitesse (12).

45

50

55

Fig. 1

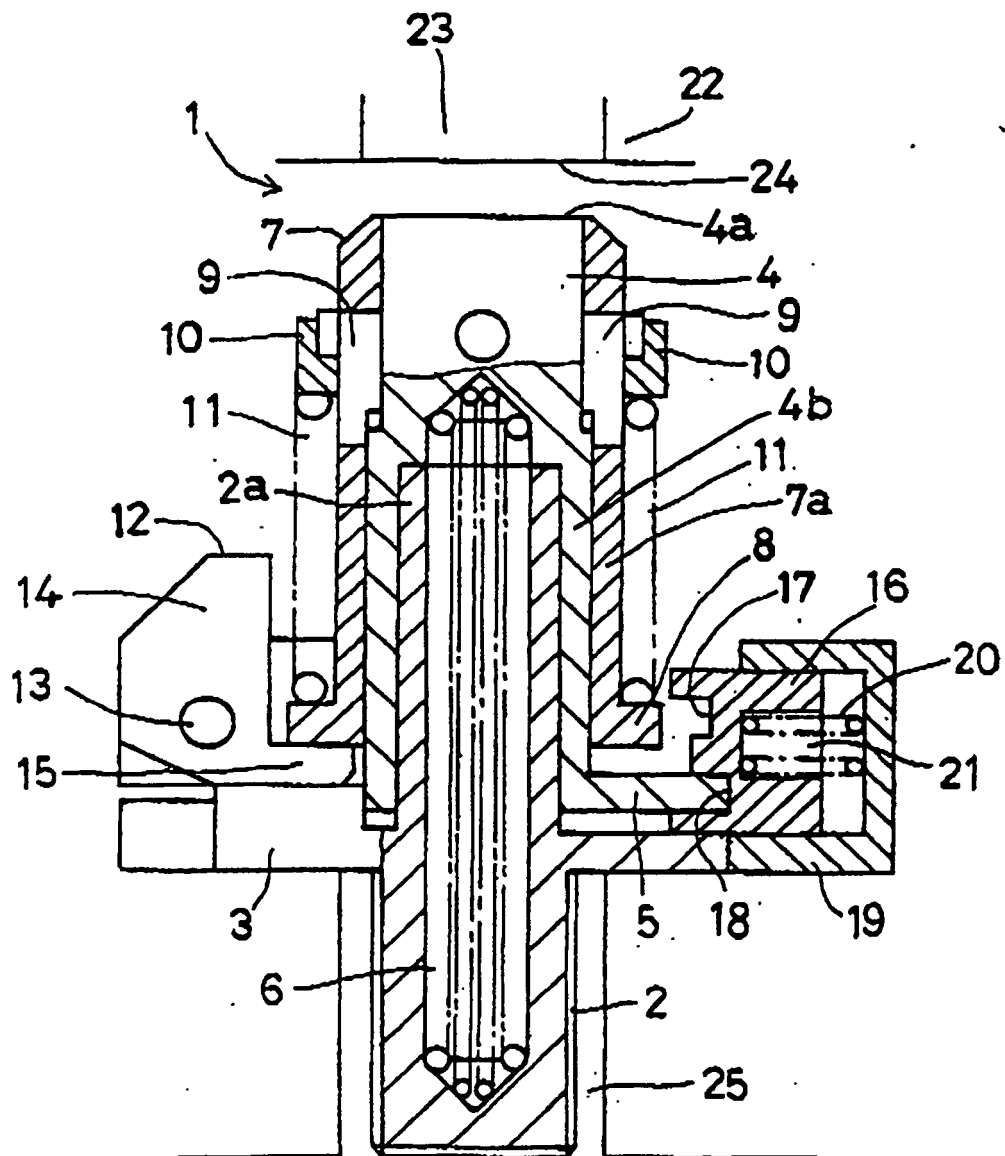


Fig. 2

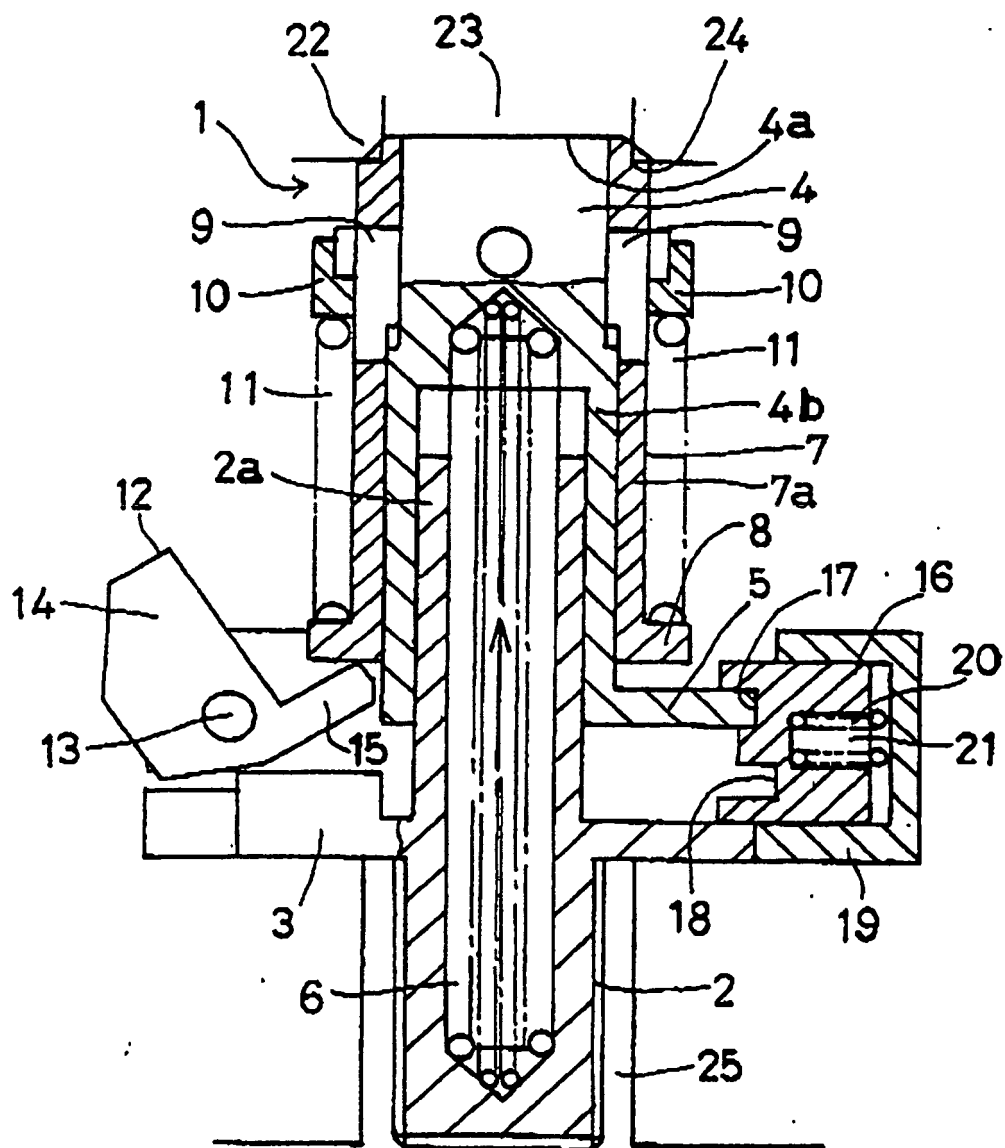


Fig. 3

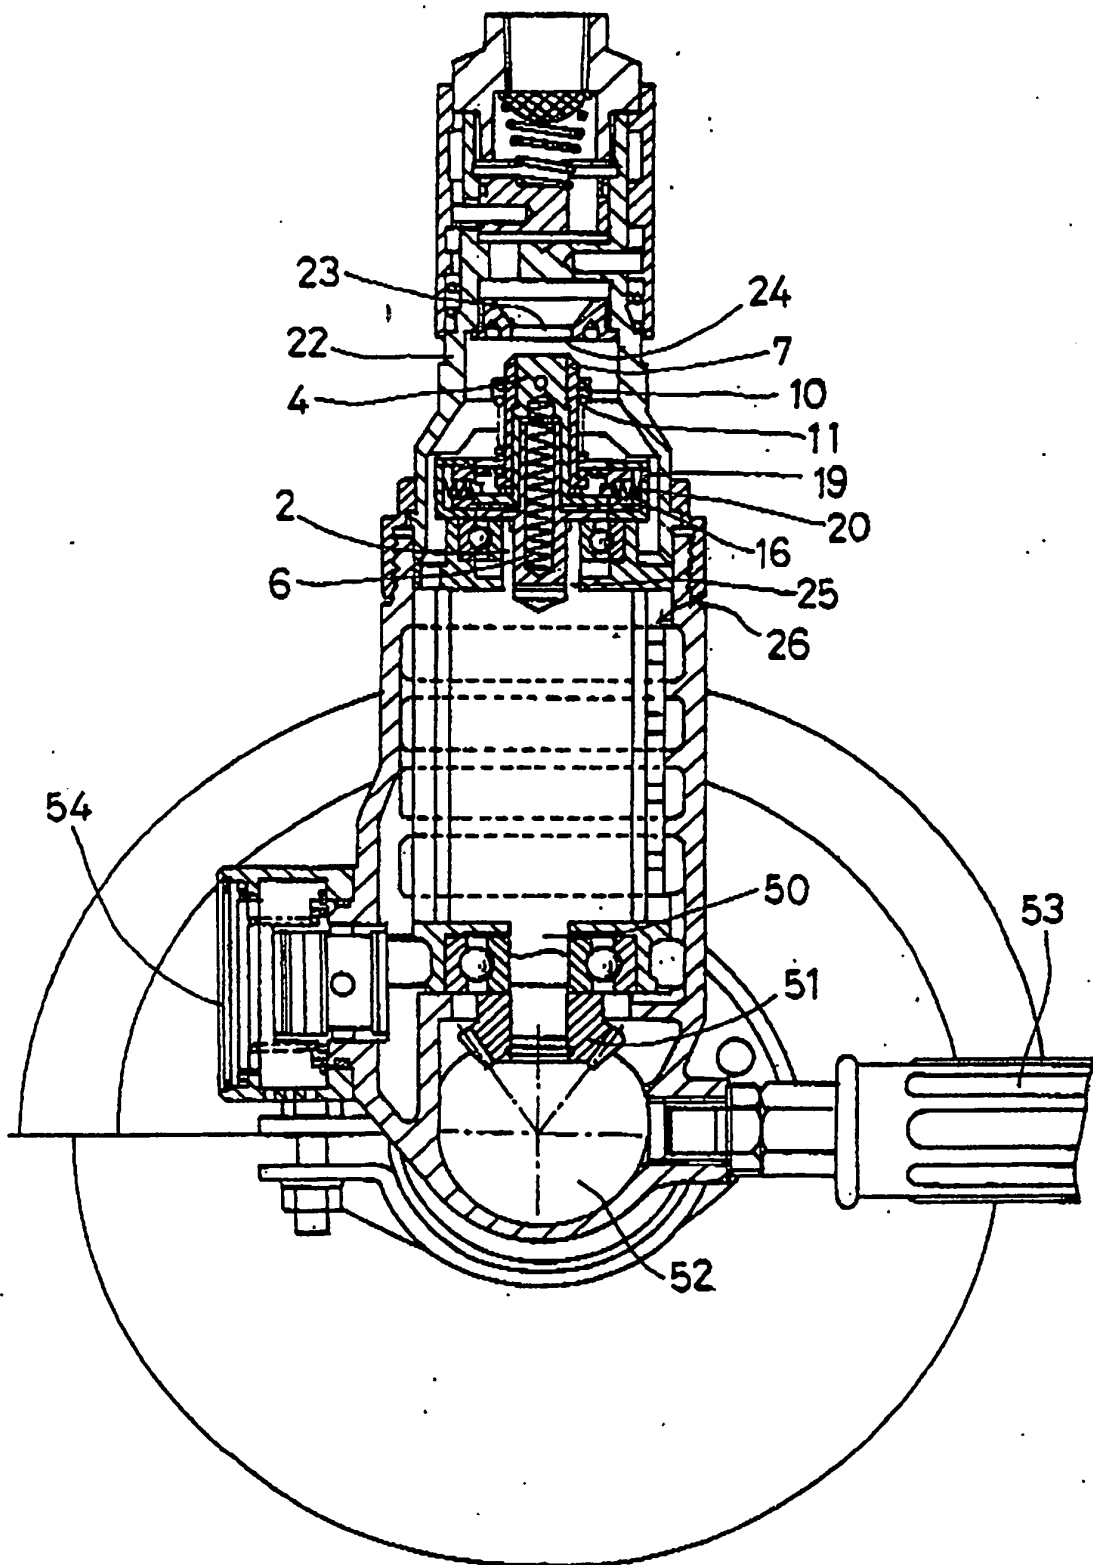


Fig. 4

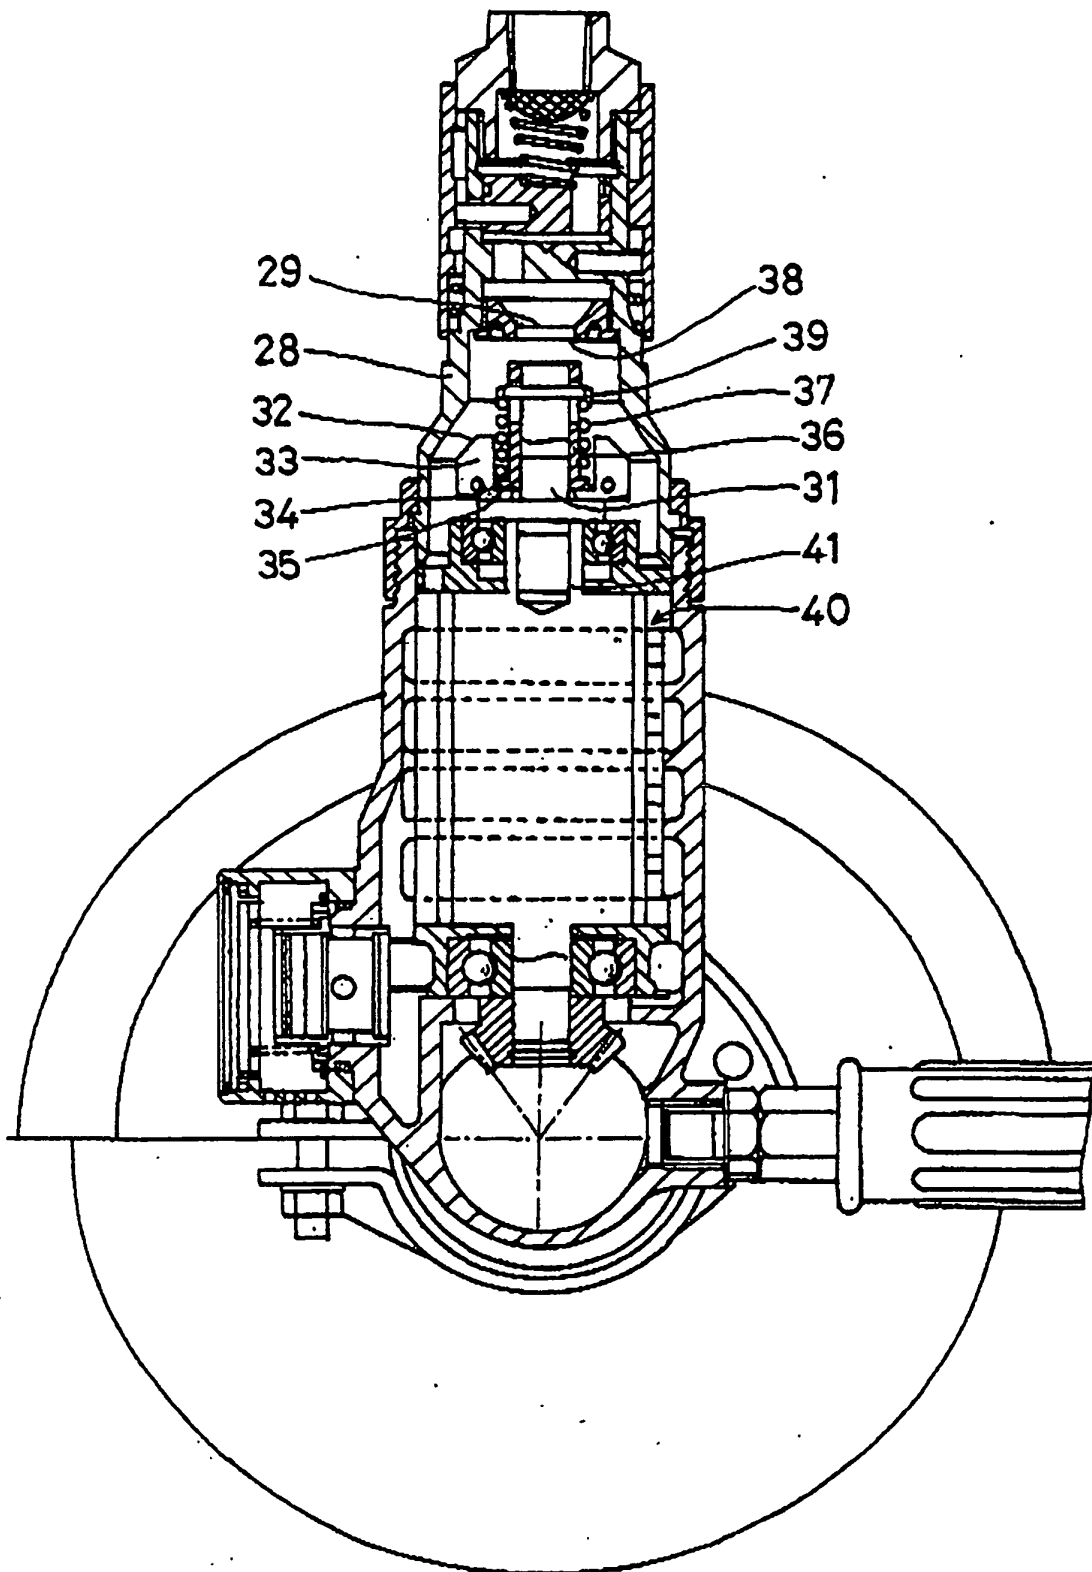


Fig. 5

