



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 069 374 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
17.01.2001 Bulletin 2001/03

(51) Int. Cl.⁷: **F21V 14/08, F21W 101/10**

(21) Application number: **99830455.4**

(22) Date of filing: **16.07.1999**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(71) Applicant:
**Automotive Lighting Italia Spa
10078 Venaria Reale (Torino) (IT)**

(72) Inventors:
• **Perlo, Piero**
12048 Sommariva Bosco(Cuneo) (IT)
• **Bigliati, Claudia**
13039 Trino(Vercelli) (IT)


- **Sinesi, Sabino**
10045 Piossasco(Torino) (IT)
- **Pairetti, Bartolomeo**
12032 Barge(Cuneo) (IT)
- **Innocenti, Gianfranco**
10040 Rivalta(Torino) (IT)
- **Manassero, Giorgio**
10024 Moncalieri(Torino) (IT)
- **Neumann, Reiner**
10078 Venaria Reale(Torino) (IT)

(74) Representative:
Notaro, Giancarlo et al
c/o Buzzi, Notaro & Antonielli d'Oulx srl,
Corso Fiume 6
10133 Torino (IT)

(54) **Motor-vehicle adaptive head-lamp having a central adjustable diaphragm**

(57) A motor-vehicle adaptive head-lamp has a diaphragm (6) located at the front of a central area of a reflector (2) with which a light source (3) is associated constituted by a discharge lamp. The annular area of the reflector (2) surrounding the central area is adapted to generate a light beam having a predetermined basic pattern. The opening of the diaphragm (6) uncovers an optical element (10) constituted by lens sectors adapted to generate additional patterns so as to give rise to a plurality of different beams, adapted to the different travel and environment conditions, which can be selected by varying the opening degree of the diaphragm (6).

FIG. 1

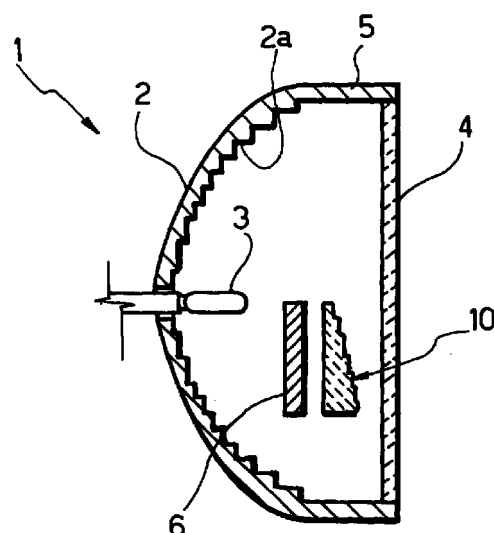

Description

[0001] The present invention relates to motor-vehicle head-lamps, of the type comprising a light source, a reflector associated with the source and a transparent element located in front of the reflector.

[0002] In particular, the invention relates to an adaptive type head-lamp, i.e. a head-lamp adapted to generate an output light beam whose pattern can be varied as a function of the travel conditions of the motor-vehicle (steering angle, speed, etc.) and the environment and light conditions, as well as the road conditions.

[0003] The object of the present invention is that of providing an adaptive head-lamp which on one hand provides an optimized pattern in any condition of use, and on the other hand has a relatively simple structure, with a very reduced bulk and a relatively low cost.

[0004] In view of achieving this object, the invention provides a head-lamp of the above indicated type, characterized in that:

- between the reflector and the transparent element there is located at least one diaphragm which can be adjusted between a fully opened position and a fully closed position,
- in its fully closed position, the diaphragm occupies an area which corresponds to a substantially central area of the reflector,
- the reflector has an annular area surrounding said central area having a surface which is shaped so as to generate a light beam coming out of the head-lamp having a predetermined basic pattern,
- at the front or the rear of the diaphragm there is provided an element constituted by a plurality of lens sectors which are uncovered in a variable way as a function of the opening degree of the diaphragm and which are shaped so that they give rise to a plurality of additional light beams, which can be selected by means of the diaphragm, so as to generate, preferably gradually, a different overall pattern for each different condition of use.

[0005] Preferably the above mentioned central area where the diaphragm is located is slightly offset downwards, below the horizontal line passing through the centre of the reflector.

[0006] According to a further feature of the invention, motor means are provided for driving movement of diaphragm between its fully closed position and its fully opened position and electronic control means for controlling said motor means are also provided, which receive signals from sensor means for sensing the travel and environment conditions and control the motor means as a function of said signals.

[0007] The above mentioned sensor means may comprise for instance a sensor of the motor-vehicle steering angle, a speed sensor, a light sensor, a GPS

receiver, or also a video camera located on board the vehicle having the function of monitoring both the environment conditions and the conditions of the road on which the motor-vehicle travels.

[0008] In the preferred embodiment of the invention, the light source is constituted by a discharge lamp, such as of the D2S or D2R type. The transparent element is preferably a totally transparent element, with no lenses or prisms.

[0009] In the above mentioned preferred embodiment, the diaphragm is constituted by a substantially rectangular element made of a metal sheet which can be wound or bent.

[0010] Further features and advantages of the invention will become apparent from the description which follows with reference to the annexed drawings, given purely by way of non limiting example, in which:

figure 1 is a cross-sectional of diagrammatic view of a head-lamp according to the invention,
figure 2 is a front-view of the head-lamp of figure 1,
figures 3, 3A, 3B, 3C, 3D show different embodiments of the diaphragm forming part of the head-lamp according to the invention,
figure 4 is a block diagram which shows the principle of operation of the diaphragm,
and figure 5 is a diagram showing the various light patterns which can be obtained by the head-lamp according to the invention.

[0011] With reference to the drawings, numeral 1 generally designates a motor-vehicle head-lamp, comprising a reflector 2 associated with a light source 3, preferably a discharge lamp, such as of the type marketed under the codes D2S or D2R. A transparent element 4 which is totally transparent, i. e. has no lenses or prisms, is located at the front of the reflector 2. In the example shown, the reflector 2 has two planar walls 5, located at the top and at the bottom, having absorbing features. The materials chosen for reflector 2 and transparent element 4 may be those which are used traditionally in the head-lamps of this type.

[0012] Between the transparent element 4 and the reflector 2 there is placed a diaphragm 6 which can be adjusted continuously between a fully closed position (shown in figure 2 and the left-hand part of figure 3) and a fully opened position (shown in the right-hand part of figure 3). When diaphragm 6 is in the fully closed condition, it occupies an area corresponding to a substantially central area of the reflector 2, as shown in figure 2. The reflector 2 has an annular area 2a surrounding said central area and having a surface which is shaped so as to generate a light beam coming out of the head-lamp having a basic predetermined pattern, of the "low beam" type.

[0013] Figure 5 shows the pattern which can be obtained with the head-lamp according to the invention in a plane orthogonal to the optical axis of the head-

lamp located at a distance of 25 meters therefrom. In this figure, axes H and V respectively designate the horizontal and vertical directions, whereas the various lines indicate the profiles of the area illuminated by the head-lamp in the different conditions of use. The basic beam generated by the annular area 2a of reflector 2 is that which gives rise to the pattern designated by line B, of the "low beam" or "cross-beam" type, having features defined by the regulations or more specifically by the car manufacturers.

[0014] In the embodiment shown in the drawings, the diaphragm 6 is constituted by a curtain - like element having a substantially rectangular shape, which can be wound on one side (figure 3) or bent in various manners (see the variants of figures 3A, 3B, 3C, 3D). The movement of the diaphragm 6 is controlled by an electric motor which is not shown in figure 3, but is designated by 7 in the block diagram of figure 4. The details of construction of the electric motor controlling the diaphragm 6 and the way by which it is mounted within the head-lamp are not shown herein, since they can be provided in any known way, and since the deletion of these details from the drawings renders the latter simpler and easier to understand. With reference to figure 4, the electric motor 7 which controls the diaphragm 6 is controlled by an electronic control unit 8 which receives a plurality of signals 9 from sensor means sensing the travel and environment conditions of the motor-vehicle.

[0015] Also with reference to figure 1, in front of the diaphragm 6, i. e. between the diaphragm 6 and the transparent element 4 (or alternatively at the rear of the diaphragm) there is located an optical element 10 defining a series of lens sectors which are "uncovered" and thus activated, as a function of the opening degree of the diaphragm 6. When the diaphragm 6 is fully closed, none of these sectors is active, so that the head-lamp only generates the basic pattern B of figure 5. When the diaphragm is opened, the lens sectors of the element 10 are progressively activated to give rise to a number of additional light beams which added to the basic pattern give rise to an overall light beam coming out of the head-lamp having the more appropriate features for any condition of use.

[0016] Thus, for example, with reference to figure 5, in the case of activation for driving in town, the basic pattern B is added with two distinct areas C, as shown in the figure. For driving out of town, the two areas D are activated, whereas pattern E is generated for driving on a highway. If desired, the elevated illumination pattern F can be generated, for example for reading elevated street signals. The area G is activated instead when a glaring beam has to be obtained. Areas L and R are activated for illuminating the road in a curve to the left or the right, respectively, whereas the sum of the two areas L and R is activated when an anti-fog illumination is wished.

[0017] In an embodiment of the device according to the invention, the head-lamp had a dimension of 130

mm in the vertical direction and 112 mm in the horizontal direction, with a diaphragm which in the fully closed condition occupied an area of 36 mm (horizontally) x 30 mm (vertically). In a variant, the diaphragm 6 had an elliptical section of 38 mm x 32 mm and in another variant a circular section with a radius of 36 mm.

[0018] As already indicated in the foregoing, the signals 9 sent to the electronic control unit 8 may come from sensors of various type, such as a sensor of the motor-vehicle steering angle, a speed sensor, a GPS receiver, and sensors of the environment and light conditions. Additionally or alternatively, a video camera may be used, located on board the motor-vehicle and adapted to the detect both the environment conditions and the conditions of the road on which the motor-vehicle travels.

[0019] Naturally, while the principle of the invention remains the same, the details of construction and the embodiments may widely vary with respect to what has been described and illustrated purely by way of example, without departing from the scope of the present invention.

[0020] In particular, it is possible to provide for many diaphragms adapted to cooperate with each other in order to "uncover" and thus activate any portion of the optical element 10.

Claims

1. Motor-vehicle head-lamp, comprising a light source (3), a reflector (2) associated with the source (3), and a transparent element (4) located in front of the reflector (2), characterized in that:
 - between the reflector (2) and the transparent element (4) there is located at least one diaphragm (6) which can be adjusted between a fully opened position and a fully closed position,
 - in the fully closed position, the diaphragm (6) occupies an area corresponding to a substantially central area of the reflector (2),
 - the reflector (2) has an annular area surrounding said central area having a surface which is shaped so as to generate a light beam coming out of the head-lamp having a predetermined basic pattern B,
 - in front or at the rear of the diaphragm (6) there is located an optical element (10) constituted by a plurality of lens sectors which are uncovered in a variable manner as a function of the opening degree of the diaphragm (6) and are shaped so that they give rise to a plurality of additional light beams, which may be selected by means of the diaphragm (6) so as to generate an overall pattern which is different for each condition of use.

2. Head-lamp according to claim 1, characterized in that motor means (7) are provided for driving movement of the diaphragm (6) between its fully closed position and its fully opened position, and electronic control means (8) are provided for controlling said motor means (7), said control means (8) for receiving signals (9) from said sensor means of the motor-vehicle travel conditions and the environment conditions and controlling said motor means (7) as a function of said signals. 5 10
3. Head-lamp according to claim 2, characterized in that said sensor means comprises one or more sensors chosen among: a sensor of the motor-vehicle steering angle, a speed sensor, a sensor of environment light, a GPS receiver. 15
4. Head-lamp according to claim 2, characterized in that said sensor means comprises a video camera located on board the motor-vehicle and adapted to detect the environment conditions and the conditions of the road on which the motor-vehicle travel. 20
5. Head-lamp according to claim 1, characterized in that said transparent element (4) has a totally transparent surface having no prisms or lenses. 25
6. Head-lamp according to claim 1, characterized in that said diaphragm (6) is made by at least one sheet element having a substantially rectangular shape which can be wound or bent. 30
7. Head-lamp according to claim 1, characterized in that said diaphragm (6) is shaped so as to selectively activate any portion of said optical element in each partially opened condition thereof. 35

40

45

50

55

FIG. 2

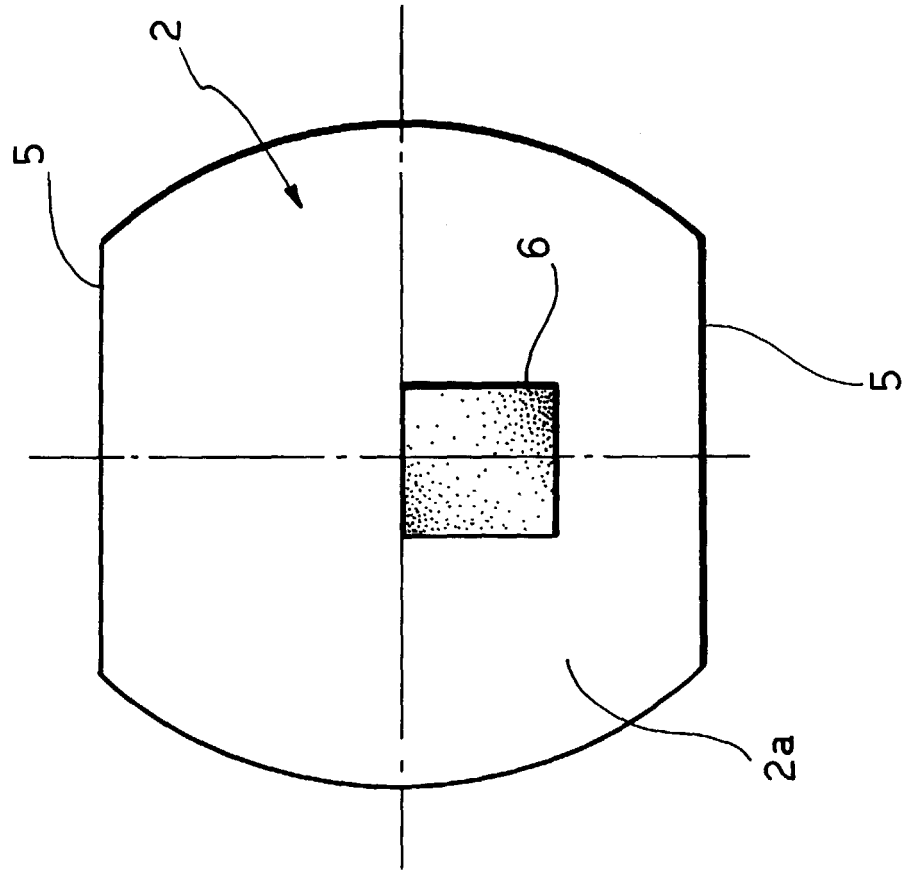


FIG. 1

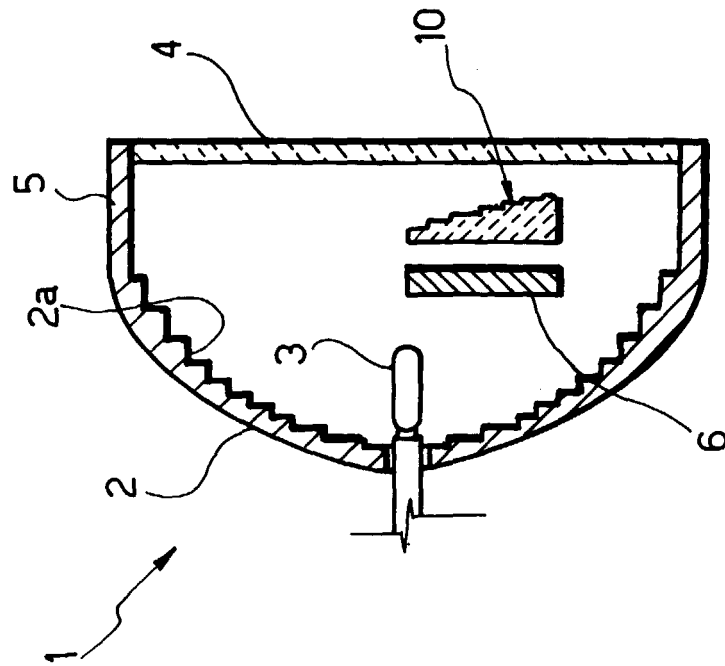


FIG. 3

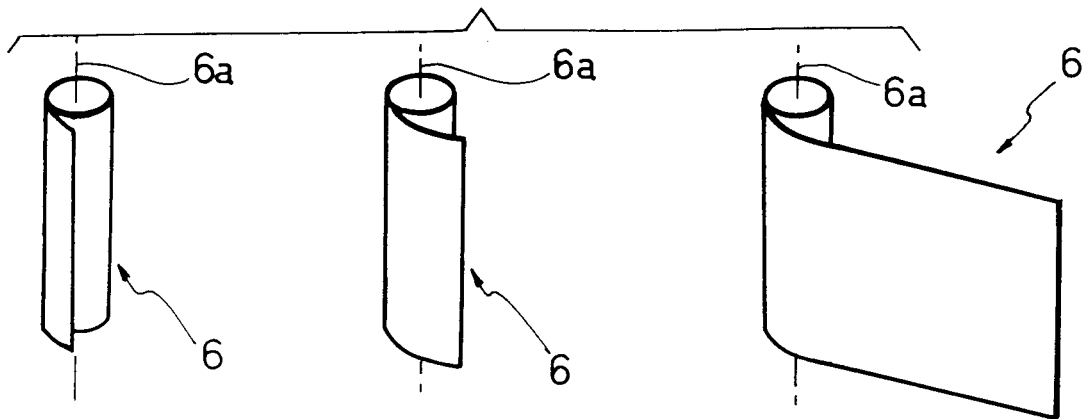


FIG. 3A

FIG. 3B




FIG. 3C

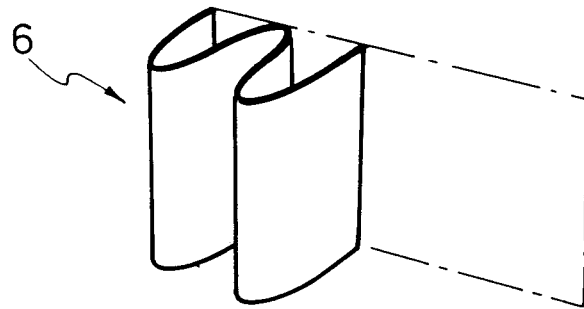


FIG. 3D

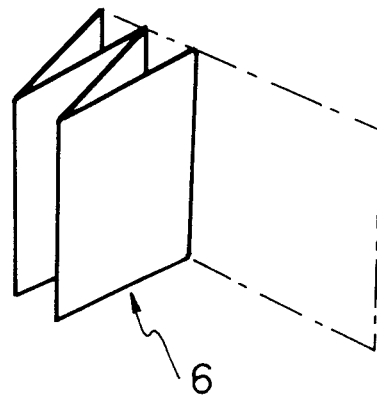
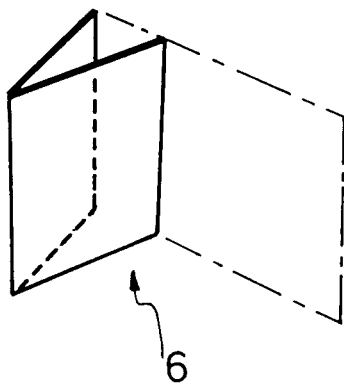


FIG. 4


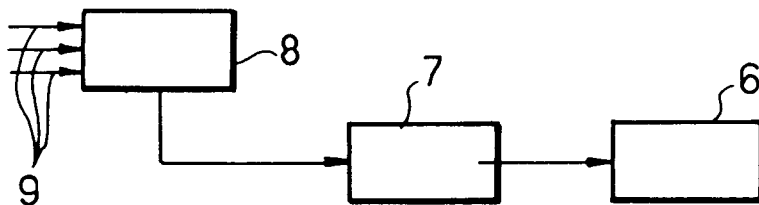


FIG. 5



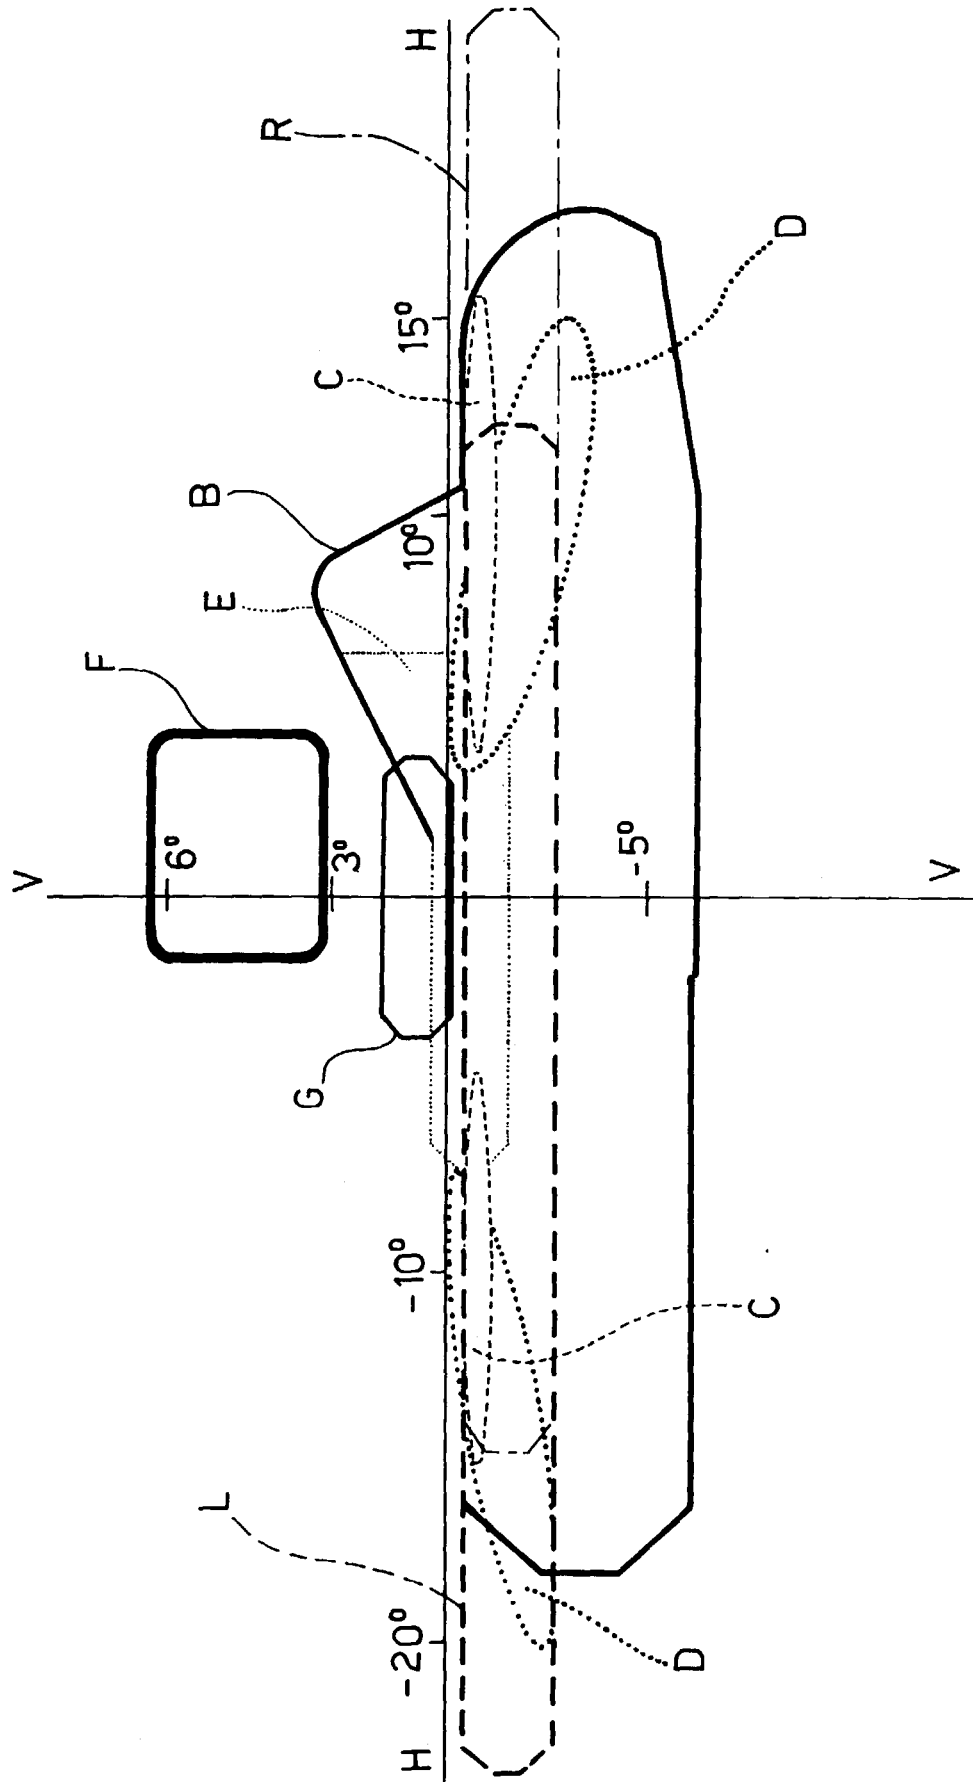

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 83 0455

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	FR 2 699 259 A (VALEO VISION) 17 June 1994 (1994-06-17) * page 5, line 17 - page 6, line 1 * * page 8, line 1 - line 4 * * page 10, line 1 - line 31 * * page 11, line 3 - line 9 * * figures 1-5 *	1	F21M3/18
A	DE 196 42 467 A (BOSCH GMBH ROBERT) 16 April 1998 (1998-04-16) * column 4, line 52 - line 68 * * column 5, line 1 - line 3 * * column 5, line 37 - column 6, line 5 * * figures 5,6 *	1	
A	EP 0 705 730 A (BOSCH GMBH ROBERT) 10 April 1996 (1996-04-10) * column 8, line 50 - column 10, line 54 * * figures 8,9 *	1	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			F21M
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
THE HAGUE		1 December 1999	De Mas, A
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 83 0455

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

01-12-1999

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
FR 2699259	A	17-06-1994	NONE		
DE 19642467	A	16-04-1998	FR	2754500 A	17-04-1998
EP 0705730	A	10-04-1996	DE	4435507 A	11-04-1996
			JP	8111101 A	30-04-1996
			US	5769525 A	23-06-1998

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82