



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 083 397 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
24.03.2004 Bulletin 2004/13

(51) Int Cl.7: **F27B 9/36, F27B 9/24**

(21) Application number: **00500199.5**

(22) Date of filing: **07.09.2000**

(54) **Method for reducing defects in ceramic tile production**

Methode zur Verringerung von Mängeln bei der Produktion keramischer Fliesen

Méthode pour réduire les défauts dans la production de carreaux en céramique

(84) Designated Contracting States:
ES IT PT

(30) Priority: **08.09.1999 US 392292**

(43) Date of publication of application:
14.03.2001 Bulletin 2001/11

(73) Proprietor: **PRAXAIR TECHNOLOGY, INC.**
Danbury, CT 06810-5113 (US)

(72) Inventors:
• **Paskocimas, Carlos Alberto**
Sao Carlos - SP (BR)
• **Da Silva Cava, Sergio**
Barrio Uvaranas, Ponta Grossa - Parana (BR)
• **Germany Herter, Clovis**
Porto Alegre - R.S. (BR)

• **Mendonca Sobrinho, Tulio**
Sao Paulo - SP (BR)
• **Tasca, Abilio**
Sao Paulo - SP (BR)

(74) Representative: **Elzaburu, Alberto de et al**
Elzaburu S.A.
Miguel Angel, 21
28010 Madrid (ES)

(56) References cited:
EP-A- 0 184 175 **EP-A- 0 184 749**
US-A- 4 329 142 **US-A- 4 391 585**

• **PATENT ABSTRACTS OF JAPAN vol. 018, no.**
203 (M-1590), 11 April 1994 (1994-04-11) & JP 06
003070 A (MURATA MFG CO LTD), 11 January
1994 (1994-01-11)

EP 1 083 397 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

DescriptionField of the Invention

5 **[0001]** This invention is generally related to a method for reducing the defects associated with heating of ceramic materials. More specifically, this invention relates to the use of oxygen to reduce or eliminate the black core defects during the production of enameled ceramic tiles in the roller hearth kiln.

Background of the Invention

10 **[0002]** The argillaceous minerals used in the formulation of the primary compounds in enameled tiles contain frequently a high quantity of substances that are susceptible to chemical reactions with oxygen at high temperatures. The argillaceous minerals contain substantial quantities of carbon and organic materials, sulfur and its compounds, and some oxides of transition metals (particularly iron) which can generate defects in the sintered ceramic products in their lower valence state. Accordingly, it is necessary to use an oxygen rich atmosphere to have these materials oxidized, in a stage prior to the firing process.

15 **[0003]** Incomplete oxidation during the firing phase results in certain burned products in the ceramic product, and causes certain textural changes (and imperfections), which lowers the quality of the ceramic products and the mechanical resistance characteristics of the final ceramic product. A dark core known as "black core" will likely develop during the firing, which is formed by carbon residues from the thermal decomposition of the organic material contained in the clays. Particularly, the dark color in the center is believed to be caused by iron, which is present in a reduced condition. The main source of reduction of the ferric oxide (Fe_2O_3) to ferrous oxide (FeO), and/or metallic iron (Fe) is the presence of a carbonaceous residue which results from the carbonization of organic impurities. This reduction is dependent on the oxidation rate of these transition metals contained in the clay and the oxidation velocity is dependent on various factors including: 1) the nature and quantity of oxidizable and reducible substances; 2) the particle size of these substances; 3) the heating rate; 4) the atmosphere concentration surrounding the oxidizable and reducible substances on oxygen, carbon monoxide and sulfur dioxide; 5) the composition and textural variation of the pieces during each step of the burning cycle; and 6) the enamel fusibility deposited in the "green body". Generally, the black core defect occurs with greater frequency in the single firing process. A slow firing cycle is preferred over a faster firing cycle in order to obtain a better quality product, although such a slow firing cycle may not be practical in the industry.

20 **[0004]** The addition of oxygen significantly benefits the ceramic production process including 1) reducing or eliminating the defects formed from the firing process; 2) maintaining or increasing the production rate; and 3) allowing the use of lower quality raw materials (i.e., rich in transition metals and/or organic compounds). Oxygen enrichment also allows the process, at a constant or higher production rate, to produce a final product having superior quality compared with the traditional method which does not use additional oxygen.

25 **[0005]** A number of attempts have been made to prevent the formation of black core. However, each of these methods presents certain disadvantages.

[0006] Improvements to the quality of the raw material have been considered. However, this increases the production costs and requires additional expense to make such raw material improvements.

30 **[0007]** Reduction in the compacting pressure has also been attempted. However, the difficulty relating to "green compact" manipulation prior to the firing process reduces the facility of this process. Additionally, reduction in compacting pressure raises the porosity in the final product, which reduces the intrinsic product quality (dimensional variation, mechanical resistance etc.) and which will reduce the product competitiveness in the marketplace.

[0008] Increasing the enameled tile residence time in the furnace reduces the productivity of the available equipment.

35 **[0009]** The use of additives/flux agents enable the liberation of oxygen when heated, thus improving the oxidation of the organic compounds. As these materials have low melting temperatures during the enameled tiles pre-heating, promotes a rapid reduction of the opened porosity. This will avoid the interactions with the furnace atmosphere at a defined temperature. Additionally, the additive/flux agents promote further darkening of burned products.

40 **[0010]** The use of powders with fine particles may facilitate the elimination of volatiles. However, it is difficult to work with fine powder as a significantly higher compacting pressure is required, thus reducing the properties in the ceramic body (i.e., particles distribution homogeneity), affecting mainly the porosity and the final mechanical resistance. As a result, the product quality may be affected.

45 **[0011]** The use of higher melting temperature vitrifying enamels raises the residence time of the "green compact" into the oxidizing furnace atmosphere to better oxidize the organic compounds. The porous area remains open for a longer period of time. As a result, the aesthetics of the final product is compromised.

50 **[0012]** The lower moisture content of the enamel tiles provides a lower volume of gases to be extracted from the green compact. Lower content of moisture represents fewer opened channels for gases to exit, thus, greater difficulty of the oxidant atmosphere to penetrate into the green body.

[0013] Processing the enameled ceramic tiles with a thin enamel layer may compromise the abrasion resistance of the final product. Reducing the thickness of the green-compact enables a reduction in the mechanic stress. The higher content of moisture provides a higher quantity of open channels, thus enhancing the green body oxidation but requiring an increase in green body residence time into the kiln for moisture extraction.

[0014] U.S. patent No. 4,329,142 relates to the reduction of defects caused by the incomplete oxidation of the carbonaceous materials and sulfur compounds present in the raw material.

[0015] US-A-4 391 585 discloses a method for reducing defects in the production of ceramic products during the firing process comprising one injection nozzle for spraying additional oxygen to the decarbonization zone. The injection nozzle is mounted in the roof of a kiln. In operation, a computer adjusts the oxygen concentration to try and maintain the average oxygen concentration at the kiln via the injection nuzzle.

[0016] D2 US-A-4 329 142 teaches also a method for reducing defects in the production of ceramic products during the firing process comprising one or more jets or streams of oxygen-rich gas extending into the spaces between the stacks of the ceramic products, but retractable therefrom to allow kiln cars to be advanced through the kiln.

[0017] None of the above reference teaches or suggests the claimed invention for using heated oxygen in the production of enameled ceramics by minimizing the transition metal state valence reduction. It is necessary, therefore, to provide a method for producing enameled ceramics which minimizes incomplete oxidation, by avoiding the transition metal state valence reduction.

Summary of the Invention

[0018] One aspect of this invention is directed to a method for reducing product defects in the production of ceramic products during the firing process and for increasing the production rate of the ceramic products, the method comprising the steps of providing an enriched oxidizing atmosphere in a furnace at the vicinity of the ceramic products to maintain a heated oxidizing atmosphere; passing the ceramic products for firing in the vicinity of the oxidizing atmosphere; and firing the ceramic products in the presence of the oxidizing atmosphere.

Detailed Description of the Invention

[0019] This invention provides a method for maintaining the characteristic of the raw material such as grain sizes, moisture content, compacting pressure, porosity, dimensions, thickness, enamel type and enameling process during the manufacturing of the ceramic material. An enameled tile product using this process may be obtained with little or no defects, such as black core. Better mechanical resistance and high production rate are maintained. Further, this invention is directed to optimizing other process parameters such as higher compacting pressure, the use of lower quality raw material, higher moisture contents, larger raw materials, greater green compact thickness, enamel with lower temperature of fusibility, capacity for using low BTU gas fuel, such as gasogene, and reducing the specific consumption while increasing production. This process is adaptable to any roller kiln, thus minimizing initial investments.

[0020] The quality of the ceramic products processed in roller kilns depends mainly on the furnace conditions. The kiln atmosphere composition is one of the most important factors that characterizes the burning conditions. The kiln furnace atmosphere must provide an-oxidizing condition to eliminate or reduce the occurrence of defects in the tile, such as black core.

[0021] The process of this invention is to locally control the kiln atmosphere composition by adding oxygen. Oxygen may be preheated outside of the kiln to provide a higher oxidant atmosphere, mainly in the temperature where the defects can occur. Thus, the material must be characterized in a ceramic specialized laboratory to determine these temperatures, as well as the composition of oxidizable substances.

[0022] The addition of oxygen raises the oxygen concentration available to react with the oxidizable compounds of the ceramic compact. Several spin rolls (for transporting the pieces of ceramic product into the furnace) were substituted by static rolls (without spin movement), through which the oxygen was introduced into the furnace. This process enables the oxygen to be added to the furnace in close proximity to the ceramic materials, increasing the oxygen concentration at this point and the oxidation efficiency, without being wasted in the enrichment of the total furnace gases volume. This invention also enables the oxygen to be heated directly into the ceramic rolls, thus improving the oxygen reactivity with the compound materials to be oxidized.

[0023] In this invention, any atmosphere having more available oxygen than the existing oxygen concentration in the furnace atmosphere will prevent black core defects. The lowest measured concentration in the furnace atmosphere without oxygen added was about 1%. Thus, pure oxygen and/or oxygen mixture capable of enriching the furnace atmosphere at an oxygen concentration of greater than about 1% will prevent the core defects and increase the production rate of the ceramic products.

[0024] Because the furnace rolls are hot through continuously heating, the addition of oxygen in the process uses this available source of heat to promote the heating of the oxygen added to the furnace, thus improving the oxidation

process reaction. Increasing the oxygen concentration or increasing the oxidizing atmosphere temperature increases the oxidation process efficiency. Alternatively, the oxygen may be preheated outside of the kiln furnace.

[0025] A variety of methods according to the claims may be used to add oxygen to the furnace.

[0026] A typical method of injecting oxygen is by removing the rotating rolls to install static roll without the rotating movement for oxygen injection. A variation of such oxygen injecting is by using small static rolls (or tubes) installed among the existing rolls for oxygen addition.

[0027] A control system is needed to feed oxygen only when the holes drilled in the rotating rolls have a good approximation of gas flow with the ceramic materials. Further, the oxygen rolls may be added above the tiles, below the tiles, or both above and below the tiles. In all cases, lower black core defect results when oxygen is fed close to the tiles undergoing treatment.

[0028] Preferably, the oxidizing atmosphere is added into the furnace in the pre-heating zone (or the oxidizing zone). The temperature of the furnace for the oxidizing atmosphere may range from about 200°C to about 1000°C, preferably from about 400°C to about 900°C.

EXAMPLE A

[0029] In one embodiment of this invention, a roller kiln for a single firing process was provided in which the acceleration of the burning cycle and the nominal production was increased from about 4300 m²/day to about 4900 m²/day for ceramic tiles with low softening enamel temperature, and from about 4500 m²/day to about 5000 m²/day for ceramic tiles with refractory enamel. This was accomplished due to the oxygen utilization to accelerate the reactions of the oxidation of the ceramic materials. The addition of oxygen was done by the substitution of one roll with spin movement by one static roll (without spin movement) in each of the three existing rolls, in a defined kiln section. These rolls (without spin movement) were built with the same sillimanite materials as the existing rolls, where several holes were drilled on its length and directed to the inferior piece-surfaces to enable the added oxygen to distribute uniformly in the kiln transversal section.

EXAMPLE B

[0030] Trials were performed to analyze the influence of an oxygen-enriched atmosphere on the black core defect. Samples of ceramic materials were characterized using x-ray diffraction (DRX) and chemical analysis by x-ray fluorescence. The temperatures of reactions and the oxidant atmosphere were determined by differential thermal analysis (DTA) and thermogravimetric analysis (TG).

[0031] Ceramic material samples were ignited in a laboratory scale furnace, simulating the industrial burning cycle. Additions of oxygen and oxygen/nitrogen mixture were made by furnace atmosphere enrichment and addition of oxygen directly in the ceramic material samples. A scanning electron microscope was used to examine the structures of the oxidized layers and the non-oxidized layers (black core).

[0032] The results of this trial demonstrated that oxygen addition, under the prescribed conditions, completely prevented the black core formation.

EXAMPLE C

[0033] A trial was conducted to determine the oxygen consumption in the process that prevented black core formation. Roller kilns are the most technologically advanced and widely used for enameled tile production and are very versatile as compared to conventional methods for introducing ceramic materials for firing. Some advantages for the use of roller kiln are its ability for good burning uniformity, bigger production with reduced burning cycles, lower production losses and lower fuel consumption. Another type of furnace is the tunnel kiln. The roller kiln furnace is preferred because it uses a single stage burning cycle, while the tunnel kiln furnaces uses a two stage burning cycle.

[0034] For this trial, a roller kiln produced by Enaplic Engenharia was used. The total width was 93 m, the useful width was 2.2 m. There were 35 rolls in each module, the burning cycle for low softening temperature enamel tiles was 43 min., and the burning cycle for refractory enamel tiles was 41 min. The tile production for low softening temperature enamel was 4500 m²/day. The tile production for the refractory enamel tiles was about 4850 m²/day. The fuel consumed in this trial was relatively low at about HHV 1480 kcal/Nm³. Fuel consumption was about 26,000 Nm³, and the temperature of the off gases at the kiln was from about 250°C to about 400°C. The tile mass in the kiln inlet was about 16.6 ± 0.4 kg/m², and the mass tile in the kiln outlet was about 16.2 ± 0.4 kg/m². The tile density in the furnace inlet was about 1.85 ± 0.02 g/cm³. The moisture content in the tile at the furnace was about 2.00 ± 0.50% by mass. The water absorption of the tiles at the kiln outlet was about 4.5 ± 1.5% by volume. The tiles size at the furnace inlet was 360.2 mm x 360.2 mm and the tiles size at the furnace outlet was about 335.8 mm x 335.8 mm.

Oxygen addition in the kiln:

[0035] Oxygen was added directly to the ceramic tiles. Some of the spin rolls in the roller kiln furnace were replaced by static rolls at the positions where the oxygen was fed. During the trial, one static roll was replaced, and two spin rolls were maintained. Drilled rolls were made to feed oxygen into the kiln. One of the extremities was closed with refractory mortar, while oxygen was fed into the other extremity. Thirty (30) holes of 1.2 mm diameter (1900 mm in length) were drilled to distribute the oxygen flow to the ceramic tile pieces.

[0036] Thermogravimetric analysis and differential-thermal analysis of the raw ceramic tile material showed mass loss and endothermic reaction in the temperature showed a range of from about 400°C to about 900°C. Oxygen was directed to the pre-heating zone in the temperature range of from about 400°C to about 900°C.

[0037] One hundred twenty spin rolls were substituted by an equal number of static rolls. Oxygen distributors were used to control the flow of oxygen to feed the four rolls in each module of the furnace. Each oxygen distributor was equipped with critical orifice system to measure the oxygen flow. Thirty oxygen distributors were installed in the kiln furnace. An oxygen rotameter was installed in to measure the total oxygen flow fed to the kiln furnace.

[0038] Measurements were performed in the field to determine the extent of black core defects. The kiln atmosphere was analyzed with the addition of oxygen in the static rolls and without oxygen addition. Fig. 1 provides a transverse view of the kiln furnace 100. Ceramic tiles 110 were passed through the furnace 100, preferably roller kiln furnace, at a position between the kiln roof 102 and kiln bottom 104. The static roll 132 used-for oxygen addition was placed transversally across the kiln furnace. Monitor probes were placed at various positions 120, 122, 124 and 126 to measure the atmospheric measurements in the kiln.

[0039] Table I below provides the results of the trials using certain modules under specific oxygen flow for each roll in the furnace, and the resulting oxygen and carbon dioxide concentration at the various position resulting therefrom.

Cell	Probe Position	O ₂ Conc.(%)	CO ₂ Conc.(%)	O ₂ added O ₂ Conc.(%)	O ₂ added CO ₂ Conc.(%)
A	122	4.30	13.00	17.80	10.10
	124	4.10	12.60	6.80	11.30
	126	4.20	12.40	7.70	10.70
	128	4.50	12.60	6.80	10.80
B	122	1.40	15.40	11.60	11.60
	124	1.90	14.90	7.80	12.10
	126	2.00	15.10	7.90	12.10
	128	1.90	14.40	7.80	11.50
C	122	1.10	15.30	12.40	11.20
	124	2.20	15.90	8.50	11.60
	126	1.30	16.30	8.20	12.40
	128	1.80	15.20	8.20	12.10

The above data were taken under the following trial conditions: the oxygen flow rate for each roll in cell A was 2.5 Nm³/h @ fce; the oxygen flow rate for each roll in cell B was 1.8 Nm³/h @ fce; and the oxygen flow rate for each roll in cell C was 1.3 Nm³/h @ fce. Where oxygen was not added, the production rate was 4500 m²/day of high softening temperature enamel; and where oxygen was added, the production rate was 4850 m²/day of the same high softening temperature enamel. The total oxygen added by the rotameter was 138 Nm³/h @ fce.

[0040] It is shown that the oxygen concentration is highest at position 122 (nearest the product) due to the way the oxygen is added in the furnace through the rolls.

EXAMPLE D

[0041] A trial to determine the formation of black core defect was performed using the procedure in Example C. The baseline conditions, as determined without oxygen, for high temperature softening enamel tiles was 4500 m²/day without black core defects, with the compacting pressure of 280 bar. Results of this trial-show that a production of 5020 m²/day was achieved without formation of black core defects even when oxygen was provided at 2.25 Nm³/h of oxygen for each roll. The total oxygen flow rate was 81 Nm³/h.

[0042] The furnace temperature was from about 400°C to about 900°C, and the optimal temperature was from about 700°C to about 900°C. It was determined that at a furnace temperature of 700°C, the tile surface temperature was about 45°C lower than the furnace temperature. At a furnace temperature of about 900°C, the tile temperature was

about 15°C lower than the furnace temperature.

EXAMPLE E

5 **[0043]** A trial on the formation of black core in tiles with low softening temperature enamels was performed based on lead oxides. The performance of this type of tiles present difficulties because these enamel melts at a lower temperature, thus closing the pores in lower temperature and becoming more difficult for the interaction of the oxidant atmosphere with the organic compounds of the clay. As a result, the production rate of this kind of tiles is lower than, for example, the tiles used for trial in Example D.

10 **[0044]** The production rate was about 4540 m²/day without the addition of oxygen, and at a compacting pressure of 343 bar. Very high black core defect results in the absence of oxygen, other than ambient oxygen. Comparatively, the addition of oxygen to the kiln furnace of about 185 Nm³/h showed the increased production to about 5200 m²/day, and decreased in black core defects to near trace amounts.

15

Claims

20 1. A method for reducing product defects in the production of ceramic products during the firing process and for increasing the production rate of said ceramic products, said method comprising:

- a. providing a heated enriched oxidizing atmosphere in a furnace through a plurality of static rolls at the vicinity of the ceramic products to maintain a heated oxidizing atmosphere;
- b. passing said ceramic products for firing in the vicinity of said heated enriched oxidizing atmosphere; and
- c. firing said ceramic products in the presence of said heated enriched oxidizing atmosphere.

25

2. The method of claim 1 which comprises adding heated enriched oxygen-containing gas to said oxidizing atmosphere.

30

3. The method of claim 2 which comprises preheating said enriched oxygen-containing gas outside of the kiln furnace.

4. The method of claim 2 wherein said oxygen-containing gas comprises adding an oxidizing atmosphere having an oxygen concentration of greater than about 1%.

35

5. The method of claim 2 wherein said heated enriched oxidizing atmosphere comprises pure oxygen.

6. The method according any preceding claims which comprises passing said ceramic products for firing in the plurality of static rolls drilled through its length in a longitudinal direction.

40

7. The method according any preceding claims which comprises passing said heated enriched oxidizing atmosphere to a roller kiln having static rolls.

Patentansprüche

45 1. Eine Methode zur Verminderung von Herstellungsfehlern bei der Herstellung von Keramikprodukten während des Brennprozesses und zur Steigerung der Produktionsquote besagter Keramikprodukte, wobei besagte Methode folgendes umfaßt:

50 a. Zurverfügungstellung einer erhitzten angereicherten oxydierenden Atmosphäre in einem Brennofen mittels einer Vielzahl von statischen Rollen in der Nähe der Keramikprodukte zur Aufrechterhaltung einer erhitzten oxydierenden Atmosphäre;

b. Weitertransport der besagten Keramikprodukte für den Brennprozeß in die Nähe der besagten erhitzten angereicherten oxydierenden Atmosphäre; und

55

c. Brennung der besagten Keramikprodukte in der Gegenwart der besagten erhitzten angereicherten oxydierenden Atmosphäre.

EP 1 083 397 B1

2. Die Methode gemäß Anspruch 1, die den Zusatz von erhitztem angereichertem sauerstoffhaltigem Gas zu der oxydierenden Atmosphäre umfaßt.
- 5 3. Die Methode gemäß Anspruch 2, die die Vorheizung des besagten erhitzten angereicherten sauerstoffhaltigen Gases außerhalb des Keramikbrennofens umfaßt.
4. Die Methode gemäß Anspruch 2, wobei das besagte sauerstoffhaltige Gas die Hinzusetzung einer oxydierenden Atmosphäre umfaßt, die eine Sauerstoffkonzentration, die größer als ca. 1% ist, enthält.
- 10 5. Die Methode gemäß Anspruch 2, wobei die besagte erhitzte angereicherte oxydierende Atmosphäre reinen Sauerstoff enthält.
6. Die Methode gemäß einem der vorstehenden Ansprüche, die den Weitertransport der besagten Keramikprodukte für den Brennprozeß in der Vielzahl der statischen Rollen umfaßt, welche eine Bohrung in Längsrichtung über ihre gesamte Länge aufweisen.
- 15 7. Die Methode gemäß einem der vorstehenden Ansprüche, die den Weitertransport der besagten erhitzten angereicherten oxydierenden Atmosphäre zu einem Rollenbrennofen umfaßt, der über statische Rollen verfügt.

20

Revendications

1. Une méthode pour réduire les défauts de fabrication d'articles de céramique pendant le processus de cuisson et pour augmenter le taux de production de ces articles de céramique, méthode qui consiste à:
- 25 a. créer une atmosphère oxydante enrichie et chauffée dans un four à travers plusieurs rouleaux statiques près des articles de céramique afin de maintenir une atmosphère oxydante chauffée;
- b. passer ces articles de céramique pour leur cuisson près de cette atmosphère oxydante enrichie et chauffée;
- 30 et
- c. cuire ces articles de céramique en présence de cette atmosphère enrichie et chauffée.
2. La méthode de la revendication 1, qui consiste à ajouter à cette atmosphère oxydante un gaz enrichi et chauffé contenant de l'oxygène.
- 35 3. La méthode de la revendication 2, qui comprend le préchauffage de cet gaz enrichi contenant de l'oxygène à l'extérieur du four à céramique.
- 40 4. La méthode de la revendication 2, où ledit gaz contenant de l'oxygène comprend le rajout d'une atmosphère oxydante qui possède une concentration d'oxygène supérieure à 1% environ.
5. La méthode de la revendication 2, où ladite atmosphère oxydante enrichie et chauffée comprend de l'oxygène pur.
- 45 6. La méthode suivant l'une des revendications précédentes, qui comprend le passage desdits articles de céramique pour leur cuisson sur les multiples rouleaux statiques perforés tout au long de façon longitudinale.
7. La méthode suivant l'une des revendications précédentes, qui comprend le passage de ladite atmosphère oxydante enrichie et chauffée à un four à rouleaux contenant des rouleaux statiques.
- 50

55

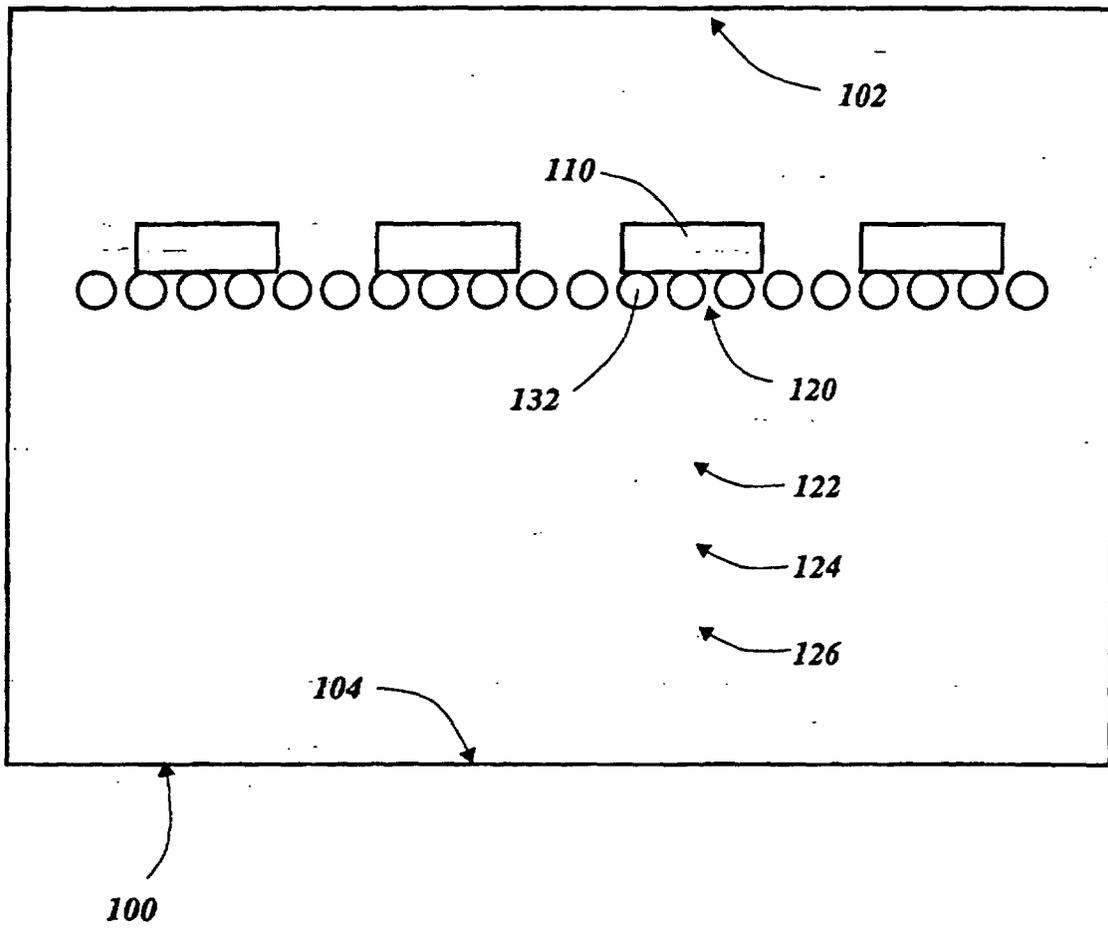


Fig. 1