



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 088 666 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
04.04.2001 Bulletin 2001/14

(51) Int. Cl.⁷: **B41J 2/175**

(21) Application number: **00121230.7**

(22) Date of filing: **29.09.2000**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **29.09.1999 US 407271**

(71) Applicant:
**OWENS-ILLINOIS CLOSURE INC.,
Toledo Ohio 43666 (US)**


(72) Inventor: **Hock, Mark R.
Des Plaines, IL 60016 (US)**

(74) Representative:
**Casalonga, Axel et al
BUREAU D.A. CASALONGA - JOSSE
Morassistrasse 8
80469 München (DE)**

(54) **Liquid containment and dispensing device**

(57) A diaphragm 24 for attaching to a free edge of a perimetrical wall 18 of a pumping chamber 16 of a chassis 14 of a liquid containment and dispensing device 10, said diaphragm being preshaped to have a raised central portion 24a surrounded by a planar edge portion 24b. The raised central portion of the diaphragm permits the diaphragm, when secured to a free edge of the perimetrical wall, to flex with respect to the pumping chamber without leading to the formation of wrinkles in the planar edge portion. The diaphragm has an innermost layer 24c of LDPE, and the planar edge portion thereof is secured by heat staking to the free edge of the perimetrical wall of the chassis, which is formed by molding from a plastic material. An aluminum crimp ring 26 is provided to tightly retain the planar edge portion of the diaphragm against the free edge of the perimetrical wall of the chassis. The dispensing device has a liquid containing pouch 19 that is formed by an opposed pair of generally cup-shaped members 21, 23 each of which has a generally planar free edge 21a, 23a, respectively, that is heat-staked to a perimetrical frame 17, which is formed integrally with the chassis and depends therefrom. The raised central portion of each of the cup-shaped members permits attachment of such cup-shaped members to the perimetrical frame without the formation of wrinkles in a perimetrical edge of each of the cup-shaped members.

FIG. 1

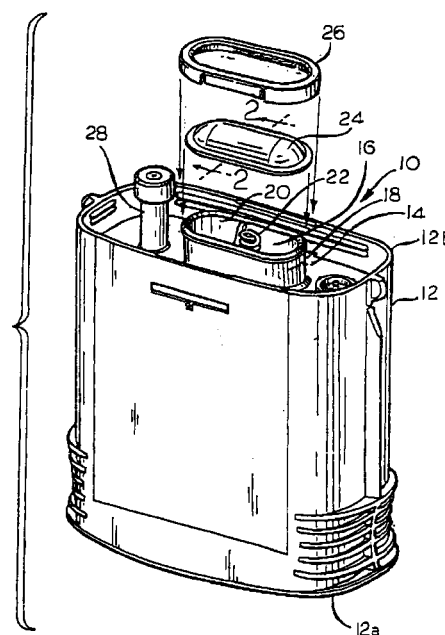

EP 1 088 666 A1

Description

CROSS REFERENCE TO RELATED APPLICATION

[0001] This application is a continuation-in-part of my co-pending application Serial No. 09/103,803.

BACKGROUND OF THE INVENTION

1. FIELD OF THE INVENTION

[0002] This invention relates to a liquid containment and dispensing device. More particularly, this invention relates to a liquid containment and dispensing device with a self-contained pump. The device of this invention is useful for containing and dispensing printing ink in an ink jet printer.

2. DESCRIPTION OF THE PRIOR ART

[0003] U.S. Patent 5,784,087 (Wallace et al.), the disclosure of which is incorporated herein by reference, describes a liquid containment and dispensing device with a self-contained pump that was developed for use in containing and dispensing printing ink in an ink jet printer. The pump of the aforesaid device includes a linearly acting pumping member that reciprocates within a pumping chamber, which is defined by a perimetrical wall, and the pumping chamber is covered by a thin, flexible diaphragm, which is fabricated from a laminate of thin films. The diaphragm is then heat-staked to a free edge of the perimetrical wall that surrounds the pumping chamber.

[0004] The use of a flexible diaphragm fabricated from a laminate of films require great care in its heat staking to the perimetrical wall of a pumping chamber, however, due to the tendency of such a diaphragm to form wrinkles around its outside as sufficient material is left in the central portion of the diaphragm to permit it to flex sufficiently to accommodate the pumping motion of the pumping member. Further, the use of heat-staking to secure the diaphragm to the perimetrical wall also requires great care in the control of the temperatures used in the heat-staking operation, as excessively high temperatures can degrade the thin films used in the diaphragm, while excessively low temperatures can result in a poor quality seal between the diaphragm and the perimetrical wall.

[0005] The device of the aforesaid '087 patent uses a flexible pouch that is fabricated from a single sheet for containing ink, the single flexible sheet being formed from a laminate of thin films. The pouch of such reference is supported only at its open end, and is unsupported on its sides and closed end. However, as is taught in U.S. Patent Application Serial No. 08/892,131 (Kamp), which is assigned to the assignee of this application, and in its published European counterpart, EP 0 891 867 A2, it is desirable to totally enclose the ink

pouch of such a device by a frame that depends from the chassis of the device, to which the open end of the pouch is in fluid communication. Such a construction increases the resistance of the device to shock loads. In such a construction, a pouch formed from a single flexible sheet was also used, the edges of the folds of the folded sheet in such a device being heat staked to the sides of the frame rather than to one another. In such an arrangement, however, there is also a tendency to form wrinkles around the exterior of the pouch-forming sheet, at the location of its heat staking to the frame, in order to leave sufficient material in the central portion of the sheet to define a cavity for holding ink.

SUMMARY OF THE INVENTION

[0006] According to the present invention, there is provided a liquid containment and dispensing device, especially a liquid containment and dispensing device that is useful in containing and dispensing printing ink in an ink jet printer, with a pumping chamber cover that does not tend to wrinkle around its outside, where it is joined to a free edge of a perimetrical wall of the pumping chamber. Further, the invention as described above incorporates a crimped metallic ring to help secure the pumping chamber cover to the free edge of the perimetrical wall of the pumping chamber to augment the seal that is formed therebetween by heat-staking.

[0007] The elimination of wrinkles in the pumping chamber cover according to the present invention is obtained by pre-shaping a sheetlike cover material by a thermoforming operation, to thereby provide a domed configuration to a central portion of the cover that results in sufficient flexibility to accommodate the reciprocation of a pumping element without requiring excessive material in the surrounding portion of the cover. In the preferred embodiment of the present invention, the cover is formed from a sheetlike material that is a thin laminate of two or more polymeric films, with a suitable adhesive between adjacent layers of such laminate to prevent delamination of the layers thereof. At least one of the films is a material with good resistance to oxygen and moisture vapor transmission, such as ethylene vinyl alcohol copolymer (EVOH), which is preferably used in the interior of the laminate, with an innermost layer of a low density polyethylene (LDPE), which has good flexibility and bonds well to the perimetrical wall of the pumping chamber when the wall and the liquid containment and dispensing device chassis of which it is a part is formed from polyethylene by injection molding. The outermost layer of the pumping chamber cover is then formed from a high heat resistant polymer such as nylon (a polyamide material) for good resistance to abrasion and to prevent the film structure from sticking to the heat staking die.

[0008] The elimination of wrinkles in the ink pouch of a device with a pouch supporting frame according to the teachings of the aforesaid Serial No. 08/892,131 is

obtained by constructing the pouch from an opposed pair of laminated sheets, each of which is pre-shaped into a domed configuration, for example, by thermoforming. The edges of such pre-shaped sheets are then heat staked to adjacent portions of the surrounding frame, rather than to one another, to define a pouch that is closed on its sides and one end, to thereby be capable of retaining ink or other liquid in a suitable manner.

[0009] Accordingly, it is an object of the present invention to provide an improved liquid containment and dispensing device of a type that has a self-contained pump. More particularly, it is an object of the present invention to provide a liquid containment and dispensing device as described above that has utility in containing and dispensing printing ink in an ink jet printer.

[0010] It is also an object of the present invention to provide an improved joint between a pumping chamber cover and an annular wall of a pumping chamber of a liquid containment and dispensing device of the type described above.

[0011] It is also an object of the present invention to provide a device of the foregoing character with an improved liquid containing pouch.

[0012] It is also an object of the present invention to provide a device of the foregoing character in which improved shack resistance is imparted to the pouch by surrounding its sides and closed end by a frame to which the sides and closed end of the pouch are sealingly joined and to do so without the formation of wrinkles in the material of the pouch in the region of its juncture with the surrounding frame.

[0013] For a further understanding of the present invention and the objects thereof, attention is directed to the drawing and the following brief description thereof, to the detailed description of the preferred embodiment of the invention and to the appended claims.

BRIEF DESCRIPTION OF THE DRAWING

[0014]

Fig. 1 is an exploded, perspective view of a liquid containment and dispensing device according to the preferred embodiment of the present invention; Fig. 2 is sectional view, at an enlarged scale, taken on line 2-2 of Fig. 1;

Fig. 3 is a fragmentary view, at a further enlarged scale, of the element illustrated in Fig. 2;

Fig. 4 is a front elevational view of a subassembly of the device that is illustrated in Fig. 1;

Fig. 5 is an end elevational view of the subassembly of Fig. 4; and

Fig. 6 is an exploded, perspective view of the subassembly of Figs. 4 and 5,

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0015] A liquid containment and dispensing device according to the preferred embodiment of the present invention is indicated generally by reference numeral 10 in Fig. 1. The liquid containment and dispensing device 10 is made up of a hard protective shell 12 that is closed at an end 12a, which will be the upper end when the device 10 is installed, for example, in an ink jet printer. A molded plastic chassis 14 is installed in an opposed, open end 12b of the shell 12, and the chassis 14 has a pumping chamber 16 defined and surrounded by a perimetrical wall 18, which is formed integrally with the chassis 14.

[0016] A pumping element 20, shown fragmentarily, is positioned within the pumping chamber 16 and is reciprocable therein, a coil spring 22 being provided to bias the pumping element 20 away from the closed end 12a of the shell 12. The pumping chamber 16 is closed by a cover or diaphragm 24, whose outer portion is heat-staked to a free edge of the perimetrical wall 18 that surrounds the pumping chamber 16. The diaphragm 24 is then further secured to the perimetrical wall 18 by an aluminum crimp ring 26 to further ensure that the seal between the diaphragm 24 and the perimetrical wall 18 remains secure throughout the life of the ink containment and dispensing device 10.

[0017] Ink or other liquid is dispensed from the liquid containment and dispensing device 10 by deflecting the central part of the diaphragm 24 to deflect the pumping element 20 within the pumping chamber 16, against the force of the coil spring 20, to thereby pump the liquid from a flexible pouch (not shown in Fig. 1), which is secured to the underside (in the illustrated arrangement) of the chassis 14 through a fluid outlet portion 28 of the chassis 14. As thus far described, the liquid containment and dispensing device 10 functions in the manner described in the aforesaid US. Patent 5,784,087, except that the device of such reference does not disclose the use of a crimp ring corresponding to the crimp ring 26 of the device 10 of Fig. 1.

[0018] The device 10 of Fig. 2 differs further from the device of the aforesaid reference in that the diaphragm 24 is preshaped, for example, by a thermoforming operation, to provide it with a domed central portion 24a and a planar surrounding edge portion 24b, which is the portion that is heat-staked to the perimetrical wall 18 on the chassis 14. The diaphragm 24, thus, has sufficient excess material in its central portion 24a without requiring excess material in its surrounding edge portion 24b to be able to flex as required during the pumping of ink or other liquid from the device 10, as described above. Such excess material can lead to wrinkling in an otherwise planar diaphragm, which can complicate the problem in properly heat-staking a diaphragm to the free edge of a perimetrical wall of a liquid containment and dispensing device of the type

described. Such wrinkling can also cause premature failure of the diaphragm material as a result of the flexing cycle.

[0019] As is shown in Fig. 2 and even more clearly in Fig. 3, the diaphragm 24 is formed from a lamination of layers of polymeric materials of various compositions. The layers include an innermost layer 24c of any member of the polyethylene material such as LDPE, LLDPE, HDPE, metallocene PE, ethylene vinyl acetate and ethylene ethyl acrylate or blends thereof, preferably with a density in the range of 0.880g./cc.-0.964g./cc. Any such material has good strength and flexibility and heat-stakes well to the perimetrical wall of the chassis 14 when the chassis 14 is formed of polyethylene. The diaphragm 24 also includes an intermediate layer 24d of a material with good resistance to gas and moisture vapor transmission, such as nylon and nylon co-polymers, PVDC and EVOH, which is the preferred material. The diaphragm 24 also includes an outermost layer 24e of a polymer selected for high melt temperature, abrasion resistance and flex life, such as nylon and nylon co-polymers and polypropylene. Since the material of the layers 24c, 24d, 24e, as described, do not bond well to one another, preferably layers 24f, 24g of an adhesive are provided between adjacent layers of the diaphragm 24 to prevent the layers 24c, 24d, 24e from delaminating in service.

[0020] The diaphragm 24, as described, is preferably produced by co-extrusion because adhesives used in co-extrusion are usually higher in molecular weight than those used in laminated composites, such higher molecular weight adhesives being less susceptible to being dissolved by aggressive printing inks.

[0021] While Figs. 2 and 3 may create the impression that the diaphragm 24 has substantial thickness, in practice, for a diaphragm 24 for a device 10 that is designed to contain up to approximately 100 ml. of printing ink, a standard size, the diaphragm 10 will have a total thickness of the order of 5 mils (0.005 in.).

[0022] The molded plastic chassis 14 has a perimetrical frame 17 that depends therefrom and is integral therewith, the frame 17 having a spaced apart opposed pair of side members 17a, 17b and a transversely extending bottom member 17c that extends between the side members 17a, 17b. An open-ended pouch indicated generally by reference numeral 19 is formed by sealingly joining the free, planar edges of an opposed pair of generally cup-shaped members 21, 23 to the side members 17a, 17b and the bottom member 17c, for example, by heat staking. In that regard, each cup-shaped member 21, 23 is formed from a laminated sheet into the illustrated cup-shaped configuration, for example, by thermoforming, and the laminated sheet from which each cup-shaped member 21, 23 is formed may correspond, for example, to the laminate used in the manufacture of the diaphragm 23 by co-extrusion. Because the interior of each of the cup-shaped members 21, 23 is pre-shaped, as described, its planar free

edges 21a, 23a, respectively, need not undergo any wrinkling to match up precisely with the adjacent portions of the frame 17 in order to define a pouch 19 with sufficient internal volume to hold the required amount of ink or other liquid, such as up to 100 ml. of such liquid. Thus, the heat staking of the members 21, 23 to the frame 17 does not involve quality assurance risks of the type involved in heat staking flat sheets with sufficient internal volume to the frame 17.

[0023] Although the best mode contemplated by the inventor for carrying out the present invention as of the filing date hereof has been shown and described herein, it will be apparent to those skilled in the art that suitable modifications, variations and equivalents may be made without departing from the scope of the invention, such scope being limited solely by the terms of the following claims and the legal equivalents thereof.

Claims

1. A liquid containment and dispensing device comprising:

a shell having an open end and a closed end;
a chassis positioned within said open end of said shell and having a perimetrical frame depending from said chassis; and
a liquid containing pouch comprising;

first and second opposed, generally pre-shaped cup-shaped members, each of said cup-shaped members having a generally planar free edge, the free edge of each of said first and second cup-shaped members being sealingly joined to said perimetrical frame of said chassis.

2. A liquid containment and dispensing device according to Claim 1 wherein said chassis and said frame are formed integrally in a single piece from a thermoplastic material, wherein each of said first and second generally cup-shaped members has at least an innermost layer of a thermoplastic material, and wherein each of said first and second generally cup-shaped members is sealingly joined to said perimetrical frame of said chassis by heat staking said innermost layer of said each of said first and second generally cup-shaped members to said perimetrical frame.
3. A liquid containment and dispensing device according to Claim 1 or 2 wherein each of said first and second generally cup-shaped members is formed of a laminated sheet that includes said innermost layer and at least one layer external to said innermost layer.
4. A liquid containment and dispensing device accord-

ing to Claim 3 wherein said laminated sheet further comprises an outermost layer and an intermediate layer, said intermediate layer having good resistance to transmission of oxygen and moisture vapor.

5

5. A liquid containment and dispensing device according to Claim 4 wherein said intermediate layer is selected from the group consisting of nylon, nylon co-polymers, PVDC and EVOH.

10

6. A liquid containment and dispensing device according to Claim 4 or 5 wherein said outermost layer is selected from the group consisting of nylon, nylon co-polymers and polypropylene.

15

7. A liquid containment and dispensing device according to Claim 4 and further comprising:

a first layer of an adhesive between said innermost layer and said intermediate layer.

20

8. A liquid containment and dispensing device according to Claim 7 and further comprising:

a second layer of adhesive between said intermediate layer and said outermost layer.

25

9. A liquid containment and dispensing device according to Claim 2 wherein said thermoplastic material of said chassis and said frame is polyethylene and wherein said thermoplastic material of each of said first and second generally cup-shaped members is selected from the group consisting of members of the polyethylene family.

30

35


40

45

50

55

FIG. 1

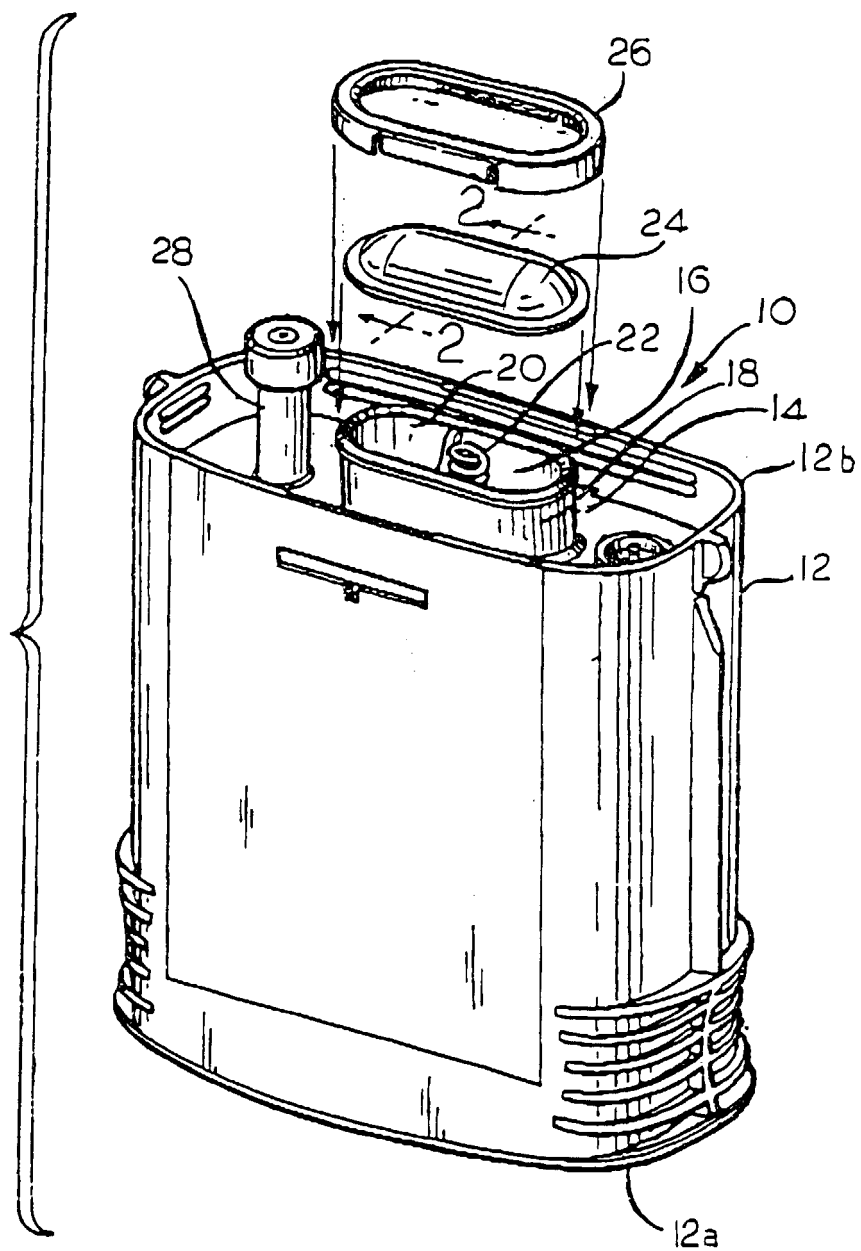

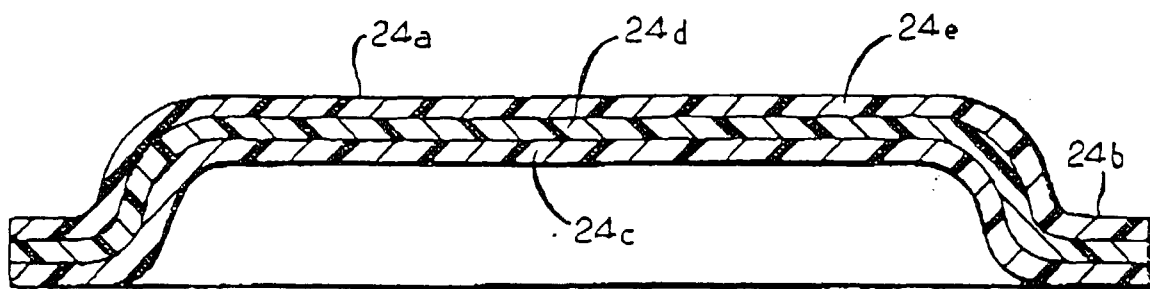


FIG. 2

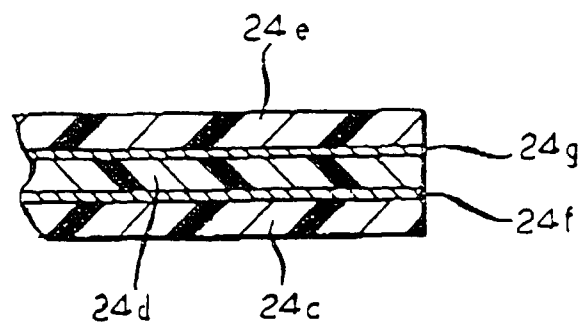


FIG. 3

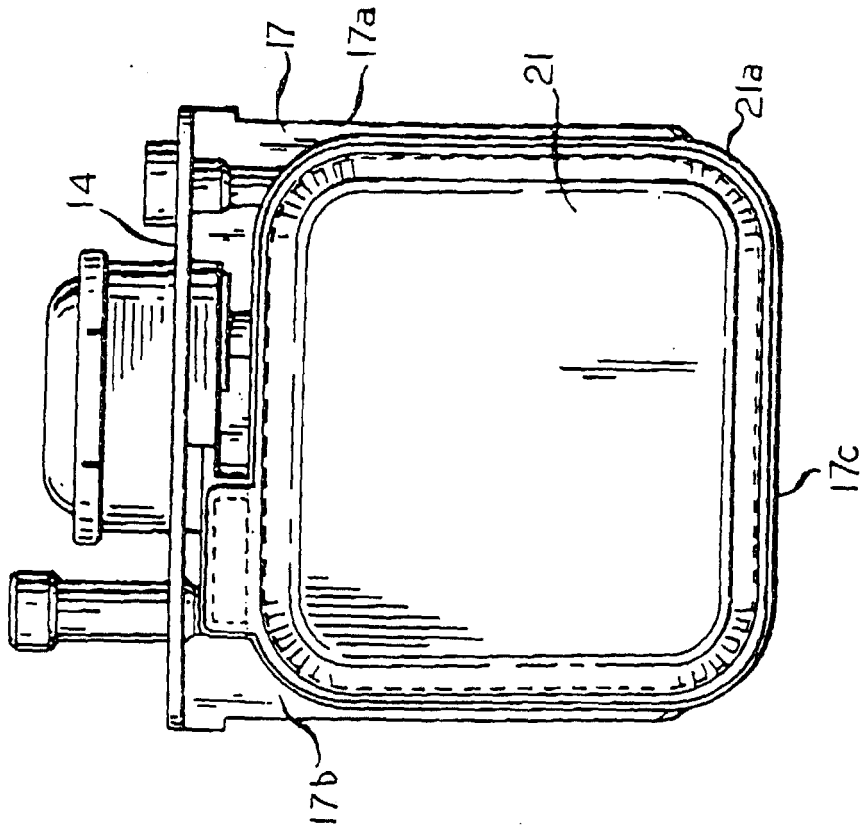


FIG. 4


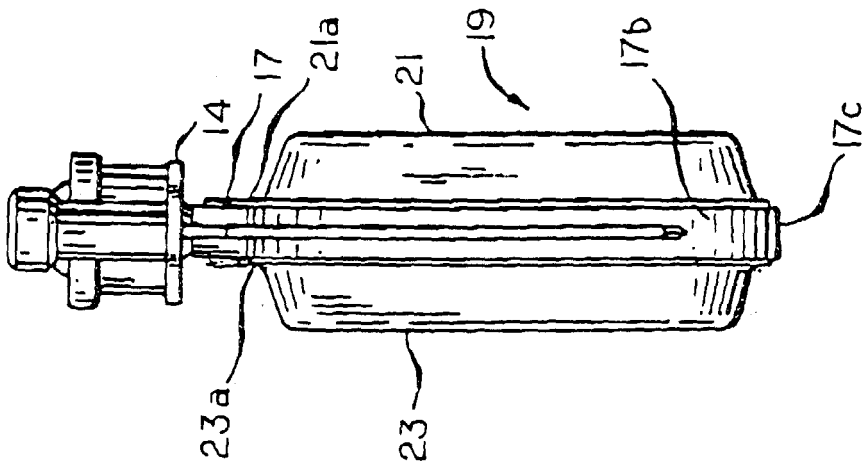


FIG. 5



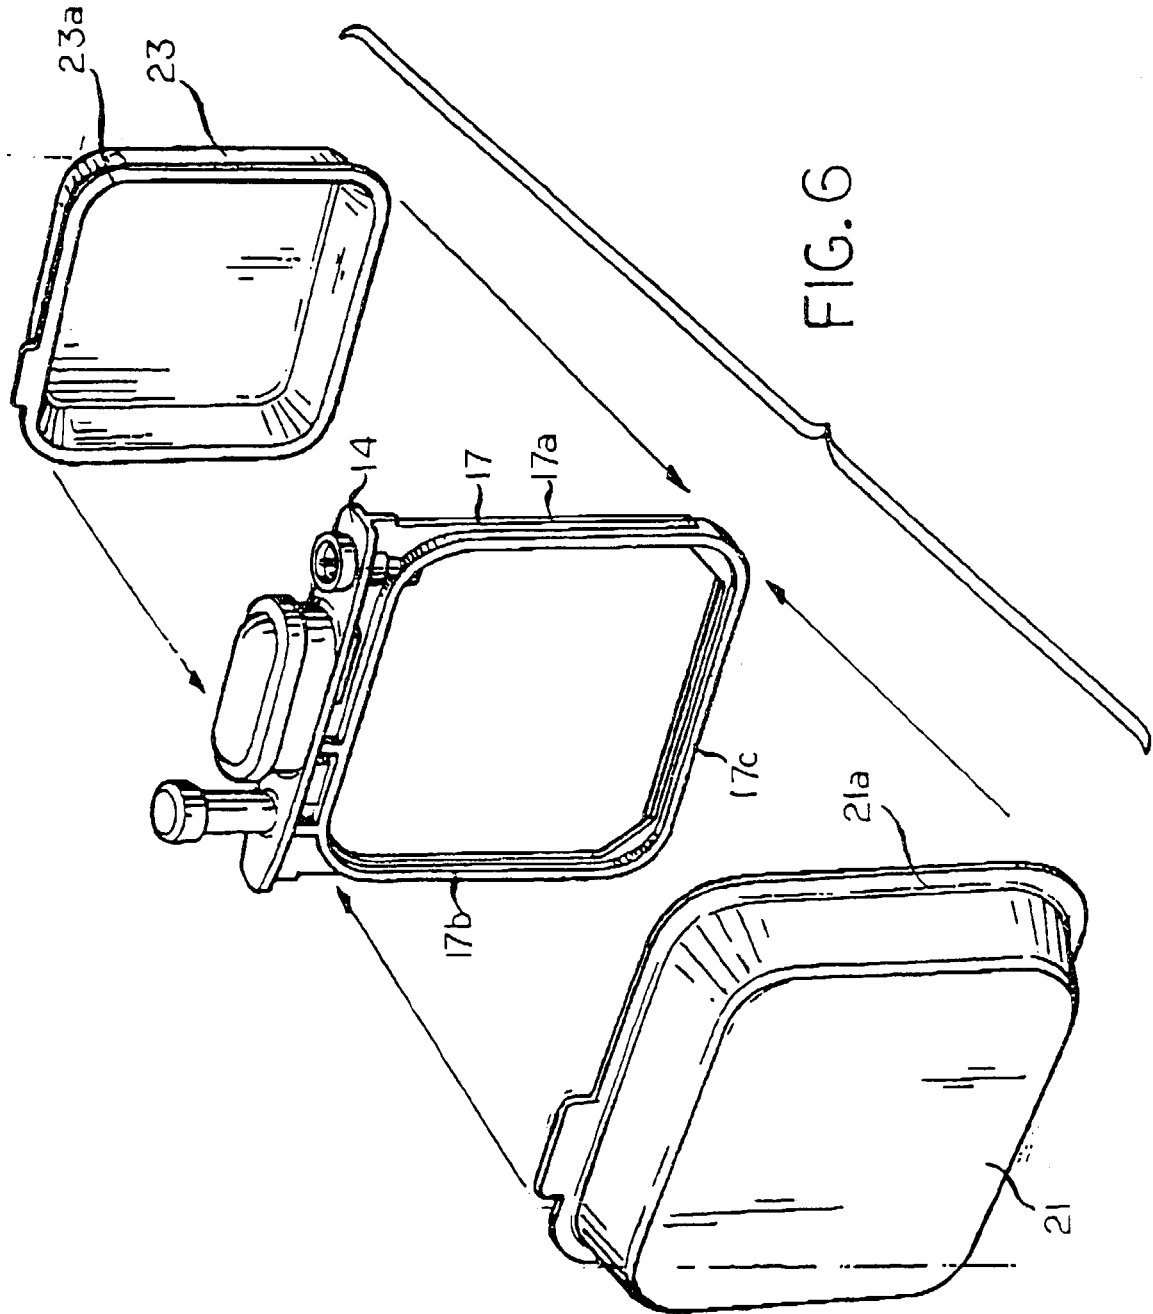

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 12 1230

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 890 441 A (HEWLETT PACKARD CO) 13 January 1999 (1999-01-13) * column 3, line 7 - line 35 * * column 3, line 43 - column 4, line 17 * * column 5, line 21 - column 6, line 21; figures 1,2 * -----	1-9	B41J2/175
A	EP 0 940 258 A (HEWLETT PACKARD CO) 8 September 1999 (1999-09-08) * paragraph '0037! - paragraph '0038!; figure 12 * -----	1	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			B41J
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 9 January 2001	Examiner Van Oorschot, J
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 12 1230

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

09-01-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0890441 A	13-01-1999	US 6158853 A	12-12-2000
		JP 11227221 A	24-08-1999
EP 0940258 A	08-09-1999	CN 1227793 A	08-09-1999
		EP 1060081 A	20-12-2000
		JP 11291516 A	26-10-1999
		WO 9944830 A	10-09-1999

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82