

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 093 922 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
25.04.2001 Bulletin 2001/17

(51) Int Cl. 7: B41J 2/175

(21) Application number: 99250376.3

(22) Date of filing: 21.10.1999

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(71) Applicant: Microjet Technology Co., Ltd
Hsin Chu (TW)

(72) Inventors:
• Mou, Tse-Chi
Hsin Chu (TW)

- Lin, Fu-San
Hsin Chu (TW)
- Ho, Jing-Yuan
Hsin Chu (TW)
- Chou, Chin-Yi
Hsin Chu (TW)

(74) Representative: UEXKÜLL & STOLBERG
Patentanwälte
Beselerstrasse 4
22607 Hamburg (DE)

(54) Pressure-adjustment means

(57) The present invention is about a pressure-adjustment means for ink-jet cartridges. An element, which is an elastic air-bag (23), is employed inside the ink-jet cartridge. The air inside the elastic air-bag (23) is in ventilation with the air external to the ink-jet cartridge. When the pressure difference between the air pressure inside the air-bag and the back pressure of the ink-cartridge undergoes changes, this elastic air-bag (23) may then automatically adjust its own volume by expansion or contraction by virtue of its elastic structure, and in turn modify the ink volume inside the cartridge, so that the ink contained inside the ink-jet cartridge is prevented from leaking while permitting the printhead to be able to continue releasing ink droplets outwards in spurts.

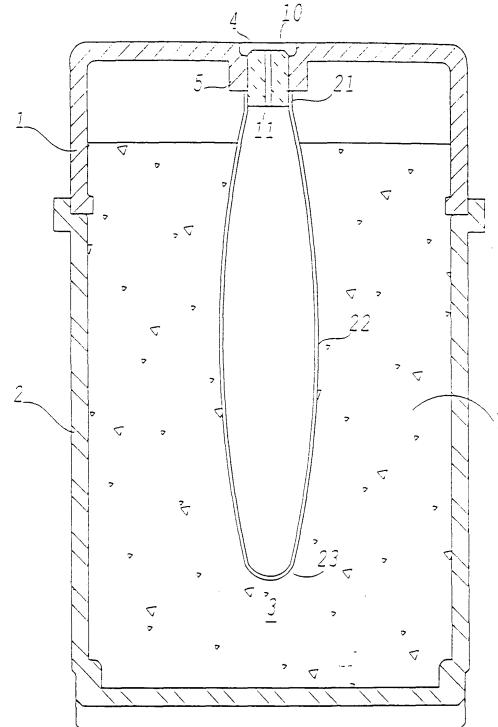


Figure 3

Description**FIELD OF THE INVENTION**

[0001] This present invention relates to a pressure-adjustment means, especially to a pressure-adjusting means for adjusting the pressure in the ink chamber inside an ink-jet cartridge.

DESCRIPTION OF THE PRIOR ART

[0002] In this modern era of massive information and ubiquitous presence of computers, not only is the use of computers in heavy demand, but the quality and speed of computers also need to meet stringent expectation. This demand for performance also extends to the computer peripherals. As a result, not only are novel peripherals emerge daily, but their performances also improve constantly. Of all the peripherals, the most common one is probably the printer, which has become almost an indispensable part of any computer system.

[0003] The currently available printers in the market can be classified into three types based on their methods of printing: dot-matrix, ink-jet and laser printers. Although dot-matrix printers are lower priced, as their printing speed and printing quality are both inferior, they have been unable to compete against ink-jet or laser printers in the market and are relegated to specific tasks only. In the current market are predominantly ink-jet and laser printers, and each of which has its strengths and weaknesses when compared vis-à-vis the other: ink-jet printers cost less, while laser printers possess superior printing quality. Although ink-jet printers are more attractively priced, however, their inferior printing quality and speed make them less competitive when more sophisticated printing is being demanded. Generally speaking, as ink-jet printers use liquid (i.e., ink) as its printing medium, the physical properties of liquids can adversely affect the printing quality. For instance, negative effects can arise from the flexibility of ink, turbulence, air-bubbles in the ink and uncontrollable ink flow direction due to smaller viscosity coefficient, etc.

[0004] Included in the design of ink-jet printing is a means for controlling the release of ink droplets from the ink chamber to the medium surface. As described in the prior art, ink-jet printing is accomplished by the use of a printhead, attached to the ink-jet cartridge, which releases ink in spurts in response to control signals.

[0005] Printheads generally employ either of two methods to release ink spurts: by means of thermal bubbles or by a piezoelectricity. In the thermal bubbles method, a thermal film resistor in the printhead heats up a small portion of the ink to almost boiling temperature and the gaseous ink (i.e., the ink droplets) is then released through the orifices. In the piezoelectricity method, a piezoelectric element in the printhead responds to the control signals and generates pressure waves by compressing the ink that forces the ink to gush through

the orifices.

[0006] Although the two prior art ink-jet printing methods can effectively release ink from the ink chamber in droplets, they are ineffective to prevent ink leakage when the printer is in its idle state. Therefore, the conventional design is in need of a technique that can prevent ink leakage during the idle state. This may be achieved by creating within the ink chamber certain slight "back pressure." This back pressure refers to pressure in the condition of partial vacuum within the ink chamber or pressure in the chamber being less than atmospheric pressure, for the purpose of preventing free flow of ink through the printhead. Additionally, back pressure increase refers to increasing the pressure difference between the pressure inside the ink chamber and the atmospheric pressure.

[0007] The back pressure in the ink-jet cartridge must be able to prevent ink leakage at all times, while it can not be so great as to prevent the ability to release the ink droplets. Furthermore, the design of the ink-jet cartridge must be such that the cartridge remains operative under any condition. Specifically, when the printhead is idle, the ink should be held inside, and when the printing is in progress, spraying of ink should be unhindered. When ink level drops low because of consumption, from the ideal gas law, the increased space volume should lead to decreased back pressure in the ink chamber. And if the back pressure mentioned previously is not adjusted accordingly, the printhead would be unable to overcome the increased back pressure and incapable of releasing the ink droplets in spurts.

[0008] The U.S. Patent No. 5,409,134 discloses a pressure-adjustment means which comprises of certain air-bag and elastic springs that can respond to changes of back pressure inside the ink chamber. This air-bag can move between the smallest ink volume setting and the biggest ink volume. It can adjust the volume of air inside the ink chamber to compensate for the changes in the ink volume, so that the back pressure inside the ink chamber can be maintained within a pre-determined range such that ink would not leak when in idle state and can spurt outwards of the printhead when heated.

[0009] For instance, when the air pressure in the surrounding decreases so that the difference between the atmospheric pressure and the back pressure is reduced, the pressure-adjustment means will activate to increase the back pressure for holding in the ink by increasing the volume of the ink chamber.

[0010] The pressure-adjustment means disclosed by said U.S. patent comprises of a pair of elastic springs 6 and an inelastic but inflatable air-bag attached thereon. The springs 6 and the air-bag 20 are installed inside the ink chamber 3 of the ink-jet cartridge, wherein the air inside the air-bag can ventilate with the air outside of the ink-jet cartridge as shown in Figure 1. The springs 6 work with the air-bag 20 and enable the air-bag 20 to inflate or deflate in response to the changes in pressure. Such inflation/deflation takes place when the pressure

inside the ink chamber 3 changes as well as when the pressure outside of the ink chamber 3 changes.

[0011] In reference to Figure 2, the inflation of air-bag 20 will push against the springs 6 which in turn react with an elastic force that pushes back on the air-bag, so that the elastic springs 6 and air-bag 20 remain engaged in a state of equilibrium. The inflation/deflation of the air-bag adjusts the volume inside the ink chamber 3, and thereby constrains the back pressure inside the ink chamber 3 within the normal operative range, so that the ink-jet cartridge remains operative in spite of changes in the external air pressure or consumption of the ink.

[0012] However, in employing the pressure-adjustment means comprising of the combination of elastic springs 6 and the attached air-bag, in order to produce the desired result, the elastic constant of the elastic springs 6 and the inflation/deflation capability of the air-bag 20 must both be precisely controlled in the manufacturing process. In case of weak engagement between the elastic springs 6 and the air-bag 20 so that slack therebetween arises, the sensitivity to detect the changes in the pressure would then be reduced. As there is a stringent demand on the exact physical properties of the elastic springs 6 and the air-bag 20 in manufacturing process, the product acceptance rates are thus lowered. In view of such, the present invention provides a method, which is superior to the prior art in having more effective quality control during the manufacturing process and having higher product acceptance rates, which are achieved by reducing the number of elements involved that simplifies the structure. The present invention thus has practical implication for the industry.

SUMMARY OF THE INVENTION

[0013] The primary object of the present invention is to provide a single element of elastic air-bag for adjusting the back pressure inside the ink chamber.

[0014] In view of the requirement in achieving exactness in handling the physical properties of the constituents, which effectively lowers the product acceptance rates, the present invention proposes to use less constituent elements or superior pressure-adjustment means to make improvement. The pressure-adjustment means of the present invention refers to an elastic air-bag installed within the ink-jet cartridge, wherein the air inside the air-bag is in circulation with the air outside the ink-jet cartridge. When the pressure difference between the air pressure inside the air-bag and the back pressure in the ink chamber undergoes changes, the elastic air-bag automatically inflates or deflates itself by virtue of its own elasticity, so as to change the volume inside the ink chamber that maintains the back pressure to within a certain range. This then prevents any ink leakage during idle state, and at same time, enables smooth releasing of ink droplets by the printhead during printing.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] The following drawings can further illustrate the characteristics of the present invention:

5 Figure 1. A cross-sectional view of the prior art pressure-adjustment means, its combined elastic springs and air bag inside the ink-jet cartridge.

10 Figure 2. A cross-sectional view of the pressure-adjustment means shown in Figure 1, as its air-bag inflates that deforms the elastic springs.

15 Figure 3. A cross-sectional view of the ink-jet cartridge of the present invention, wherein the pressure-adjustment means employs an elastic air-bag within the ink-jet cartridge.

20 Figure 4. A cross-sectional view of the pressure-adjustment means disclosed by the present invention, when its elastic air-bag is in the inflation state.

25 Figure 5. A cross-sectional view of the pressure-adjustment means disclosed by the present invention in another embodiment.

Numbering Scheme

[0016]

30 1. top lid,
2. cartridge housing,
3. ink chamber,
4. central opening,
35 5. base,
6. elastic springs,
7. ink,
10. connecting body,
11. through hole,
40 20. air-bag,
21. neck,
22. elastic portion,
23. elastic air-bag.

45 DETAILED DESCRIPTION OF THE INVENTION

[0017] First, referring to Figure 3 for the embodiment of the present invention, the ink-jet cartridge of the present invention comprises of a top lid 1 and a cartridge housing 2. When the top lid 1 is fastened unto the cartridge housing 2, the internal space thus formed defines the volume of the ink chamber 3 inside the ink-jet cartridge that contains ink therein. The printhead (not shown) installed at the bottom portion of the ink chamber 55 possesses a plurality of open orifices whereby ink within the ink chamber 3 spurts outwards by virtual of the heat-expansion or piezoelectricity methods mentioned previously. As shown in Figure 3, the pressure-adjustment

means of the present invention is situated mostly inside the ink-jet cartridge, one end of the means connects with the top lid 1 while the other end suspends within the ink-jet cartridge. This pressure-adjustment means comprises of a connecting body 10 and an elastic air-bag 23, wherein the air-bag 23 comprises of a neck portion 21 and an elastic portion 22 and the neck portion 21 is being tightly bundled at the bottom of the connecting body 10. The connecting body 10 having a through hole 11 and enables the process of air ventilation between the air inside the elastic air-bag connected therewith and the external air. The diameter of the through hole is approximately between 1.3mm and 0.05mm.

[0018] The elastic air-bag 23 acts similar to a inflatable ball as shown in Figure 3. The inside of the elastic air-bag 23 is hollow, which expands or contracts in response to the pressure changes, and its respective external surface is in contact with the ink and the internal space of the ink-jet cartridge. This elastic air-bag can be made from high-polymer materials, such as latex, silicon gel or rubber, with non-linear elastic coefficient and maximum yield strength at between 5600-6400 kg/cm².

[0019] Referring again to Figure 3, a central opening 4 in the top lid 1 of the ink-jet cartridge receives the connecting body 10 for the pressure-adjustment means of the present invention and enables the connecting body 10 to tightly fasten onto the top lid 1. As the diameter of the through hole 11 is between 1 mm to 3 mm, far smaller than the diameter of the air-bag 23, the ability of the air-bag 23 to make adjustments by inflation/deflation will not be negatively affected by its sensitivity to the influence of the atmospheric pressure. In the normal operating situation, namely, when the ink-jet cartridge is open and installed on the ink-jet printer, if the external conditions change (e.g., rising temperature or atmospheric pressure becoming less than 1 ATM,) so that the back pressure internal to the ink-jet cartridge becomes greater than the atmospheric pressure, the elastic portion 22 of the air-bag 23 will decompress the air-bag 23 in response to the pressure difference and releases the internal air through the through hole 11. The ink level then lowers so that the pressure equilibrium inside the ink-jet cartridge is restored, which prevents ink leakage.

[0020] Referring to Figure 4, in the case where the ink level inside the ink chamber 3 lowers as the printing continues in progress, from the ideal gas law, the increased volume inside the closed ink-jet cartridge will lead to decreased back pressure in the ink chamber 3. Therefore the pressure inside the air-bag 23 (atmospheric pressure) will be greater than the back pressure inside the ink chamber 3, and the elastic portion 22 will inflate and expand as shown. This expanded volume will cause the lowered ink level to rise up so that the original equilibrium state is restored. By virtue of the pressure-adjustment means of the present invention, under any circumstance, the ink-jet cartridge can maintain its pressure in balance so as to ensure smooth ink flow during printing.

[0021] To further increase the sensitivity of the pres-

sure-adjustment means to the changes in pressure, in another embodiment, an additional spring 30 is installed. In Figure 5, the constituent elements of this second embodiment are similar to those of first embodiment,

5 with the only difference being an additional spring 30. One end of the spring is hooked to the hook 31 at the bottom of cartridge housing 2, while the other end is fastened to the suspending end of the air-bag 23. The spring 30 creates an elastic force pulling on the air-bag 23, so that when either the external atmospheric pressure or the back pressure internal to the ink chamber 3 undergoes changes, the elastic portion 22 of the air-bag 23 can respond even faster to such pressure changes and expand or contract appropriately. Those skilled in 10 the art will also note that the suspending end of the air-bag 23 can also be fastened to the bottom of the chamber housing 2 directly, so that a reactive force is created which provides the air-bag 23 greater sensitivity when undergoing expansion.

15 **[0022]** After the elaboration of the preferred embodiments, those skilled in the art should be able to grasp the present invention and without departing from the scope and spirit of the claims, make various modifications. The present invention is not restricted to the preferred embodiment; for example, there is no specification 20 on the shape of the elastic air-bag; any shape which can provide the needed elasticity is acceptable.

EFFECTIVENESS OF THE INVENTION

25 **[0023]** The pressure-adjustment means of the present invention enables the ink-cartridge to be immune from the influences of external pressure changes or ink consumption and remain in normal operative state, and adjusts the back pressure of the ink chamber of the ink-jet cartridge by a single element elastic air-bag such that the product acceptance rates in the manufacturing process can be effectively controlled.

[0024] In summary, the present invention possesses 30 numerous useful features, and effectively improves upon the drawbacks of the prior art. It provides a practical and reliable device which is novel with utilitarian value.

45 Claims

1. A pressure-adjustment means, for adjusting internal pressure in the ink-jet cartridge, comprising:

50 a connection body, installed on the ink-jet cartridge housing and having a through hole for connection with the atmosphere; and an elastic air-bag, comprising an elastic element having an opening and situated within the ink-jet cartridge, such that the opening being tightly bundled inside said connecting body and having ventilation with the atmosphere, said elastic element being capable of changing the

volume of the elastic air-bag in accordance with
the changes in pressure.

2. A pressure-adjustment means as recited in Claim 1, wherein said elastic element of said elastic air-bag can be made from high polymer material. 5
3. A pressure-adjustment means as recited in Claim 1, wherein when the internal pressure of the ink-jet cartridge undergoes changes, said elastic element 10 can appropriately adjust the volume of the air-bag so as to reach a new state of equilibrium.
4. A pressure-adjustment means as recited in Claim 1, wherein an additional spring fastened onto the 15 housing of the ink-jet cartridge at one end and to the said elastic air-bag at the other end for the provision of a stress.
5. A pressure-adjustment means as recited in Claim 1, wherein one end of said elastic air-bag can also 20 be fastened to the ink-jet cartridge housing.

25

30

35

40

45

50

55

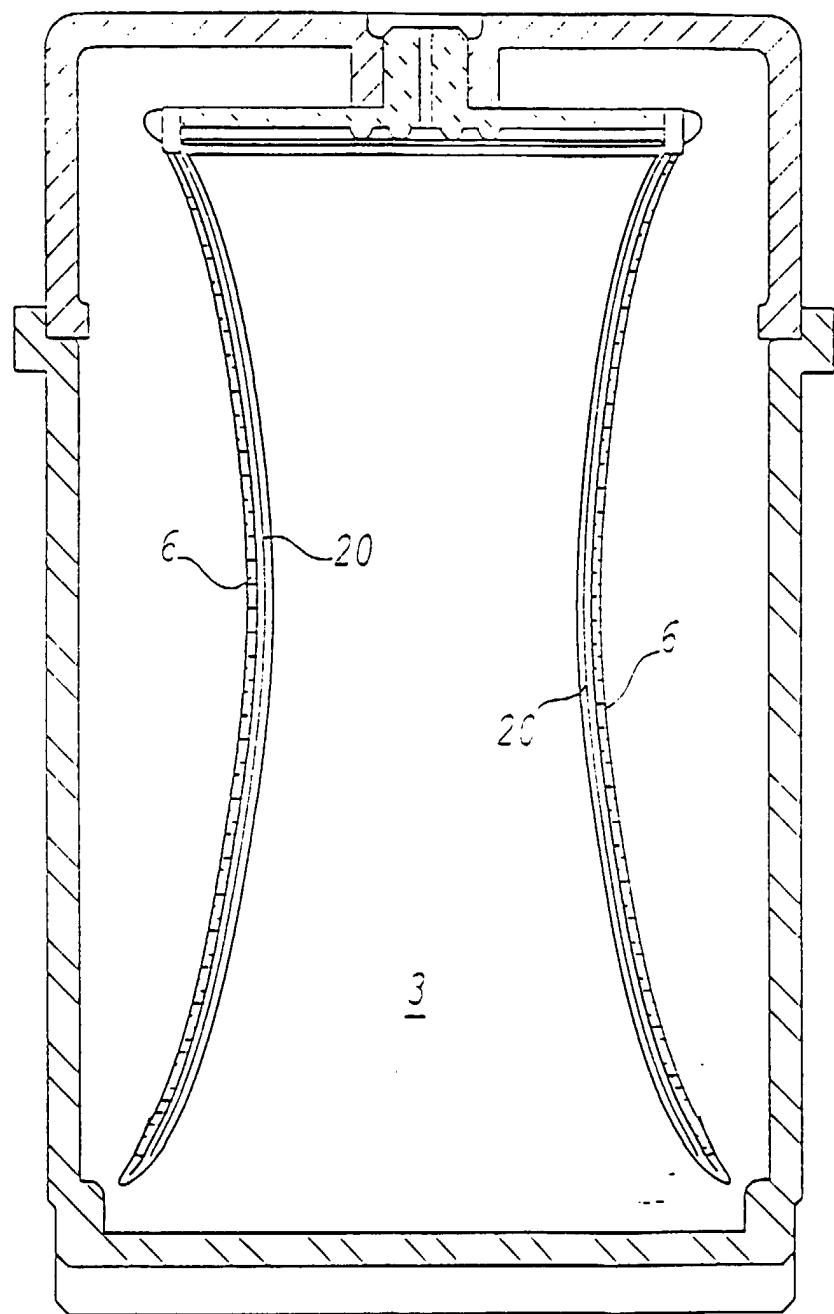


Figure 1

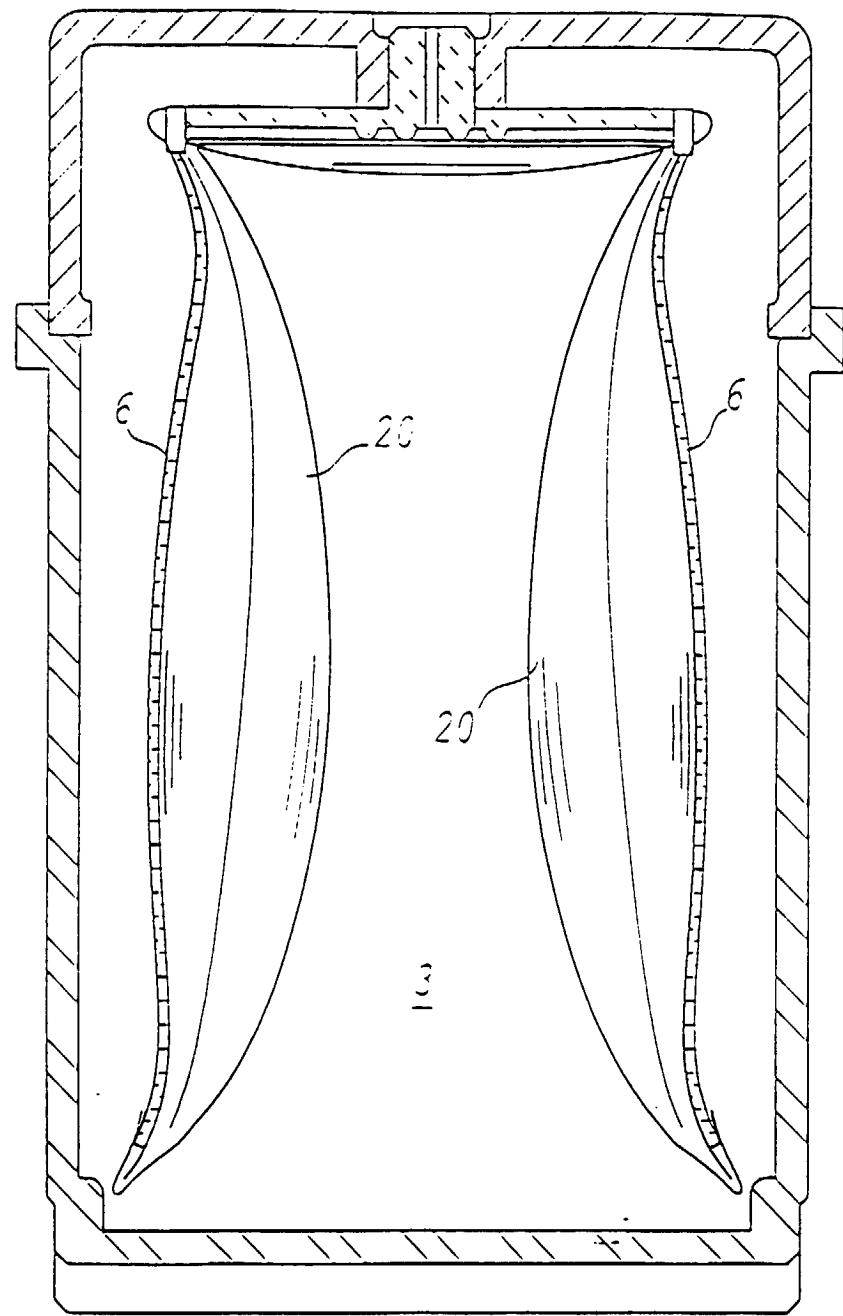


Figure 2

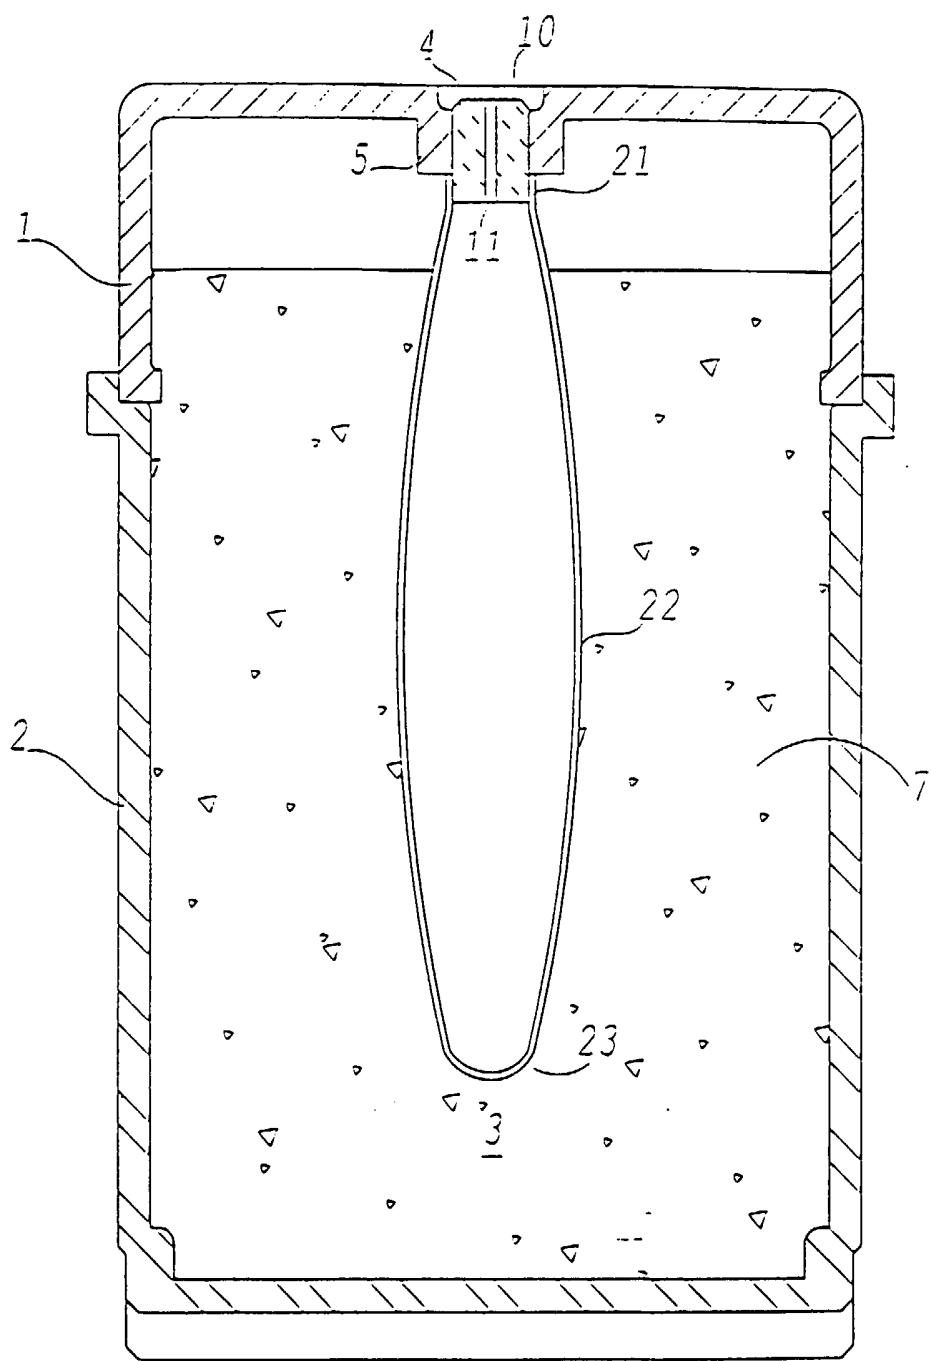


Figure 3

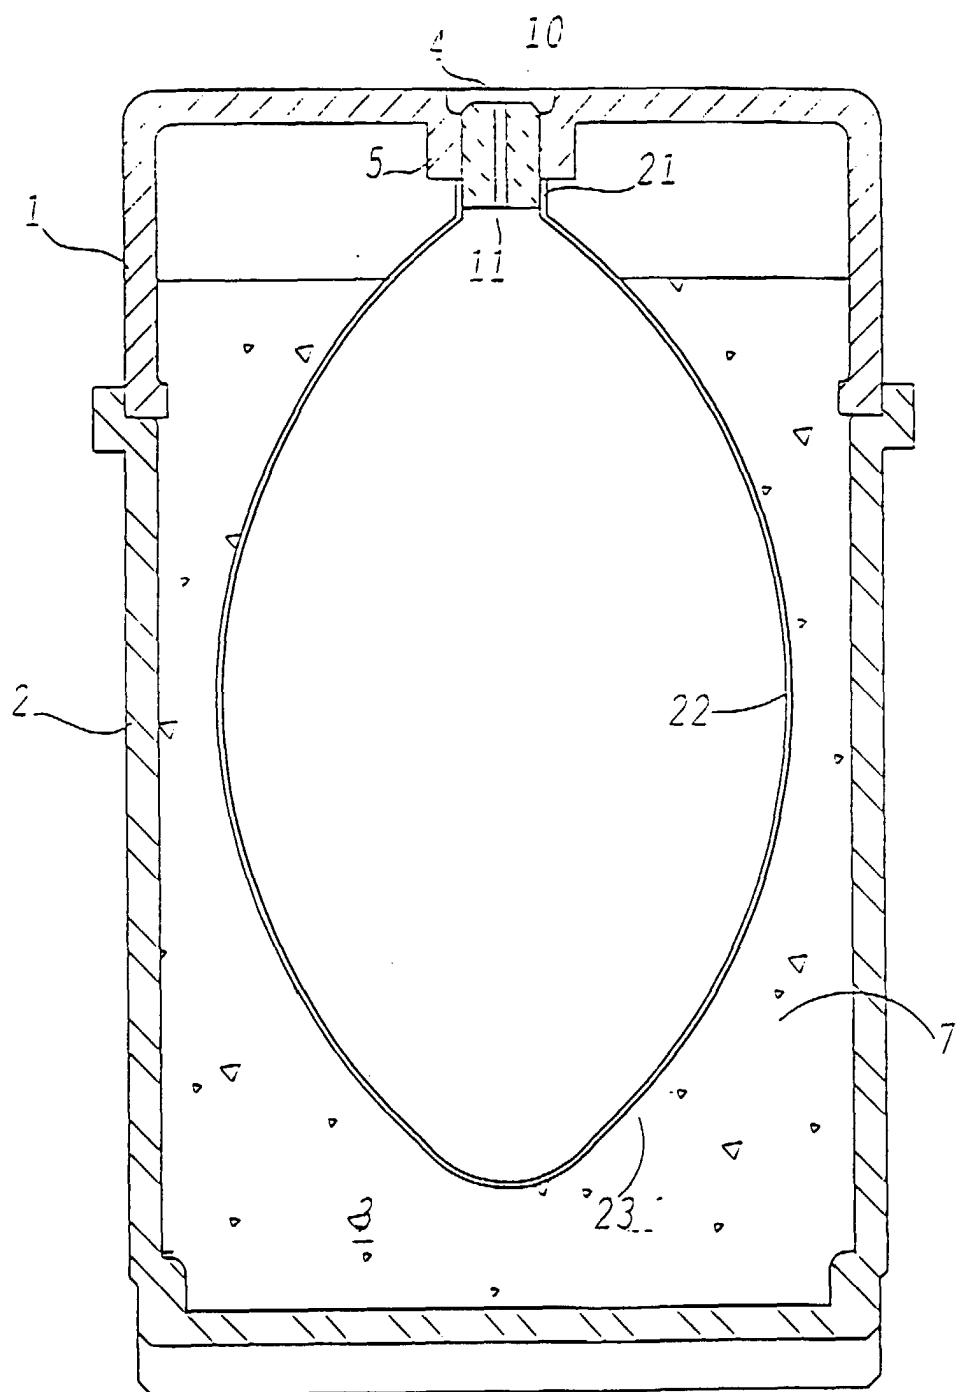


Figure 4

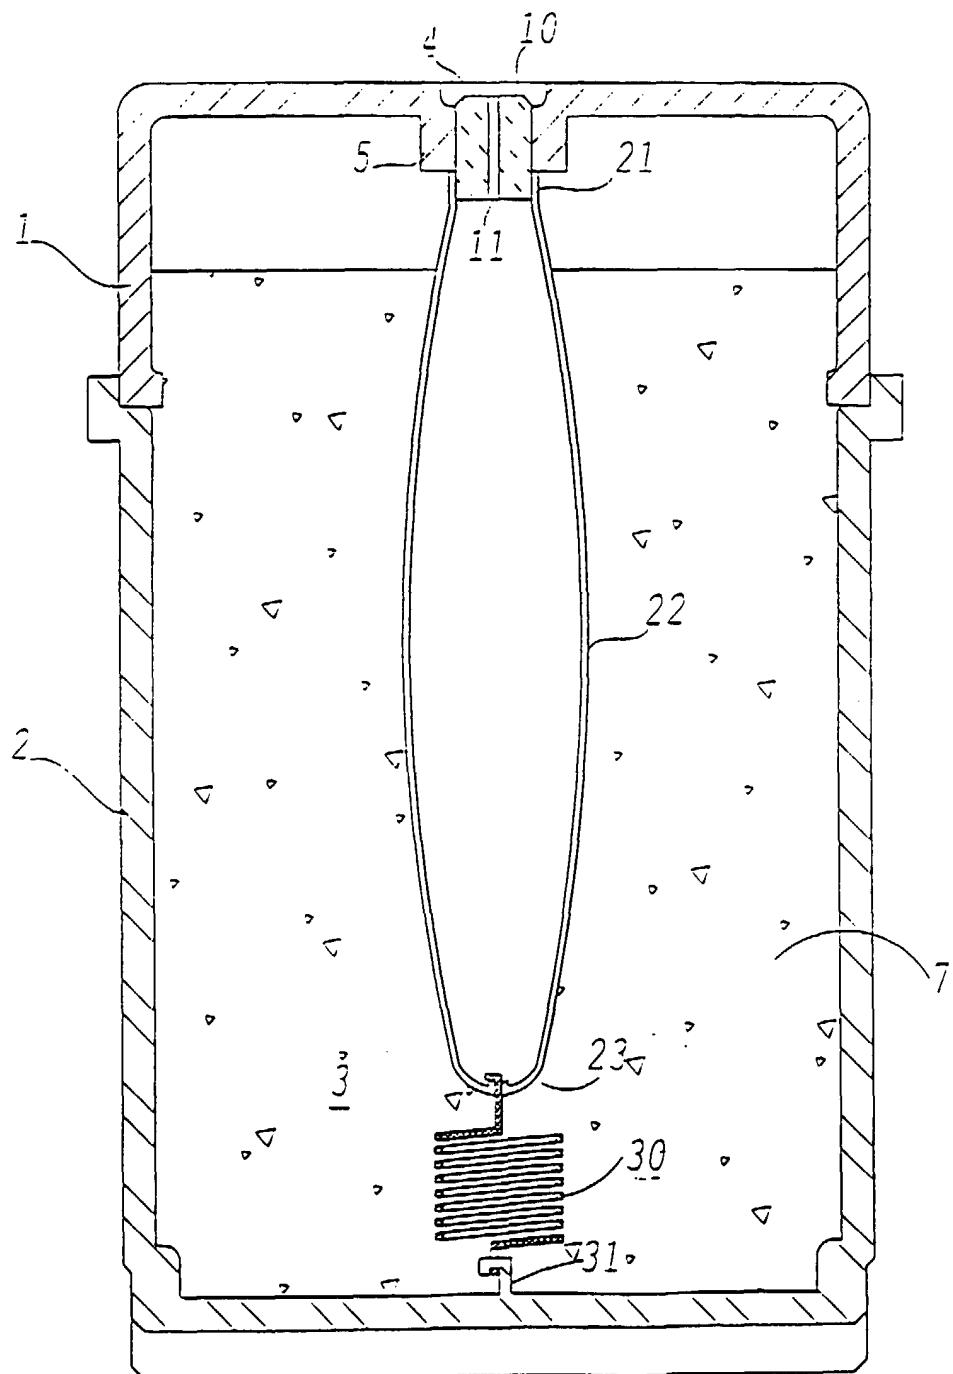


Figure 5



DOCUMENTS CONSIDERED TO BE RELEVANT									
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)						
A	US 5 719 609 A (HALL RONALD W ET AL) 17 February 1998 (1998-02-17) * column 2, line 56 - column 5, line 65; figures 1,2 *	1-5	B41J2/175						
A	PATENT ABSTRACTS OF JAPAN vol. 005, no. 101 (M-076), 30 June 1981 (1981-06-30) & JP 56 044666 A (RICOH CO LTD), 23 April 1981 (1981-04-23) * abstract *	1-5							
A	EP 0 857 576 A (HEWLETT PACKARD CO) 12 August 1998 (1998-08-12) * column 4, line 55 - column 5, line 45; figure 4 * * column 6, line 46 - column 7, line 3; figure 7 *	1							

TECHNICAL FIELDS SEARCHED (Int.Cl.7)									
B41J									
<p>The present search report has been drawn up for all claims</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%;">Place of search</td> <td style="width: 33%;">Date of completion of the search</td> <td style="width: 33%;">Examiner</td> </tr> <tr> <td>THE HAGUE</td> <td>21 January 2000</td> <td>Adam, E</td> </tr> </table> <p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>				Place of search	Date of completion of the search	Examiner	THE HAGUE	21 January 2000	Adam, E
Place of search	Date of completion of the search	Examiner							
THE HAGUE	21 January 2000	Adam, E							

ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.

EP 99 25 0376

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

21-01-2000

Patent document cited in search report		Publication date		Patent family member(s)		Publication date
US 5719609	A	17-02-1998	US	5975686 A		02-11-1999
JP 56044666	A	23-04-1981		NONE		
EP 0857576	A	12-08-1998	US	5975689 A		02-11-1999
			JP	10217510 A		18-08-1998

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82