



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
30.05.2001 Bulletin 2001/22

(51) Int Cl.7: **G01T 5/08**

(21) Application number: **00310563.2**

(22) Date of filing: **29.11.2000**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
 Designated Extension States:
AL LT LV MK RO SI

- **Poissin, George Edward**
Niskayuna, New York 12309 (US)
- **Han, Sung Su**
Niskayuna, New York 12309 (US)
- **Dejule, Michael Clement**
Clifton Park, New York 12065 (US)

(30) Priority: **29.11.1999 US 451030**

(71) Applicant: **GENERAL ELECTRIC COMPANY**
Schenectady, NY 12345 (US)


(74) Representative: **Goode, Ian Roy et al**
GE LONDON PATENT OPERATION,
Essex House,
12/13 Essex Street
London WC2R 3AA (GB)

(72) Inventors:
 • **Albagli, Douglas**
Clifton Park, New York 12065 (US)

(54) **High resolution and high luminance scintillator and radiation imager employing the same**

(57) A fiber optic scintillator includes (18), for example, a plurality of relatively low-density glass scintillating elements (20) for converting radiation into light and a plurality of relatively high-density glass radiation absorbing elements (40) interspersed among the plurality of scintillating elements (20). The high-density glass radiation absorbing elements (40) increase the x-ray stopping power of the scintillator and also produce electron showers which interact desirably in adjacent scintillating elements (20) to increase the luminance of the scintilla-

tor (18). The high-density glass radiation absorbing elements also absorb x-ray cross-talk from absorption of radiation in the scintillating elements (20) and desirably include optical absorbers for absorbing optical cross-talk, both of which improves the resolution of the scintillator (18). The plurality of scintillating elements (20) and high-density glass radiation absorbing elements (40) typically are fibers, and the high-density glass radiation absorbing elements (140) may define cladding around the scintillating low-density glass fibers.

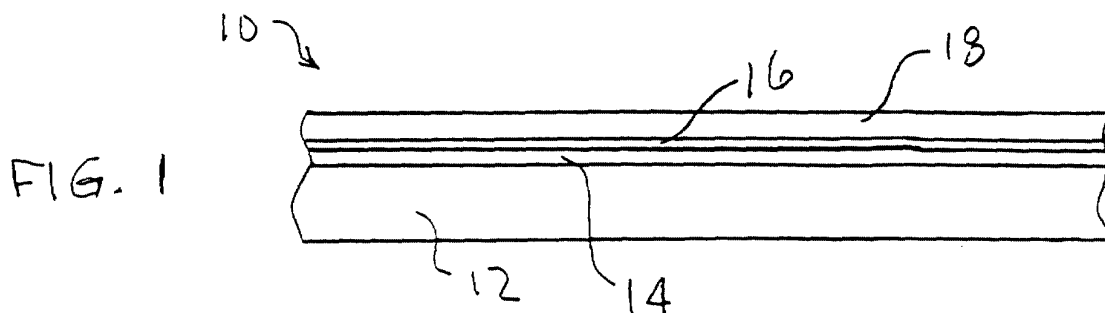

Description

[0001] This invention relates generally to radiation imaging, and more particularly, to radiation imaging via the conversion of radiation into visible light impinging on a light sensitive imaging array.

[0002] Radiation imagers typically include a scintillator coupled to a light sensitive imaging array. Radiation absorbed in the scintillator, such as a fiber optic scintillator, result in the emission of optical photons which in turn pass into the light sensitive imaging array. The light sensitive imaging array, such as a plurality of photodiodes, generates an electrical signal corresponding to the incident optical photon flux. Each of the photodiodes is coupled to circuitry to allow charge collected on the photodiode to be read.

[0003] Fiber optic scintillators or fiber optic scintillating plates are formed from an array of scintillating glass fibers disposed substantially parallel to one another. The core of each of the glass fibers is doped with a scintillating material so that the glass fibers scintillate when excited by radiation such as x-rays. The surface of each of the glass fibers is clad with a non-scintillating, lower optical index glass material.

[0004] Light generated in the scintillator in response to absorption of radiation in the core of a scintillating glass fiber is emitted isotropically. The portion of the light emitted at an angle less than the optical critical angle for the fiber is reflected and guided within the glass fiber and preferably made to exit from a surface of the fiber optic scintillator directed towards the light sensitive imaging array. The portion of the light emitted at an angle greater than the optical critical angle for the fiber exits the side of the glass fiber and thus may impinge on and be detected elsewhere by the light sensitive imaging array.

[0005] This latter portion of the light or so called "optical cross-talk" results in image quality degradation.

[0006] While fiber optic scintillators are generally suitable for medical imaging, for example, using x-rays having energies of about 50 KeV to about 80 KeV, such fiber optic scintillators have a number of drawbacks for use in industrial imaging applications such as nondestructive testing of parts using x-rays having high energies, e.g., about 100 KeV or greater.

[0007] For example, increasing the density of the scintillating glass fibers, in order to stop and absorb high energy x-rays, undesirably results in a reduction of the brightness or luminance of the scintillator. In particular, high-density glass fibers doped with a scintillating material typically exhibit a poorer conversion of absorbed radiation into optical photons compared to low-density glass fibers.

[0008] In addition, increasing the thickness of the scintillator in order to stop and absorb the high energy x-rays also undesirably results in increased optical cross-talk which degrades the resulting detected image.

[0009] Non-scintillating, black or colored glass fibers,

so called "extramural absorber" (EMA) fibers have been used, e.g., interspersed among the plurality of scintillating glass fibers, for the purpose of absorbing stray light before the light reaches the bottom surface of the fiber optic scintillator. However, while EMA fibers reduce optical cross-talk and thus improve the resolution of the scintillator, the image brightness or luminance is also reduced as fewer optical photons reach the image plane at the bottom of the fiber optic scintillator.

[0010] Therefore, there is a need for a high resolution and high luminous scintillator for use in medical imaging and in industrial imaging using high energy radiation.

[0011] The present invention provides a scintillator having a first plurality of radiation absorbing elements comprising a scintillating material for converting radiation into light, and a second plurality of radiation absorbing elements interspersed among the plurality of scintillating elements. The first plurality of radiation absorbing elements has a first radiation absorption efficiency, and the second plurality of radiation absorbing elements has a second radiation absorption efficiency which is greater than the first radiation absorption efficiency.

[0012] In another aspect of the invention, a radiation imager is provided having a light sensitive imaging array, and a scintillator, as noted above, disposed adjacent to the light sensitive imaging array.

[0013] In still another aspect of the invention, a method for forming a scintillator includes providing a bundle comprising a first plurality of radiation absorbing elements having a scintillating material for converting radiation into light and a second plurality of radiation absorbing elements, as noted above, interspersed among the first plurality of scintillating elements, drawing the bundle to reduce the cross-section of the first plurality of radiation absorbing elements and the second plurality of radiation absorbing elements, cutting the drawn bundle into a plurality of sections, and assembling the plurality of sections to form a scintillator having an array of parallel first and second radiation absorbing elements.

[0014] Embodiments of the invention will now be described, by way of example, with reference to the accompanying drawings, in which:

FIG. 1 is a cross-sectional, side view of a portion of an exemplary radiation imager of the present invention;

FIG. 2 is an enlarged, top view of the scintillator shown in FIG. 1;

FIG. 3 is an enlarged, cross-sectional view of the scintillator taken along line 3-3 of FIG. 2;

FIG. 4 is a top view of an alternative scintillator of the present invention; and

FIG. 5 is an enlarged, cross-sectional, side view of one of fibers forming the scintillator shown in FIG. 4.

[0015] FIG. 1 is a cross-sectional view of a portion of an exemplary radiation imager 10 of the present invention. Radiation imager 10 includes a substrate 12 on which a light sensitive imaging array 14 is disposed, and a fiber optic scintillator 18 optically coupled to light sensitive imaging array 14. Desirably, a barrier layer 16 is disposed between light sensitive imaging array 14 and scintillator 18 for protecting light sensitive imaging array 14. As explained in greater detail below, scintillator 18 provides a high resolution and high luminous scintillator for use in, for example, medical imaging and desirably, industrial imaging using high energy radiation such as x-ray radiation having energies of about 100 KeV or greater.

[0016] Light sensitive imaging array 14 includes a plurality of photosensitive elements or light sensitive imaging regions that are typically arranged in rows and columns on substrate 12. For example, each light sensitive imaging region typically comprises a photodiode disposed over a bottom contact pad and below an upper conductive layer. The upper conductive layer commonly includes a transparent conductive material such as indium tin oxide or the like. A suitable light sensitive imaging array is disclosed in greater detail in U.S. Patent No. 5,401,668.

[0017] Fiber optic scintillator 18 emits optical photons or visible light in response to the absorption of incident radiation. The emitted visible light then penetrates barrier layer 16 impinging on light sensitive imaging array 14. The impingement of the light results in voltage levels that are periodically read and interpreted as digital data. For example, light sensitive imaging array 14 may be made operable via suitable external electric circuitry, e.g., data lines and thin film transistors (TFTs).

[0018] FIGS. 2 and 3 illustrate, in greater detail, exemplary fiber optic scintillator 18 which includes a first plurality of radiation absorbing elements 20 and a second plurality of radiation absorbing elements 40 interspersed among the first plurality of first radiation absorbing elements 20. In this exemplary scintillator, the first and second plurality of radiation absorbing elements comprise a plurality of parallel fibers formed into an array.

[0019] For example, the plurality of radiation absorbing elements 20 include a first plurality of scintillating fibers, each of which include a respective scintillating core 24 with a respective first refractive index surrounded by a cladding 26 desirably having a second lower refractive index. Core 24 desirably includes a low-density glass doped with a scintillating material. For example, the scintillating fibers may include a terbium-activated or gadolinium-activated silicate luminescent glass core and a silicate glass cladding. Advantageously, by using a low-density glass, the scintillating material provides a higher conversion of absorbed radiation into optical photons compared to using a high-density glass.

[0020] The second plurality of radiation absorbing elements 40 include, for example, a plurality of non-scintillating fibers comprising a high-density glass. Desirably, the high-density glass is also doped with an optical absorber to absorb light. Advantageously, the high-density glass provides a greater radiation absorption efficiency compared to the plurality of scintillating fibers.

[0021] Suitable high-density glasses include flint glass or lead crystal containing lead oxide. Other suitable high-density glasses include glasses having an effective atomic number (Z) desirably greater than 50, e.g., high-density glasses containing barium (Z=56), platinum (Z=78), lead (Z=82), or combinations thereof. For silicate-based glasses, desirably, the high-density glass comprises about 60 percent to about 80 percent silicate glass and about 20 percent to about 40 percent of one or more substances having an atomic number greater than 50. Suitable optical absorbing materials for absorbing optical light include, for example, incorporating iron or cobalt into the high-density glass.

[0022] By providing the non-scintillating fibers with a greater radiation absorbing efficiency (e.g., x-rays absorbed in a material, measured per unit volume) than the scintillating fibers, it is possible to increase the absorption of radiation of the scintillator, increase the brightness of illumination of the scintillator, and increase the resolution of the scintillator compared to prior art scintillators.

[0023] In the scintillating fibers, the absorption of imaging radiation is primarily via Compton scattering interactions, i.e., a portion of the energy of an x-ray is imparted to an electron with a resulting reduced energy x-ray (i.e., Compton x-ray). As best shown in FIG. 3, an x-ray A enters a top surface of scintillator 18 and is absorbed at a point P in core 24 of the scintillating fiber resulting in a Compton x-ray and an energized electron which interacts with the scintillating material in the scintillating fibers to emit optical photons, e.g., light rays L1 and L2. Light ray L1, emitted at an angle greater than the critical angle is internally reflected within core 24 and emitted from a bottom surface of scintillator 18. Light ray L2, emitted at an angle greater than the critical angle passes through the scintillating fiber and continues through adjacent scintillating fibers until it is absorbed by a high-density glass fiber.

[0024] Another function of the plurality of high-density glass fibers is to absorb Compton x-rays (e.g., Compton x-ray R) which travel through the scintillating fibers until they are absorbed by a high-density glass fiber. These Compton x-rays, i.e., "Compton x-ray cross-talk," would otherwise have a very long range in the scintillator (e.g., across multiple fiber dimensions) and degrade the resolution of the scintillator. Desirably, the ratio of high-density glass fibers to scintillating, low-density fibers is about 1 to 2.

[0025] Still another function of the plurality of high-density glass fibers is to increase the radiation stopping power of the scintillator. For example, x-rays B which interact with high-density glass fiber produce high-energy electron showers S, which interact in adjacent scintillating fibers.

tillating fibers producing light rays, e.g., light ray L3, which increase the brightness or luminance of the scintillator. The electron range for electron showers by high energy x-rays, e.g., 100 KeV, are of the order of about 50 microns to about 100 microns. Hence, if the fiber size is of the order of 20 microns, most of the electrons will escape the high-density glass fibers and produce light in the scintillating glass fibers.

[0026] FIGS. 4 and 5 illustrate an alternate embodiment of a fiber optic scintillator 118 having a plurality of double clad radiation absorbing fibers 130. Each of radiation absorbing fibers 130 includes an inner scintillating fiber 120 surrounded by an outer radiation absorbing cladding 140. Inner scintillating fiber 120 desirably comprises a scintillating glass fiber core 124 with a lower optical index glass cladding 126 to increase the critical angle for internal reflection of light. Outer radiation absorbing cladding 140 desirably comprises a high-density glass as discussed above in greater detail. As also discussed above, the high-density glass cladding is desirably doped with optical absorbers to absorb light emitted outside the critical angle of the scintillating fiber.

[0027] The double clad radiation absorbing fibers of scintillator 118 has two advantages. First, the high-density glass is in closer proximity to the scintillating fiber so that high energy electron showers will be efficiently coupled to the scintillating fibers. Second, the scintillator requires fibers of only one type thereby facilitating the manufacturing process (discussed below) of the scintillator.

[0028] A method for fabricating a scintillator of the present invention includes forming a relatively small number of elements into a bundle, using heat and mechanical means to form them into a tight bundle and then drawing the bundles down to small diameters, cutting the fiber bundles into sections, and assembling the sections into larger arrays of fibers which are heat fused and cut into slabs.

[0029] For the scintillator shown in FIGS. 4 and 5, the initial double clad radiation absorbing fibers are formed, for example, by inserting the scintillating fiber inside of a lower optical index glass tube and then inserting the assembly into a larger high-density glass tube. This assembly is then be heated and drawn down to a smaller diameter either before or after assembling into a fiber bundle.

[0030] For completeness, various aspects of the invention are set out in the following numbered clauses:-

1. A scintillator (18) comprising:

a first plurality of radiation absorbing elements (20) comprising a scintillating material for converting radiation into light;
a second plurality of radiation absorbing elements (40) interspersed among said plurality of scintillating elements; and
said first plurality of radiation absorbing ele-

ments (20) having a first radiation absorption efficiency, said second plurality of radiation absorbing elements having a second radiation absorption efficiency, and said second radiation absorption efficiency being greater than said first radiation absorption efficiency.

2. The scintillator (18) of clause 1 wherein said second plurality of radiation absorbing elements (40) being operable to absorb radiation via a photoelectric effect and produce a plurality of electron showers (S) convertible to light in said first plurality of radiation absorbing elements (20).

3. The scintillator (18) of clause 1 wherein said first plurality of radiation absorbing elements (20) being operable to absorb radiation via Compton scattering, and wherein said second plurality of radiation (R) absorbing elements being operable to absorb radiation generally from Compton scattering in said first plurality of radiation absorbing elements (20).

4. The scintillator (18) of clause 1 wherein said first plurality of radiation absorbing elements (20) comprise a plurality of scintillating fibers, and said second plurality of radiation absorbing elements (40) comprise a plurality of non-scintillating fibers.

5. The scintillator (18) of clause 1 wherein said second plurality of radiation absorbing elements (40) further comprise a light absorbing material.

6. The scintillator (18) of clause 1 wherein said first plurality of radiation absorbing elements (20) comprise a low-density glass material and said second plurality of radiation absorbing elements (40) comprise a high-density glass material.

7. The scintillator (18) of clause 6 wherein said first plurality of radiation absorbing elements (20) comprise at least one of a luminescent terbium-activated glass material and luminescent gadolinium-activated glass material, and said second plurality of radiation absorbing elements (40) comprise a lead oxide glass material.

8. A scintillator (118) comprising:

a plurality of radiation absorbing fibers (130) comprising an inner scintillating fiber (120) having a scintillating material for converting radiation into light and an outer radiation absorbing cladding (140) surrounding said inner scintillating fiber; and
said inner scintillating fiber (120) having a first radiation absorption efficiency, said outer radiation absorbing cladding (140) having a second radiation absorption efficiency, and said second radiation absorption efficiency being greater than said first radiation absorption efficiency.

9. A radiation imager (10) comprising:

a light sensitive imaging array (14);

a scintillator (18) disposed adjacent to said light sensitive imaging array (14), said scintillator (18) comprising:

a first plurality of radiation absorbing elements (20) comprising a scintillating material for converting radiation into light; 5
a second plurality of radiation absorbing elements (40) interspersed among said plurality of scintillating elements (20); and
said first plurality of radiation absorbing elements (20) having a first radiation absorption efficiency, said second plurality of radiation absorbing elements (40) having a second radiation absorption efficiency, and said second radiation absorption efficiency being greater than said first radiation absorption efficiency. 10 15

10. The radiation imager (10) of clause 9 wherein said second plurality of radiation absorbing elements (40) being operable to absorb radiation via a photoelectric effect and produce a plurality of electron showers (S) convertible to light in said first plurality of radiation absorbing elements (20). 20

11. The radiation imager (10) of clause 9 wherein said first plurality of radiation absorbing elements (20) being operable to absorb radiation generally via Compton scattering, and wherein said second plurality of radiation absorbing elements operable to absorb Compton radiation (R) from Compton scattering in said first plurality of radiation absorbing elements (20). 25 30

12. The radiation imager (10) of clause 9 wherein said first plurality of radiation absorbing elements (20) comprise a plurality of scintillating fibers, and said second plurality of radiation absorbing elements (40) comprise a plurality of non-scintillating fibers. 35

13. The radiation imager (10) of clause 9 wherein said second plurality of radiation absorbing elements (40) further comprise a light absorbing material. 40

14. The radiation imager (10) of clause 9 wherein said first plurality of radiation absorbing elements (20) comprise a low-density glass material and said second plurality of radiation absorbing elements comprises a high-density glass material. 45

15. The radiation imager (10) of clause 15 wherein said first plurality of radiation absorbing elements (20) comprise at least one of a luminescent terbium-activated glass material and luminescent gadolinium-activated glass material, and said second plurality of radiation absorbing elements (40) comprise a lead oxide glass material. 50

16. A radiation imager (10) comprising: 55

a light sensitive imaging array (14);
a scintillator (118) disposed adjacent to said light sensitive imaging array (14), said scintilla-

tor (118) comprising:

a plurality of radiation absorbing fibers (130) comprising an inner scintillating fiber (120) having a scintillating material for converting radiation into light and an outer radiation absorbing cladding (140) surrounding said inner scintillating fiber (120); and
said inner scintillating fiber (120) having a first radiation absorption efficiency, said outer radiation absorbing cladding (140) having a second radiation absorption efficiency, and said second radiation absorption efficiency being greater than said first radiation absorption efficiency.

17. A method for forming a scintillator (18), the method comprising:

providing a bundle comprising a first plurality of radiation absorbing elements (20) comprising a scintillating material for converting radiation into light and a second plurality of radiation absorbing elements (40) interspersed among the first plurality of scintillating elements (20), the first plurality of scintillating elements (20) having a first radiation absorption efficiency, the second plurality of radiation absorbing elements (40) having a second radiation absorption efficiency, and the second radiation absorption efficiency being greater than the first radiation efficiency;
drawing the bundle to reduce the cross-section of the first plurality of radiation absorbing elements (20) and the second plurality of radiation absorbing elements (40);
cutting the drawn bundle into a plurality of sections; and
assembling the plurality of sections to form the scintillator (18) having an array of parallel first and second radiation absorbing elements (20,40).

18. The method of clause 17 wherein the first plurality of radiation absorbing elements (20) comprise a plurality of fibers, and the second plurality of radiation absorbing elements (40) comprise a plurality of fibers.

19. The method of clause 17 wherein the first plurality of radiation absorbing elements (20) comprise a low-density glass material and the second plurality of radiation absorbing elements (40) comprises a high-density glass material.

20. The method of clause 17 wherein the drawing further comprises heating the bundle.

21. The method of clause 17 wherein the assembling comprises fusing together the plurality of sections.

22. A method for forming a scintillator (118), the method comprising:

providing a bundle comprising a plurality of radiation absorbing fibers (130) comprising an inner scintillating fiber (120) having a scintillating material for converting radiation into light, and an outer radiation absorbing cladding (140) surrounding said inner scintillating fiber (120), said scintillating fiber (120) having a first radiation absorption efficiency, said outer radiation absorbing cladding (140) having a second radiation absorption efficiency, and said second radiation absorption efficiency being greater than said first radiation absorption efficiency; drawing the bundle to reduce the cross-section of the plurality of radiation absorbing fibers; cutting the drawn bundle into a plurality of sections; and assembling the plurality of sections to form the scintillator (118) having an array of parallel radiation absorbing fibers (130).

Claims

1. A scintillator (18) comprising:

a first plurality of radiation absorbing elements (20) comprising a scintillating material for converting radiation into light; a second plurality of radiation absorbing elements (40) interspersed among said plurality of scintillating elements; and said first plurality of radiation absorbing elements (20) having a first radiation absorption efficiency, said second plurality of radiation absorbing elements having a second radiation absorption efficiency, and said second radiation absorption efficiency being greater than said first radiation absorption efficiency.

2. The scintillator (18) of claim 1 wherein said second plurality of radiation absorbing elements (40) is operable to absorb radiation via a photoelectric effect and produce a plurality of electron showers (S) convertible to light in said first plurality of radiation absorbing elements (20).

3. The scintillator (18) of claim 1 wherein said first plurality of radiation absorbing elements (20) is operable to absorb radiation via Compton scattering, and wherein said second plurality of radiation (R) absorbing elements is operable to absorb radiation generally from Compton scattering in said first plurality of radiation absorbing elements (20).

4. The scintillator (18) of claim 1 wherein said first plurality of radiation absorbing elements (20) comprise a plurality of scintillating fibers, and said second plurality of radiation absorbing elements (40) comprise

a plurality of non-scintillating fibers.

5. The scintillator (18) of claim 1 wherein said second plurality of radiation absorbing elements (40) further comprise a light absorbing material.

6. A scintillator (118) comprising:

a plurality of radiation absorbing fibers (130) comprising an inner scintillating fiber (120) having a scintillating material for converting radiation into light and an outer radiation absorbing cladding (140) surrounding said inner scintillating fiber; and said inner scintillating fiber (120) having a first radiation absorption efficiency, said outer radiation absorbing cladding (140) having a second radiation absorption efficiency, and said second radiation absorption efficiency being greater than said first radiation absorption efficiency.

7. A radiation imager (10) comprising:

a light sensitive imaging array (14); and a scintillator (18) according to any one of claims 1 to 5 disposed adjacent to said light sensitive imaging array (14).

8. A radiation imager (10) comprising:

a light sensitive imaging array (14); and a scintillator (118) according to any one of claims 1 to 6 disposed adjacent to said light sensitive imaging array (14).

9. A method for forming a scintillator (18), the method comprising:

providing a bundle comprising a first plurality of radiation absorbing elements (20) comprising a scintillating material for converting radiation into light and a second plurality of radiation absorbing elements (40) interspersed among the first plurality of scintillating elements (20), the first plurality of scintillating elements (20) having a first radiation absorption efficiency, the second plurality of radiation absorbing elements (40) having a second radiation absorption efficiency, and the second radiation absorption efficiency being greater than the first radiation efficiency; drawing the bundle to reduce the cross-section of the first plurality of radiation absorbing elements (20) and the second plurality of radiation absorbing elements (40); cutting the drawn bundle into a plurality of sections; and assembling the plurality of sections to form the

scintillator (18) having an array of parallel first and second radiation absorbing elements (20,40).

10. A method for forming a scintillator (118), the method comprising: 5

providing a bundle comprising a plurality of radiation absorbing fibers (130) comprising an inner scintillating fiber (120) having a scintillating material for converting radiation into light, and an outer radiation absorbing cladding (140) surrounding said inner scintillating fiber (120), said scintillating fiber (120) having a first radiation absorption efficiency, said outer radiation absorbing cladding (140) having a second radiation absorption efficiency, and said second radiation absorption efficiency being greater than said first radiation absorption efficiency; 10
drawing the bundle to reduce the cross-section of the plurality of radiation absorbing fibers; 15
cutting the drawn bundle into a plurality of sections; and
assembling the plurality of sections to form the scintillator (118) having an array of parallel radiation absorbing fibers (130). 20
25

30

35

40

45

50

55

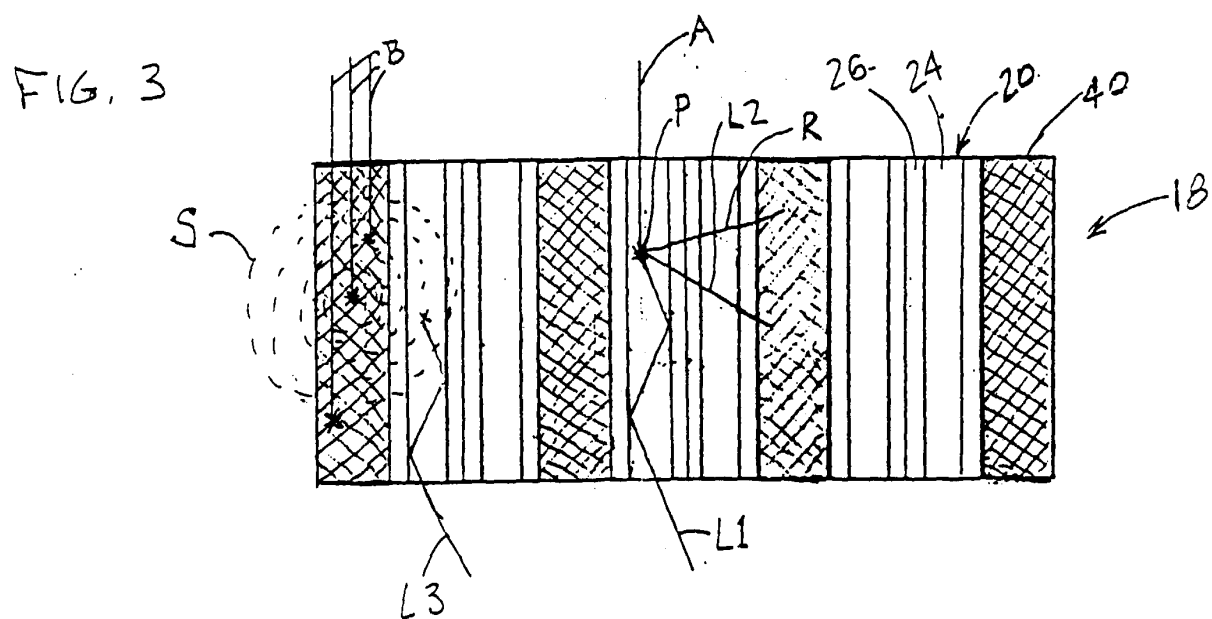
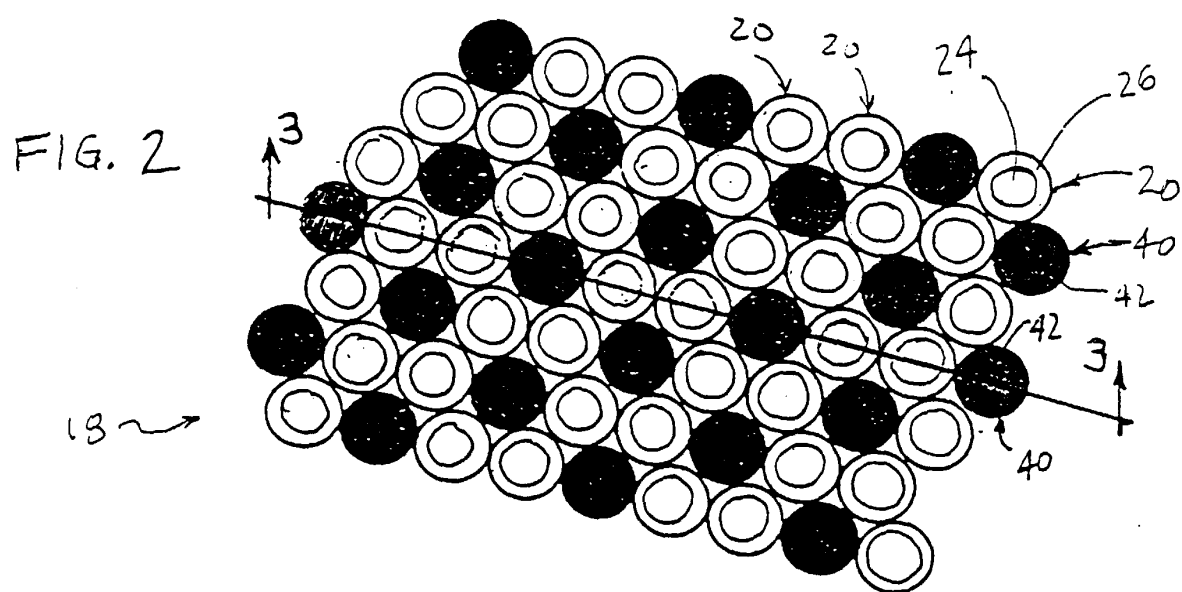
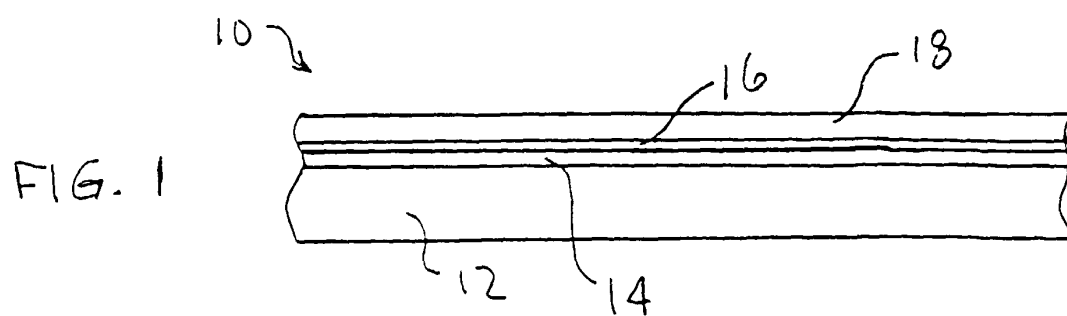


FIG. 4

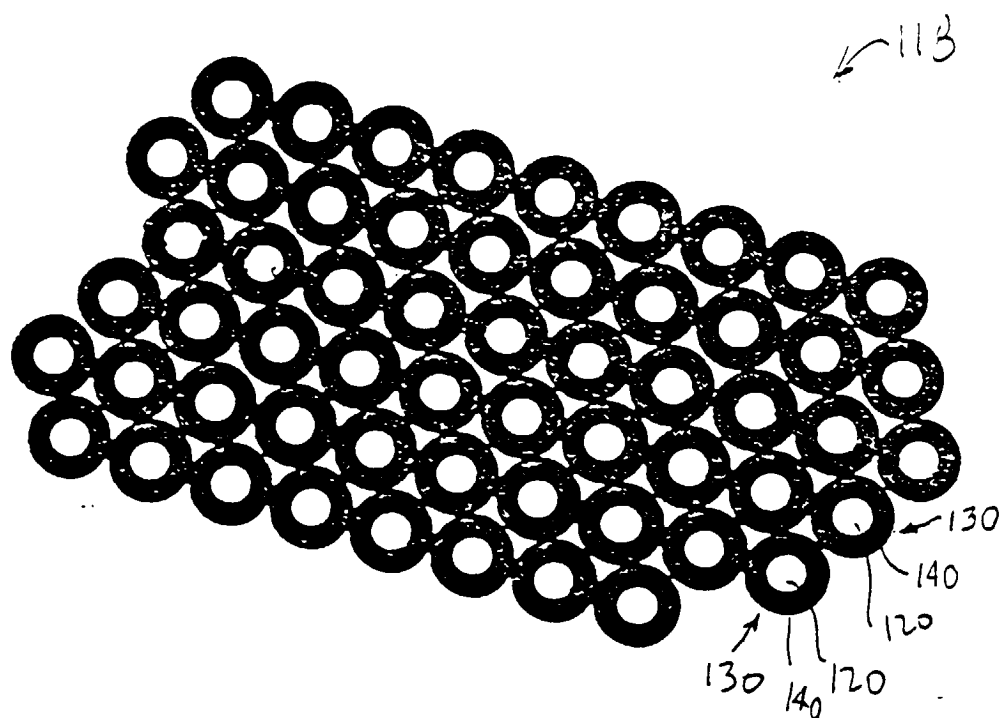


FIG. 5

