

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 112 869 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
09.06.2004 Bulletin 2004/24

(51) Int Cl.7: **B60C 9/26**, B60C 9/20

(21) Application number: **00127664.1**

(22) Date of filing: **18.12.2000**

(54) **Continuous folded belt and splice therefore**

Ununterbrochener, gefaltener Gürtel und Spleissung dafür

Armature de sommet continuée, pliée, et son épissure

(84) Designated Contracting States:
DE FR GB IT

(72) Inventor: **Losey, Robert Allen**
Kent, OH 44240 (US)

(30) Priority: **28.12.1999 US 474034**

(74) Representative: **Kutsch, Bernd**
Goodyear S.A.
Patent Department
7750 Colmar-Berg (LU)

(43) Date of publication of application:
04.07.2001 Bulletin 2001/27

(73) Proprietor: **THE GOODYEAR TIRE & RUBBER**
COMPANY
Akron, Ohio 44316-0001 (US)

(56) References cited:
EP-A- 0 875 402 **AT-B- 404 336**
FR-A- 2 361 230 **US-A- 4 325 423**

EP 1 112 869 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

[0001] The invention relates to reinforcing components for elastomeric products, and elastomeric products made using the reinforcing component. In an illustrated embodiment, the reinforcing component is a belt package for a pneumatic tire.

Background Art

[0002] Elastomeric products, such as drive belts, conveyor belts and pneumatic tires are sometimes made with reinforced components, wherein the reinforcement is parallel cords or filaments encapsulated in a rubber matrix. Often, more than one of these components need to be laid up in the product adjacent to another such component, and most often, when more than one layer of reinforcement is used, the cords or filaments in adjacent components have opposing angles. Such components have edges with exposed reinforcement ends, and splices, especially in belts and tires.

[0003] When an elastomeric product works, there is a tendency, over time, for the ends of the reinforcement, and the edges of components that have physical properties different from the elastomer, to break free of the elastomer. Also, splices can break loose from the elastomer and cause separations of the reinforcing component from the elastomer. Often, additional components are added to the product, or the product is otherwise modified, to reduce or eliminate these problems.

[0004] With respect to radial pneumatic tires, EP-A-875 402 attempts to solve this problem by providing two belt layers comprising an inclining strip, formed by aligning a plurality of reinforcing cords to a tire circumferential direction, and extending it zig-zag in the tire circumferential direction so that the strip is turned back from the lower belt layer to the upper belt layer at both end portions of the two belt layers. A tire made using this type of reinforcement is said to improve straight driving stability while improving edge separation resistance of the belt layers.

[0005] Although the zigzag folding of an elastomeric reinforced strip eliminates the problem of cord ends at a belt edge, such strips still contain a splice. Because two layers of belt are created from a single strip of reinforced elastomer, and the upper belt layer and lower belt layer are disposed at opposed angles, the conventional overlap splice and the conventional butt splice cannot be used with this configuration. The challenges of this kind of construction is to create a splice that can be made with a minimum amount of cutting, i.e., a splice that is not labor intensive, and to create a splice that provides a smooth transition in the composite, i.e., in a completed tire, there are no bulges caused by stacking material in an overlap splice.

[0006] It is an object of this invention to provide a re-

inforcing component which can be used in elastomeric products that does not have cut edges comprising free ends of cord or filament reinforcement, and appears to be substantially spliceless in a completed product.

5 [0007] Other objects of the invention will be apparent from the following description and claims.

Definitions

10 [0008] "Apex" refers to a wedge of rubber placed between the carcass and the carcass turnup in the bead area of the tire, usually used to stiffen the lower sidewall of the tire.

[0009] "Axial" and "axially" means lines or directions that are parallel to the axis of rotation of the tire.

15 [0010] "Bead" means that part of the tire comprising an annular tensile member wrapped by ply cords and shaped, with or without other reinforcement elements such as flippers, chippers, apexes, toe guards and chafers, to fit the design rim.

20 [0011] "Belt reinforcing structure" means at least two layers of plies of parallel cords, woven or unwoven, underlying the tread, unanchored to the bead, and having both left and right cord angles in the range from 17 degrees to 28 degrees with respect to the equatorial plane of the tire.

25 [0012] "Carcass ply" means the tire structure apart from the belt structure, tread, undertread, sidewall rubber and the beads.

30 [0013] "Cord" means one of the reinforcement strands of which the plies in the tire are comprised.

[0014] "Equatorial plane (EP)" means the plane perpendicular to the tire's axis of rotation and passing through the center of its tread.

35 [0015] "Filament" refers to a single yarn.

[0016] "Pantographing" refers to the shifting of the angles of cord reinforcement in a tire when the diameter of the tire changes, e.g. during the expansion of the tire in the mold.

40 [0017] "Ply" means a continuous layer of rubber-coated parallel cords.

[0018] "Pneumatic tire" means a mechanical device of generally toroidal shape (usually an open torus) having beads and a tread and made of rubber, chemicals, fabric and steel or other materials. When mounted on the wheel of a motor vehicle, the tire through its tread provides a traction and contains the fluid or gaseous matter, usually air, which sustains the vehicle load.

45 [0019] "Radial" and "radially" means directions radially toward or away from the axis of rotation of the tire.

50 [0020] "Radial-ply tire" means a belted or circumferentially restricted pneumatic tire in which the ply cords which extend from bead to bead are laid at cord angles between 65 to 90 degrees with respect to the equatorial plane of the tire.

55 [0021] "Shoulder" means the upper portion of a sidewall just below the tread edge.

[0022] "Sidewall" means that portion of a tire between

the tread and the bead.

[0023] "Splice" refers to the connection of end of two components, or the two ends of the same component in a tire. "Splice" may refer to the abutment or the overlapping of two such ends.

[0024] "Tread" means a molded rubber component which, when bonded to a tire casing, includes that portion of the tire which comes into contact with the road when the tire is normally inflated and under normal load.

Summary of the Invention

[0025] The invention relates to a pneumatic tire having at least a pair of substantially parallel annular beads (12), at least one carcass ply (14) wrapped around the beads, a tread (18) disposed over the at least one carcass ply in a crown area of the tire, and sidewalls (20) disposed between the tread (18) and the beads (12). A reinforcement package (24) is disposed between the tread (18) and the at least one carcass ply (14) in the crown area of the tire, the reinforcement package (24) comprising an elastomeric composite having a second end (42) and a first end (32). The elastomeric composite is reinforced with substantially parallel reinforcement cords (26) oriented at substantially 0° with respect to a longitudinal centerline (CL) of the composite. The composite is folded upon itself to provide a reinforcement package (24) having an upper layer (46), wherein the reinforcement cords have an angle of 17 to 35° with respect to the equatorial plane (EP) of the tire (10), and a lower layer (48), wherein the reinforcement cords have an angle of -17 to -35° with respect to the equatorial plane (EP) of the tire (10). The reinforcement package (24) has a splice (28) wherein upper layer (46) at second end tip (37) overlaps with lower layer (48) at a first end (32). The splice (28) comprises a triangular configuration made by cutting upper layer (46) at first end (32) at angle of 17 to 35° for a distance corresponding to 70 to 90% of the width of elastomeric composite (24), and removing all cut reinforcement cords (26) from cut-out (30) at first end (32).

[0026] Second end (42) of reinforcement package (24) fits with and overlaps with cut end (32) of reinforcement package (24) without modification.

[0027] The reinforcement cords (26) may comprise steel, polyester, polyamide, aromatic polyamide, reconstituted cellulose, polyvinyl alcohol, fiberglass, carbon-fibers and mixtures thereof.

[0028] In the illustrated embodiment, the reinforcement cords (26) are selected from the group comprising polyethylene naphthalate, terephthalate, rayon and aramid. The reinforcement cords (26) have a dTex of 3300 to 13000 and an end count in the reinforcement package (24) of 4 to 11 ends per centimeter (epc).

Brief Description of Drawings

[0029] Fig. 1 illustrates a prior art tire using a contin-

uous folded belt.

[0030] Fig. 2 illustrates a prior art belt reinforcement used in the tire of Fig. 1.

[0031] Fig. 3 illustrates an expanded view of the prior art belt reinforcement.

[0032] Fig. 4 illustrates a tire of the invention.

[0033] Fig. 5 illustrates a continuous belt of the invention.

[0034] Fig. 6 illustrates an expanded view of a continuous belt of the invention.

[0035] Fig. 7 illustrates a splice for the belt reinforcement of the invention.

[0036] Fig. 8 illustrates a diagram comparing the strengths of a belt of the invention made using PEN reinforcement as compared to the strength of a conventional steel belt.

[0037] Fig. 9 illustrates load displacement of a reinforcement package of the invention as compared to a conventional steel belt.

[0038] Fig. 10 illustrates the fatigue strengths of belts made using a variety of constructions and a variety of materials.

[0039] Fig. 11 illustrates the fatigue properties of a belt using PEN reinforcement as compared to a belt made with steel cord reinforcement.

Detailed Description of the Invention

[0040] With reference now to Figs. 1 and 2, prior art belt reinforcement 22, as illustrated in EP-A- 875 402, is made by turning a reinforced elastomeric strip back and forth upon itself throughout the circumference of a tire. The reinforcing cords in the strip cross one another between the layers comprising zone portions in which the reinforcing cords incline to the right in the tire circumferential direction, and zone portions in which the reinforcing cords incline to the left in the tire circumferential direction. Fig. 3 illustrates the turning of the elastomeric strip in an extended view so that the lay up of the elastomeric strip can be understood.

[0041] With reference now to Fig. 4, a tire of the invention 10 comprises at least a pair of substantially parallel annular beads 12 around which is wrapped at least one carcass ply 14. Belt reinforcement 24 is disposed in a crown area of the tire, and tread 18 is disposed radially outward of belt reinforcement 24. Sidewalls 20 are disposed between tread 18 and beads 12. It is noted that a prior art tire, having the prior art belt reinforcement shown in Fig. 2, could also be fairly represented by Fig. 4 at specific points in the tire, because of the substantial similarity of the cross sections at specific points on the tires, i.e., in the middle of the folded over portions of the reinforced elastomeric strip.

[0042] With reference now to Figs. 4, 5 and 6, the belt reinforcement of the invention is illustrated using the same views as used in Figs. 1, 2 and 3 for the prior art belt reinforcement. In Figs. 5 and 6, it is shown that instead of folding the reinforced elastomeric strip back

and forth upon itself, the belts of the invention are made by continuously folding the strip in the same direction, as if wrapping the elastomeric strip around a core. The core may be imaginary or the core 23 may comprise an elastomer. When no core is used, the rubber from the rivet acts to crosslink the upper portion of the belt with the lower portion of the belt. In one illustrated embodiment, a green rubber core 23, having a width comprising 60% to 95% of the belt width, is used, around which the elastomeric strip is wrapped. In Fig. 6, a portion of a core 23 is illustrated. Those skilled in the art will recognize that when a core 23 is used, core 23 will have the same length as reinforcement 24, and instead of a single core, the core may take the form of belt edge strips.

[0043] In an alternative embodiment, the core may comprise a reinforced strip, especially a reinforced strip that has discontinuous reinforcement, such as described by Davisson, in US-A- 4 791 973.

[0044] It is believed that the bending of the reinforcement cords in the same direction reduces the stresses on the cords, and improves the stability of the belt construction. Reduced stress on the reinforcement cords is believed to improve fatigue strength of the cords, and to improve the overall wear properties of the tire. Further reduction of stresses on the folded cords may be obtained by inclusion of the rubber core 23 between the folded layers, which may reduce the kink at the folded edges of the elastomeric strip.

[0045] With reference now to Fig. 7, the splice portion 28 of belt reinforcement 24 is illustrated. To make splice 28, a cut-out 30 is made in first end 32 of belt 24, wherein a first cut 36 is made parallel to edge 34 of the belt, edge 34 being the longest side of the folded over angle which comprises first end 32 of the belt. In the illustrated embodiment, first cut 36 and a second cut 40 intersect, and with edge 38 form a triangle. The cut-out portion 30 of first end 32 of belt 24 is shaped so as to fit folded end 42 of the second end 44 of the reinforced strip used to make belt 24, i.e., the folded over end 42 is used without cutting, which reduces the labor involved in making belt splice 28.

[0046] Making splice 28 in this manner provides a substantial overlap between first end 32 and second end 44 of the belt, and since folded over end 42 fits within cutout portion 30, there is no extra material thickness in a tire made using belt 24. As illustrated in Figs. 6 and 7, the cord angles of the upper portion 46 and lower portion 48 are the same in the splice as in the remainder of the belt. Accordingly, strength is maintained in the splice, aided further by a substantial amount of adhesion in the substantial overlap between upper portion 46 and lower portion 48 in the area of splice 28.

[0047] Belt reinforcement 24 is preferably made using reinforcement comprising organic filaments or cords, although those skilled in the art will recognize that in particular constructions, a fiber reinforced elastomeric strip can be used to form folded belt structure 24. Organic filaments or cords that may be used as reinforcement

may comprise polyesters, aramid, nylon, polyvinyl alcohols, polyalkylenes, cellulose, fiberglass and carbon fibers. Those skilled in the art will recognize that steel cords which have a high degree of flexibility may be used. In the illustrated embodiment, very good results were obtained using polyethylene naphthalate (PEN) cords, which were obtained from Allied Signal.

[0048] The PEN cords used in the illustrated tire constructions were processed using a slow draw procedure to produce longer crystals of the PEN material in the filaments. This process is believed to provide better dimensional stability, a better tensile modulus, and other improved physical properties. The cords produced by the process had a nominal linear density of 1100/2/3 dTex (1000/2/3 denier), and a 4X4 twist, and had a tensile strength of 9.2 dN/tex (10.4 grams per denier (gpd)) and a tensile modulus of 230 dN/tex (260 gpd).

[0049] The cords may be dipped using a single end dipping unit, and the cords may be woven into fabric. Alternatively, the fabric may be prepared according to WO98/47726 or WO99/16630. It is believed that the dipping procedure further enhances the properties of the PEN cord. Those skilled in the art will recognize that conventional fabric dipping can be used if safeguards are used to insure proper adhesion, dimensional stability, and maximum uniformity.

[0050] It is believed that the specific properties of the PEN cords are secondary, however, since the design or architecture of the belt package is most important to the properties of the tire, and other cord materials and combinations can be used to obtain required belt package properties for a specified tire.

[0051] In a method of the invention, an elastomeric strip is first prepared by calendering a plurality of parallel reinforcement cords to produce a calendered strip of material with continuous reinforcement cords parallel to the edge of the calendered strip. Those skilled in the art will recognize that such a calendered strip is made in the preparation of conventional belts, but in order to prepare the conventional belts, the calendered strip is cut on an angle, and the angled ends are spliced together to provide a belt strip having reinforcement at an angle to the edge of the belt strip.

[0052] In the present invention, the cutting and splicing of the strip is avoided, since the calendered strip is used in the invention as it comes off the calender, i.e., the reinforcement in the strip is parallel to the edge of the strip.

[0053] The calendered strip is cut to a length needed for forming a belt in a tire. For example, in a tire having a green circumference of 226 cm (89 inches), and the green belt had a width of 192 mm, and the cord angle of the reinforcement was 32°.

[0054] The calendered strip is folded at an angle of 20 to 40 degrees in a plurality of continuous folds, wherein all the folds are in the same direction, to produce a structure equivalent to wrapping the strip around a pipe or a flat stick, and removing the pipe or stick and

flattening the wrapped structure.

[0055] A tire has been designed having belt reinforcement comprising 6700 dTex reinforcement cords, made from a strip of calendered material 192 mm wide with a cord density of 11 epc. The folded structure may be made by choosing the desired angle of reinforcement, and making a first fold at the desired angle. In the illustrated embodiment, the angle of reinforcement was chosen to be 30°. Folding may be continued following the same pattern throughout the length of the calendered strip. The splice may be made by cutting the first end of the strip at a 30° angle for a distance corresponding to 85% of the belt width (163 mm). A second cut made parallel to the edge of the belt will intersect with the first cut, and the severed reinforcement cords can be removed.

[0056] In an embodiment wherein the reinforcement is used in the construction of a tire, the first end of the folded, calendered strip is overlapped with the second end of the folded, calendered strip in the crown area of the tire. The first end and second end overlap smoothly, and without stacking reinforcement material in the overlapped portion.

[0057] Optionally, adhesive may be placed on one or both ends of the calendered strip and the two ends pressed together.

[0058] In an additional embodiment of the method, the calendered strip may be folded over a gum rubber core having a width comprising 60 to 95% of the width of a belt construction being made, and bending the reinforcement cords or filaments at the folded edges of the calendered strip over the rubber core, the rubber core providing adhesion between the upper and lower folded portions of the calendered strip, as well as providing a spacer that may prevent kinking at the folded edges of the belt. The core may comprise belt edge strips, 1.3 to 3.2 cm (0.5 to 1.25 inches) wide, placed at the folded edges of the belt.

[0059] The tire of the invention is otherwise constructed as is known to those skilled in the art.

[0060] The invention is further illustrated with reference to the following examples.

Example 1:

[0061] In this example, the elongation of a conventional steel belt is compared with the elongation of a continuous belt made according to the invention which is made with 6,700 dTex (6,000 denier) PEN reinforcement cord having 8.3 epc (ends per centimeter) (21 epi (ends per inch)). The belts were constructed in the same manner as such belts would be prepared for use in building a tire, but were subjected to load in a laboratory to determine their strength and elongation properties. As can be seen in Fig. 8, the conventional steel belt showed an elongation of about 2.8 cm (1.1 inch) with a load of about 2640 N (600 pounds), at which point the belt broke. By contrast, the continuous belt of the invention made with PEN cords showed an elongation of about 3

cm (1.2 inches) at about 8,360 N (1900 pounds) load, whereupon the belt broke.

[0062] From Fig. 8, it can be seen that the elongation of the PEN belt at 2,640 N (600 pounds) was about 1.3 cm (1/2 inch).

[0063] This data illustrates that a belt of the invention reinforced with PEN cord can withstand a heavier load, and undergoes less elongation at the same load as compared to a conventional steel belt.

Example 2:

[0064] In this example, a second belt of the invention, made with PEN cord having a linear density of 6,700 dTex (6,000 denier) and an end count of 11 epc (28 epi) is compared with the steel belt construction referred to in example 1. In this example, with reference to Fig. 9, the displacements of the belts in laboratory testing is shown. As can be seen in the figure, the steel belt held its shape fairly well until the load on the belt exceeded 3,740 N (850 pounds), whereupon the displacement increased rapidly from 0.13 cm (0.05 inch) to 0.38 cm (0.15 inch) at 5,280 N (1200 pounds). By contrast, the continuous belt of the invention, reinforced with PEN cord, fairly well maintained its shape until the load exceeded 3,520 N (800 pounds), whereupon it deflected from 0.13 cm (0.05 inch) to 0.25 cm (0.10 inch) at 5,280 N (1200 pounds).

[0065] This data illustrates that the belt of the invention, made using PEN reinforcement cords, theoretically, would make a tire construction which is more able to hold its shape than a tire construction made using conventional cut steel belts.

Example 3:

[0066] In this example, relative data for a number of composite belts made of different materials is illustrated. Conventional cut belts made of steel, aramid and PEN are compared with a continuous belt of the invention which is reinforced with PEN cords. The data illustrates, with reference to Fig. 10, that the continuous belt of the invention, made using PEN cord reinforcement, has superior tensile modulus, plane shear, and fatigue properties as compared to the other composites.

Example 4:

[0067] In this example, lab data is provided wherein composite belts made according to the invention are compared with conventional steel cut belts in a fatigue, cycles to failure test. With reference to Fig. 11, the data illustrates that the continuous belt of the invention, reinforced with PEN cords, survived 6,000 cycles to failure, whereas the conventional composite steel cord reinforced cut belts survived 100 cycles to failure.

Claims

1. A pneumatic tire having at least a pair of substantially parallel annular beads (12), at least one carcass ply (14) wrapped around said beads, a tread (18) disposed over said at least one carcass ply in a crown area of said tire, and sidewalls (20) disposed between said tread (18) and said beads (12), wherein a reinforcement package (24) is disposed between said tread (18) and said at least one carcass ply (14) in said crown area, said reinforcement package (24) comprising an elastomeric composite having a second end (42) and a first end (32), said elastomeric composite being reinforced with substantially parallel reinforcement cords (26) oriented at substantially 0° with respect to a longitudinal centerline (CL) of said composite, **characterized in that** said composite is folded upon itself to provide reinforcement package (24) having an upper layer (46) wherein reinforcement cords therein have an angle of 17 to 35° with respect to the equatorial plane (EP) of tire (10), and a lower layer (48) wherein reinforcement cords therein have an angle of -17 to -35° with respect to the equatorial plane (EP) of tire (10), and **in that** said reinforcement package (24) has a splice (28) wherein upper layer (46) at second end tip (37) of reinforcement package (24) overlaps with lower layer (48) at a first end (32) of reinforcement package (24), said splice (28) comprising a triangular configuration whereby upper layer (46) at first end (32) is cut at angle of 17 to 35° at first end (32) for a distance corresponding to 70 to 90% of the width of elastomeric composite (24), and wherein all cut reinforcement cords (26) are removed from cut-out (30) at first end (32).
2. The tire of claim 1 **characterized in that** second end tip (37) of reinforcement package (24) fits with and overlaps with cut end (32) of reinforcement package (24) without modification.
3. The tire of claim 1 **characterized in that** said reinforcement cords (26) comprise steel, polyester, polyamide, aromatic polyamide, reconstituted cellulose, polyvinyl alcohol, fiberglass, carbon-fibers and mixtures thereof.
4. The tire of claim 1 **characterized in that** said reinforcement cords (26) are selected from the group comprising polyethylene naphthalate, terephthalate, rayon and aramid.
5. The tire of claim 1 **characterized in that** said reinforcement cords (26) have a dTex of 3300 to 13000 and an end count in said reinforcement package (24) of 4 to 11 ends per centimeter (epc).

Patentansprüche

1. Luftreifen, mit wenigstens einem Paar von im Wesentlichen parallelen ringförmigen Wülsten (12), wenigstens einer um die Wülste gewickelten Karkassenlage (14), einem über der wenigstens einen Karkassenlage in einem Kronenbereich des Reifens angeordneten Laufstreifen (18) und zwischen dem Laufstreifen (18) und den Wülsten (12) angeordneten Seitenwänden (20), wobei zwischen dem Laufstreifen (18) und der wenigstens einen Karkassenlage (14) im Kronenbereich ein Verstärkungspaket (24) angeordnet ist, das einen elastomeren Verbund mit einem zweiten Ende (42) und einem ersten Ende (32) umfasst, wobei der elastomere Verbund mit im Wesentlichen parallelen und im Wesentlichen unter 0° bezüglich einer longitudinalen Mittellinie (CL) des Verbunds orientierten Verstärkungskorden (26) verstärkt ist, **dadurch gekennzeichnet, dass** der Verbund auf sich selbst gefaltet ist, um ein Verstärkungspaket (24) zu schaffen, das eine obere Schicht (46), in der Verstärkungskorde einen Winkel im Bereich von 17 bis 35° in Bezug auf die Äquatorialebene (EP) des Reifens (10) besitzen, und eine untere Schicht (48), in der Verstärkungskorde einen Winkel im Bereich von -17 bis -35° in Bezug auf die Äquatorialebene (EP) des Reifens (10) besitzen, aufweist und dass das Verstärkungspaket (24) eine Spleißverbindung (28) aufweist, bei der die obere Schicht (46) an einer zweiten Endspitze (37) des Verstärkungspakets (24) mit der unteren Schicht (48) an einem ersten Ende (32) des Verstärkungspakets (24) überlappt, wobei die Spleißverbindung (28) eine dreieckige Konfiguration umfasst, in der die obere Schicht (46) an dem ersten Ende (32) unter einem Winkel im Bereich von 17 bis 35° auf einer Strecke, die 70 bis 90 % der Breite des elastomeren Verbunds (24) entspricht, geschnitten ist und in der alle abgeschnittenen Verstärkungskorde (26) von dem Ausschnitt (30) am ersten Ende (32) entfernt sind.
2. Reifen nach Anspruch 1, **dadurch gekennzeichnet, dass** die zweite Endspitze (37) des Verstärkungspakets (24) ohne Veränderung und unter Überlappung mit dem geschnittenen Ende (32) des Verstärkungspakets (24) zusammenpasst.
3. Reifen nach Anspruch 1, **dadurch gekennzeichnet, dass** die Verstärkungskorde (26) Stahl, Polyester, Polyamid, aromatisches Polyamid, rekonstituierte Zellulose, Polyvinylalkohol, Glasfasern, Kohlenstoff-Fasern und Mischungen davon enthalten.
4. Reifen nach Anspruch 1, **dadurch gekennzeichnet, dass** die Verstärkungskorde (26) aus der Gruppe gewählt sind, die Polyethylen-naphthalat,

Terephthalat, Rayon und Aramid umfasst.

5. Reifen nach Anspruch 1, **dadurch gekennzeichnet, dass** die Verstärkungskorde (26) ein dTex von 3300 bis 13000 und eine Fadendichte in dem Verstärkungspaket (24) von 4 bis 11 Enden pro Zentimeter (epc) besitzen.

Revendications

1. Bandage pneumatique possédant au moins une paire de talons annulaires essentiellement parallèles (12), au moins une nappe de carcasse (14) entourant lesdits talons, une bande de roulement (18) disposée par-dessus ladite au moins une nappe de carcasse dans une zone de couronne dudit bandage pneumatique, et des flancs (20) disposés entre ladite bande de roulement (18) et lesdits talons (12), un paquet de renforcement (24) étant disposé entre ladite bande de roulement (18) et ladite au moins une nappe de carcasse (14) dans ladite zone de couronne, ledit paquet de renforcement (24) comprenant un composite élastomère possédant une deuxième extrémité (42) et une première extrémité (32), ledit composite élastomère étant renforcé avec des câblés de renforcement (26) essentiellement parallèles, orientés en formant un angle essentiellement de 0 ° par rapport à la ligne médiane longitudinale (Cl) dudit composite, **caractérisé en ce que** ledit composite est replié sur lui-même pour procurer un paquet de renforcement (24) possédant une couche supérieure (46) contenant des câblés de renforcement formant un angle de 17 à 35 degrés par rapport au plan équatorial (EP) du bandage pneumatique (10), et une couche inférieure (48) contenant des câblés de renforcement formant un angle de -17 à -35 degrés par rapport au plan équatorial (EP) du bandage pneumatique (10), et **en ce que** ledit paquet de renforcement (24) possède une épissure (28) dans laquelle la couche supérieure (46) à la pointe (37) de la deuxième extrémité du paquet de renforcement (24) chevauche la couche inférieure (48) à une première extrémité (32) du paquet de renforcement (24), ladite épissure (28) comprenant une configuration triangulaire par laquelle la couche supérieure (46), à la première extrémité (32), est découpée en formant un angle de 17 à 35 degrés à la première extrémité (32) sur une distance représentant de 70 à 90 % de la largeur du composite élastomère (24), et dans lequel tous les câblés de renforcement découpés (26) sont retirés de la découpe (30) à la première extrémité (32).

2. Bandage pneumatique selon la revendication 1, **caractérisé en ce que** la pointe (37) de la deuxième extrémité du paquet de renforcement (24) corres-

pond à l'extrémité découpée (32) du paquet de renforcement (24) et chevauche cette dernière en l'absence de modification.

3. Bandage pneumatique selon la revendication 1, **caractérisé en ce que** lesdits câblés de renforcement (26) comprennent de l'acier, du polyester, du polyamide, du polyamine aromatique, de la cellulose reconstituée, de l'alcool polyvinylique, des fibres de verre, des fibres de carbone et leurs mélanges.

4. Bandage pneumatique selon la revendication 1, **caractérisé en ce que** lesdits câblés de renforcement (26) sont choisis parmi le groupe comprenant le polyéthylènenaphtalate, le polyéthylènetéréphtalate, la rayonne et l'aramide.

5. Bandage pneumatique selon la revendication 1, **caractérisé en ce que** lesdits câblés de renforcement (26) possèdent une valeur dTex de 3300 à 13.000 et un nombre de bouts dans ledit paquet de renforcement (24) de 4 à 11 bouts par centimètre (epc).

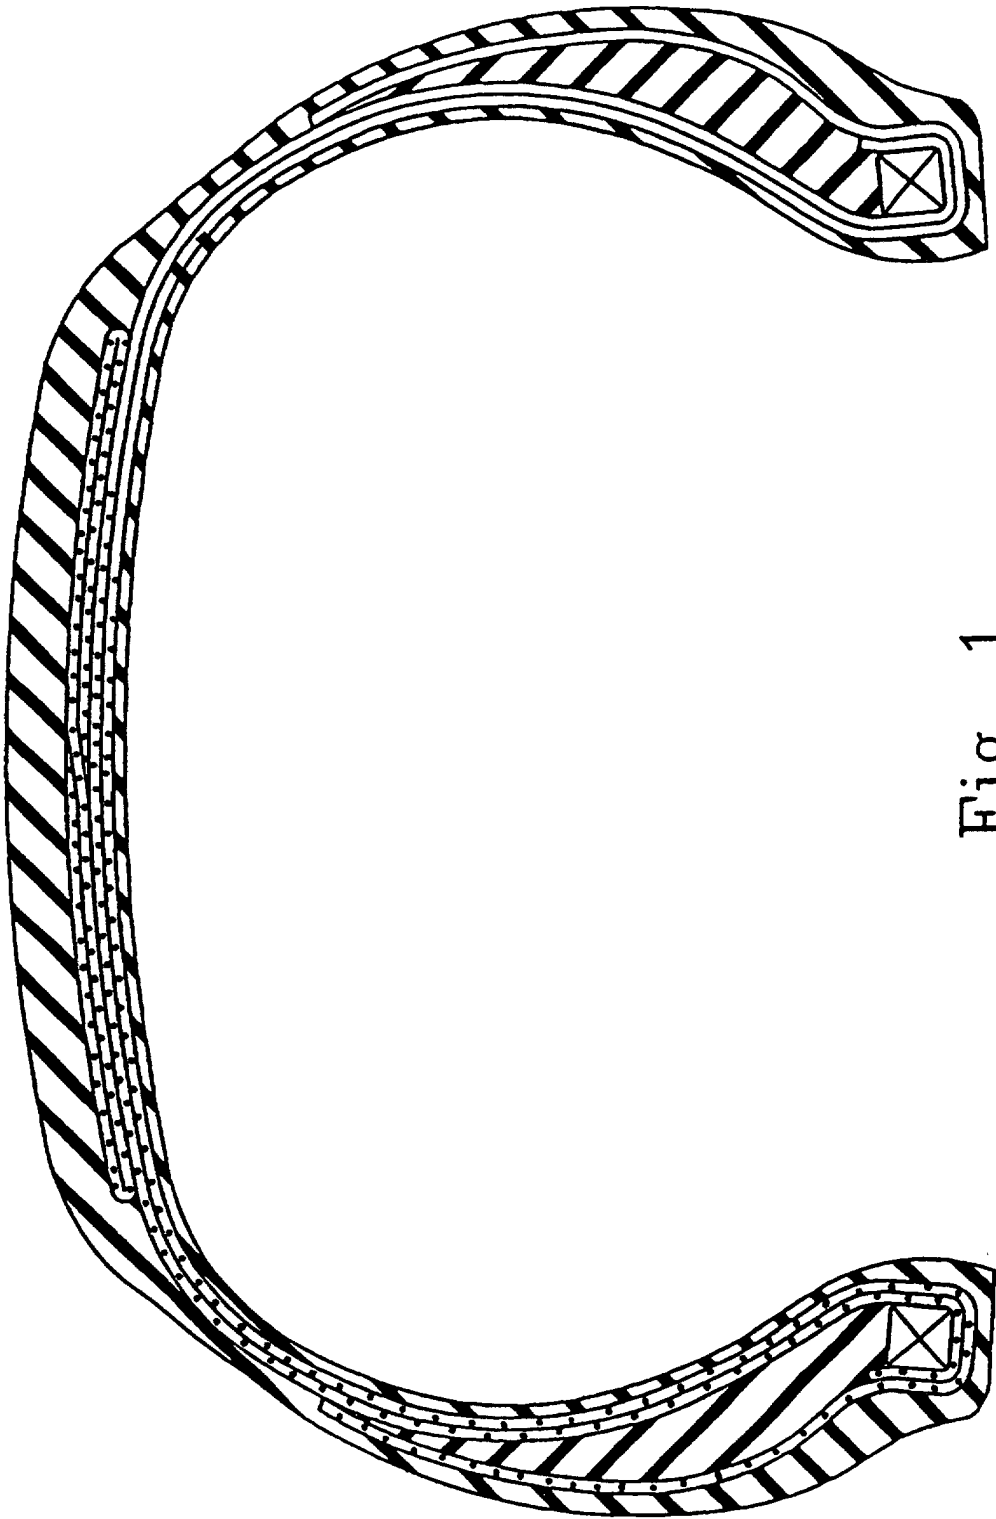


Fig. 1
Prior Art

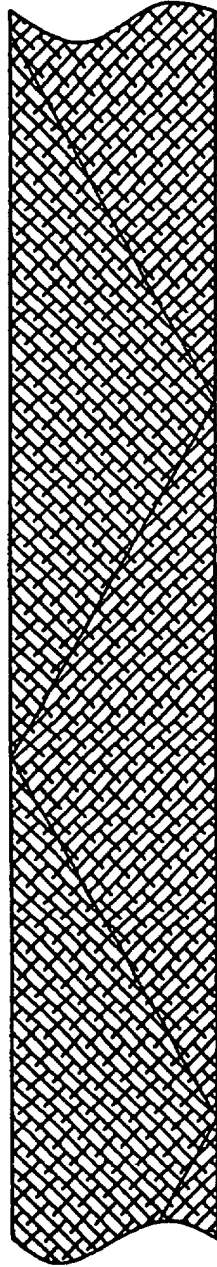


Fig. 2
Prior Art

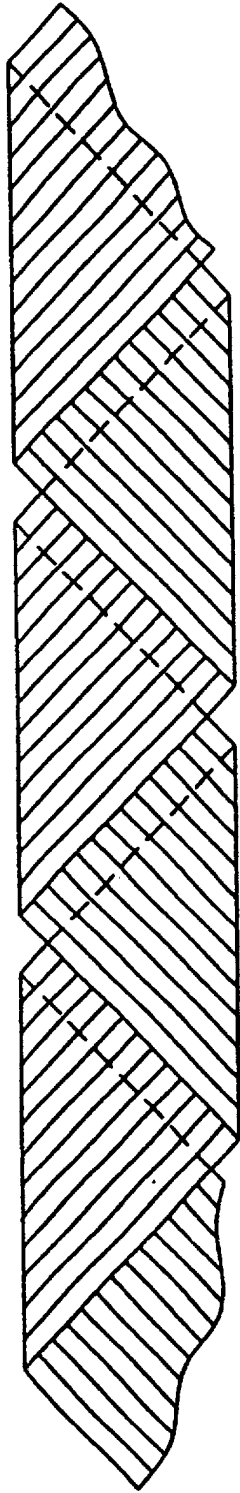


Fig 3

Prior Art


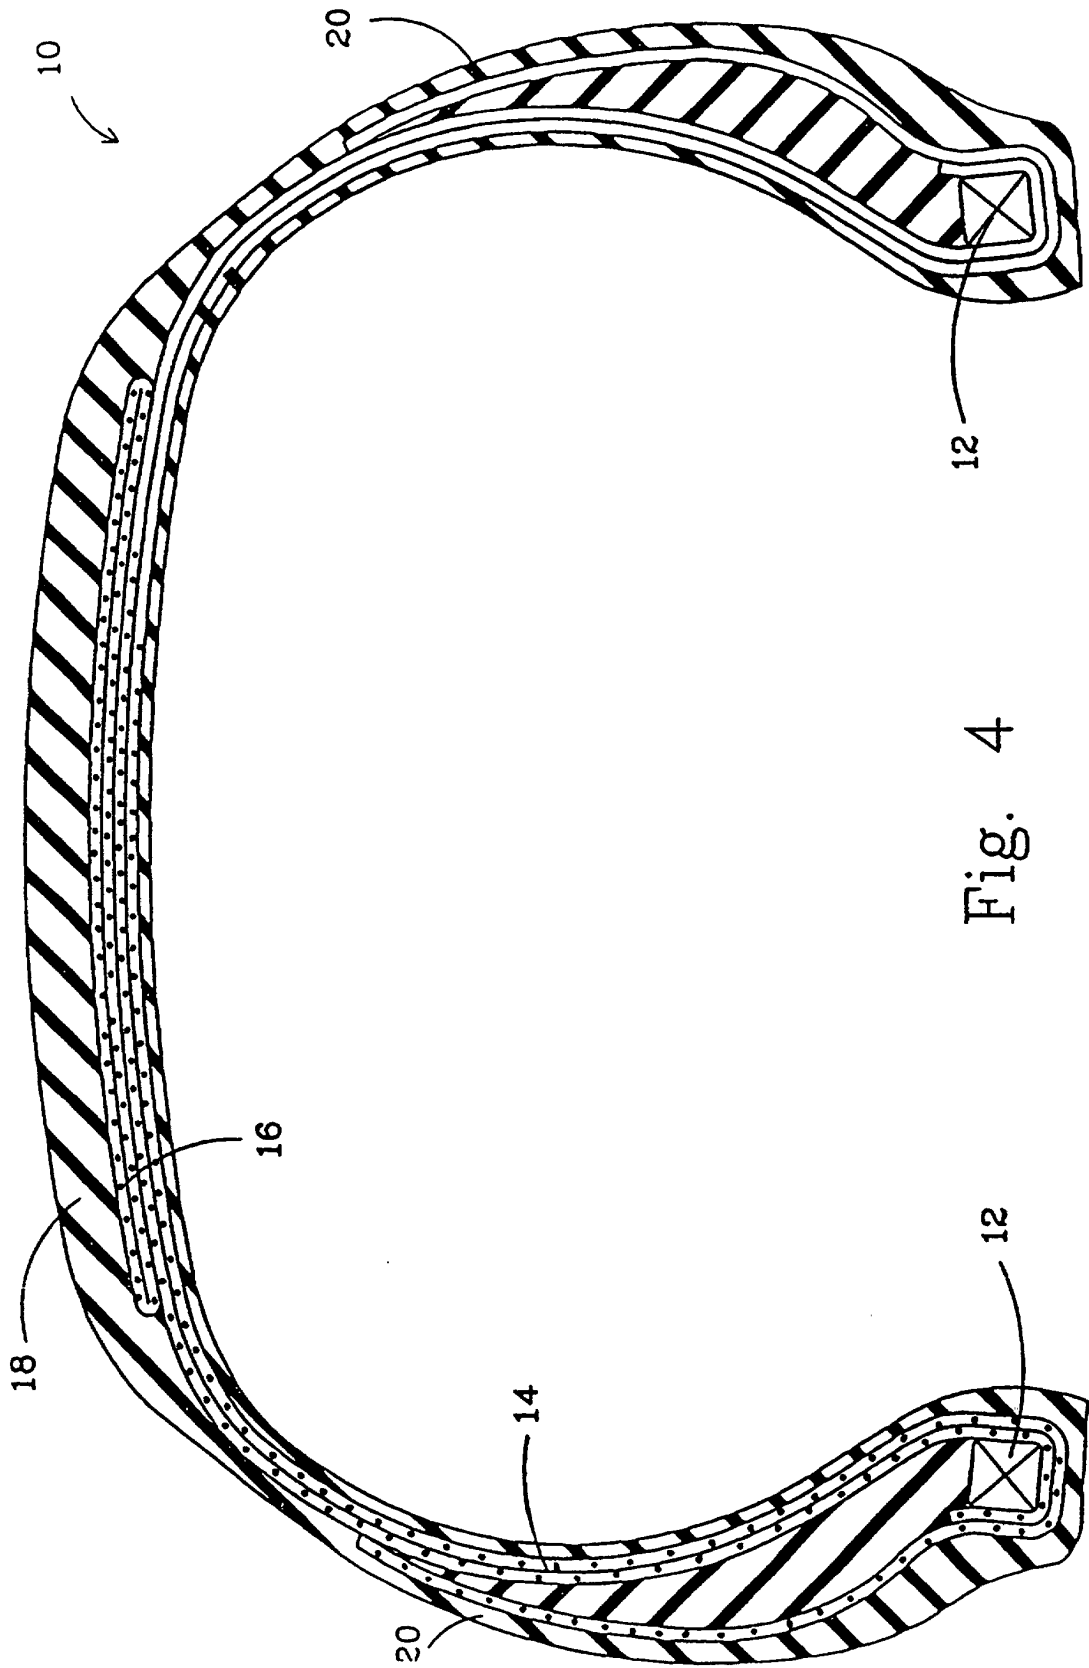


Fig. 4

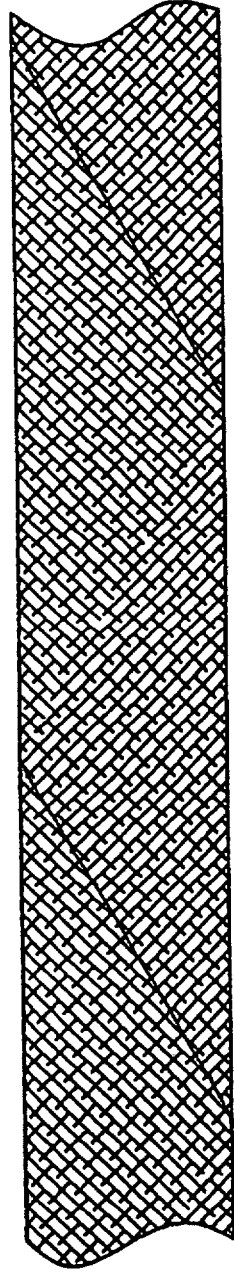

24

A curved arrow pointing from the number 24 to the hatched strip.

Fig. 5

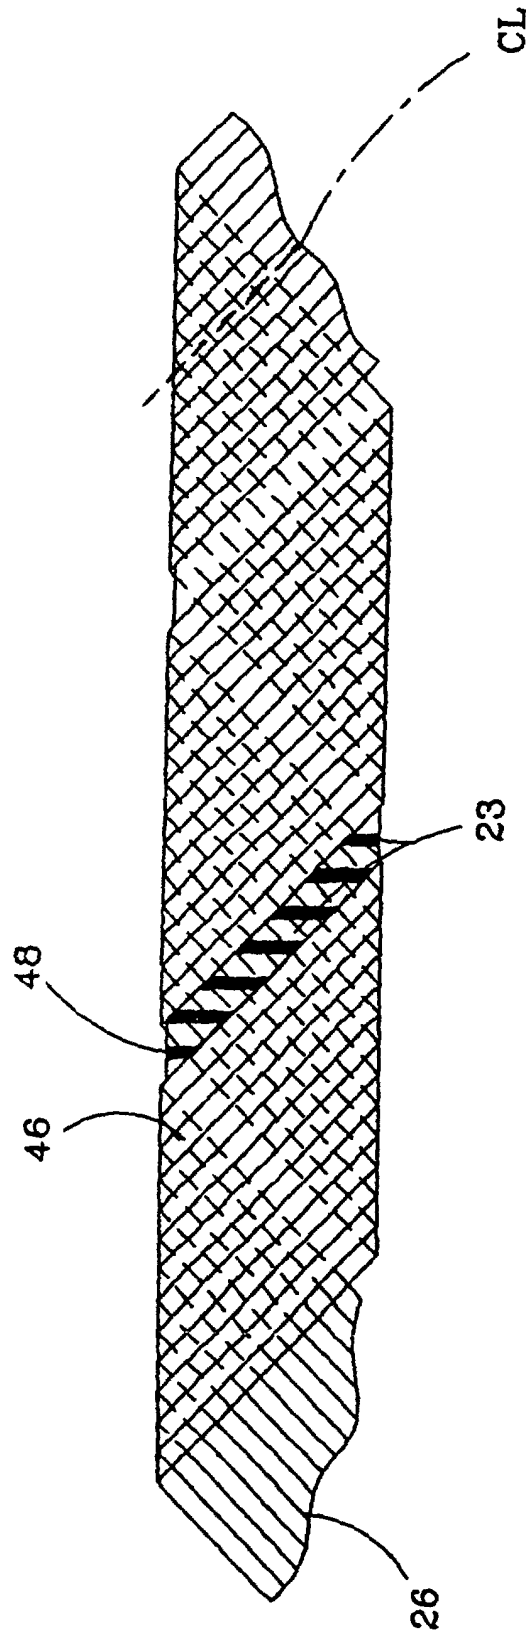


Fig 6

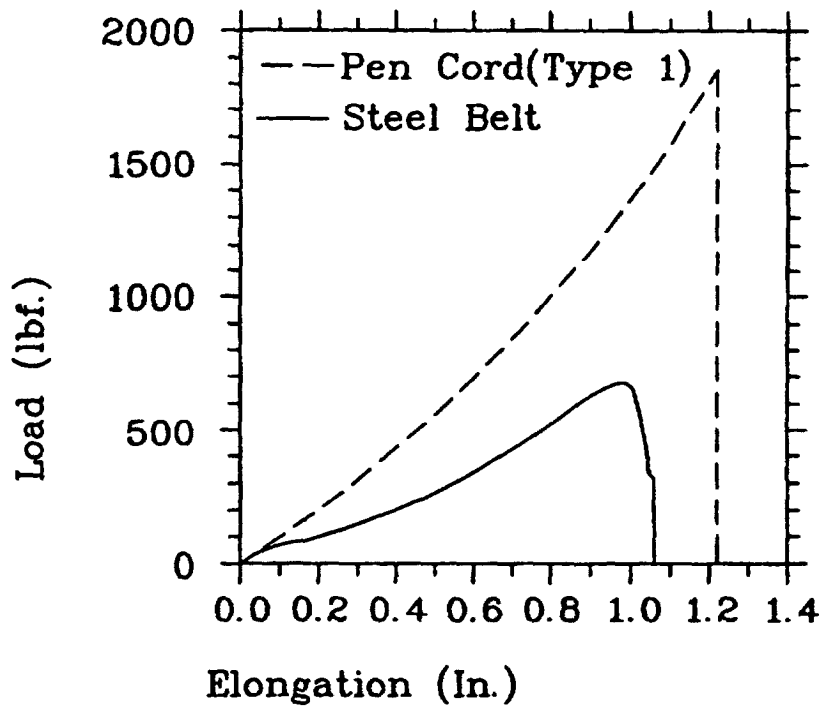


Fig 8

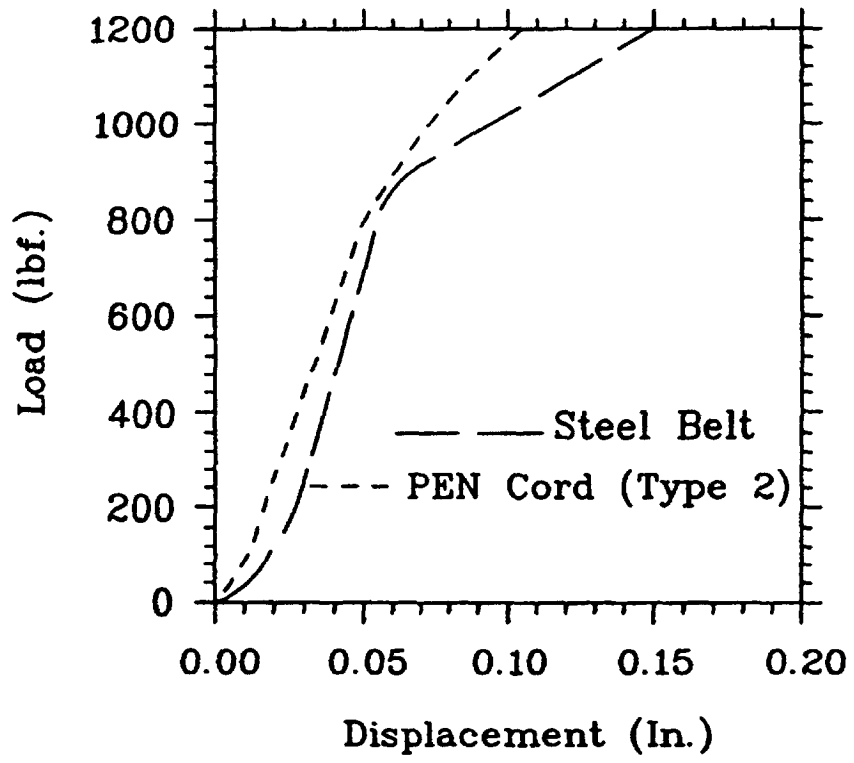


Fig 9

Data Relative to Steel (=100)

Tensile Modulus In Plane Shear

Fatigue

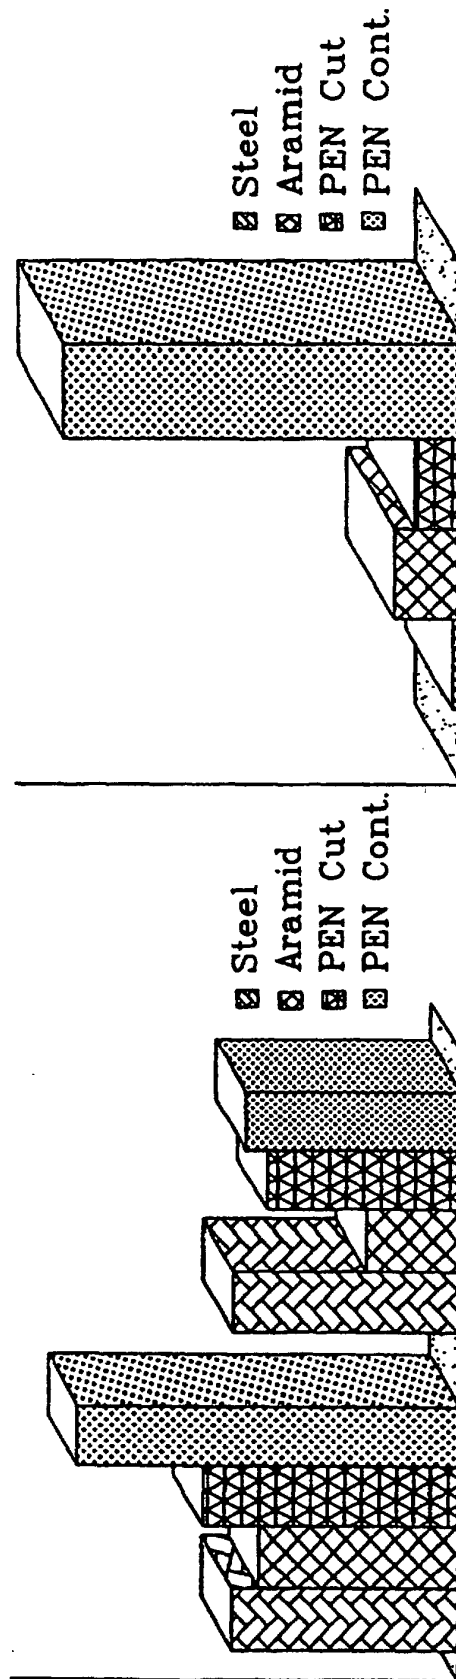


Fig 10

Fatigue Cycles To Failure

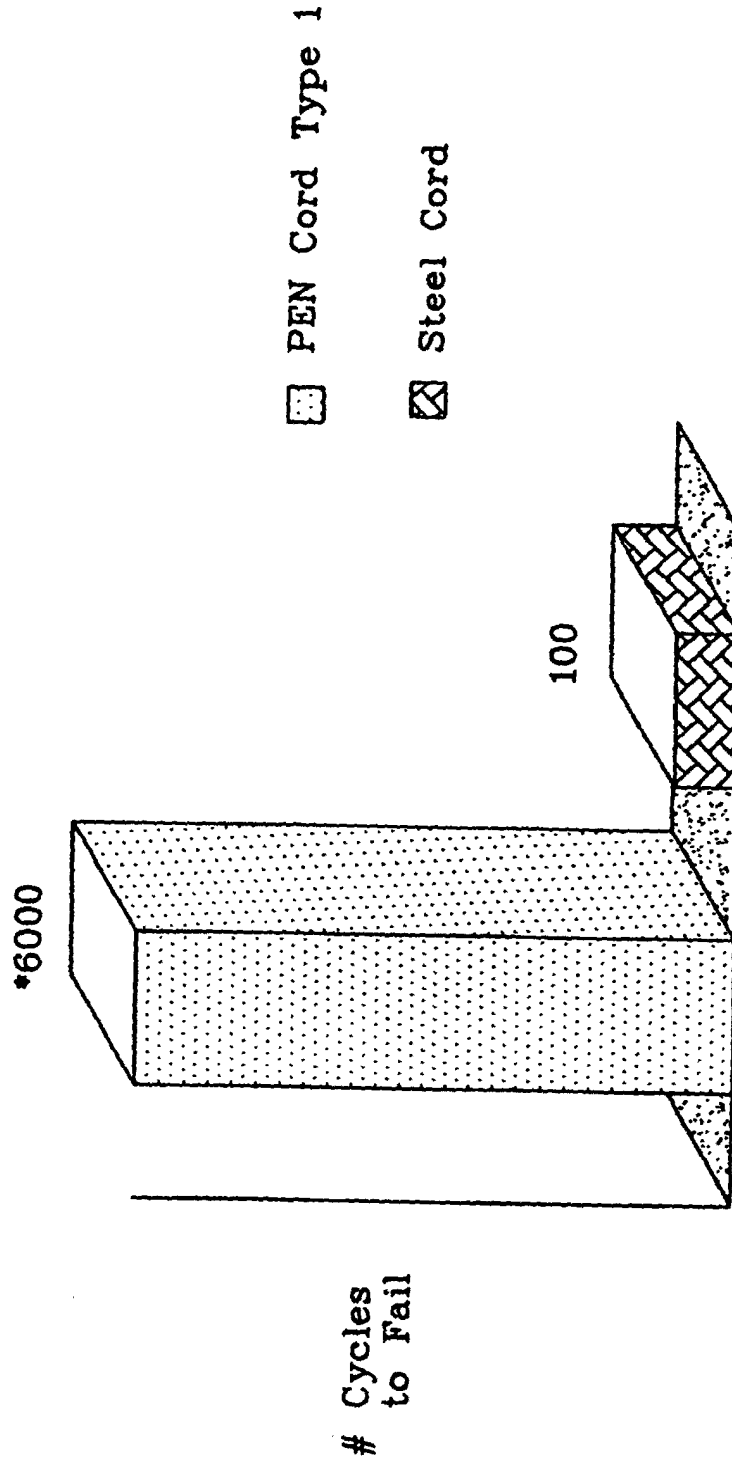


Fig 11