



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 122 969 A1**

(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 158(3) EPC

(43) Date of publication:
08.08.2001 Bulletin 2001/32

(51) Int Cl.7: **H04Q 9/00, E05B 49/00**

(21) Application number: **00940845.1**

(86) International application number:
PCT/JP00/04196

(22) Date of filing: **26.06.2000**

(87) International publication number:
WO 01/06806 (25.01.2001 Gazette 2001/04)

(84) Designated Contracting States:
DE FR GB IT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **TAMURA, Shigeaki**
Nippon Seiki Co., Ltd.
Nagaoka-shi, Niigata 940-8580 (JP)

(30) Priority: **15.07.1999 JP 20105299**



(74) Representative: **Jackson, Richard Eric et al**
Carpmaels & Ransford,
43 Bloomsbury Square
London WC1A 2RA (GB)

(71) Applicant: **NIPPON SEIKI CO., LTD.**
Nagaoka-shi, Niigata 940-8580 (JP)

(54) **KEYLESS ENTRY SYSTEM**

(57) A keyless entry system comprising a transmitter for transmitting binary pulse signals including a specific identification code by the operation of the user, a receiver for receiving said signals from the transmitter via an antenna, and a controlling section for supplying output signals for making the action intended by said user implemented when said identification code received by said receiver and the registered code stored in the storage section are determined to be identical is provided. The ground of the receiving section and the ground of the controlling section are electrically connected.

FIG. 5

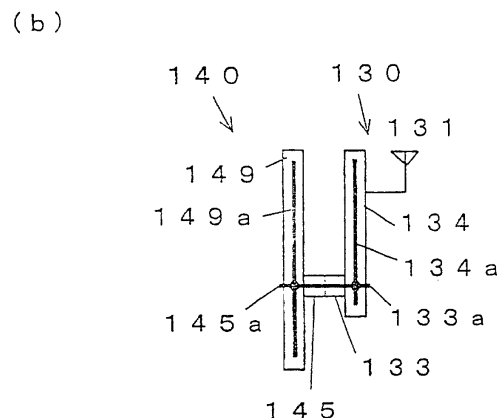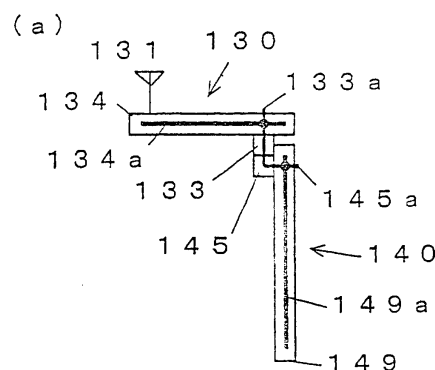

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The present invention relates to a keyless entry system mounted, for example, on the four-wheel vehicle (hereinafter referred to as vehicle).

2. Description of the Related Art

[0002] A wireless keyless entry system using a feeble electric current intended for use in the vehicle is already put into actual use. It is constructed in such a manner that a signal including the identification code supplied from the transmitter provided as a portable electronic key (remote controller) by the operation of the user such as a driver is received by the receiver via an antenna, and when the identification code is determined to be correct, the action intended by said user, such as the open/close operation of the door lock, is controlled.

[0003] In many cases, the receiver in such a system is disposed in the trunk room or in the dashboard, and the antenna is installed on the rear glass or the upper portion of the dashboard remote from the receiver. Therefore, the wiring connecting the antenna and the receiver requires a shielding process in order to prevent external noise that may enter from the environment, whereby the cost may be increased.

[0004] As a measure to solve this problem, a structure having a receiver integrated within the combination meter mounted in front of the driver's seat, and an antenna is mounted on the meter board or in the meter housing is disclosed in the Japanese Patent Laid-Open No. 8-216735. In this arrangement, the shielding process is eliminated and the number of the component may be reduced, thereby realizing reduction of the cost.

[0005] However, in this system, the high receiving sensitivity is required as a matter of course. Though the most effective measure to realize the high receiving sensitivity is upsizing of the antenna, it has been difficult to realize since mounting of the antenna on the combination meter is physically limited due to the size of the meter.

SUMMARY OF THE INVENTION

[0006] With such a problem in view, it is an object of the present invention to provide a keyless entry system in which the antenna is mounted on the combination meter while improving the receiving sensitivity.

[0007] The keyless entry system according to the first aspect of the invention comprises a transmitter 200 for transmitting binary pulse signals including a specific identification code by the operation of the user, a receiver 130 for receiving said signals from the transmitter 200 via an antenna 131, and a controlling section 140 for

supplying output signals for making the action intended by said user implemented when said identification code received by said receiver 130 and the registered code stored in the storage section are determined to be identical, wherein the sensitivity of the antenna 131 is improved by electrically connecting a ground 134a of the receiving section 130 and a ground 149a of the controlling section 140.

[0008] The keyless entry system according to the second aspect of the invention comprises a transmitter 200 for transmitting binary pulse signals including a specific identification code by the operation of the user, a receiver 130 for receiving said signals from the transmitter 200 via an antenna 131, and a controlling section 140 for supplying output signals for making the action intended by said user implemented when said identification code received by said receiver 130 and the registered code stored in the storage section are determined to be identical, wherein the sensitivity of the antenna 131 is improved by forming said receiving section 130 in a unit that is attachable and detachable with respect to the controlling section 140 and forming connecting portions 133, 145 in the receiving section 130 and the controlling section 140 respectively for electrically connecting the ground 134a of the receiving section 130 and the ground 149a of the controlling section 140 by mounting the receiving section 130 on the controlling section 140. Especially, it is realized in a simple structure just by providing connecting portions 133 and 145 including at least two conductive terminals and connecting at least one of them to the ground 134a and 149a.

[0009] The keyless entry system according to the third aspect of the invention comprises a transmitter 200 for transmitting binary pulse signals including a specific identification code by the operation of the user, a receiver 130 for integrally or externally mounted to the combination meter mounted in front of the driver's seat of the vehicle so as to receive said signals from the transmitter 200 via the antenna 131, is a controlling section 140 integrally mounted on said meter for controlling said meter and supplying output signals for making the action intended by said user implemented when said identification code received by said receiver 130 and the registered code stored in the storage section are determined to be identical, wherein the sensitivity of the antenna 131 can be improved by electrically connecting the ground 134a of the receiving section 130 and the ground 149a of the controlling section 140.

[0010] The keyless entry system according to the fourth aspect of the invention comprises a transmitter 200 for transmitting binary pulse signals including a specific identification code by the operation of the user, a receiver 130 for integrally or externally mounted to the combination meter mounted in front of the driver's seat of the vehicle so as to receive said signals from the transmitter 200 via the antenna 131, and a controlling section 140 integrally mounted on said meter for controlling said meter and supplying output signals for mak-

ing the action intended by said user implemented when said identification code received by said receiver 130 and the registered code stored in the storage section are determined to be identical, wherein the sensitivity of the antenna 131 is improved by forming said receiving section 130 in a unit that is attachable and detachable with respect to said meter and forming connecting portions 133, 145 in the receiving section 130 and the controlling section 140 respectively for electrically connecting the ground 134a of the receiving section 130 and the ground 149a of the controlling section 140 by mounting the receiving section 130 on said meter. Especially, it is realized in a simple structure just by providing connecting portions 133 and 145 including at least two conductive terminals and connecting at least one of them to the ground 134a and 149a.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011]

Fig. 1 is a block diagram showing the structure of an embodiment of the present invention;
 Fig. 2 is a block diagram showing the main portion of the embodiment of Fig. 1;
 Fig. 3 is a block diagram showing a state in which the embodiment of Fig. 1, and Fig. 2 is in use;
 Fig. 4 is a diagrammatic sketch explaining the relation between the receiving unit and the control unit of the same embodiment; and
 Fig. 5 is a diagrammatic sketch explaining the relation between the receiving unit and the control unit of the same embodiment.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0012] Referring now to the drawings, the present invention will now be described.

[0013] Fig. 1 to Fig. 5 show an instrument apparatus 100 for the vehicle (combination meter) to be installed in front of the driver according to an embodiment of the present invention, wherein the main unit comprises a display unit 110 for providing visual displays according to various states of the vehicle, an audio unit 120 for providing acoustic displays according to said various states of the vehicle, and a receiving unit 130 for supplying signals for controlling the vehicle in response to radio information from the outside.

[0014] The display unit 110 is intended for indication of various information on the vehicle as shown in Fig. 2, and comprises, for example, at least one instrument body 111 of cross coil type or stepping motor type for indicating a driving speed, the number of revolution of the engine, and the quantity of residual fuel by the angular degrees of the needle, a drive circuit 112 provided in association with the instrument body 111 for supplying signals to drive the instrument body 111, a displaying

element 113 such as LCD, EL, or EC for displaying the travel distance or the distance from the point to point by digital numbers or an analogue bar, a drive circuit 114 provided in association with the display element 113 for supplying signals to drive the display element 113, a lamp for illuminating various indicators such as a direction indicator, a light illumination indicator, or a seat belt wearing state indicator, a display element 115 such as LED, and a drive circuit 116 provided in association with the display element 115 for supplying signals to drive the display element 115.

[0015] The alarm unit 120 is intended for giving the driver a prescribed alarm as needed according to the state of the vehicle as shown in Fig. 2, and comprises, for example, a sounding element 121 such as a buzzer that gives an alarm sound by the operation of the driver or by the output of the sensors installed at adequate locations as needed, and a drive circuit 122 provided in association with the sounding element 121 for supplying signals to drive the sounding element 121. The sounding element 121 may be mounted independently, or in association with a loudspeaker (not shown) that is installed at other location of the vehicle.

[0016] The receiving unit (receiver) 130 is intended for making the control unit described later perform a prescribed process in response to radio information from the outside as shown in Fig. 2, and comprises, for example, an antenna 131 for receiving radio wave signals from the remote controller (transmitter) 200 for the keyless entry system, and a receiving section 132 connected to the antenna 131 for subjecting said signals processes such as noise elimination process or a waveform shaping process and supplying said processed signal.

[0017] The reference numeral 140 denotes a control unit for controlling the respective main units 110 to 130 and the electrical equipment unit installed at each location of the vehicle described later, and comprises a control element 141 such as a microcomputer and a communication interface 142 for communicating control information with the control element 141 and receiving the output from the sensors installed at an adequate locations of the vehicle.

[0018] The respective main units 110 to 140 are detachably connected by the connecting means 117, 123, 133, 143, 144, 145 such as connectors. The controlling unit 140 comprises a connecting means 146 such as a connector to be connected to a multiplex communication line described below and a connecting means 147 to be connected to the communication line (not shown) other than said multiple communication line, and a connecting means 148 to be connected to the power source line, not shown. The components such as circuits relating to the connecting means 147, 148 in the controlling unit 140 are not shown.

[0019] In this embodiment, a display unit 110, an alarm unit 120, a receiving unit 130, and a controlling unit 140 are disposed at the location where the conventional combination meter is situated, and other electric

equipments provided in the vehicle, not shown, are controlled concentrically by the controlling unit 140. In other words, as shown in Fig. 3, the instrument apparatus for the vehicle 100 is connected to the multiplex communication line 300 running throughout the vehicle via the connecting means 146.

[0020] The door module installed on each door (electric equipment unit) 400 comprises an actuator (electric equipment) 401 for locking or unlocking the door lock, a driving unit 402 for controlling the actuator 401, a communication interface 403 for controlling the actuator 401 via the driving unit 402 according to the instruction from the controlling element 141 of the meter driving device 100, and a switch 404 for locking and unlocking the door lock and moving the window up and down, and is connected to the multiplex communication line (signal path) 300 via the connecting means 405 such as a connector.

[0021] Control of the door lock in this structure is carried out as follows. In other words, the receiving unit 130 in the instrument apparatus for the vehicle 100 receives door open/close information from the remote controller 200. Then the controlling element 141 of the controlling unit 140 reads information received by the receiving unit 130, and, to be specific, when the identification code received at the receiver 130 and the registered code stored in the storage section (provided in the controlling unit 140 and may be integrated with the controlling element 141) are determined to be identical, the result or the instruction is transmitted to each door module 400 via the multiplex communication line 300 so that the door module 400 drives the actuator 401 by the driving unit 402. The door module 400 mounted on each door can lock and unlock the door lock or move the window up and down independently by the switch 404. The door module 400 mounted on the door at the driver's seat can lock and unlock the door lock move the window up and down at the driver's seat by driving the actuator 401 by the driving unit 402, and in addition, it is capable of transmitting the operating signals from the switch 404 to the control unit 140 via the multiplex communication line 300, and reading them at the control element 141, then transmitting the result to each door module 400 to lock and unlock the door lock or to move the window up and down at each location.

[0022] As shown in Fig. 4, the receiving unit 130 and the control unit 140 are formed respectively on the independent substrates 134 and 149, and both substrates are physically connected by the connector (connecting portion) 133, 145, and the points of grounding potentials 134a, 149a of both substrates 134, 149 (GND; ground) are electrically connected. To be more concrete, as shown in Fig. 5, the substrate 134 of the receiving unit 130 and the substrate 149 of the controlling unit 140 may be connected perpendicularly (Fig. 5A) or in parallel (Fig. 5B), which may be selected according to the relation with the shape of the combination meter. Therefore, although the connectors 133, 145 as connecting portions have at least two conductive terminals respectively

(not shown), since it is essential only that at least one of said two conductive terminals 133a, 145a is respectively connected to the ground 134a, 149a, the structure may be prevented from being complicated.

[0023] In this structure, the substrate 134 serves as a bottom board of the antenna 131 so that the grounds 134a and 149a of the grounded substrates 134, 149 exhibit the mirror effect to form an imaginary antenna of electric image aside from the antenna 131, whereby the same effect as the case where the antenna 131 is up-sized is exerted, thereby increasing the benefit of the antenna 131.

[0024] In order to ensure the sufficient effect and efficiency, it is desired that the grounds 134a, 149a have large areas respectively, for example by forming both substrates 134, 149 by multilayer substrates respectively so that the respective one of those layers are used as grounds 134a, 149a.

[0025] According to the present invention, the receiving unit (receiver) is integrated in the combination meter mounted on the surface in front of the driver's seat and an antenna is provided in the receiving unit, so that the number of components is reduced and the shielding process is eliminated, whereby the cost reduction is realized.

[0026] Since the receiving unit and the controlling unit for controlling the same is formed on the independent substrates respectively, and the points of grounding potentials on those substrates are electrically connected, the same effect as the case where the antenna is up-sized is exerted and thus the benefit of the antenna is increased, whereby the receiving sensitivity is improved.

Claims

1. A keyless entry system comprising:

a transmitter for transmitting binary pulse signals including a specific identification code by the operation of the user, a receiver for receiving said signals from the transmitter via an antenna; and

a controlling section for supplying output signals for making the action intended by said user implemented when said identification code received by said receiver and the registered code stored in the storage section are determined to be identical;

wherein said ground of the receiving section and a ground of the controlling section are electrically connected.

2. A keyless entry system comprising:

a transmitter for transmitting binary pulse signals including a specific identification code by

the operation of the user, a receiver for receiving said signals from the transmitter via an antenna; and

a controlling section for supplying output signals for making the action intended by said user implemented when said identification code received by said receiver and the registered code stored in the storage section are determined to be identical;

wherein said receiving section is formed in a unit that is attachable and detachable with respect to the controlling section and connecting portions for electrically connecting the ground of the receiving section and the ground of the controlling section by mounting the receiving section on the controlling section in the receiving section and the controlling section respectively.

3. A keyless entry system comprising: 20

a transmitter for transmitting binary pulse signals including a specific identification code by the operation of the user;

a receiver for integrally or externally mounted to the combination meter mounted in front of the driver's seat of the vehicle so as to receive said signals from the transmitter via the antenna; and

a controlling section integrally mounted on said meter for controlling said meter and for supplying output signals for making the action intended by said user implemented when said identification code received by said receiver and the registered code stored in the storage section are determined to be identical; wherein the ground of the receiving section and the ground of the controlling section are electrically connected.

4. A keyless entry system comprising:

a transmitter for transmitting binary pulse signals including a specific identification code by the operation of the user;

a receiver for integrally or externally mounted to the combination meter mounted in front of the driver's seat of the vehicle so as to receive said signals from the transmitter via the antenna; and

a controlling section integrally mounted on said meter for controlling said meter and supplying output signals for making the action intended by said user implemented when said identification code received by said receiver and the registered code stored in the storage section are determined to be identical; wherein said receiving section is formed in a

unit that is attachable and detachable with respect to said meter, and the connecting portions for electrically connecting the ground of the receiving section and the ground of the controlling section by mounting the receiving section on said meter are formed in the receiving section and the controlling section respectively.

5. A keyless entry system as set forth in Claim 2 or Claim 4, wherein said connecting portion is a connector having at least two conductive terminals, and at least one of said two conductive terminals is connected to the ground.

FIG. 1

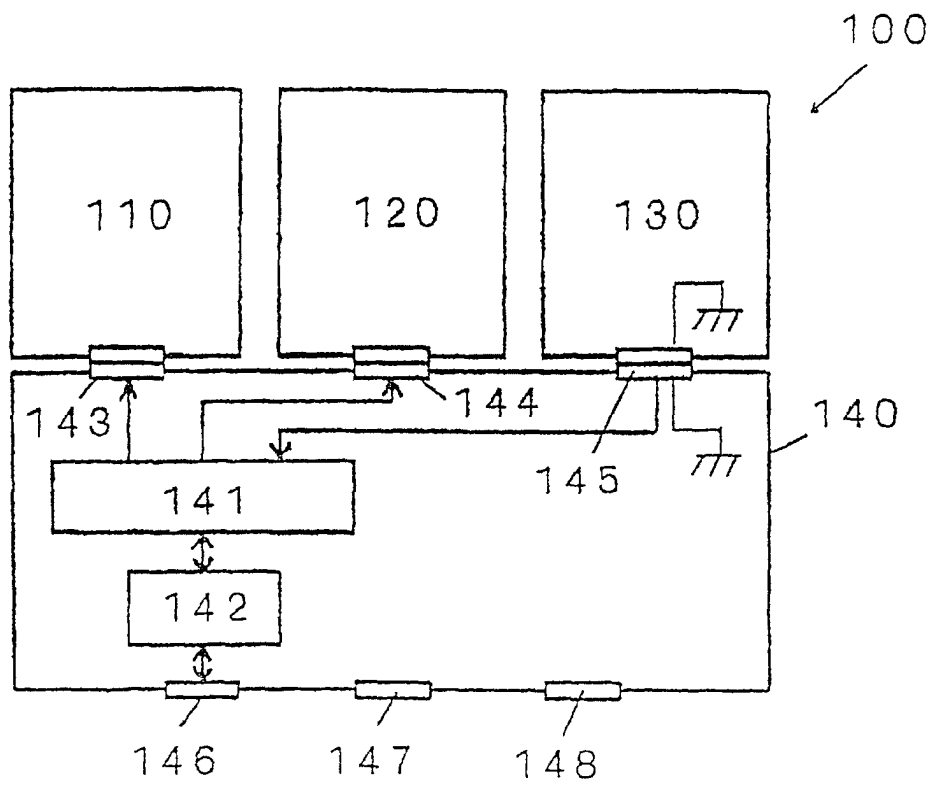


FIG. 2

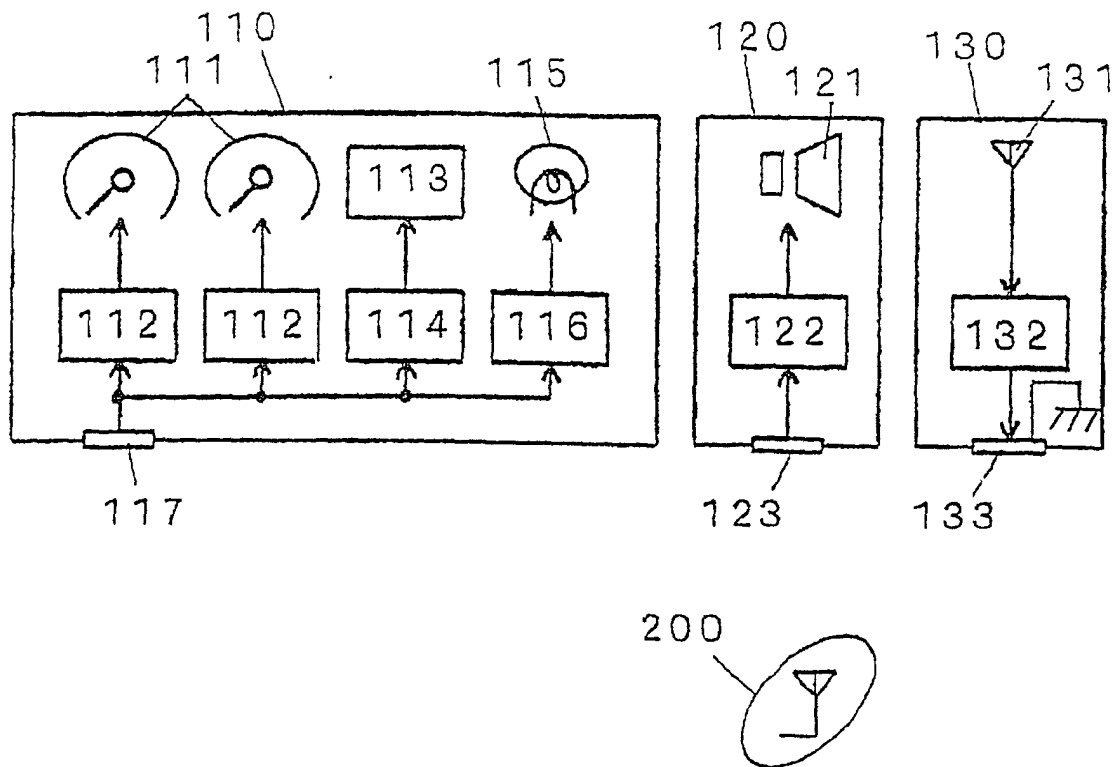


FIG. 3

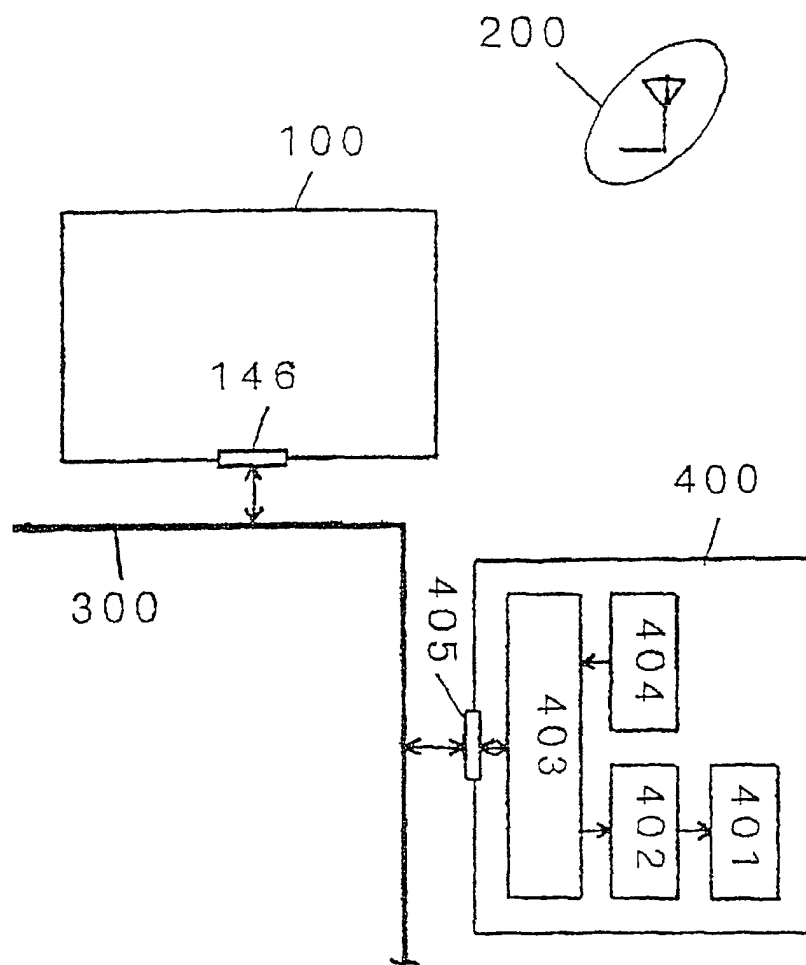


FIG. 4



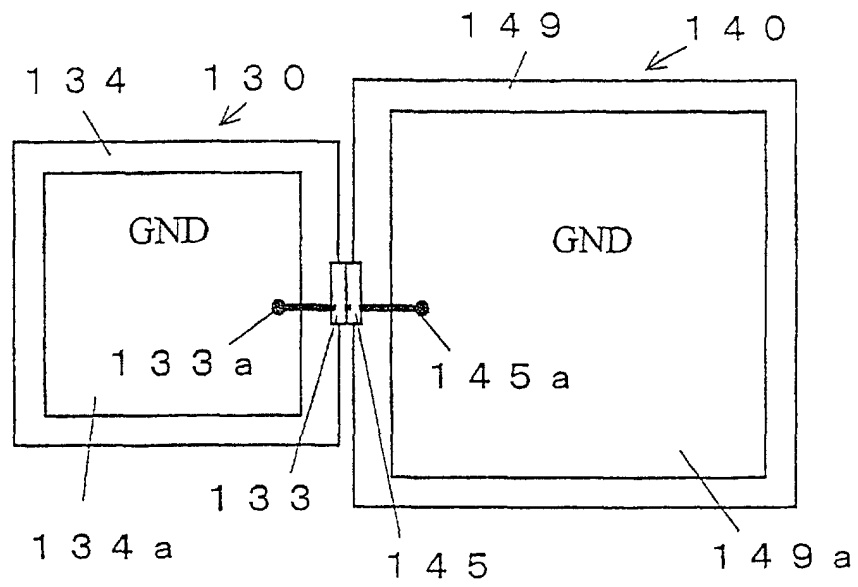


FIG. 5

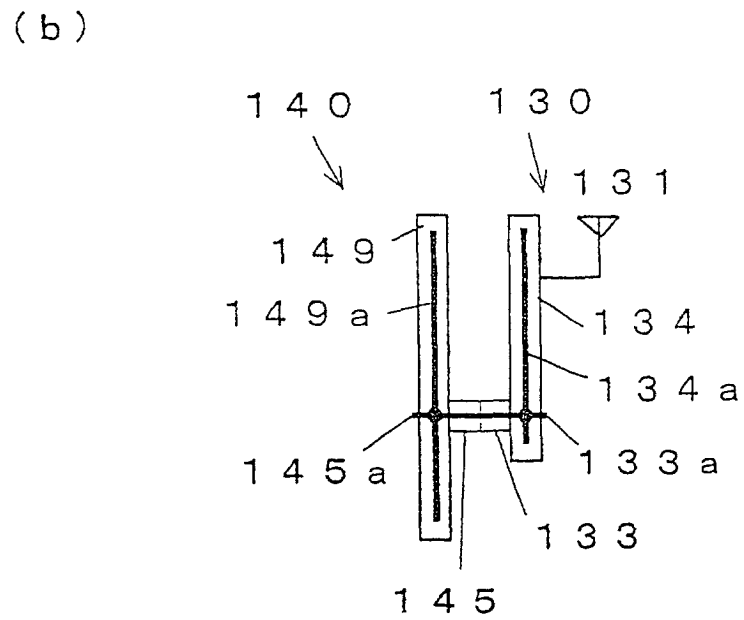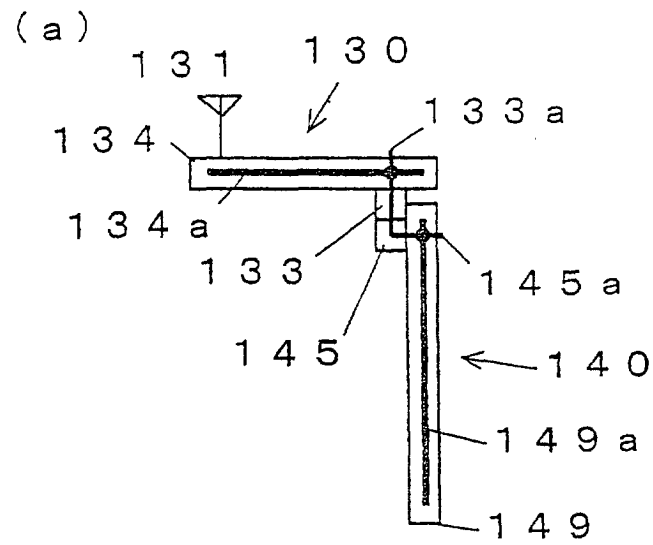

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP00/04196

A. CLASSIFICATION OF SUBJECT MATTER Int.Cl ⁷ H04Q9/00, E05B49/00		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) Int.Cl ⁷ H04Q9/00-9/16, E05B49/00, H01Q1/00-1/52		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Jitsuyo Shinan Koho 1926-1996 Jitsuyo Shinan Toroku Koho 1996-2000 Kokai Jitsuyo Shinan Koho 1971-2000 Toroku Jitsuyo Shinan Koho 1994-2000		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JP, 11-27023, A (Niles Parts Co., Ltd.), 29 January, 1999 (29.01.99), Fig. 2 & EP, 889538, A	1-5
Y	JP, 10-154953, A (TOKAI RIKI CO., LTD.), 09 June, 1998 (09.06.98), Par. No. [0003] (Family: none)	1-5
A	JP, 9-275360, A (OMRON CORPORATION), 21 October, 1997 (21.10.97) & DE, 19713929, A & TW, 320813, A	1-5
A	JP, 10-145121, A (TOKAI RIKI CO., LTD.), 29 May, 1998 (29.05.98) (Family: none)	1-5
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 17 July, 2000 (17.07.00)		Date of mailing of the international search report 01 August, 2000 (01.08.00)
Name and mailing address of the ISA/ Japanese Patent Office		Authorized officer
Facsimile No.		Telephone No.

Form PCT/ISA/210 (second sheet) (July 1992)