



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 132 514 B9**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

Note: Bibliography reflects the latest situation

(15) Correction information:
Corrected version no 1 (W1 B1)
Corrections, see page(s) 41, 42

(51) Int Cl.7: **D05C 15/32, D05C 15/18**

(48) Corrigendum issued on:
22.12.2004 Bulletin 2004/52

(45) Date of publication and mention
of the grant of the patent:
18.08.2004 Bulletin 2004/34

(21) Application number: **01111949.2**

(22) Date of filing: **27.11.1997**

(54) **Independent servo motor controlled scroll-type pattern attachment for tufting machine and computerized design system**

Mit unabhängigen Stellmotoren betriebene Musterherstellungsvorrichtung für Tuftingmaschinen und rechnergestütztes Entwurfssystem

Dispositif pour produire des motifs commandés par des servomoteurs indépendants pour machine à tufter et système de conception assistée par ordinateur

(84) Designated Contracting States:
DE GB

(30) Priority: **27.11.1996 US 31954 P**

(43) Date of publication of application:
12.09.2001 Bulletin 2001/37

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
97120835.0 / 0 854 220

(73) Proprietor: **Tuftco Corporation**
Chattanooga, TN 37408 (US)

(72) Inventors:
• **Morgante, Michael R.**
New York 14052-0018 (US)

• **Stanfield, Randall E.**
Tennessee 37379 (US)
• **Bishop, Mike**
Tennessee 37377 (US)

(74) Representative: **UEXKÜLL & STOLBERG**
Patentanwälte
Beselerstrasse 4
22607 Hamburg (DE)

(56) References cited:
GB-A- 2 002 828 **US-A- 2 862 465**
US-A- 3 752 094 **US-A- 3 943 865**
US-A- 4 469 037 **US-A- 4 867 080**
US-A- 5 058 518 **US-A- 5 588 383**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 132 514 B9

Description**BACKGROUND OF THE INVENTION**

5 **[0001]** This invention relates to a yarn feed mechanism for a tufting machine and more particularly to a scroll-type pattern controlled yarn feed wherein each set of yarn feed rolls is driven by an independently controlled servo motor. A computerized design system is also provided because of the complexities of working with the large numbers of individually controllable design parameters available to the new yarn feed mechanism.

10 **[0002]** Pattern control yarn feed mechanisms for multiple needle tufting machines are well known in the art and may be generally characterized as either roll-type or scroll-type pattern attachments. Roll type attachments are typified by J.L. Card, U.S. Patent No. 2,966,866 which disclosed a bank of four pairs of yarn feed rolls, each of which is selectively driven at a high speed or a low speed by the pattern control mechanism. All of the yarn feed rolls extend transversely the entire width of the tufting machine and are journaled at both ends. There are many limitations on roll-type pattern devices. Perhaps the most significant limitations are: (1) as a practical matter, there is not room on a tufting machine for more than about eight pairs of yarn feed rolls; (2) the yarn feed rolls can be driven at only one of two, or possibly three speeds, when the usual construction utilizing clutches is used -- a wider selection of speeds is possible when using direct servo motor control, but powerful motors and high gear rotors are required and the shear mass involved makes quick stitch by stitch adjustments difficult; and (3) the threading and unthreading of the respective yarn feed rolls is very time consuming as yarns must be fed between the yarn feed rolls and cannot simply be slipped over the end of the rolls, although the split roll configuration of Watkins, U.S. Patent No. 4,864,946 addresses this last problem.

20 **[0003]** The pattern control yarn feed rolls referred to as scroll-type pattern attachments are disclosed in J.L. Card, U.S. Patent No. 2,862,465, are shown projecting transversely to the row of needles, although subsequent designs have been developed with the yarn feed rolls parallel to the row of needles as in Hammel, U.S. Patent No. 3,847,098. Typical of scroll type attachments is the use of a tube bank to guide yarns from the yarn feed rolls on which they are threaded to the appropriate needle. In this fashion yarn feed rolls need not extend transversely across the entire width of the tufting machine and it is physically possible to mount many more yarn feed rolls across the machine. Typically, scroll pattern attachments have between 36 and 120 sets of rolls, and by use of electrically operated clutches each set of rolls can select from two, or possibly three, different speeds for each stitch.

25 **[0004]** The use of yarn feed tubes introduces additional complexity and expense in the manufacture of the tufting machine; however, the greater problem is posed by the differing distances that yarns must travel through yarn feed tubes to their respective needles. Yarns passing through relatively longer tubes to relatively more distant needles suffer increased drag resistance and are not as responsive to changes in the yarn feed rates as yarns passing through relatively shorter tubes. Accordingly, in manufacturing tube banks, compromises have to be made between minimizing overall yarn drag by using the shortest tubes possible, and minimizing yarn feed differentials by utilizing the longest tube required for any single yarn for every yarn. The most significant limitation of scroll-type pattern attachments, however, is that each pair of yarn feed rolls is mounted on the same set of drive shafts so that for each stitch, yarns can only be driven at a speed corresponding to one of those shafts depending upon which electromagnetic clutch is activated. Accordingly, it has not proven possible to provide more than two, or possibly three, stitch heights for any given stitch of a needle bar.

30 **[0005]** As the use of servo motors to power yarn feed pattern devices has evolved, it has become well known that it is desirable to use many different stitch lengths in a single pattern. Prior to the use of servo motors, yarn feed pattern devices were powered by chains or other mechanical linkage with the main drive shaft and only two or three stitch heights, in predetermined ratios to the revolutions of the main drive shaft, could be utilized in an entire pattern. With the advent of servo motors, the drive shafts of yarn feed pattern devices could be driven at almost any selected speed for a particular stitch.

35 **[0006]** Thus a servo motor driven pattern device might run a high speed drive shaft to feed yarn at 0.9 inches per stitch if the needle bar does not shift, 1.0 inches if the needle bar shifts one gauge unit, and 1.1 inches if the needle bar shifts two gauge units. Other slight variations in yarn feed amounts are also desirable, for instance, when a yarn has been sewing low stitches and it is next to sew a high stitch, the yarn needs to be slightly overfed so that the high stitch will reach the full height of subsequent high stitches. Similarly, when a yarn has been sewing high stitches and it is next to sew a low stitch, the yarn needs to be slightly underfed so that the low stitch will be as low as the subsequent low stitches. In addition, some yarn feed rolls, particularly at the ends of the tufting machine, may experience relatively more yarn drag from the tube bank. Compensation for this additional drag can be provided by very slightly overfeeding the yarn on those rolls. Therefore, there is a need to provide a pattern control yarn feed device capable of producing scroll-type patterns and of feeding the yarns from each pair of yarn feed rolls at an individualized rate.

40

45

50

55

SUMMARY OF THE INVENTION

[0007] It is therefore an object of this invention to provide in a multiple needle tufting machine a pattern controlled yarn feed mechanism incorporating a plurality of individually driven sets of yarn feed rolls across the tufting machine.

[0008] The yarn feed mechanism made in accordance with this invention includes a plurality of sets of yarn feed rolls, each set being in direct communication with a servo motor. Two sets of yarn feed rolls, and two servo motors, are mounted upon a plurality of transversely spaced supports on the machine. Each set of yarn feed rolls is driven at the speed dictated by its corresponding servo motor and each servo motor can be individually controlled.

[0009] It is a further object of this invention to provide a pattern controlled yarn feed mechanism which does not rely upon electromagnetic clutches, but instead uses only servo motors.

[0010] It is another object of this invention to provide an improved tube bank to further minimize the differences in yarn feed rates to individual needles.

[0011] It is yet another object of this invention to provide a computerized design system to create, modify, and graphically display complex carpet patterns suitable for use upon a pattern controlled yarn feed mechanism in which each set of yarn feed rolls is independently controlled and may rotate at any of numerous possible speeds on each stitch of a pattern.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012]

Figure 1 is a side elevation of a multiple needle tufting machine incorporating a yarn feed mechanism made in accordance with the invention;

Figure 2 is a side elevation view of a transverse support holding a set of yarn feed rolls and the servo motor which controls their rotation;

Figure 3 is a rear elevation view of the transverse support of Figure 2;

Figure 4 is a bottom elevation view of the transverse support of Figure 2;

Figure 5 is a sectional view of the transverse support of Figure 2 taken along the line 5-5 with one yarn feed roll shown in an exploded view;

Figure 6 is a schematic view of the electrical flow diagram for a multiple needle tufting machine incorporating a yarn feed mechanism made in accordance with the invention;

Figure 7 is an illustration of pattern screen display on a computer workstation utilized to create, modify and display patterns for yarn feed mechanisms made in accordance with the invention.

Figure 8 is an illustration of a pattern created for tufting by a single needle bar without shifting.

Figure 9 is a chart of the needle stepping relationships for the pattern of Figure 8 according to a conventional scroll attachment using only three yarn feed speeds.

Figure 10 is a chart of the needle stepping relationships and yarn feed speeds utilized for the pattern of Figure 8 in a tufting machine with a pattern attachment according to the present invention utilizing eight yarn feed speeds.

Figure 11 is a three-dimensional computer screen display of the pattern shown in Figure 8.

Figure 12 is a flow chart for the determination of yarn feed values based upon the previous two stitches and the shifting of the needle bar.

Figure 13 is a simplified flow chart for determining yarn feed values based upon the previous two stitches without regard to shifting.

Figure 14 is a flow chart illustrating a method of approximating an appropriate yarn feed value for a given stitch.

DETAILED DESCRIPTION OF THE INVENTION

[0013] Referring to the drawings in more detail, Figure 1 discloses a multiple needle tufting machine **10** upon which is mounted a pattern control yarn feed attachment **30** in accordance with this invention. It will be understood that it is possible to mount attachments **30** on both sides of a tufting machine **10** when desired. The machine **10** includes a housing **11** and a bed frame **12** upon which is mounted a needle plate for supporting a base fabric adapted to be moved through the machine **10** from front to rear in the direction of the arrow **15** by front and rear fabric rollers. The bed frame **12** is in turn mounted on the base **14** of the tufting machine **10**.

[0014] A main drive motor **19** schematically shown in Figure 6 drives a rotary main drive shaft **18** mounted in the head **20** of the tufting machine. Drive shaft **18** in turn causes push rods **22** to move reciprocally toward and away from the base fabric. This causes needle bar **27** to move in a similar fashion. Needle bar **27** supports a plurality of preferably uniformly spaced needles **29** aligned transversely to the fabric feed direction **15**. The needle bar **27** may be shiftable by means of well known pattern control mechanisms, not shown, such as Morgante, U.S. Patent No. 4,829,917, or R.

T. Card, U.S. Patent No. 4,366,761. It is also possible to utilize two needle bars in the tufting machine, or to utilize a single needle bar with two, preferably staggered, rows of needles.

[0015] In operation, yarns **16** are fed through tension bars **17**, pattern control yarn feed device **30**, and tube bank **21**. Then yarns **16** are guided in a conventional manner through yarn puller rollers **23**, and yarn guides **24** to needles **29**. A looper mechanism, not shown, in the base **14** of the machine **10** acts in synchronized cooperation with the needles **29** to seize loops of yarn **16** and form cut or loop pile tufts, or both, on the bottom surface of the base fabric in well known fashions.

[0016] In order to form a variety of yarn pile heights, a pattern controlled yarn feed mechanism **30** incorporating a plurality of pairs of yarn feed rolls adapted to be independently driven at different speeds has been designed for attachment to the machine housing **11** and tube bank **21**.

[0017] As best disclosed in Figure 1, a transverse support plate **31** extends across a substantial length of the front of tufting machine **10** and provides opposed upwards and downwards facing surfaces. On the upwards facing surface are placed the electrical cables and sockets to connect with servo motors **38**. On the downwards facing surface are mounted a plurality of yarn feed roller mounting plates **35**, shown in isolation in Figure 2. Mounting plates **35** have connectors such as feet **53** to permit the plates **35** to be removably secured to the support plate **31** of the yarn feed attachment. Mounted on each side of each mounting plate **35** are a front yarn feed roll **36**, a rear yarn feed roll **37** and a servo motor **38**.

[0018] Each yarn feed roll **36, 37** consists of a relatively thin gear toothed outer section **40** which on rear yarn feed roll meshes with the drive sprocket **39** of servo motor **38**. In addition, the gear toothed outer sections **40** of both front and rear yarn feed rolls **36, 37** intermesh so that each pair of yarn feed rolls **36, 37** are always driven at the same speed. Yarn feed rolls **36, 37** have a yarn feeding surface **41** formed of sand paper-like or other high friction material upon which the yarns **16** are threaded, and a raised flange **42** to prevent yarns **16** from sliding off of the rolls **36, 37**. Preferably yarns **16** coming from yarn guides **17** are wrapped around the yarn feeding surface **41** of rear yarn roll **37**, thence around yarn feeding surface **41** of front yarn roll **36**, and thence into tube bank **21**. Because of the large number of independently driven pairs of yarn feed rolls **36, 37** that can be mounted in the yarn feed attachment **30**, it is not anticipated that more than about **12** yarns would need to be driven by any single pair of rolls, which is a much lighter load providing relatively little resistance compared to the hundred or more individual yarns that might be carried by a pair of rolls on a roll type yarn feed attachment, and the thousand or more individual yarns that might be powered by a single drive shaft on some stitches in a traditional scroll-type attachment. By providing the servo motors **38** with relatively small drive sprockets **39** relative to the outer toothed sections **40** of yarn feed rolls **36, 37**, significant mechanical advantage is gained. This mechanical advantage combined with the relatively lighter loads, and relatively light yarn feed rolls weighing less than one pound, permits the use of small and inexpensive servo motors **38** that will fit between mounting plates **35**. This permits direct drive connection with the yarn feed rolls **36, 37** rather than a 90° connection as would be required if larger servo motors were used that sat upon the top of mounting plates **35**. Preferably the gear ratio between yarn feed rolls **36, 37** and the drive sprocket **39** is about 15 to 1 with the yarn feed rolls **36, 37** each having 120 teeth and the drive sprocket **39** having 8 teeth. Satisfactory results can generally be obtained if the ratio is as low as 12 to 1 and as high as 18 to 1. However, when the ratio is lower than 8 to 1 or higher than 24 to 1, it is no longer feasible to drive the yarn feed rolls as shown.

[0019] As is best illustrated in Figure 5, mounting plates **35** have hollow circular sections **51** to receive the outer toothed section **40** of the yarn feed rolls **36, 37**. The outer edge **52** of such circular sections **51** is deeper to receive the slightly thicker toothed sections **40**. The drive sprockets **39** are also similarly received, as shown in Figure 3, so that the intermeshing drive teeth are substantially concealed within mounting plates **35** and the chance of yarns **16** or other material becoming inadvertently entangled in the yarn feed drive is thereby minimized. A fixed pin **50** is set through each mounting plate **35** and yarn feed rolls **36, 37** are permitted to rotate freely about the pin **50**, on bearings **44, 45**. Preferably a retaining ring **43** and bearing **44** are mounted on the pin **50** adjacent to the mounting plate **35**, then the yarn feed roll is mounted, followed by a wave spring **46**, another bearing **45**, and an outer retaining ring **47**. Servo motors **38** are fastened to mounting plates **35** by threaded screws **49**, which pass through apertures **54** in the mounting plate **35**, and are received in the base of the servo motors **38**.

[0020] Turning now to Figure 6, a general electrical diagram of the invention is shown in the context of a computerized tufting machine. A personal computer **60** is provided as a user interface, and this computer **60** may also be used to create, modify, display and install patterns in the tufting machine **10** by communication with the tufting machine master controller **61**. Master controller **61** in turn preferably interfaces with machine logic **63**, so that various operational interlocks will be activated if, for instance, the controller **61** is signaled that the tufting machine **10** is turned off, or if the "jog" button is depressed to incrementally move the needle bar, or a housing panel is open, or the like. Master controller **61** may also interface with a bed height controller **62** on the tufting machine to automatically effect changes in the bed height when patterns are changed. Master controller **61** also receives information from encoder **68** relative to the position of the main drive shaft **18** and preferably sends pattern commands to . and receives status information from controllers **70, 71** for backing tension motor **74** and backing feed motor **73** respectively. Said motors **73, 74** are powered

by power supply 72. Finally, master controller 61, for the purposes of the present invention, sends ratio metric pattern information to motor controllers 65. For instance, the master controller 61 might signal a particular motor controller 65 that it needs to rotate its corresponding servo motor 38 through 8.430 revolutions for the next revolution of the main drive shaft 18.

[0021] Motor controllers 65 also receive information from encoder 68 relative to the position of the main drive shaft 18. Motor controllers 65 process the ratiometric information from master controller 61 and main drive shaft positional information from encoder 68 to direct corresponding motors 38 to rotate yarn feed rolls 36, 37 the distance required to feed the appropriate yarn amount for each stitch. Motor controllers 65 preferably utilize only 5 volts of current for logic power supplies 67, just as master controller 61 utilizes power supply 64. In the preferred construction, motor power supplies 66 need provide no more than 100 volts of direct current at two amps peak. The system described enables the use of hundreds of possible yarn feed rates, preferably 128, 256 or 512 yarn feed rates, and can be operated at speeds of 1500 stitches per minute. The cost of motor controller 65 is minimized and throughput speed maximized by implementing the necessary controller logic in hardware, utilizing logic chips and programmable logical gate array chips.

[0022] The preferred yarn feed servo motors 38 are trapezoidal brushless motors having a height of no more than about 3.5 inches. Such motors also preferably provide motor controllers 65 with commutation information from Hall Effect Detectors (HEDs) and additional positional information from encoders, where the HEDs and encoders are contained within the motors 38. The use of a commutation section and encoder within the servo motor avoids the necessity of using a separate resolver to provide positional control information back to a servo motor controller as has been the practice in typical prior art computerized tufting machines exemplified by Taylor, U.S. Patent No. 4,867,080.

[0023] In commercial operation, it is anticipated that broadloom tufting machines will utilize pattern controlled yarn feed devices 30 according to the present invention with 60 mounting plates 35, thereby providing 120 pairs of independently controlled yarn feed rolls 36, 37. If any pair of yarn feed rolls 36, 37 or associated servo motor 38 should become damaged or malfunction, mounting plate 35 can be easily removed by loosening bolts attaching mounting feet 53 to the transverse support plate 31 and unplugging connections to the two servo motors 38 that are secured to the mounting plate 35. A replacement mounting plate 35 already fitted with yarn feed rolls 36, 37 and servo motors 38 can be quickly installed. This allows the tufting machine to resume operation while repairs to the damaged or malfunctioning yarn feed rolls and motor are completed, thereby minimizing machine down time.

[0024] The present yarn feed attachment 30 provides substantially improved results when using tube banks specially designed to take advantage of the attachment's 30 capabilities. Historically, tube banks have been designed in three ways. Originally, the tubes leading from yarn feed rolls to a needle were made the minimum length necessary to transport the yarn to the desired location as shown in J.L. Card, U.S. Patent No. 2,862,465. Due to the friction of the yarns against the tubes, this had the result of feeding more yarn to the needles associated with relatively short tubes and less yarn to the needles associated with relatively long tubes, and with uneven finishes resulting on carpets tufted thereby.

[0025] To eliminate this effect, tube banks were then designed so that every tube in the tube bank was of the same length. On a broad loom tufting machine, this typically required that there be over 1400 tubes each approximately 18 feet long, or approximately 25,000 feet of tubing. The collective friction of the yarns passing through these tubes created other problems and a third tube bank design evolved as a compromise.

[0026] In the third design, all of the yarn feed tubes from a given pair of yarn feed rolls had the same length. Thus all of the yarn feed tubes leading from the yarn feed rolls in the center of the tufting machine would be about 10½ feet long. At the edges of the tufting machine, all of the tubes leading from the yarn feed rolls would be approximately 18 feet long. A tube bank constructed in this fashion requires slightly less than 20,000 feet of tubing, over a 20% reduction for the uniform 18 foot long tubes of the second design.

[0027] While this third design was thought to be the optimal compromise between tufting evenly across the entire machine and minimizing friction, the present yarn feed attachment has shown this is not the case. In fact when yarns are all fed through 18 foot tubes from the left hand side of the tufting machine, the yarn tubes going to the right hand side of the machine are straighter than the yarn tubes that are conveying the yarns only a few feet to needles on the left hand side of the machine. As a result, the yarns passing through relatively straighter tubes are fed slightly more yarn. This discrepancy became particularly noticeable when utilizing the present attachment 30 which allows the yarns from each pair of yarn feed rolls 36, 37 to be independently controlled. As a result, a new fourth tube bank design is new preferred in which the longest length of tubing required for yarns being fed from the center of the tufting machine is utilized as the minimum tubing length for any yarn. This length is approximately 10½ feet on a broadloom machine. The result is that the yarn tubes spreading out from the center of the tufting machine are all about 10½ feet long while yarn tubes spreading from an end of the tufting machine range between 10½ feet and about 18 feet in length. This reduces the total length of tubing in the tube bank to approximately 17,000 feet, a savings of approximately 32% in total tube length.

[0028] When the present yarn feed attachment 30 is used with a tube bank of any of the above designs, improved

tufting performance can be realized. This is because in the traditional scroll attachment all yarns being fed high are fed at the same rate regardless of whether the yarns are centrally located, or located at an end of the tufting machine. In the fourth design, this leads to centrally located yarns going through 10½ feet tubes and tufting a standard height (S) as they are distributed across the width of the carpet. However, yarns being distributed from the right end of the tufting machine will pass through 10½ foot tubes at the right side of the tufting machine and will tuft the standard height (S), but will pass through tubes approaching 18 feet in length to the left side of tufting machine and so will tuft lower due to increased friction than the standard height ($S - Fr$). On the traditional scroll attachment there is no way to minimize this amount (Fr) that the pile height is reduced due to the increased friction against the yarn traveling in longer tubes. However, with the present attachment, the yarns distributed from the right end of the machine can be fed slightly faster so that the yarns distributed to the center of the tufting machine will tuft at the standard height (S), the yarns distributed to the right side of the machine will tuft at a slightly increased height ($S + \frac{1}{2}Fr$) and the yarns distributed to the left side of the machine will tuft at a height lower than the standard height by only half the amount ($S - \frac{1}{2}Fr$) that would occur on the traditional scroll type pattern attachment. By distributing the variation across the entire width of the carpet, the discrepancy is minimized and made much less noticeable and detectable.

[0029] In an improved version of the present attachment **30**, software can be provided that requires the operator to set the yarn feed lengths for the center yarn feed rolls and the yarn feed rolls at either end of the tufting machine. Thus on a 120 roll attachment, the operator might set the yarn feed lengths for the 61st pair of yarn feed rolls **36, 37** for the 120th pair. If the yarn feed length for a high stitch was 1.11 inches for the 61st pair and 1.2 inches for the 120th pair of yarn feed rolls **36, 37**, then the software would proportionally allocate this 0.1 inch difference across the intervening 58 sets of yarn feed rolls. Thus, in the hypothetical example above, the following pairs of yarn feed rolls would automatically feed the following lengths of yarn for a high stitch once the lengths for the 61st pair and 120th pair of yarn feed rolls were set by the operator:

YARN FEED ROLL PAIR NUMBERS	LENGTH OF YARN FEED
1-6 and 115-120	1.2 inches
7-12 and 109-114	1.19 inches
13-18 and 103-108	1.18 inches
19-24 and 97-102	1.17 inches
25-30 and 91-96	1.16 inches
31-36 and 85-90	1.15 inches
37-42 and 79-84	1.14 inches
43-48 and 73-78	1.13 inches
49-54 and 67-72	1.12 inches
55-66	1.11 inches

[0030] Of course, the operator would still be permitted to further adjust the automatic settings if that proved desirable on a particular tufting machine.

[0031] Another significant advance permitted by the present pattern control attachment **30** is to permit the exact lengths of selected yarns to be fed to the needles to produce the smoothest possible finish. For instance, in a given stitch in a high/low pattern on a tufting machine that is not shifting its needle bar the following situations may exist:

1. Previous stitch was a low stitch, next stitch is a low stitch.
2. Previous stitch was a low stitch, next stitch is a high stitch.
3. Previous stitch was a high stitch, next stitch is a high stitch.
4. Previous stitch was a high stitch, next stitch is a low stitch.

Obviously, with needle bar shifting which requires extra yarn depending upon the length of the shift, or with more than two heights of stitches, many more possibilities may exist. In this limited example, it is preferable to feed the standard low stitch length in the first situation, to slightly overfeed for a high stitch in the second situation, to feed the standard high stitch length in the third situation, and to slightly underfeed the low stitch length in the fourth case. On a traditional scroll type attachment, the electromagnetic clutches can engage either a high speed shaft for a high stitch or a low speed shaft for a low stitch. Accordingly, the traditional scroll type attachment cannot optimally feed yarn amounts for complex patterns which results in a less even finish to the resulting carpet.

[0032] Many additional pattern capabilities are also present. For instance, by varying the stitch length only slightly from stitch to stitch, this novel attachment will permit the design and tufting of sculptured heights in pile of the carpet. In order to visualize the many variations that are possible, it has proven desirable to create new design methods for

the attachment. Figure 7 displays a representative dialog box **80** that allows the operator at computer **60**, or at a stand-alone or networked design computer to select pattern parameters. General screen display parameters are selected such as block width and length **81**, **82** grid spacing **83**, **84**. The width **85** and length **86** of the pattern are also set. Pattern width **85** will generally be 30, 60, or 120 when the design software is used with a 120 yarn feed roll pattern attachment **30** according to the present invention. Pattern length **86** will generally be the same as the pattern width **85** but may be shorter or much longer.

[0033] Once the parameters of the screen display and pattern size are selected, the operator inputs the number of pile heights **87** the resulting carpet will have, then individually selects each pile height by number **88**, and specifies the corresponding pile height **89**. As shown in Figure 8, each pile height **89** is displayed as a shade of gray (or saturated color), ranging from white **90** for the lowest height to black **95** or a fully saturated color for the highest height. Views of the carpet pattern may be rotated, enlarged, reduced, or provided in 3-dimensional views as shown in Figure 11 as desired. The operator or designer then can create, or modify a pattern by selecting various of the pile heights and applying them to the display.

[0034] A particularly useful feature of the software is that it automatically translates the pile heights in the finished carpet to instructions for the master controller so that the pattern designer does not have to be concerned with whether the needle bar is shifting, whether it is a high stitch after a low stitch or the like. Generally, after processing the raw design information, the software will require more yarn lengths than the number of pile heights the design contains. Figures 9 and 10 display representative yarn feed speed and stepping information for the pattern shown in Figure 8 created with a single needle bar sewing without shifting. Figure 9 displays the yarn feed speeds that would be used in conventional scroll attachments and with conventional yarn feed pattern programming. Figure 10 displays selections according to the present invention.

[0035] A particularly desirable result of the control over the yarn length of each stitch is a yarn savings of between approximately two and ten percent. This is a result of the yarn feeds for a low stitch after a high stitch being decreased by an amount greater than the increase in yarns fed for a high stitch after a low stitch. For instance, in the pattern of Figure 8 when using the novel yarn feeds of the present invention shown in Figure 10, the yarn feed for a low stitch following a high stitch is 0.002 inches -- or 0.309 inches less than the yarn fed for a usual low stitch (0.311 inches). However, the yarn feed for high stitch after a low stitch is 1.0 inches or only 0.175 inches more than the yarn fed for a normal high stitch (0.825 inches).

[0036] The discrepancy in yarn feed amounts appears to be the result of greater tension being placed on the yarn when transitioning from high to low stitches whereby the yarn is stretched slightly. In the example of Figures 8 and 10, 0.134 inches of yarn is saved in each transition from low stitching to high and back to low. Thus patterns with relatively more changes in stitch heights will realize greater economies with the present yarn feed control invention.

[0037] The savings realized in the pattern of Figure 8 may be easily calculated. As shown in Figure 9, if the pattern is tufted utilizing a prior art yarn feed mechanism providing only three yarn feed speeds, there will be 144 high stitches of 0.825 inches, 56 low stitches of 0.311 inches and 56 medium high stitches of 0.545 inches in each repeat, or a total of 166.736 inches.

[0038] However, as shown in Figure 10, when transition stitches are added in the lengths of 0.002 inches for a low stitch following either a high or medium stitch; of 1.0 inches for a high stitch following a low stitch; of 0.60 inches for a medium stitch following a low stitch; of 0.90 inches for a high stitch following a medium stitch; and of 0.40 inches for a medium stitch following a high stitch, the total yarn consumed in a repeat is only 160.324 inches. This is a savings of 6.412 inches or almost 4%.

[0039] Furthermore, in practice it is useful to use more than one transition stitch. So for instance when transitioning from a high stitch of 0.825 inches to a low stitch of 0.311 inches, the first low stitch for some yarns is preferably fed at about 0.002 inches and the second low stitch is preferably only about 0.08 inches. The third low stitch will assume the regular value of 0.311 inches. Similar over feeds for the transition to high stitches of perhaps 1.0 inches and 0.93 inches would also be made. With the two transition stitch programming, yarn savings for this pattern are even greater. The complexity added by multiple transition stitch values makes the translation of the pile heights of the finished pattern created by the designer to numeric yarn feed values even more complex. A flow chart showing the logic of the substitution of yarn feed values for the high, medium, and low pile heights selected for a given stitch by a designer is shown in Figure 12.

[0040] Pattern information depicting finished yarn pile heights, as by color saturation as shown in Figure 8 or three-dimensional form as shown in Figure 11, is input into a computer 60 (shown in Figure 6), in step **101**. In the next step **102**, the computer **60** processes the pattern height information for each pattern width position, which is represented by the yarn for a single needle on the tufting machine. Most patterns will have 30, 40, or 60 pattern width or needle positions though the present yarn feed attachment will permit even patterns with 120 positions. When using two yarn feed attachments with separate staggered needle bars, even 240 positions could be created.

[0041] In order to properly anticipate how the beginning of the pattern must be tufted, particularly after each pattern repeat, the last two stitches of the pattern in a pattern width position are read into memory of the computer in step **103**.

In step **104**, the last two stitches are compared to determine their heights. The decision boxes shown in steps **104A** through **104I** are designed for the situation where pattern heights for each stitch must be selected from high, medium, and low. In the event that additional finished pile heights are used, a more complex decision tree analysis must be utilized. Depending upon the previous two stitches, the first stitch in the pattern is processed in the appropriate decision tree **110A** through **110I**. For instance, if the last two stitches of the pattern are both high, decision tree **110A** is utilized. In step **114**, the pattern height information for the next stitch is obtained. In the next step **106**, it is determined whether this next stitch is high, medium, or low in height and the appropriate sub-tree (**106A**, **106B**, **106C**) is utilized. In the sub-tree, the first query is to determine whether the stitch is shifted **107** and if so, shifted yarn feed values are applied in step **108**. Otherwise, unshifted values are applied. Then the processor determines whether it is at the end of the pattern in step **109** and if not, step **105** directs processing to proceed at the appropriate decision tree **110**. If it is the end of the pattern, step **111** increments the pattern width position counter and the process is repeated for the next pattern width position. This begins with reading in the last two stitches of the pattern for the particular width position in step **103** for each succeeding pattern width position. When the final pattern width position has been completely processed, step **113** shows that the pattern translation into yarn feed variables is complete. At this time, numeric values may be inserted for the various stitch designations. In the example of Figure 12 with shifting of up to two steps, and three finished yarn pile heights, some 45 yarn feed values must be input.

[0042] For a typical pattern, approximate yarn feed values would initially be utilized and a short sample of carpet tufted. The resulting carpet would be examined and any necessary modifications to the stitch heights to produce the desired finish would be made. Such variations are required because of varying characteristics of different yarns and particularly yarn elasticity.

[0043] Alternative methods of developing yarn feed values may be implemented more simply in special cases. Figure 13 illustrates a flow chart for assigning yarn feed values when there are three pile heights (High, Medium and Low) and no shifting of the needle bar. The process starts at box **120** and values are initialized **121**. The value of the current stitch or step is determined **122** and the value of the previous stitch or step is determined **123**, **124**. Based upon the values of the current and previous stitches, a Current Step Value is assigned **125**.

[0044] In step **127**, counters and prior stitch values are updated, and a check is performed to determine whether the last stitch has been reached **128**. If there are more stitches, the determination of the new current stitch value **122** begins. If completed **129**, the computed yarn feed values are substituted into the carpet pattern.

[0045] Figure 14 illustrates a method of approximating yarn feed values for a yarn pattern with many yarn feed variations. In this method, the yarn feed value calculation begins **130** and the values for the current step and previous step are initialized **131**. The actual estimated amount of yarn to be provided to accomplish the desired current step or stitch is then calculated based upon the stitch rate (stitches per inch), the intended pile height of the stitch, the number of positions the needle bar is shifted during the step or stitch, and the gauge of the needle bars **132**. The values for the previous stitch and current stitch are updated and the process is repeated until the last stitch is processed **133**. In this fashion each stitch is assigned an actual yarn feed value. However, it is desirable to feed yarn slightly in advance of the tufting machine's downstroke which pulls on the yarns and drives those yarns through the backing fabric.

[0046] Two methods have been devised to address this concern. The first is simply to utilize an encoder to report the position of the needles, or the main drive shaft of the tufting machine, and program the master controller **61** of the tufting machine to signal yarn feed motors to feed the yarn required for the current stitch slightly in advance of the downstroke. This method is satisfactory for independently controlled yarn feed drives. However, to accommodate less sophisticated yarn feeds, it is sometimes desirable to provide a yarn feed value that can be fed in synchronization with the tufting machine stitches. In step **135** it is shown that by blending the yarn feed values for the previous stitch and the current stitch a more appropriate amount of yarn can be fed to the needles. Thus by the time the previous stitch is tufted, the yarn for that stitch as calculated in step **132** has been fed and a portion of the yarn required for the current stitch has also been fed to the needles. This forward averaging of the yarn feed values in step **135** is repeated through the stitches and when the last stitch is reached **136**, the calculation of values is complete **137** and may be utilized for the pattern.

[0047] The software also can preferably automatically compute the length of yarn required for a particular design by summing the length of the stitches for a given length of the design, and will translate that information to carpet weight depending upon the deniers of the yarns selected. It will be readily apparent that without the advantages provided by the related software, it would be very time consuming to take advantage of the power and advantages of the present individualized servo motor controlled yarn feed attachment.

[0048] Numerous alterations of the structure herein described will suggest themselves to those skilled in the art. It will be understood that the details and arrangements of the parts that have been described and illustrated in order to explain the nature of the invention are not to be construed as any limitation of the invention.

Claims

1. A method of automatically inputting the parameters of tufting of a tufting machine (10) of the type having an electronically controlled yarn feed attachment (30) for providing measured increments of yarn to a plurality of transversely aligned needles (29) adapted to be reciprocally driven, through a backing fabric passing from front to back through the tufting machine (10) by a rotary main drive shaft (18), thereby placing stitches comprising tufts of yarn through said backing fabric comprising the steps of:
 - (a) selecting pattern parameters of width, length, a relatively high pile height and a relatively low pile length, for stitches on a computer display;
 - (b) designing a pattern showing the location of relatively high pile tufts and relatively low pile tufts on the computer display to create a graphic representation of tufted carpet in a data file;
 - (c) processing the data file containing the graphic representation of tufted carpet to assign yarn feed values to stitches based upon the pile height selected for that stitch and at least the preceding stitch.
2. The method of claim 1 wherein the assignment of yarn feed values to stitches is based upon the pile height selected for that stitch and at least the two previous stitches.
3. The method of claim 1 wherein the yarn feed value assigned to a relatively high pile tuft coming after a relatively high pile tuft and a relatively low pile tuft is greater than the yarn feed value assigned to a relatively high pile tuft coming after two relatively high pile tufts.
4. The method of claim 2 wherein the yarn feed value assigned to stitches is further based upon the number of stitches per inch being tufted, the machine gauge and the number of gauge increments the needles are to be shifted from their previous location.
5. The method of claim 1 wherein the yarn feed value for a relatively low pile height stitch after a relatively high pile height stitch is decreased from the yarn feed value for a relatively low pile height stitch occurring after other relatively low pile height stitches by an amount greater than the amount the yarn feed value of a relatively high pile height stitch after a relatively low pile height stitch is increased from the yarn feed value for a relatively high pile height stitch occurring after other relatively high pile height stitches.
6. The method of claim 1 wherein the graphic representation of tufted carpet can be viewed in a three-dimensional format on a computer screen display.
7. The method of claim 1 wherein differences in the relative heights of pile tufts is reflected by varying the color saturation for those tufts on a computer screen display.
8. The method of claim 1 wherein the yarn feed value assigned to a given stitch in a pattern is reflective of a proportion of the yarn calculated to be required for said stitch and a proportion of the yarn calculated to be required for the next stitch in the pattern.
9. A yarn feed module on a mounting plate (35) having a first side, a second opposed side and a connector (53) adapted to be removably fastened to a scroll type yarn feed attachment (30) comprising a yarn feed servo motor (38) mounted on the first side of said mounting plate (35) in direct communication with a yarn feed roll (37) on said mounting plate.
10. The yarn feed module of claim 9 wherein said servo motor has a gear toothed drive sprocket (39) which engages with a gear toothed outer section (40) of the yarn feed roll (37).
11. The yarn feed module of claim 9 wherein the rotations of the drive sprocket (39) correspond to the rotations of the yarn feed roll (37) in the range of ratios from between about 8:1 to about 24:1.
12. The yarn feed module of claim 9 wherein the rotations of the drive sprocket (39) correspond to the rotations of the yarn feed roll (37) in the range of ratios from between about 12:1 to about 18:1.
13. The yarn feed module of claim 9 wherein the rotations of the drive sprocket (39) correspond to the rotations of the yarn feed roll (37) in a ratio of about 15:1.

14. The yarn feed module of claim 10 wherein the mounting plate (35) has a recessed circular portion (51) to receive the gear toothed outer section (40) of the yarn feed roll (37).

15. The yarn feed module of claim 9 wherein the yarn feed roll (37) has a weight of less than about one pound.

16. The yarn feed module of claim 9 wherein the servo motor (38) generates commutation information which can be communicated to a controller (61).

17. The yarn feed module of claim 9 wherein the servo motor (38) generates positional information which can be communicated to a controller (61).

18. A method of operating a tufting machine to tuft a yarn in a backing fabric such that the yarn has a relatively high pile height on selected stitches and a relatively low pile height on selected stitches comprising the steps of

- (a) inputting yarn feed value information to a master controller;
- (b) threading the desired yarn (16) around a yarn feed roll (36, 37) on a yarn feed module, through a yarn feed tube and to a needle (29);
- (c) operating the tufting machine so that the needle reciprocates and carries the yarn (16) through the backing fabric;
- (d) providing positional information concerning the reciprocation of the needle to the master controller (61);
- (e) sending ratiometric yarn feed value information corresponding to a stitch from the master controller (61) to a servo motor controller (65);
- (f) processing the ratiometric information with the servo motor controller (65) and directing a corresponding servo motor (38) in communication with the yarn feed module to rotate the distance required to feed an appropriate amount of yarn corresponding to the stitch;
- (g) reporting positional information from the servo motor (38) to the servo motor controller;
- (h) reporting status information from the servo motor controller (65) to the master controller (61).

19. A tube bank (21) for directing yarns (16) from a scroll type pattern attachment (30) to a plurality of transversely spaced reciprocable needles (29) in a tufting machine (10) wherein the minimum length of any yarn feed tube (21) is the length of yarn feed tube required to transport a yarn from a yarn feed roll in a central portion of the scroll type pattern attachment (30) to a needles (29) located adjacent a marginal portion of the tufting machine (10).

Patentansprüche

1. Verfahren zum automatischen Eingeben der Tufting-Parameter von einer Tuftingmaschine (10) des Typs, die einen elektronisch gesteuerten Garnzuführanbau (30) zum Bereitstellen von abgemessenen Garn-Zuwächsen für eine Vielzahl von quer ausgerichteten Nadeln (29) aufweist, die dazu ausgestaltet sind, um durch ein Grundgewebe, das die Tuftingmaschine (10) von vorne nach hinten durchläuft, durch eine rotierende Hauptantriebswelle (18) hin- und herbewegt zu werden, wobei Stiche, die Schlingen aufweisen, durch das Grundgewebe gesetzt werden, mit den Schritten:

- a) Auswählen von Musterparametern bezüglich Breite, Länge, relativ hohe Florhöhe und relativ niedrige Florlänge für Stiche auf einem Computerbildschirm,
- b) Entwerfen eines Musters, das die Anordnung von relativ hohen Flornoppen und relativ niedrigen Flornoppen auf dem Computerbildschirm zeigt, um eine grafische Darstellung von einem getufteten Teppich in einer Datendatei zu erzeugen;
- c) Verarbeiten der Datendatei, die die grafische Darstellung von dem getufteten Teppich enthält, um Stichen Garnzuführwerte zuzuweisen, und zwar basierend auf der Florhöhe, die für diesen Stich und zumindest für den vorhergehenden Stich ausgewählt wurde.

2. Verfahren nach Anspruch 1, bei dem die Zuweisung der Garnzuführwerte zu Stichen auf der Florhöhe basiert, die für diesen Stich und für zumindest für die beiden vorhergehenden Stiche ausgewählt wurde.

3. Verfahren nach Anspruch 1, bei dem der Garnzuführwert, der einer relativ hohen Flornoppe zugewiesen wird, die auf eine relativ hohe Flornoppe und eine relativ niedrige Flornoppe folgt, größer ist als der Garnzuführwert, der einer relativ hohen Flornoppe zugewiesen wird, die auf zwei relativ hohe Flornoppen folgt.

4. Verfahren nach Anspruch 2, bei dem der Stichen zugewiesene Garnzuführwert außerdem auf der Anzahl von pro Zoll getufteten Stichen, der Maschinen-Gauge und der Anzahl von Gaugen-Zuwächsen basiert, um die die Nadeln aus ihrer vorherigen Position verschoben werden müssen.
- 5 5. Verfahren nach Anspruch 1, bei dem der Garnzuführwert für einen Stich mit relativ niedriger Florhöhe nach einem Stich mit relativ hoher Florhöhe gegenüber dem Garnzuführwert für einen Stich mit relativ niedriger Florhöhe, der nach anderen Stichen mit relativ niedriger Florhöhe erfolgt, um einen Wert verringert ist, der größer ist als der Wert, um den der Garnzuführwert von einem Stich mit relativ hoher Florhöhe nach einem Stich mit relativ niedriger Florhöhe gegenüber dem Garnzuführwert für einen Stich mit relativ hoher Florhöhe erhöht ist, der nach anderen Stichen mit relativ hoher Florhöhe erfolgt.
- 10 6. Verfahren nach Anspruch 1, bei dem die grafische Darstellung von einem getufteten Teppich in einem dreidimensionalen Format auf einem Computerbildschirm betrachtet werden kann.
- 15 7. Verfahren nach Anspruch 1, bei dem Unterschiede bezüglich der relativen Höhen der Flornoppen durch Veränderung der Farbsättigung für diese Noppen auf einem Computerbildschirm wiedergegeben werden.
8. Verfahren nach Anspruch 1, bei dem der Garnzuführwert, der einem vorgegebenen Stich in einem Muster zugewiesen wird, auf einen Anteil des Garns, der für den Stich als benötigt berechnet wird, und auf einen Anteil des Garns rückbezogen ist, der für den nächsten Stich als benötigt berechnet wird.
- 20 9. Garnzuführmodul auf einer Montageplatte (35), die eine erste Seite, eine zweite gegenüberliegende Seite und ein Verbindungsglied (53) aufweist, das dazu ausgestaltet ist, um lösbar an einem Garnzuführanbau (30) vom Vorschub-Typ befestigt zu werden, mit einem Garnzuführservomotor (38), der an der ersten Seite der Montageplatte (35) in direkter Verbindung mit einer Garnzuführrolle (37) an der Montageplatte angebracht ist.
- 25 10. Garnzuführmodul nach Anspruch 9, bei dem der Servomotor ein gezahntes Antriebsritzel (39) aufweist, das mit einem gezahnten äußeren Abschnitt (40) der Garnzuführrolle (37) eingreift.
- 30 11. Garnzuführmodul nach Anspruch 9, bei dem die Umdrehungen des Antriebsritzels (39) den Umdrehungen der Garnzuführrolle (37) im Bereich von Verhältnissen zwischen etwa 8:1 bis etwa 24:1 entsprechen.
12. Garnzuführmodul nach Anspruch 9, bei dem die Umdrehungen des Antriebsritzels (39) den Umdrehungen der Garnzuführrolle (37) im Bereich von Verhältnissen zwischen etwa 12:1 bis etwa 18:1 entsprechen.
- 35 13. Garnzuführmodul nach Anspruch 9, bei dem die Umdrehungen des Antriebsritzels (39) den Umdrehungen der Garnzuführrolle (37) im Verhältnis von etwa 15:1 entsprechen.
- 40 14. Garnzuführmodul nach Anspruch 10, bei dem die Montageplatte (35) einen eingelassenen kreisförmigen Bereich (51) zur Aufnahme des gezahnten äußeren Abschnitts (40) der Garnzuführrolle (37) aufweist.
15. Garnzuführmodul nach Anspruch 9, bei dem die Garnzuführrolle (37) ein Gewicht von weniger als etwa einem Pfund hat.
- 45 16. Garnzuführmodul nach Anspruch 9, bei dem der Servomotor (38) Kommutierungsinformationen erzeugt, die an eine Steuerung (61) übertragen werden können.
17. Garnzuführmodul nach Anspruch 9, bei dem der Servomotor (38) Positionsinformationen erzeugt, die an eine Steuerung (61) übertragen werden können.
- 50 18. Verfahren zum Betreiben einer Tufting-Maschine, um ein Garn in einem Grundgewebe zu tuften, so dass das Garn an ausgewählten Stichen relativ hohe Florhöhen und an ausgewählten Stichen relativ niedrige Florhöhen hat, mit den Schritten:
 - a) Eingeben von Garnzuführwertinformationen in eine Hauptsteuerung (61),
 - b) Fädeln des gewünschten Garns (16) um eine Garnzuführrolle (36, 37) an einem Garnzuführmodul, durch ein Garnzuführrohr (21) und zu einer Nadel (29),
 - c) Betreiben der Tufting-Maschine, so dass die Nadel (29) hin- und herbewegt wird und das Garn (16) durch
- 55

das Grundgewebe trägt,

d) Bereitstellen von Positionsinformationen bezüglich der Hin- und Herbewegung der Nadel an die Hauptsteuerung (61),

e) Senden von ratiometrischen Garnzuführwertinformationen in Bezug auf einen Stich von der Hauptsteuerung (61) zu einer Servomotorsteuerung (65),

f) Verarbeiten der ratiometrischen Informationen mit der Servomotorsteuerung (65) und Ansteuern eines entsprechenden, mit dem Garnzuführmodul verbundenen Servomotors (38), um die Wegstrecke zu drehen, die zum Zuführen einer passenden Menge an Garn entsprechend dem Stich benötigt wird,

g) Melden von Positionsinformationen von dem Servomotor (38) an die Servomotorsteuerung,

h) Melden von Statusinformationen von der Servomotorsteuerung (65) an die Hauptsteuerung (61).

19. Rohrreihe (21) zum Lenken von Garnen (16) von einem Musteranbau (30) des Vorschub-Typs zu einer Vielzahl von quer beabstandeten, hin- und herbewegbaren Nadeln (29) in einer Tufting-Maschine (10), bei der die minimale Länge von einem Garnzuführrohr (21) die Länge von einem Garnzuführrohr ist, das zum Transport eines Garns von einer Garnzuführrolle (36, 37) in einem zentralen Bereich des Musteranbaus (30) vom Vorschub-Typ zu einer Nadel (29) benötigt wird, die sich in der Nähe eines Randbereichs der Tufting-Maschine (10) befindet.

Revendications

1. Méthode pour entrer automatiquement les paramètres de tufting d'une machine à tufter (10) d'un type possédant un dispositif (30) d'alimentation de fil commandé électroniquement et qui est destiné à faire avancer par des incréments mesurés un fil vers une pluralité d'aiguilles (29) qui sont alignées transversalement et prévues pour être entraînées par un arbre rotatif d'entraînement principal (18) en effectuant un mouvement de va et vient à travers une sous-couche tissée qui passe d'avant en arrière de la machine à tufter (10), ce qui permet de placer des points de couture comprenant des touffes de fils à travers ladite sous-couche tissée, méthode comprenant les étapes consistant à :

(a) sélectionner sur un écran d'ordinateur les paramètres de motif des points de couture tels que la largeur, la longueur, une hauteur de poils relativement élevée et une hauteur de poils relativement faible ;

(b) concevoir sur l'écran d'ordinateur un motif représentant l'emplacement des touffes de poils de hauteur relativement élevée et des touffes de poils de hauteur relativement faible pour créer une représentation graphique de tapis touffeté dans un fichier de données;

(c) traiter le fichier de données contenant la représentation graphique du tapis touffeté pour affecter des valeurs d'alimentation de fil aux points de couture en fonction de la hauteur de poils qui a été sélectionnée pour le point de couture considéré et au moins pour le point de couture précédent.

2. Méthode selon la revendication 1, dans laquelle l'affectation des valeurs d'alimentation de fil aux points de couture est déterminée en se basant sur la hauteur de poils sélectionnée pour le point de couture considéré et au moins pour les deux points de couture précédents.

3. Méthode selon la revendication 1, dans laquelle la valeur d'alimentation de fil affectée à une touffe de poils de hauteur relativement élevée venant après une touffe de poils de hauteur relativement élevée et une touffe de poils de hauteur relativement faible est supérieure à la valeur d'alimentation de fil qui est affectée à une touffe de poils de hauteur relativement élevée venant après deux touffes de poils de hauteur relativement élevée.

4. Méthode selon la revendication 2, dans laquelle la valeur d'alimentation de fil affectée aux points de couture est en outre basée sur le nombre de points de couture par pouce de touffe, sur le calibrage de la machine et sur le nombre d'incrémentes calibrés dont il faut décaler les aiguilles par rapport à leur emplacement précédent.

5. Méthode selon la revendication 1, dans laquelle la valeur d'alimentation de fil pour un point de couture à hauteur de poils relativement faible venant après un point de couture à hauteur de poils relativement élevée est diminuée par rapport à la valeur d'alimentation de fil pour un point de couture de hauteur de poils relativement faible venant après d'autres points de couture de hauteur de poils relativement faible d'une valeur supérieure à la valeur suivant laquelle une valeur d'alimentation de fil d'un point de couture de hauteur de poils relativement élevée venant après un point de couture de hauteur de poils relativement faible est augmentée à partir de la valeur d'alimentation de fil pour un point de couture de hauteur de poils relativement élevée venant après d'autres points de couture de hauteur de poils relativement élevée.

EP 1 132 514 B9 (W1B1)

6. Méthode selon la revendication 1, dans laquelle la représentation graphique du tapis touffeté peut être visualisée en trois dimensions sur un écran d'ordinateur.
7. Méthode selon la revendication 1, dans laquelle les différences de hauteurs relatives des touffes de poils sont reflétées en faisant varier le niveau de saturation des couleurs des touffes sur un écran d'ordinateur.
8. Méthode selon la revendication 1, dans laquelle la valeur d'alimentation de fil affectée à un point de couture donné dans un motif reflète une proportion du fil qui a été calculée comme étant nécessaire pour ledit point de couture et une proportion du fil qui a été calculée comme étant nécessaire pour le point de couture suivant du motif.
9. Module d'alimentation de fil disposé sur une plaque de montage (35) et ayant un premier côté, un deuxième côté opposé et un connecteur (53) prévu pour être fixé de manière amovible à un dispositif d'alimentation de fil à défilement (30), comprenant un servomoteur d'alimentation de fil (38) fixé sur le premier côté de ladite plaque de montage (35) et qui est en communication directe avec un rouleau d'alimentation de fil (37) qui est disposé sur ladite plaque de montage.
10. Module d'alimentation de fil selon la revendication 9, dans lequel ledit servomoteur possède un pignon d'entraînement à engrenage denté (39) qui se met en prise avec une partie extérieure à engrenage denté (40) du rouleau d'alimentation de fil (37).
11. Module d'alimentation de fil selon la revendication 9, dans lequel les rotations du pignon d'entraînement denté (39) correspondent aux rotations du rouleau d'alimentation de fil (37) dans une gamme de rapports qui est comprise entre environ 8 : 1 et 24 : 1.
12. Module d'alimentation de fil selon la revendication 9, dans lequel les rotations du pignon d'entraînement denté (39) correspondent aux rotations du rouleau d'alimentation de fil (37) dans une gamme de rapports qui est comprise entre environ 12 : 1 et 18 : 1.
13. Module d'alimentation de fil selon la revendication 9, dans lequel les rotations du pignon d'entraînement denté (39) correspondent aux rotations du rouleau d'alimentation de fil (37) dans un rapport d'environ 15 : 1.
14. Module d'alimentation de fil selon la revendication 10, dans lequel la plaque de montage (35) possède une partie circulaire évidée (51) destinée à recevoir la partie extérieure à engrenage denté (40) du rouleau d'alimentation de fil (37).
15. Module d'alimentation de fil selon la revendication 9, dans lequel le rouleau d'alimentation de fil (37) a un poids inférieur à environ une livre.
16. Module d'alimentation de fil selon la revendication 9, dans lequel le servomoteur (38) produit les informations de commutation qui peuvent être communiquées à un organe de commande (61).
17. Module d'alimentation de fil selon la revendication 9, dans lequel le servomoteur (38) produit les informations de position qui peuvent être communiquées à un organe de commande (61).
18. Méthode pour faire fonctionner une machine à tuffer destinée à tuffer un fil dans une sous-couche tissée de façon à ce que le fil ait une hauteur de poils relativement élevée au niveau de points de couture sélectionnés et une hauteur de poils relativement faible au niveau de points de couture sélectionnés, comprenant les étapes consistant à :
 - (a) entrer les informations de valeur d'alimentation de fil dans un organe directeur (61) ;
 - (b) filer le fil souhaité (16) autour d'un rouleau d'alimentation de fil (36, 37) disposé sur un module d'alimentation de fil, en le faisant passer à travers un tube d'alimentation de fil (21) et en l'amenant à une aiguille (29) ;
 - (c) faire fonctionner la machine à tuffer de façon à ce que l'aiguille effectue un mouvement de va et vient et transporte le fil (16) en lui faisant traverser la sous-couche tissée ;
 - (d) fournir les informations de position liées au mouvement de va et vient de l'aiguille à l'organe directeur (61) ;
 - (e) envoyer les informations quotientométriques d'alimentation de fil pas à pas correspondantes à un point de couture depuis l'organe directeur (61) à un organe de commande de servomoteur (65) ;
 - (f) traiter les informations quotientométriques d'alimentation de fil pas à pas avec l'organe de commande de

servomoteur (65) et ordonner à un servomoteur (38) correspondant qui est en communication avec le module d'alimentation de fil considéré de tourner d'une distance correspondante à la distance nécessaire pour faire avancer le fil de la valeur appropriée qui correspond au point de couture ;

(g) rapporter les informations de position provenant du servomoteur (38) à l'organe de commande de servomoteur ;

(h) rapporter les informations d'état provenant de l'organe de commande de servomoteur (65) à l'organe directeur (61).

- 19.** Râtelier de tubes (21) destinée à orienter les fils (16) provenant d'un dispositif d'alimentation de fil à défilement (30) vers une pluralité d'aiguilles (29) disposées transversalement et effectuant un mouvement de va et vient dans une machine à tuffer (10) dans laquelle la longueur minimum d'un tube d'alimentation de fil (21) quelconque est égale à la longueur de tube d'alimentation de fil qui est nécessaire pour transporter un fil depuis un rouleau d'alimentation de fil (36, 37) situé dans une partie centrale du dispositif d'alimentation de fil à défilement (30) jusqu'à une aiguille (29) située à proximité d'une partie marginale de la machine à tuffer (10).

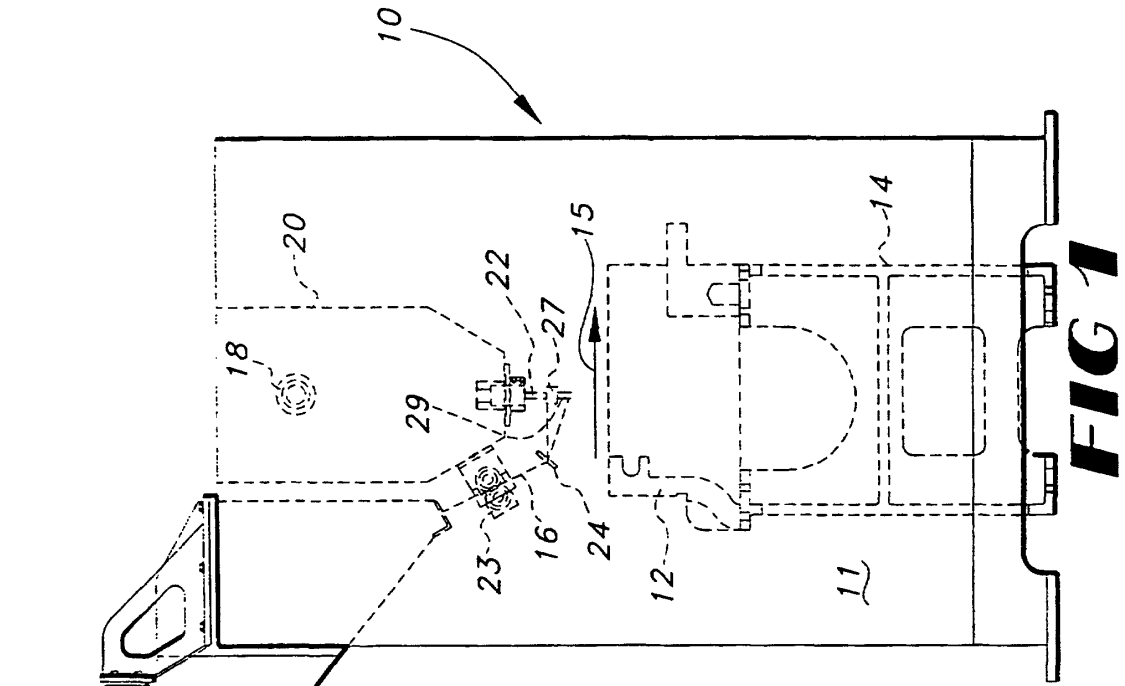


FIG 1

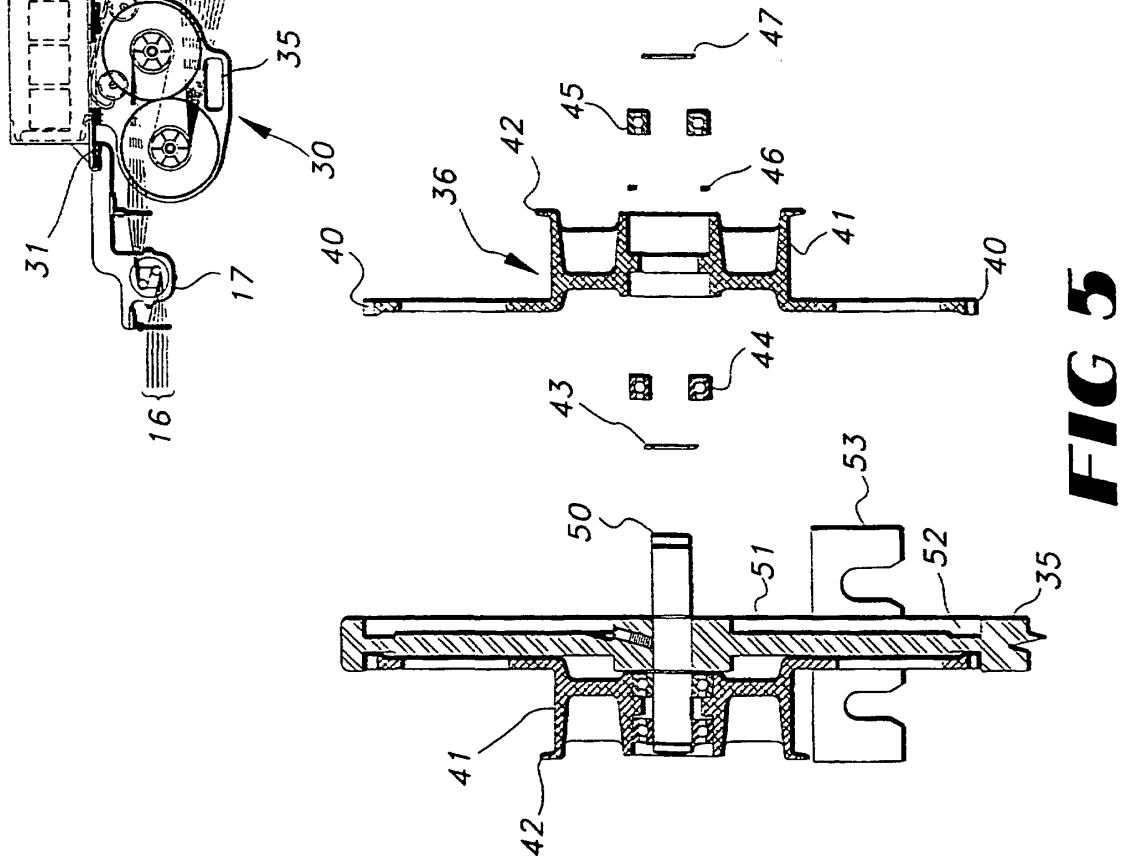
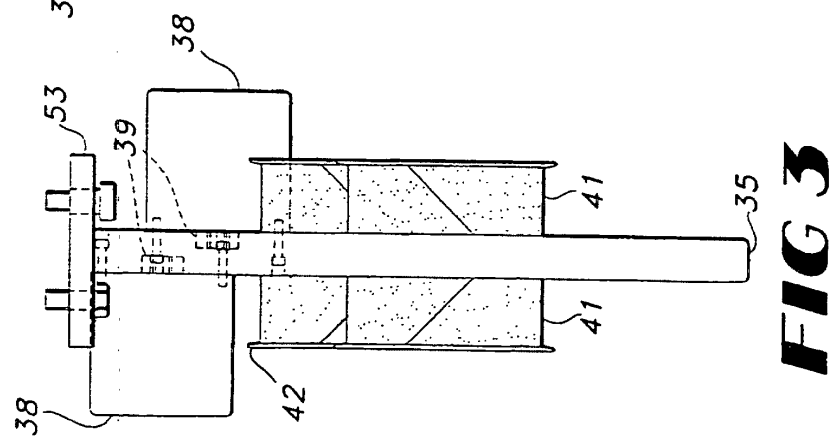
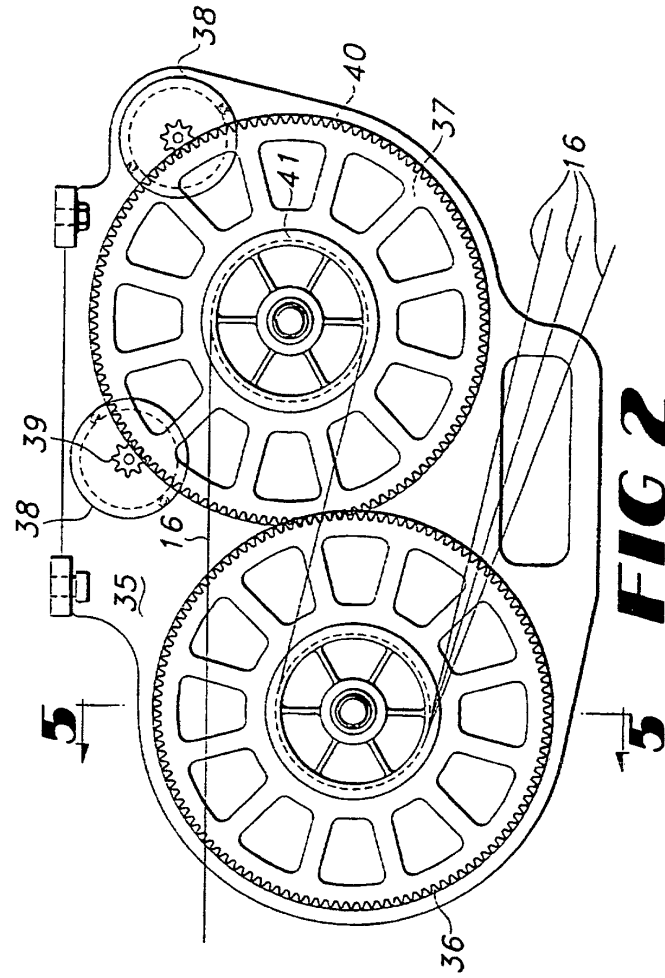
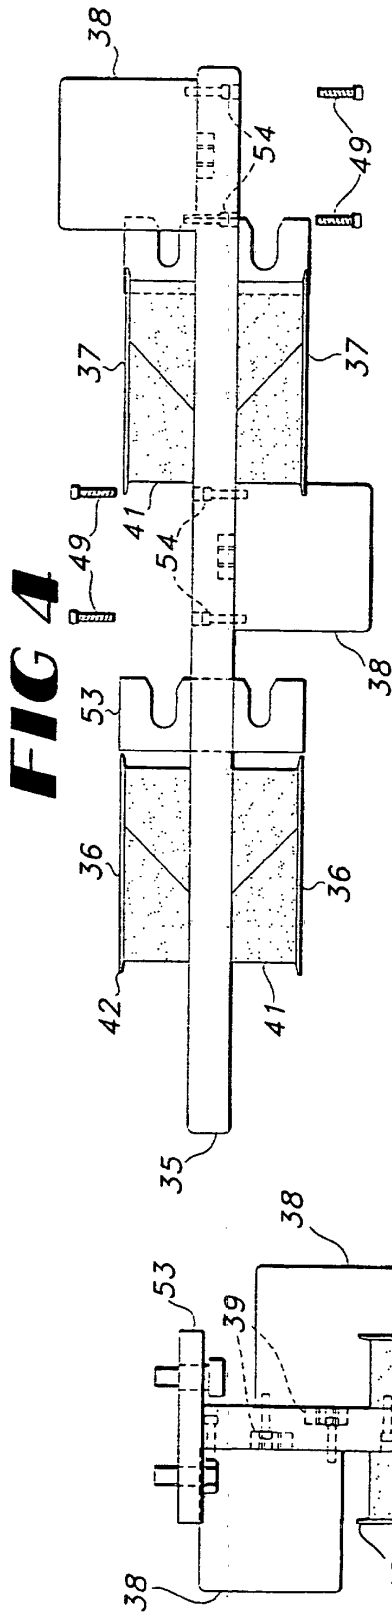


FIG 5



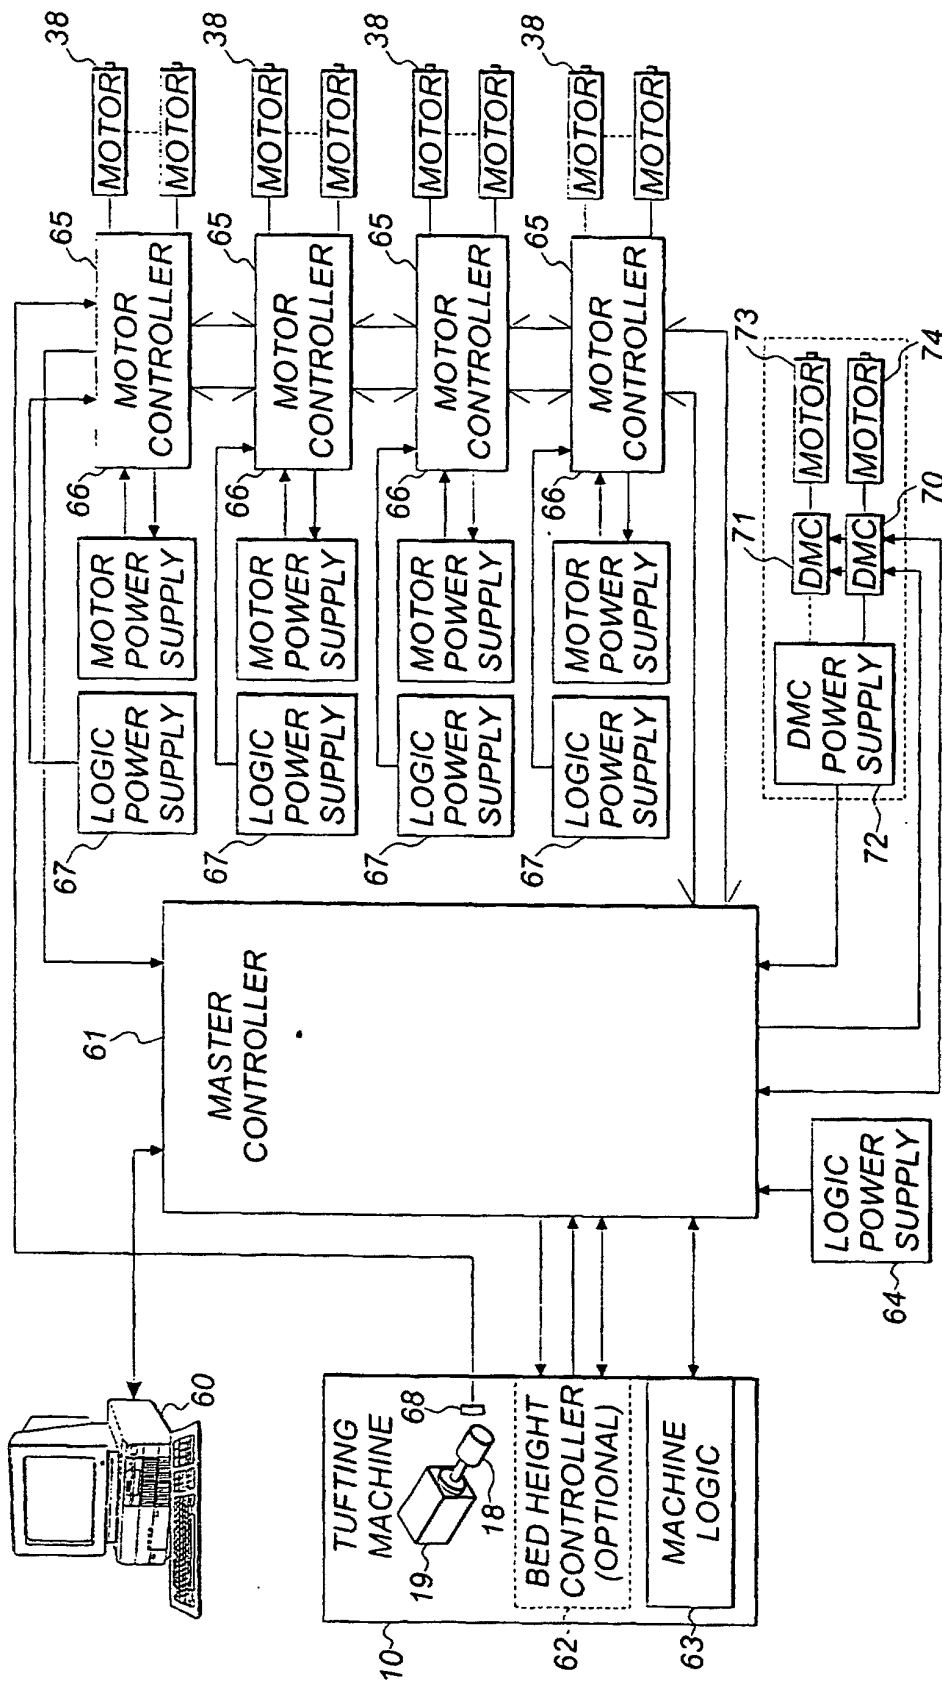


FIG 6

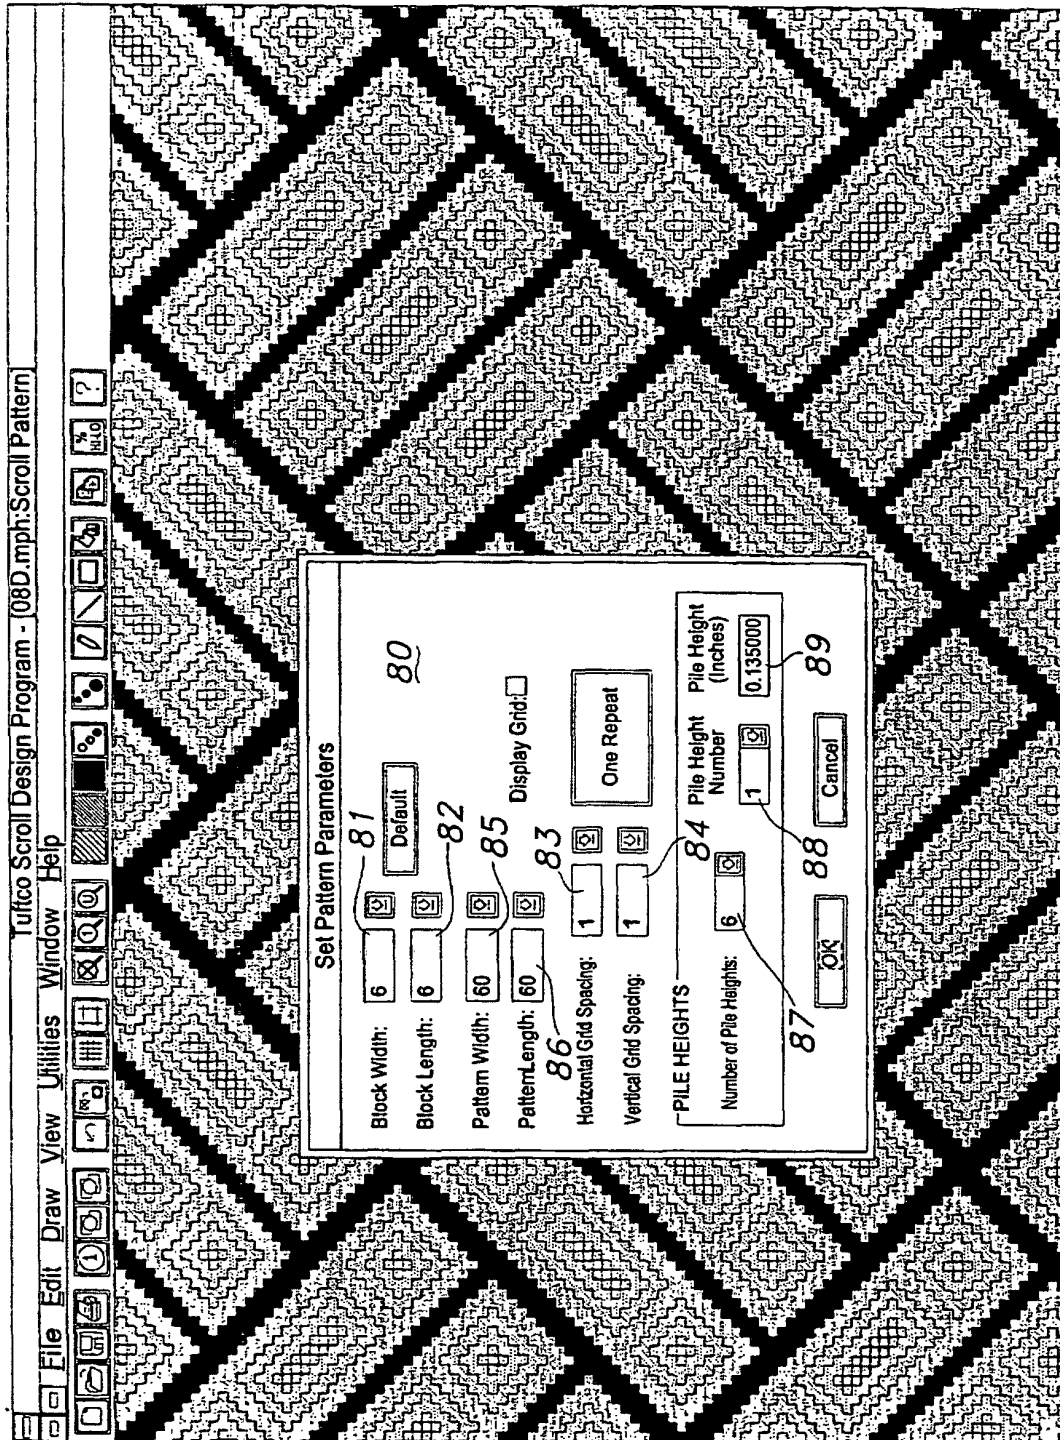


FIG 7

Circle.3PH

Date: 10/30/96

Time: 13:58

Pattern Width: 16

Pattern Length: 16

Block Width: 2

Block Length: 2

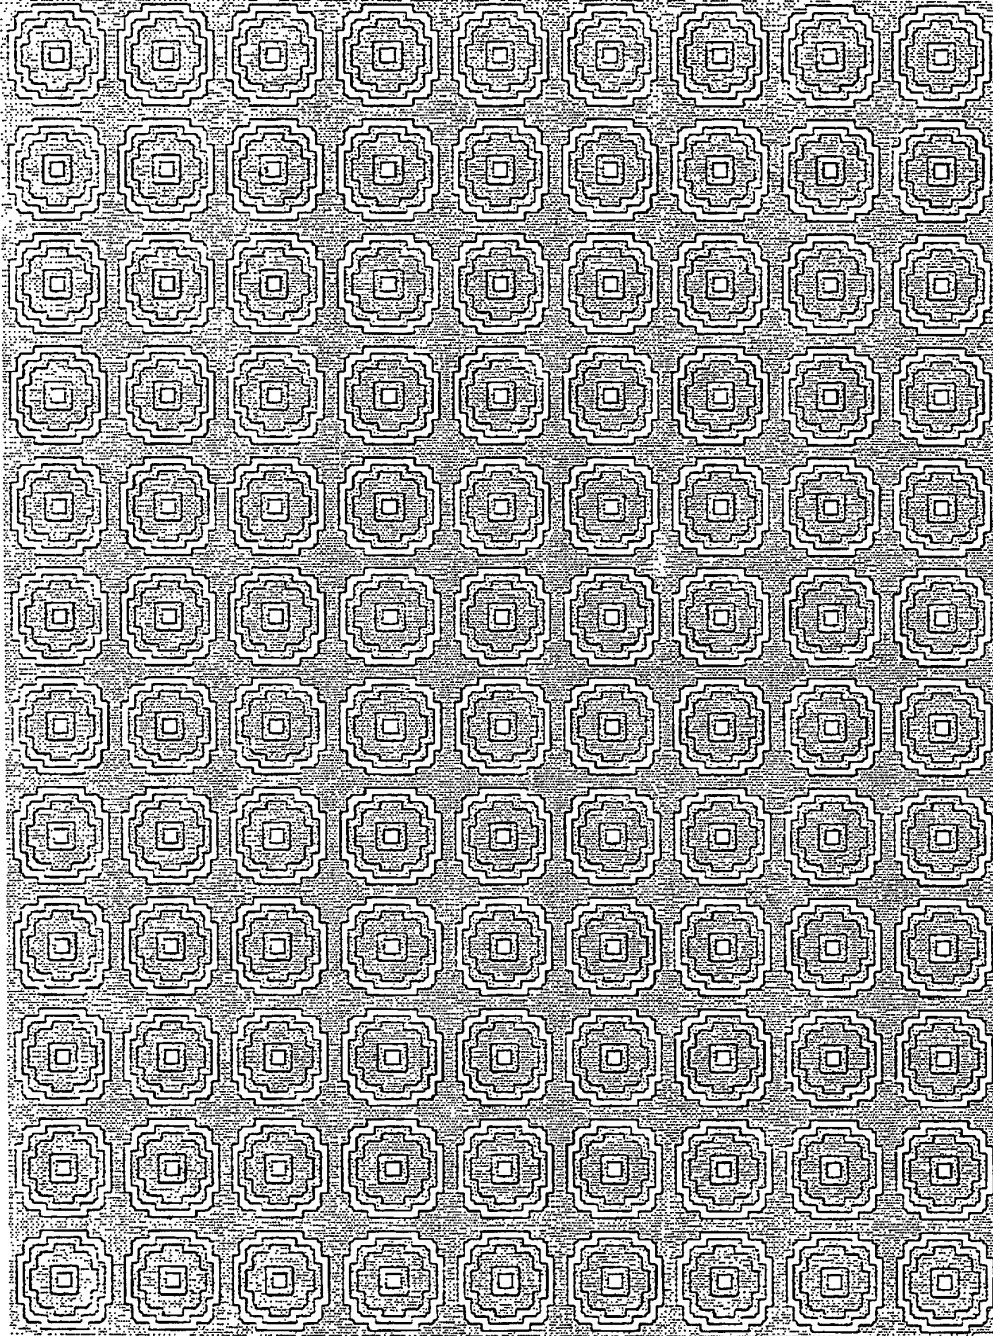


FIG 8

Pattern Statistics for Rear Pattern Attachment

Pattern last loaded: F:\tdswin\circle.3PH

Print date and time: 10/29/96 (06:53:10am)

Pattern Width: 16

Step Length: 16

Speed Usage

Speed	Count	Speed#
0.825	144	1
0.311	56	2
0.545	56	3

Available Speeds: 253

# of Speeds	# of Steps Using
1	2
2	2
3	12

Stepping Relationships

																Needle # →						
-7	-6	-5	-4	-3	-2	-1	0	1	2	3	4	5	6	7	Stp#	1	2	3	4	5	6	7...120
							R								1	S1	S1	S1	S1	S1	S1	S1
							R								2	S1	S1	S1	S1	S1	S2	S2
							R								3	S1	S1	S1	S2	S2	S2	S3
							R								4	S1	S1	S2	S2	S3	S3	S3
							R								5	S1	S1	S2	S3	S3	S1	S1
							R								6	S1	S2	S2	S3	S1	S1	S1
							R								7	S1	S2	S3	S3	S1	S1	S3
							R								8	S1	S2	S3	S1	S1	S1	S3
							R								9	S1	S2	S3	S1	S1	S1	S3
							R								10	S1	S2	S3	S3	S1	S1	S3
							R								11	S1	S2	S2	S3	S1	S1	S1
							R								12	S1	S1	S2	S3	S3	S1	S1
							R								13	S1	S1	S2	S2	S3	S3	S3
							R								14	S1	S1	S1	S2	S2	S2	S3
							R								15	S1	S1	S1	S1	S1	S2	S2
							R								16	S1	S1	S1	S1	S1	S1	S1

S1→S2 = HIGH TO LOW TRANSITION

S2→S1 = LOW TO HIGH TRANSITION

FIG 9

Pattern Statistics for Rear Pattern Attachment

Pattern last loaded: F:\tdswin\circle.3PH

Print date and time: 10/29/96 (06:53:10am)

Pattern Width: 16

Step Length: 16

Speed Usage

Speed	Count	Speed#
0.825	116	1
0.311	28	2
0.545	28	3
0.002	28	4
1.000	14	5
0.600	14	6
0.900	14	7
0.400	14	8

Available Speeds: 248

of Steps
of Speeds Using

Speeds	Using
1	1
2	2
3	1
4	2
5	8
6	2

Stepping Relationships

															Needle # →							
-7	-6	-5	-4	-3	-2	-1	0	1	2	3	4	5	6	7	Stp#	1	2	3	4	5	6	7...120
							R								1	S1	S1	S1	S1	S1	S1	S1
							R								2	S1	S1	S1	S1	S1	S4	S4
							R								3	S1	S1	S1	S4	S4	S2	S6
							R								4	S1	S1	S4	S2	S6	S6	S3
							R								5	S1	S1	S2	S6	S3	S7	S7
							R								6	S1	S4	S2	S3	S7	S1	S1
							R								7	S1	S2	S6	S3	S1	S1	S8
							R								8	S1	S2	S3	S7	S1	S1	S3
							R								9	S1	S2	S3	S1	S1	S1	S3
							R								10	S1	S2	S3	S8	S1	S1	S3
							R								11	S1	S2	S4	S3	S1	S1	S7
							R								12	S1	S5	S2	S3	S8	S1	S1
							R								13	S1	S1	S2	S4	S3	S8	S8
							R								14	S1	S1	S5	S2	S4	S4	S3
							R								15	S1	S1	S1	S5	S5	S2	S4
							R								16	S1	S1	S1	S1	S1	S5	S5

S1 → S4 → S2
 (0.825) → (0.002) → (0.311)] HIGH TO LOW TRANSITION
 S2 → S5 → S1
 (0.311) → (1.000) → (0.825)] LOW TO HIGH TRANSITION

FIG 10

CIRCLE.3PH

Date: 10/30/96 Time: 14:00

Pattern Width: 16 Pattern Length: 16

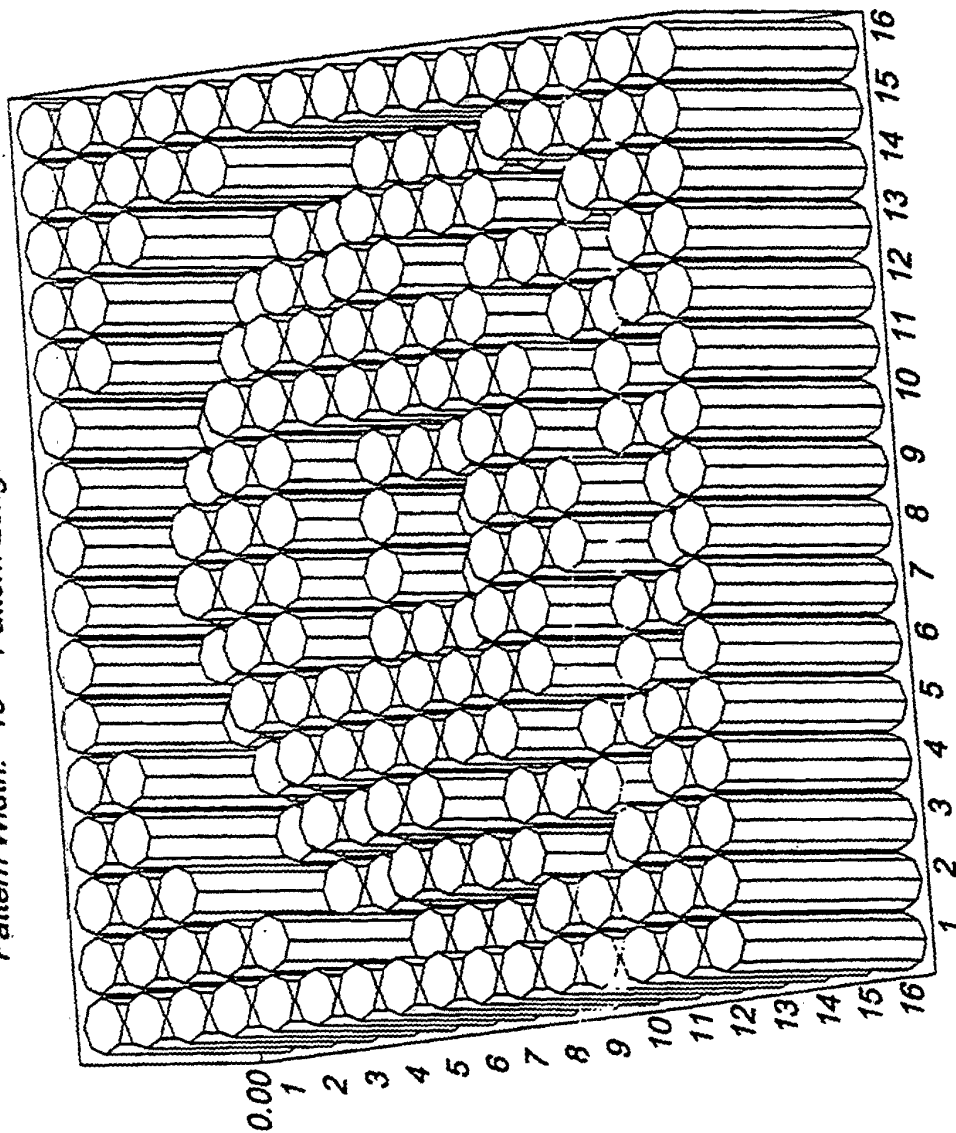
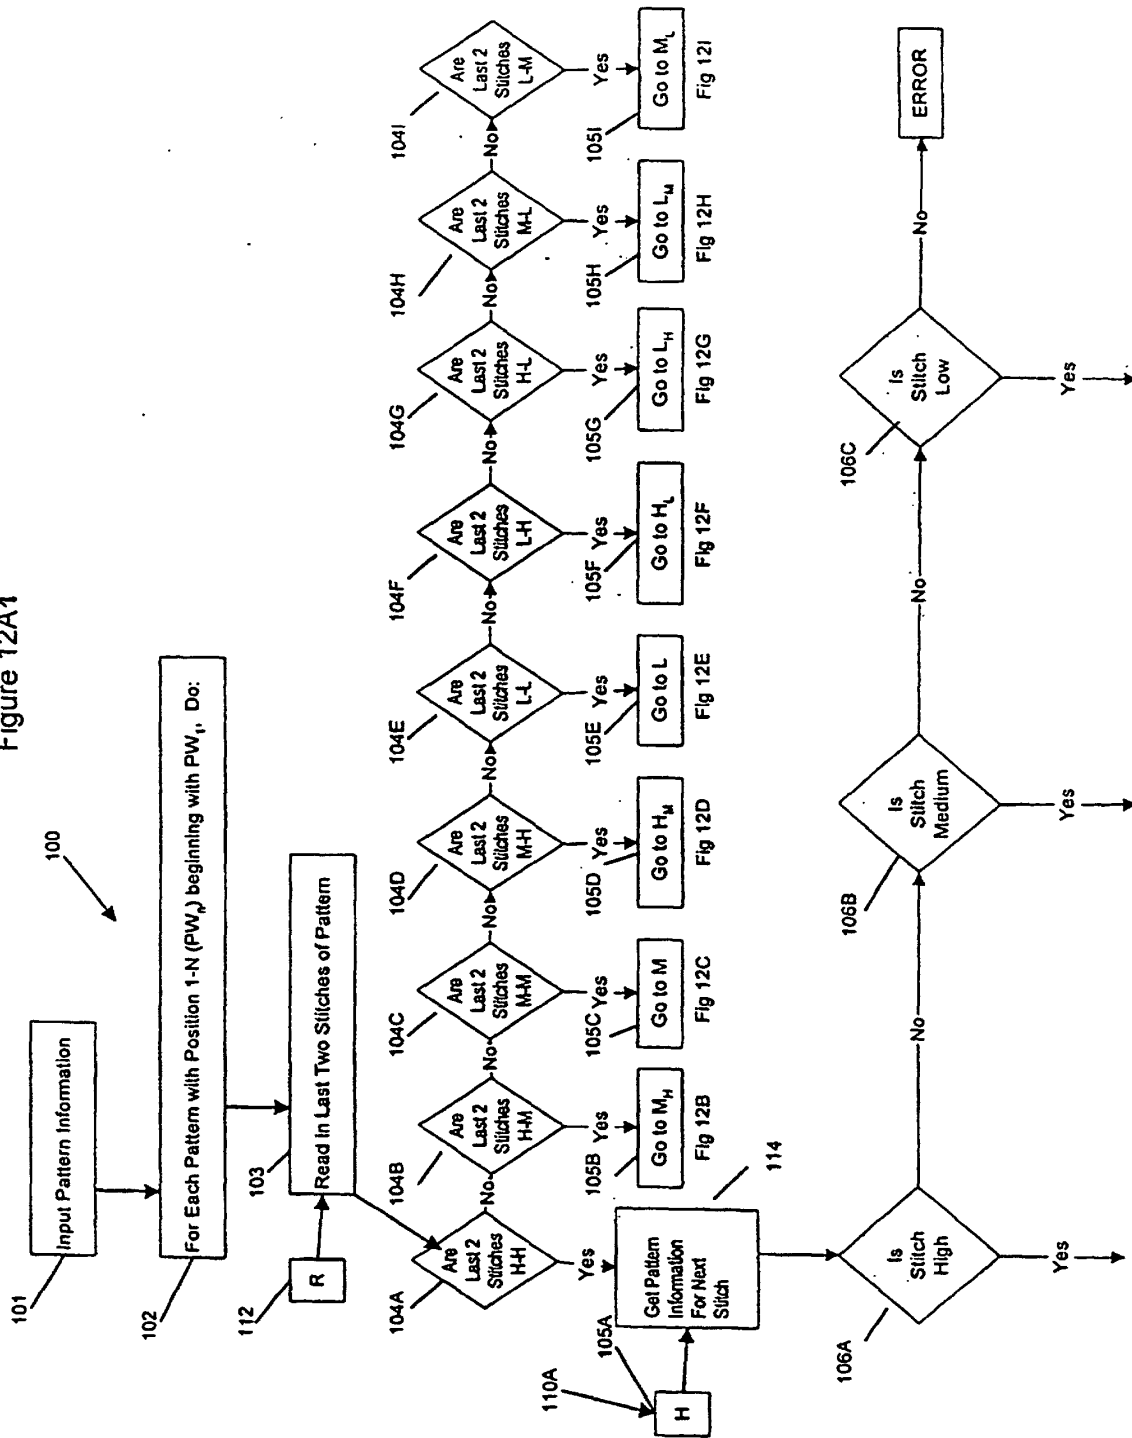


FIG 11

Figure 12A1



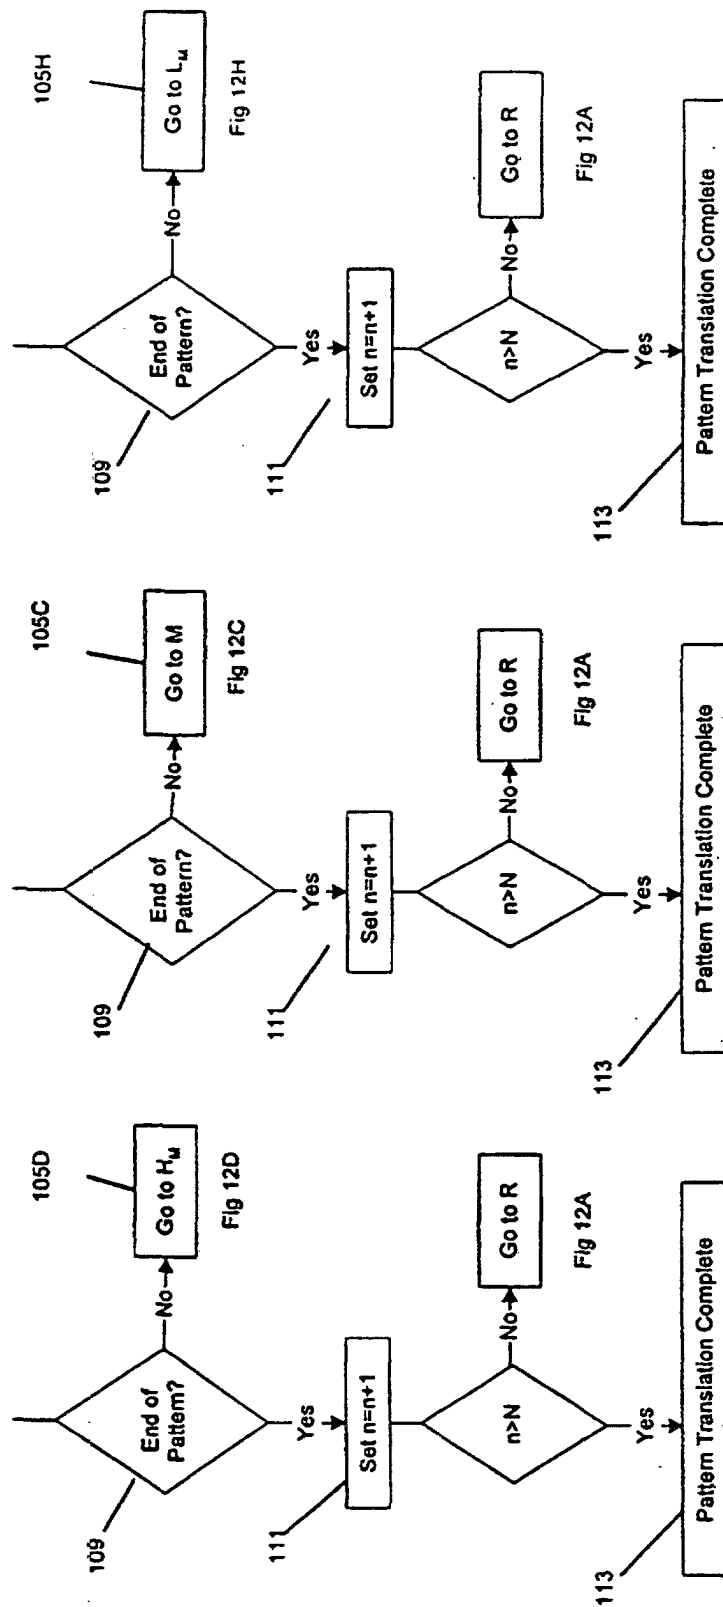
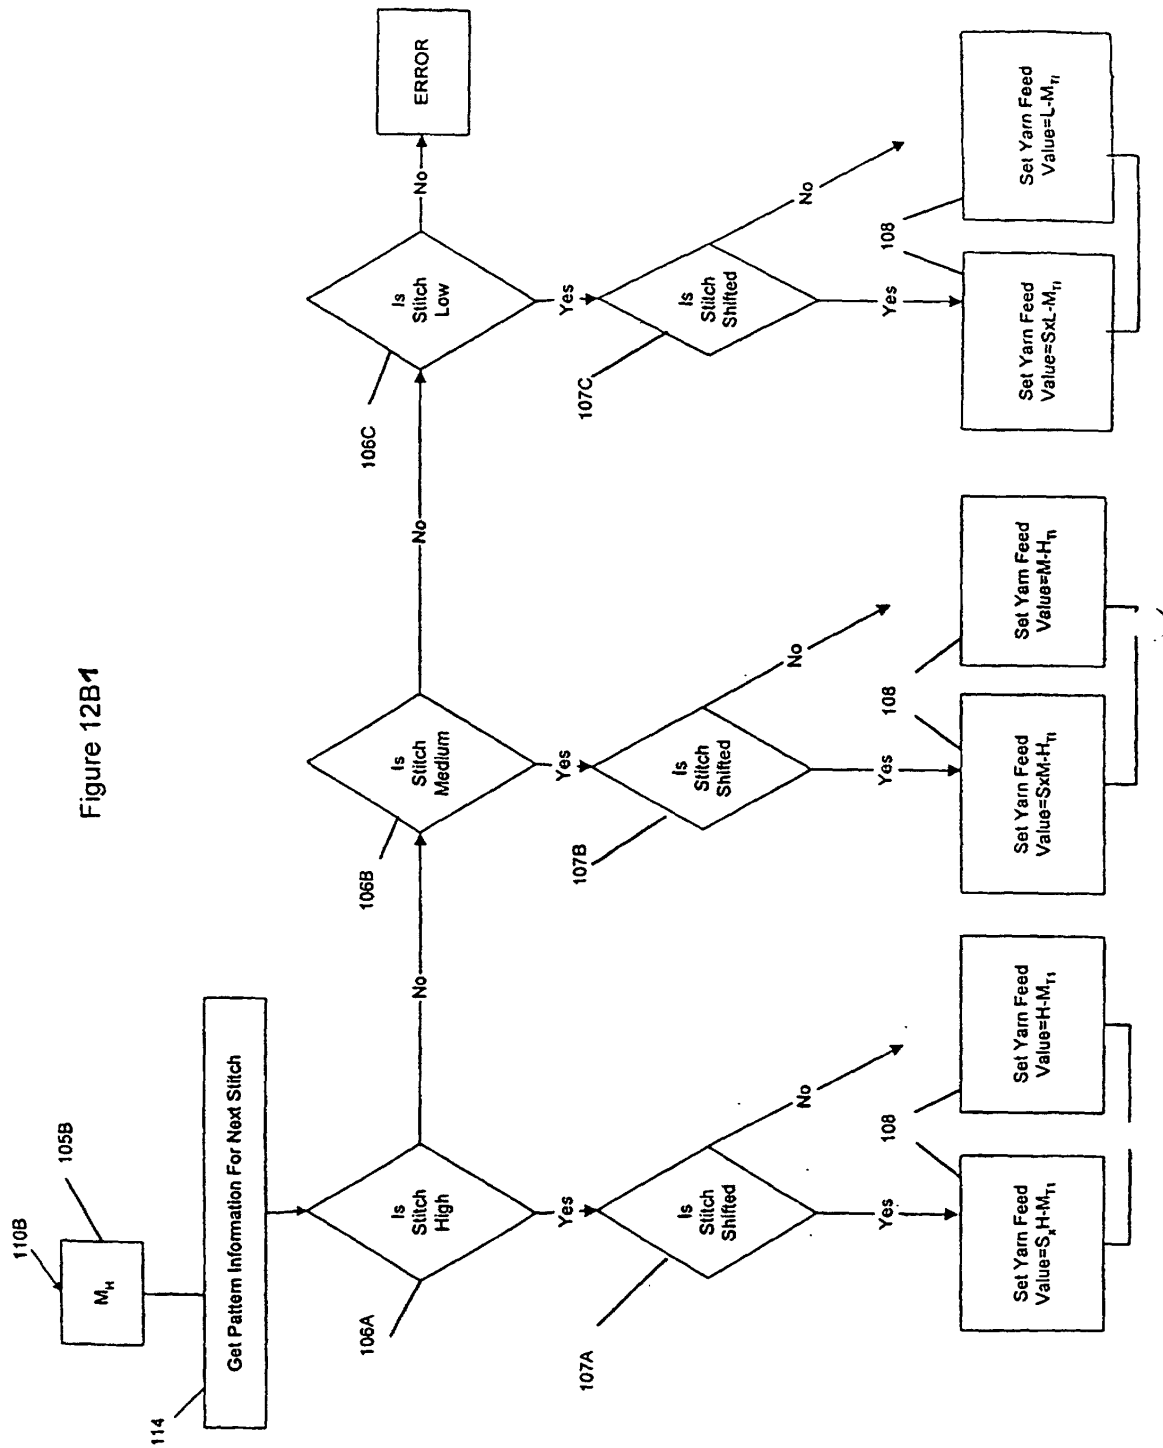


Figure 12A2



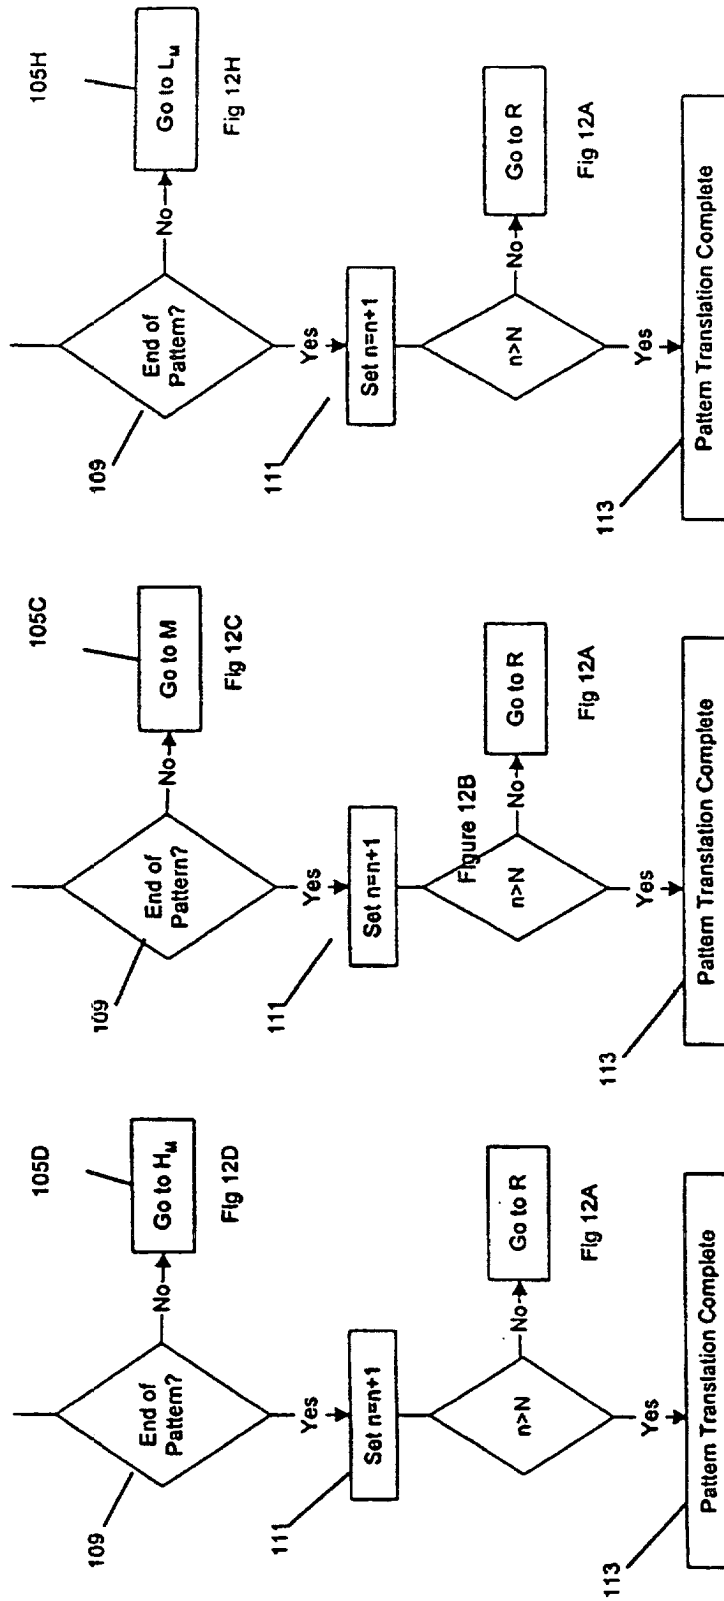
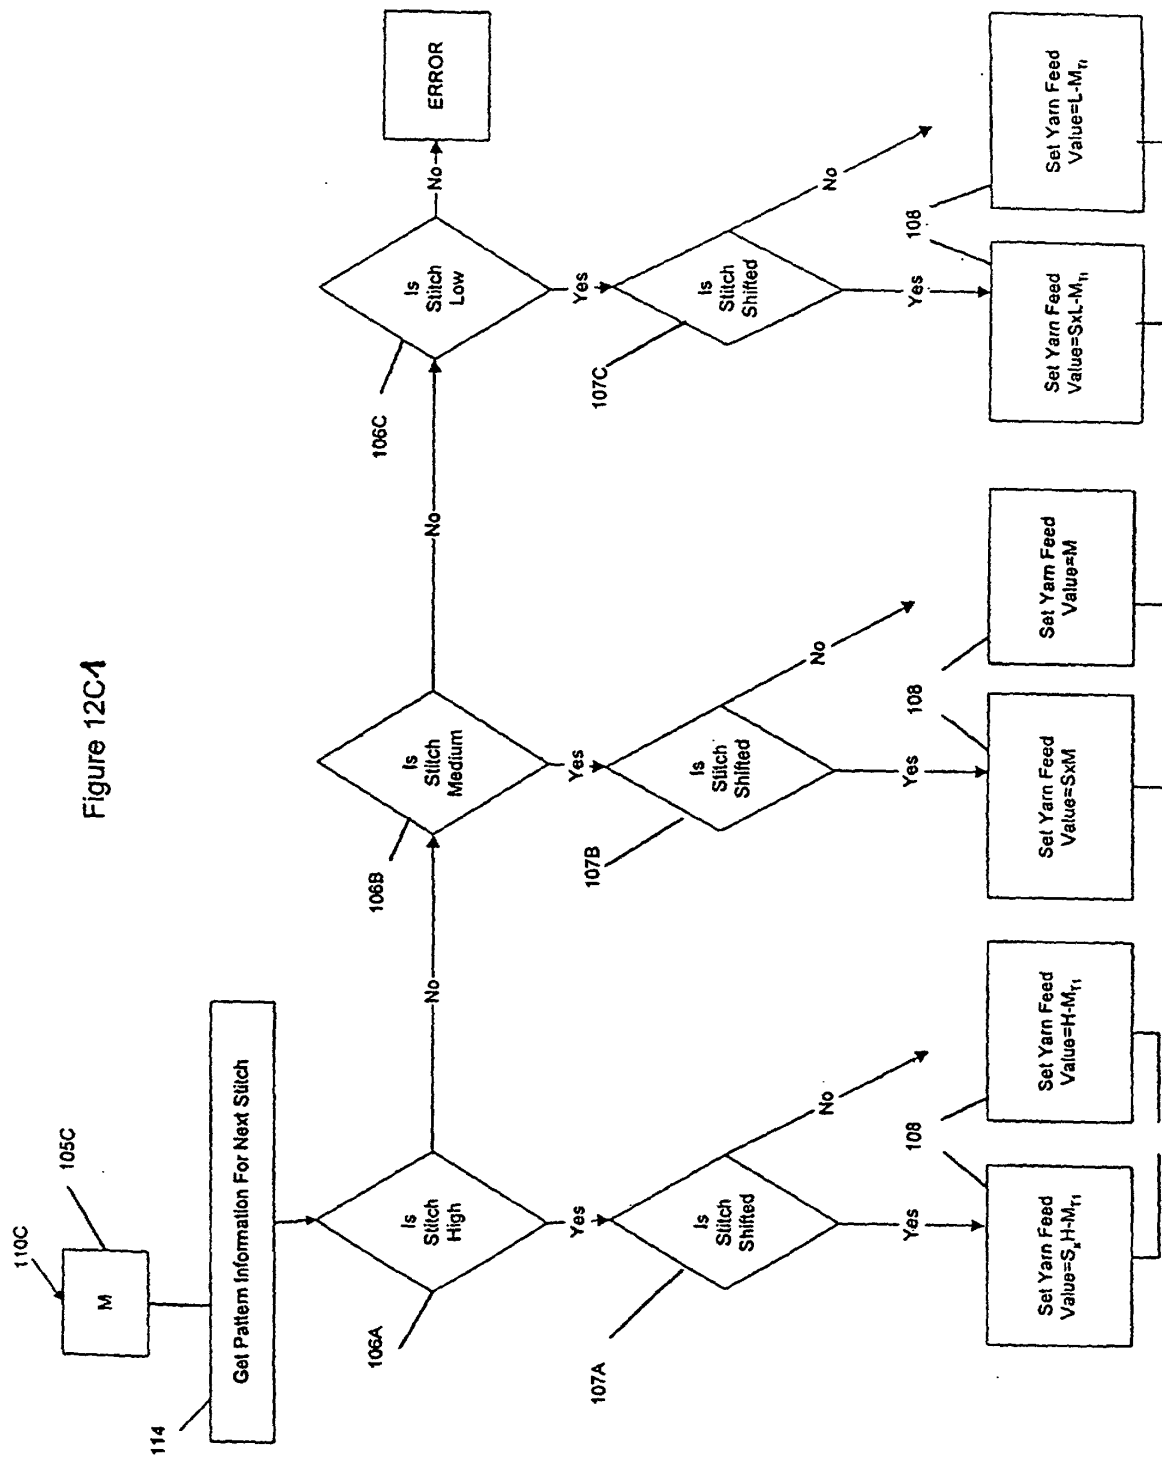


Figure 12B2



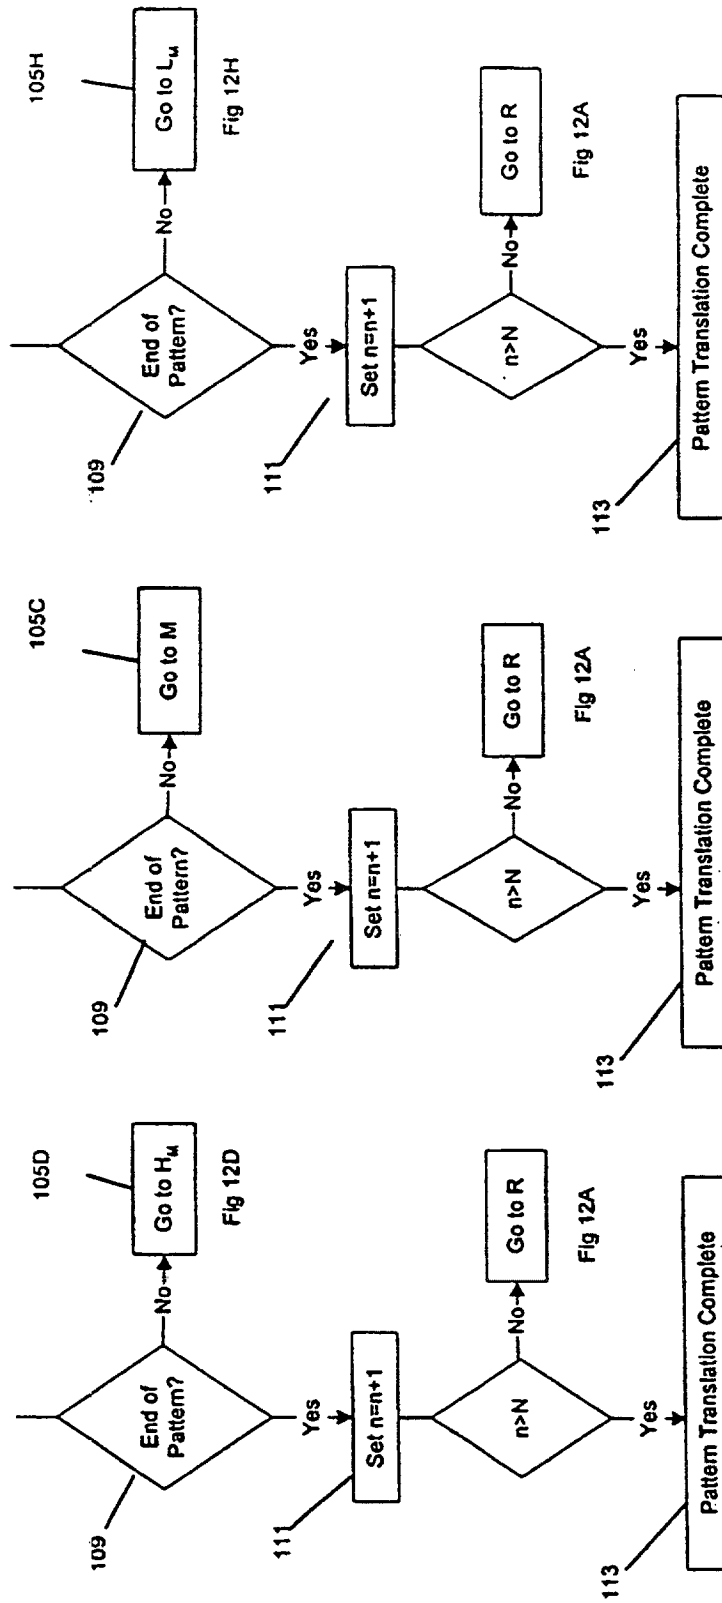
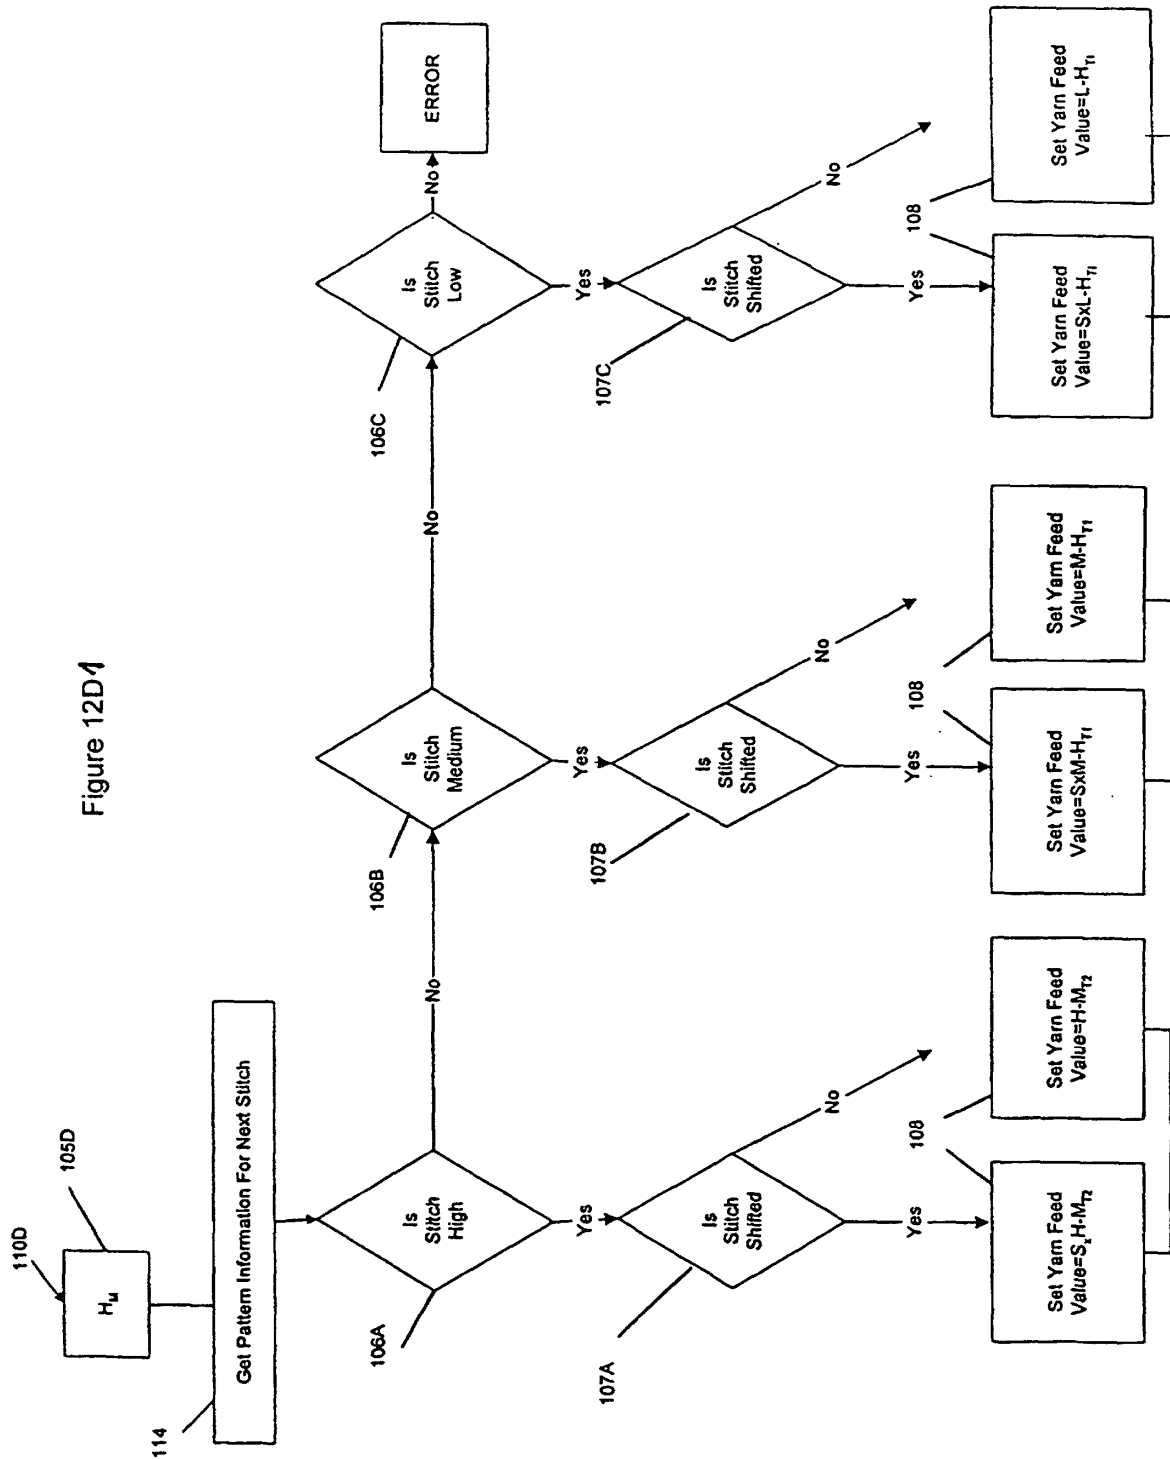


Figure 12C2



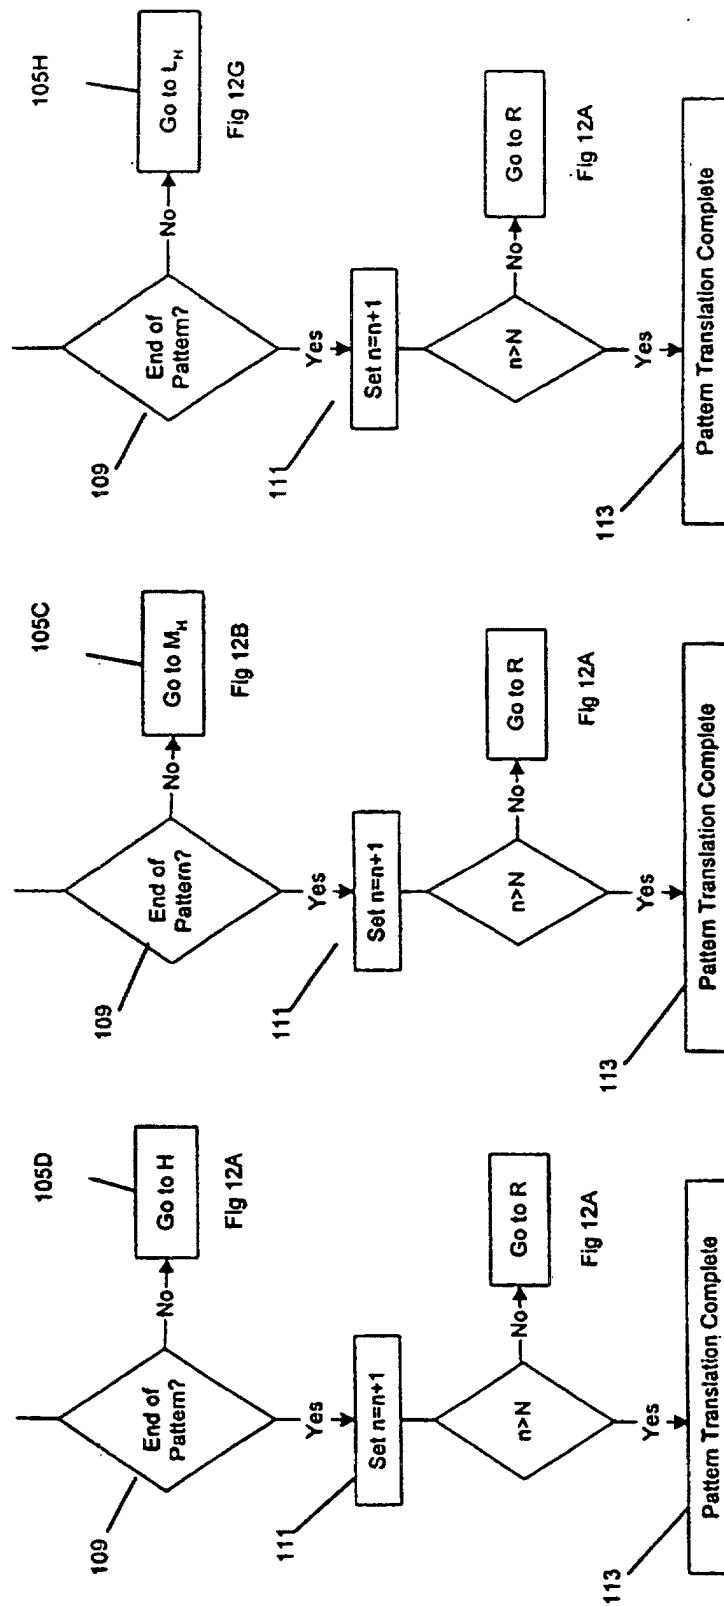
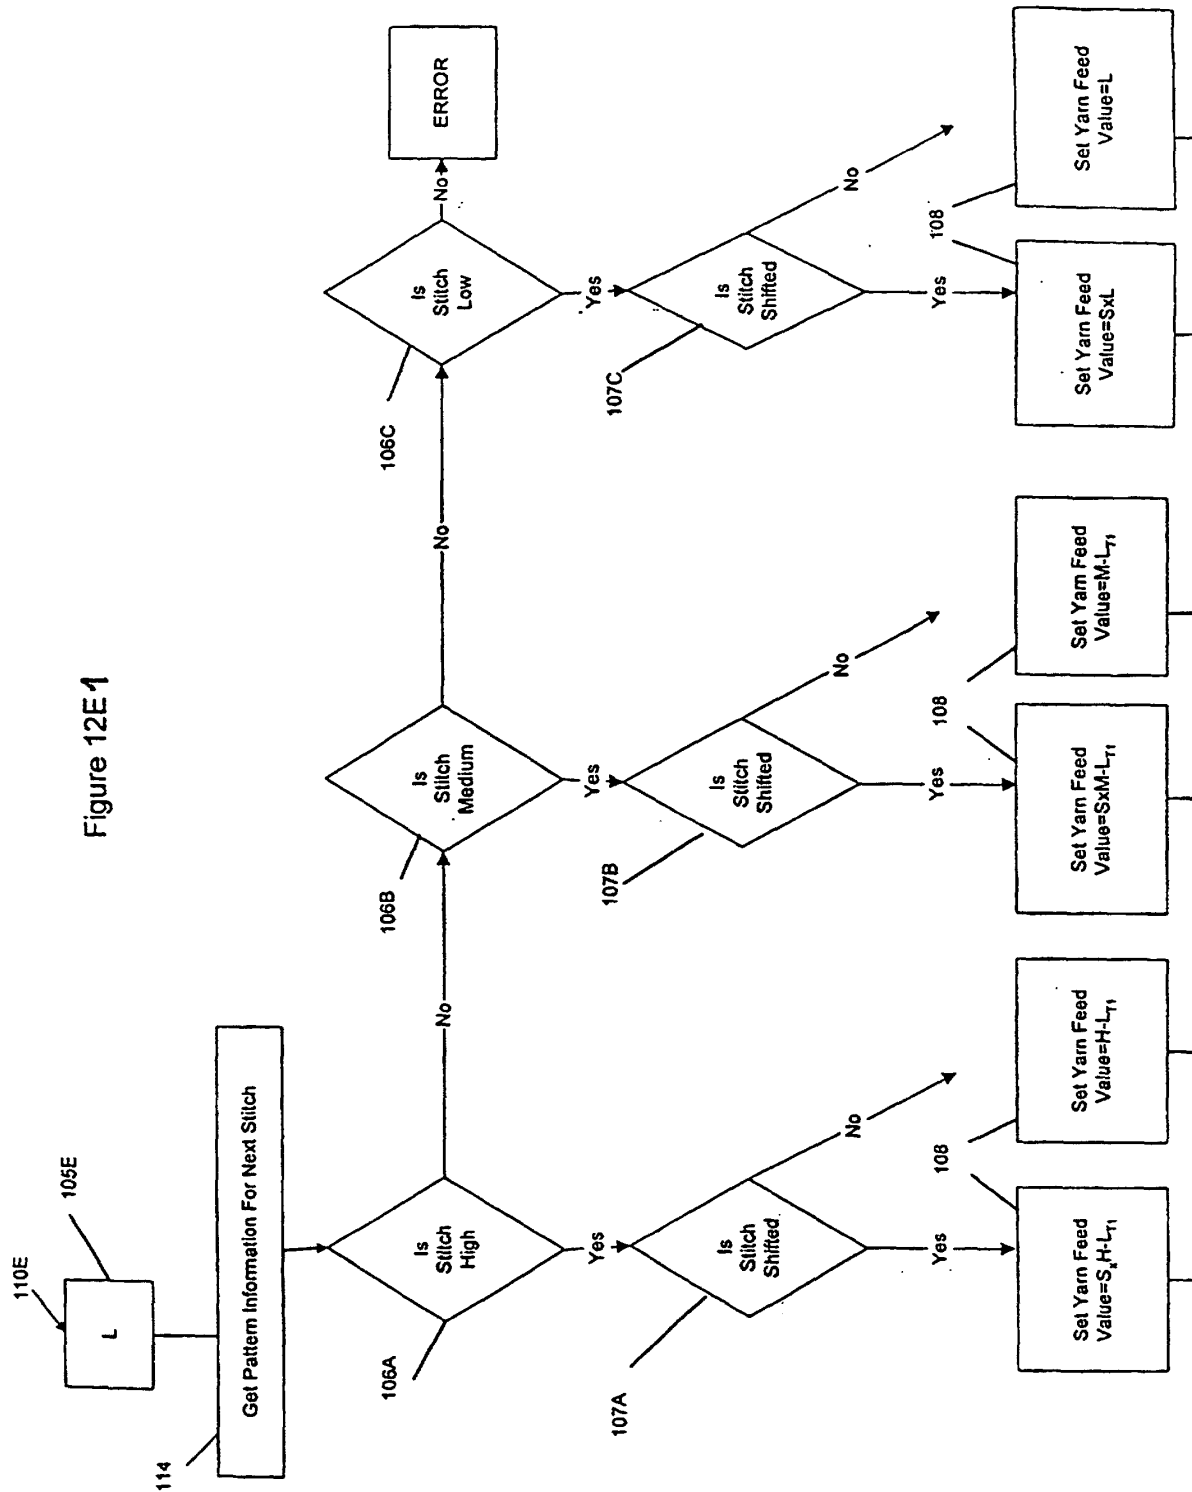


Figure 12D 2



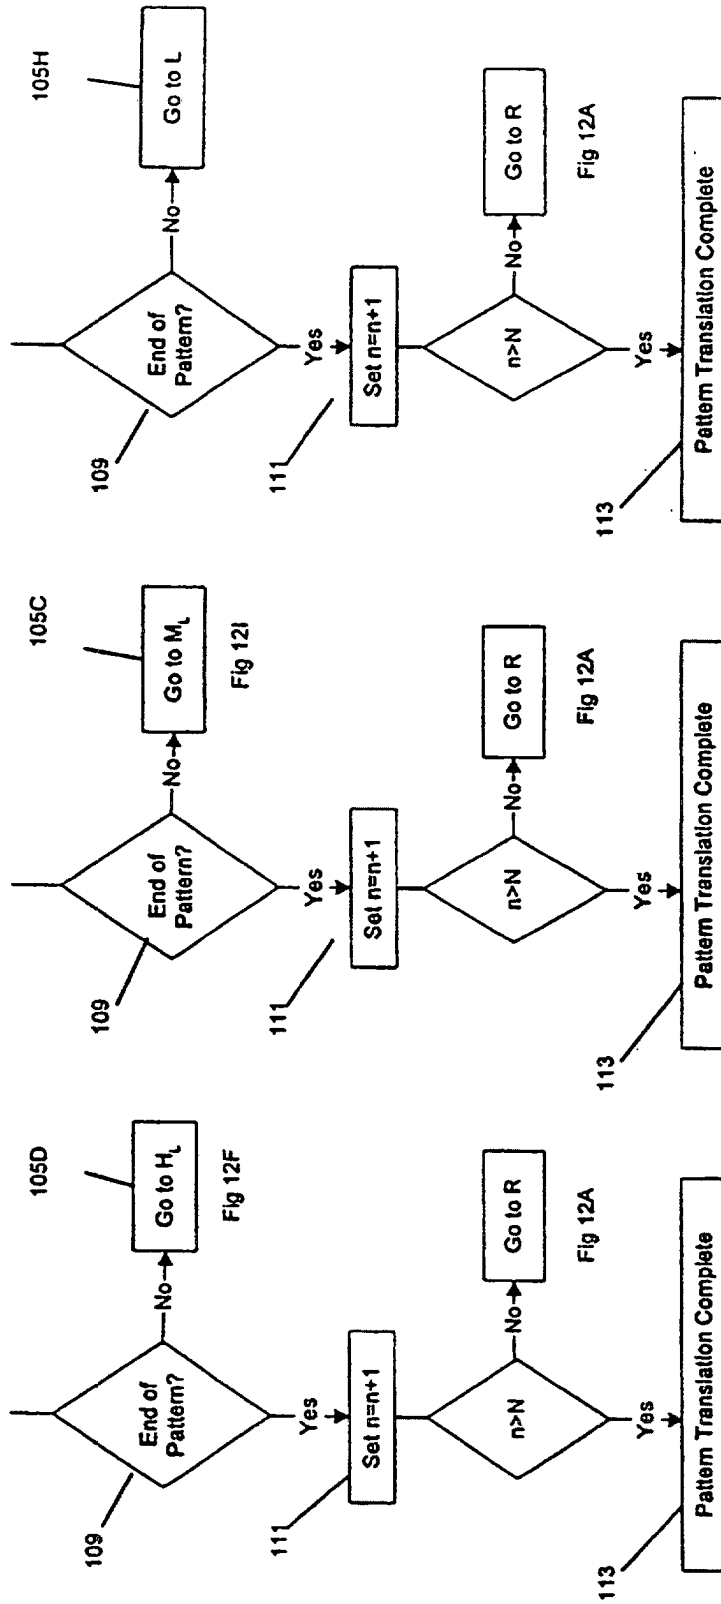
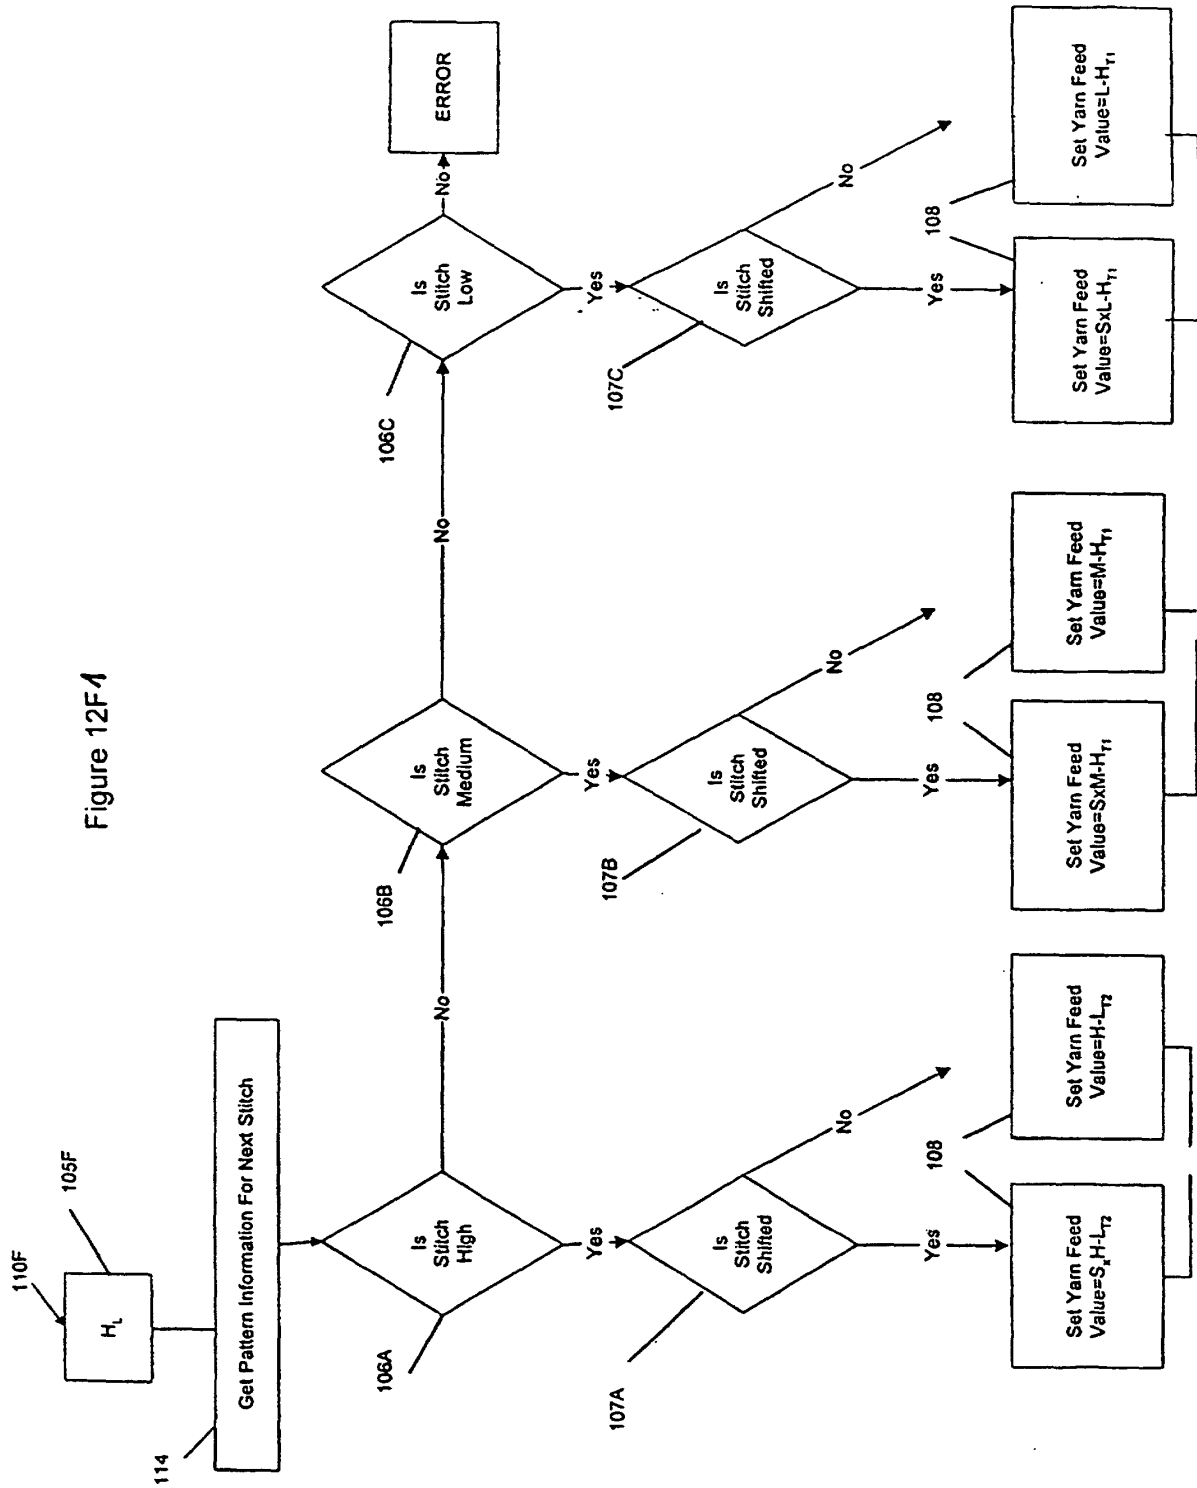


Figure 12E2



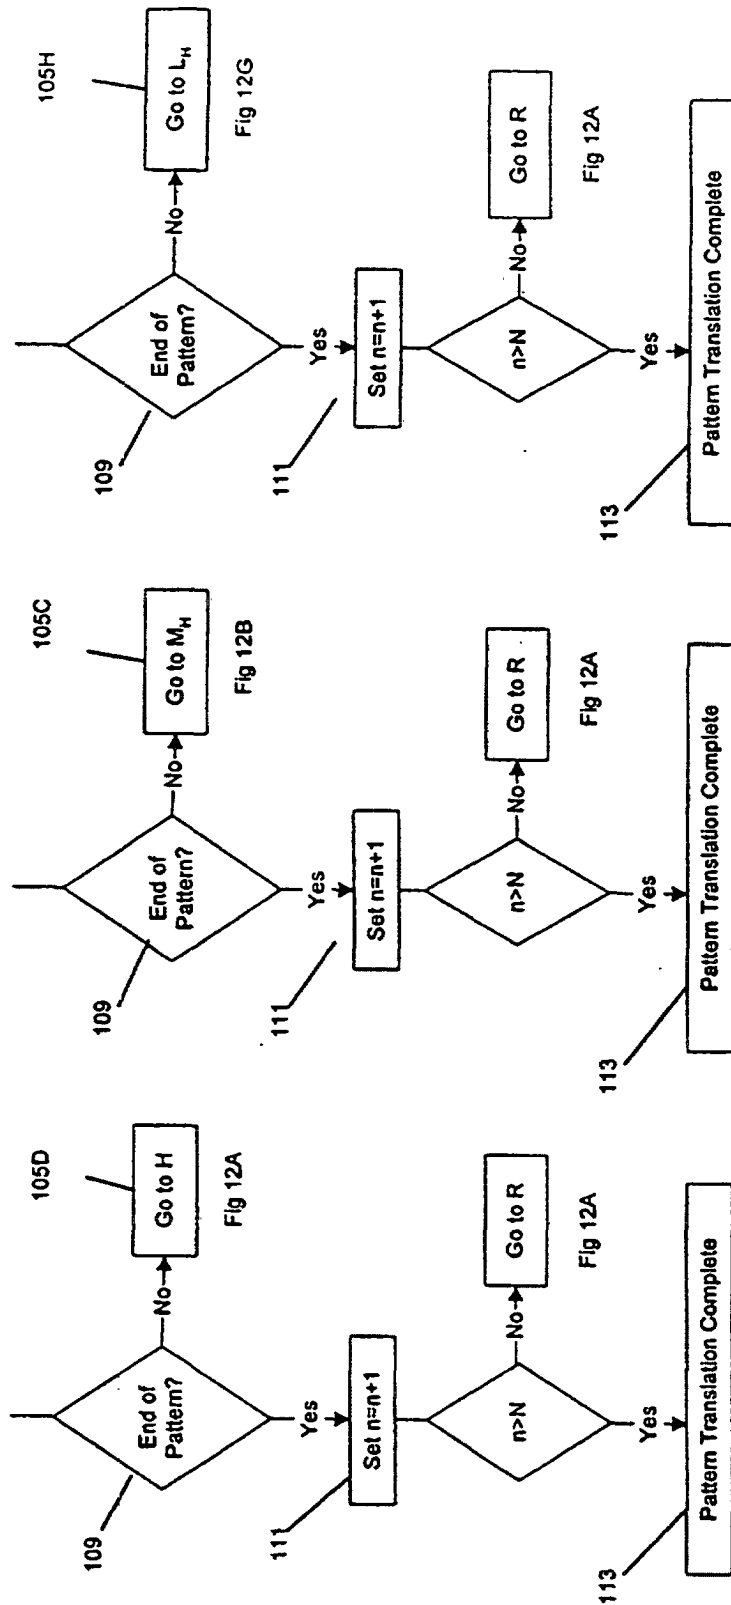
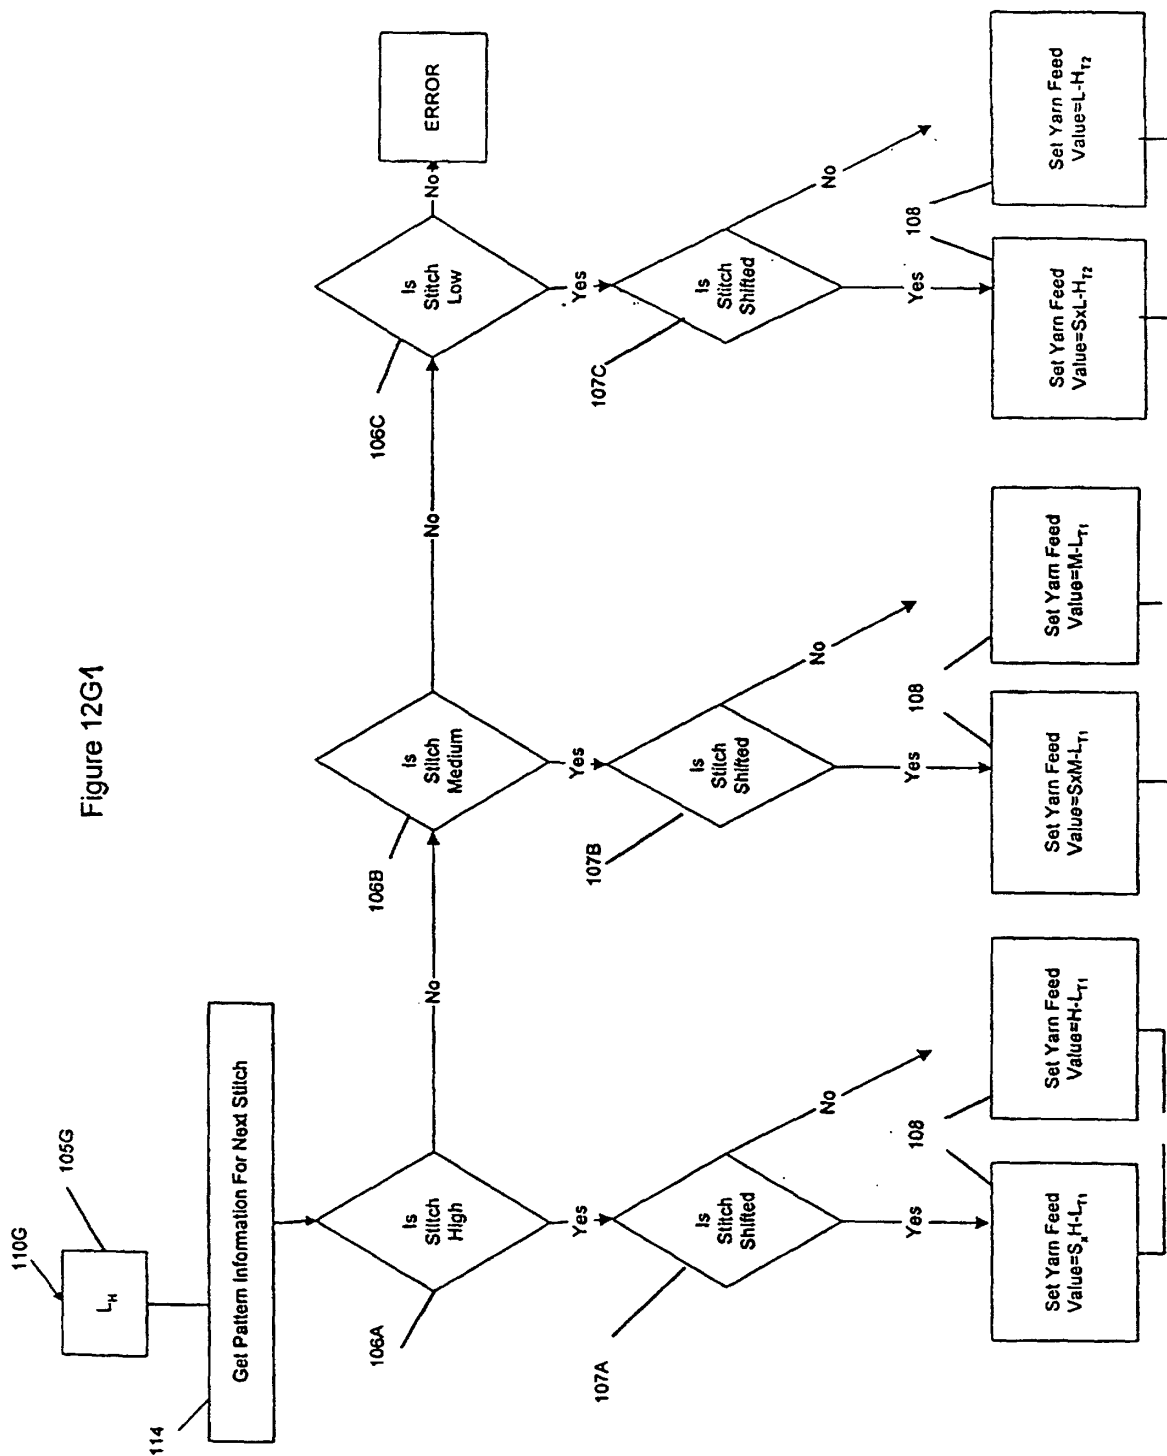


Figure 12F 2

Figure 12G1



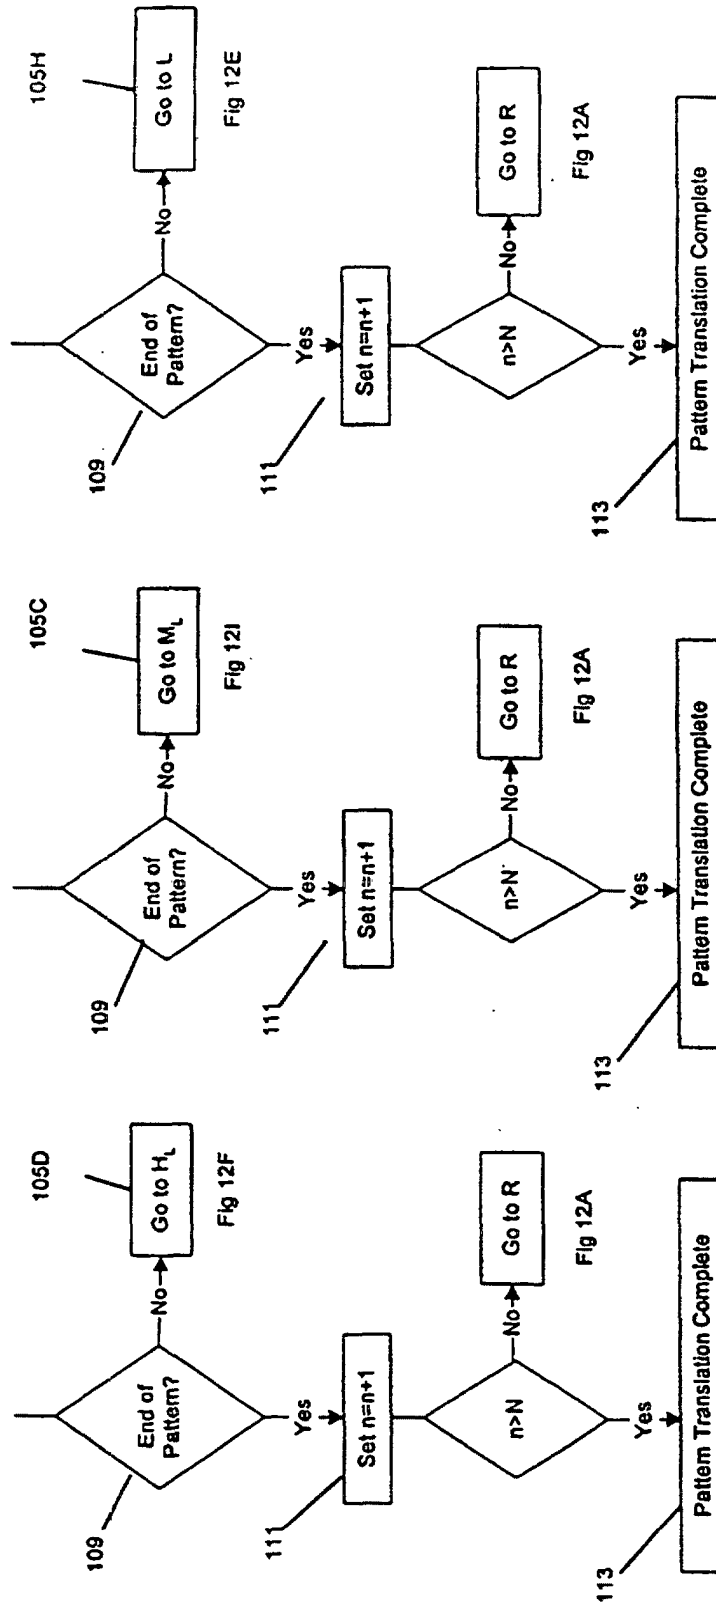
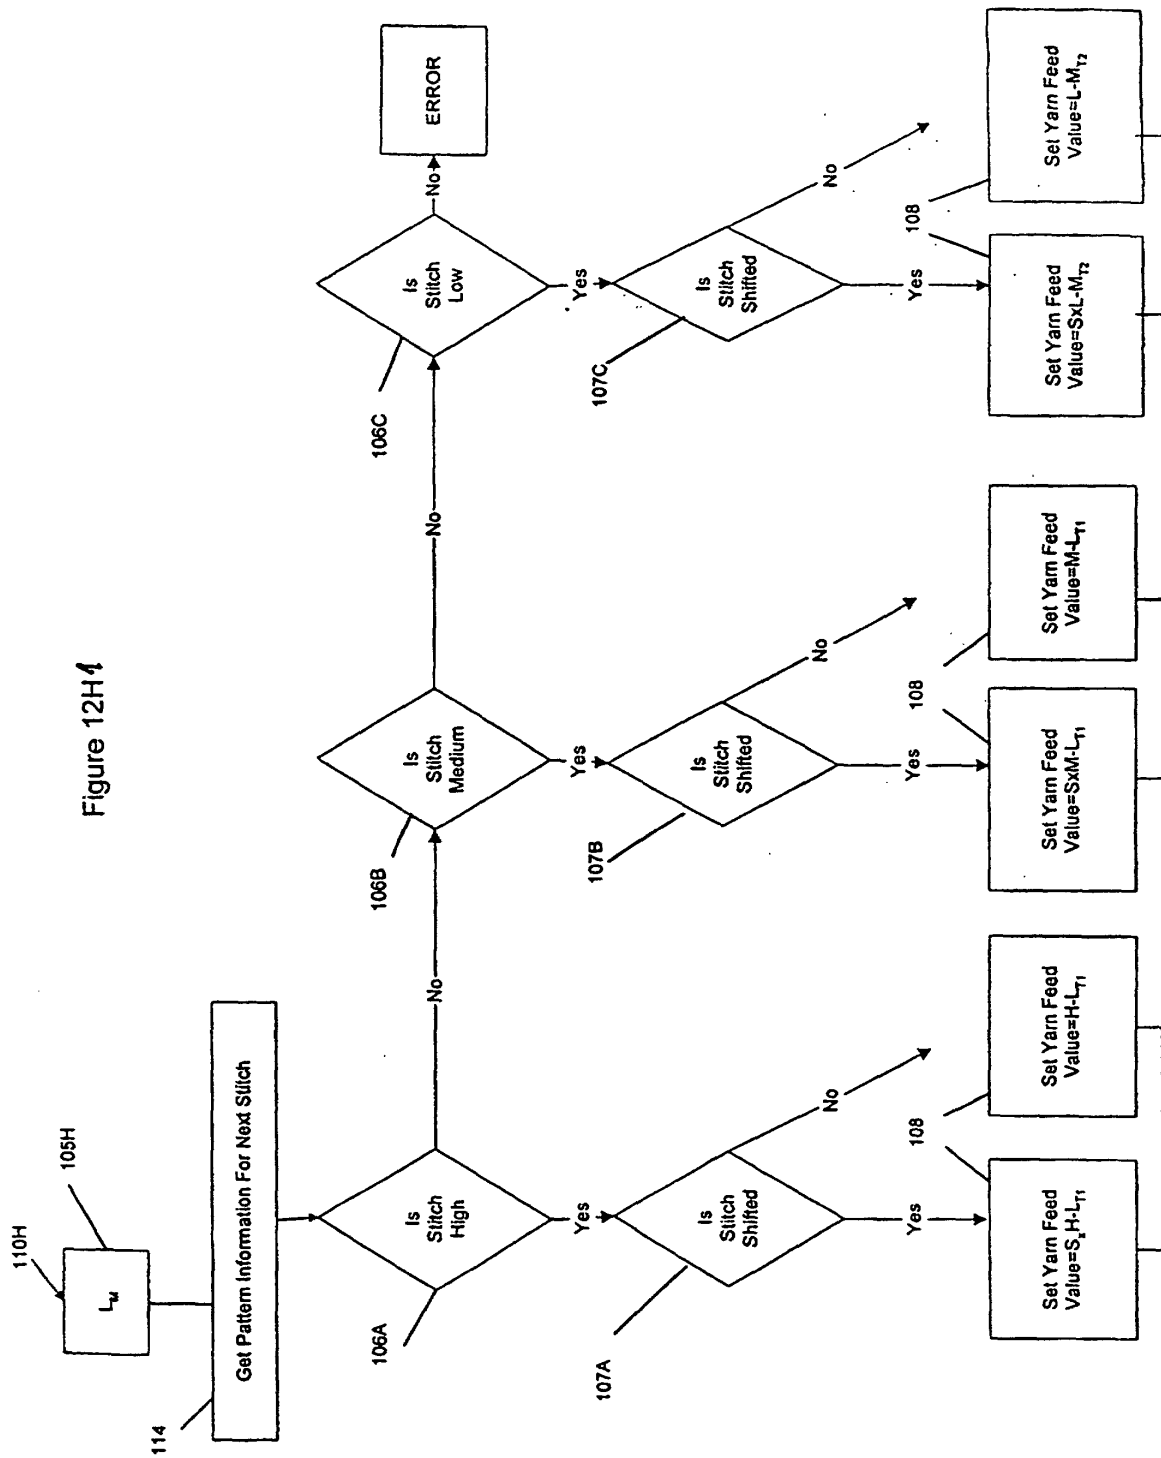


Figure 12GZ



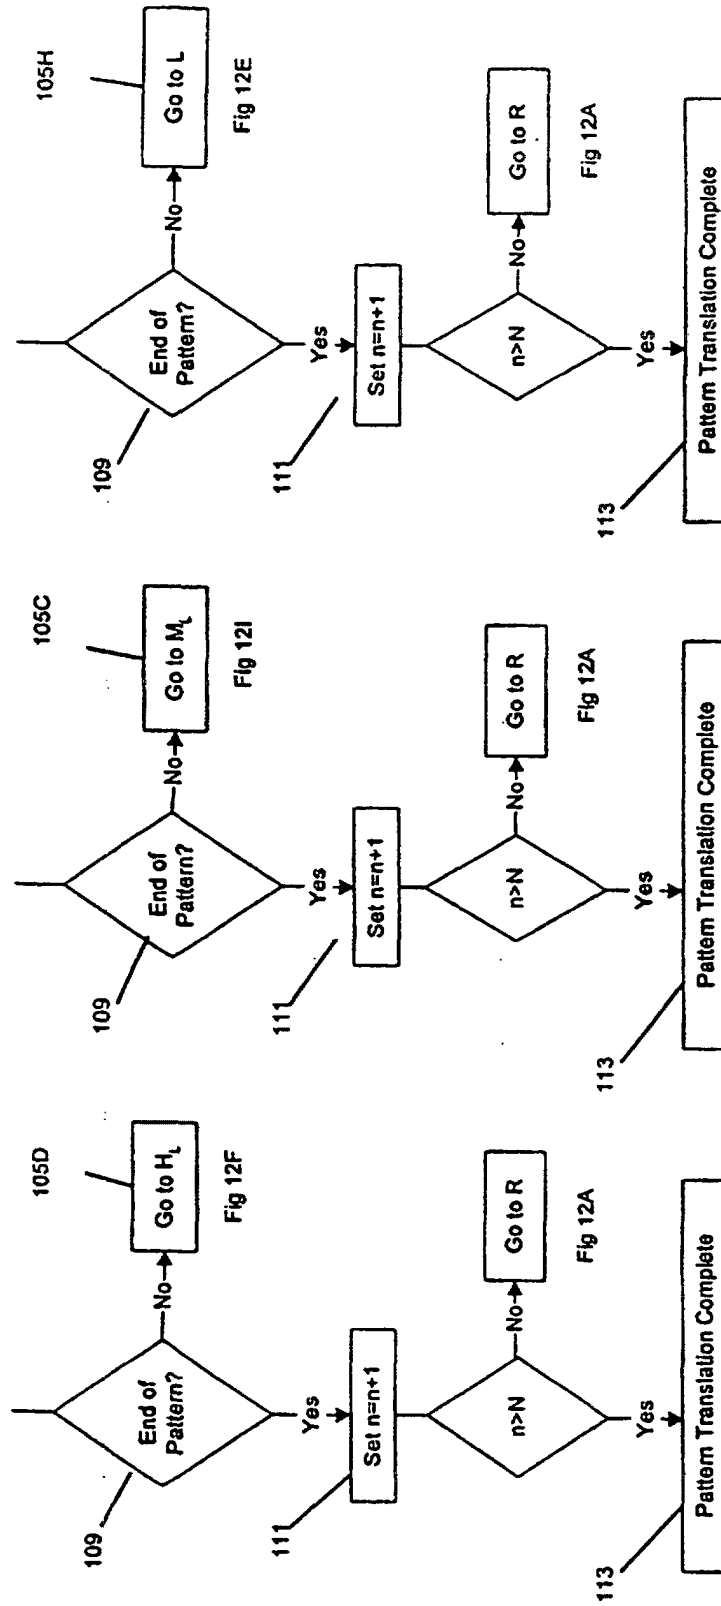
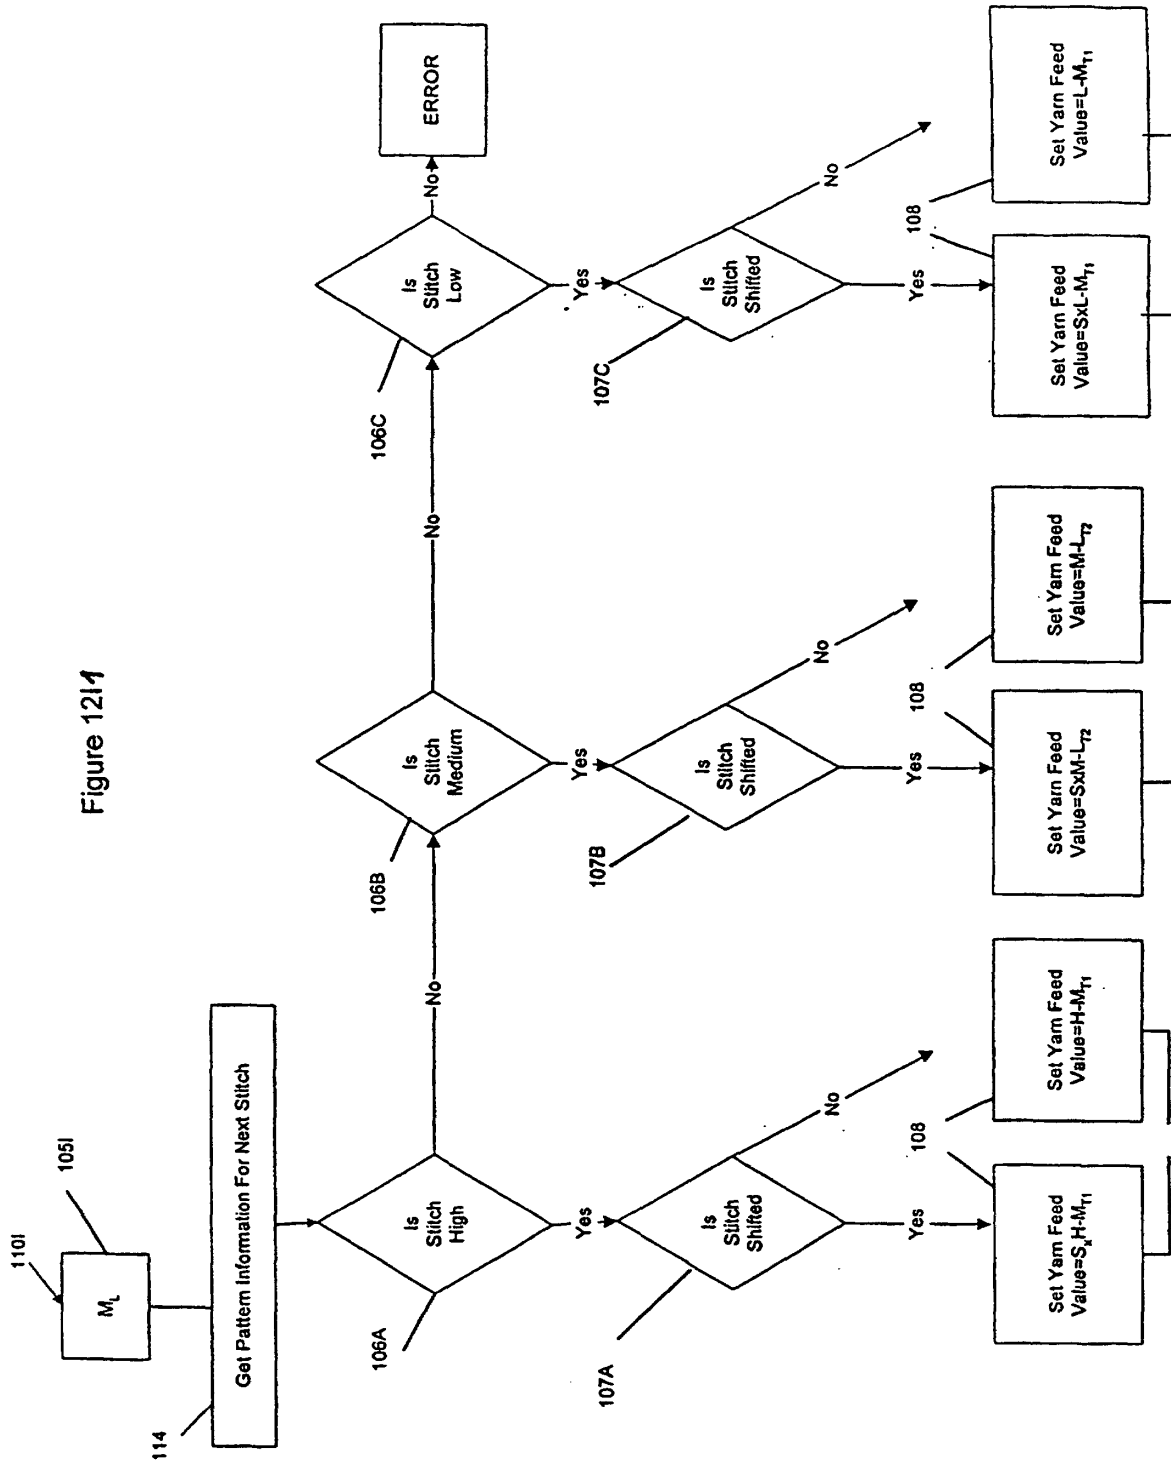


Figure 12H2



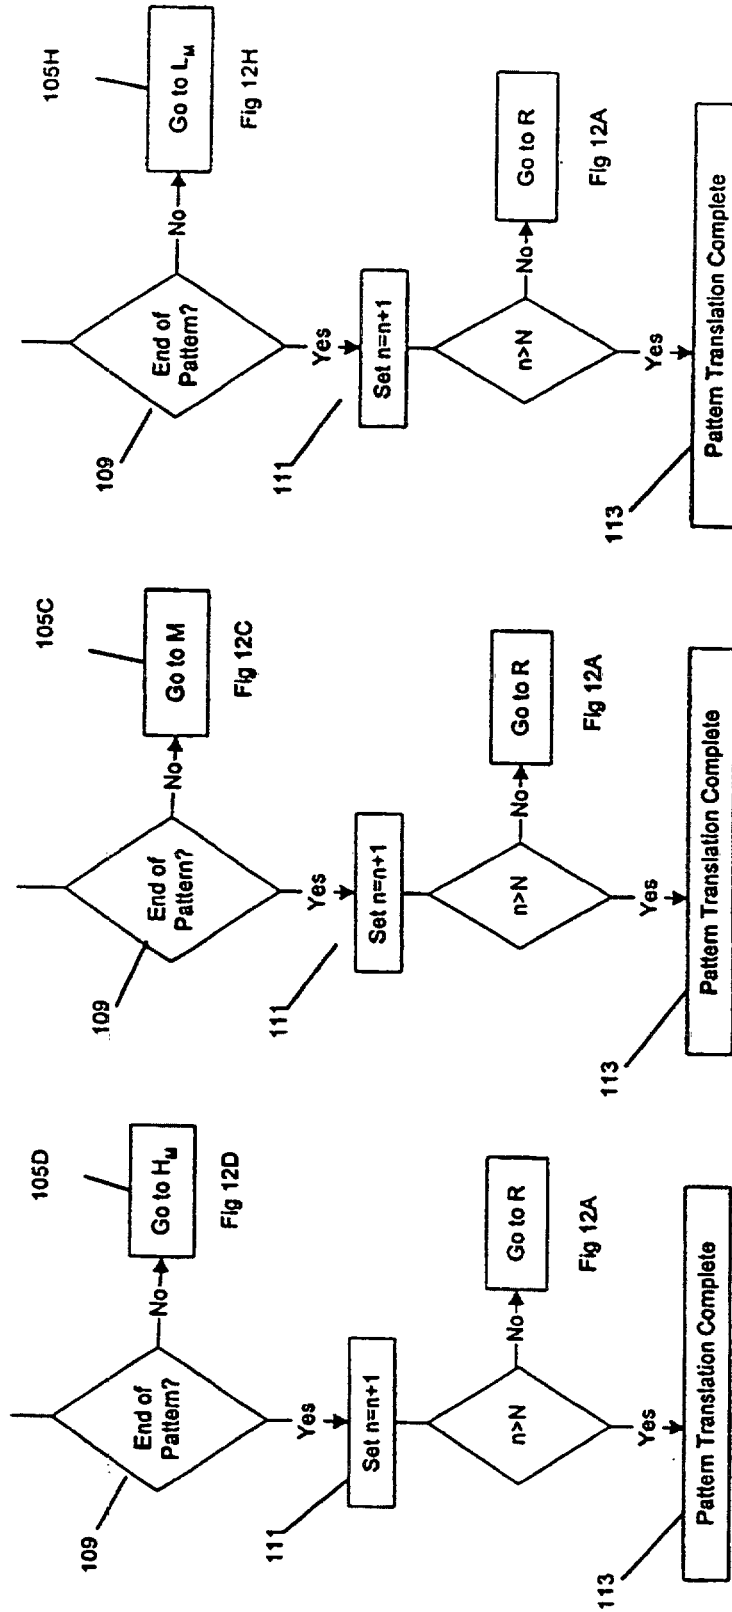


Figure 12I2

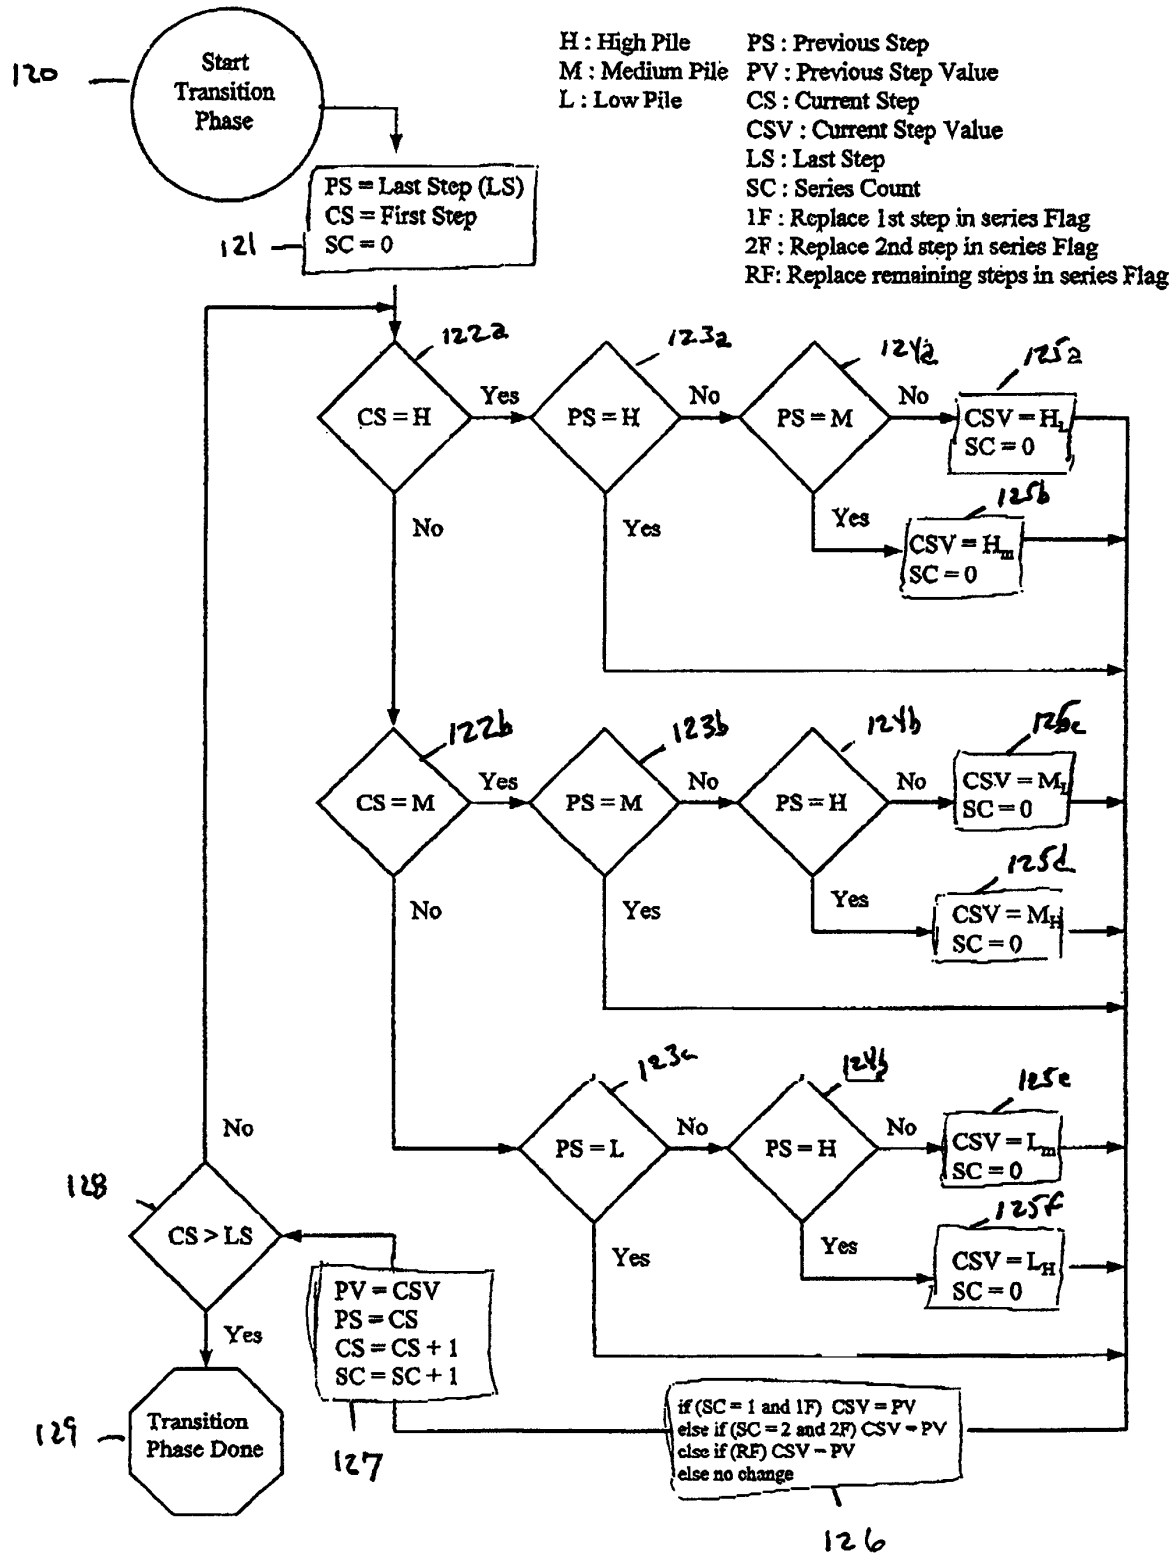


FIGURE 13

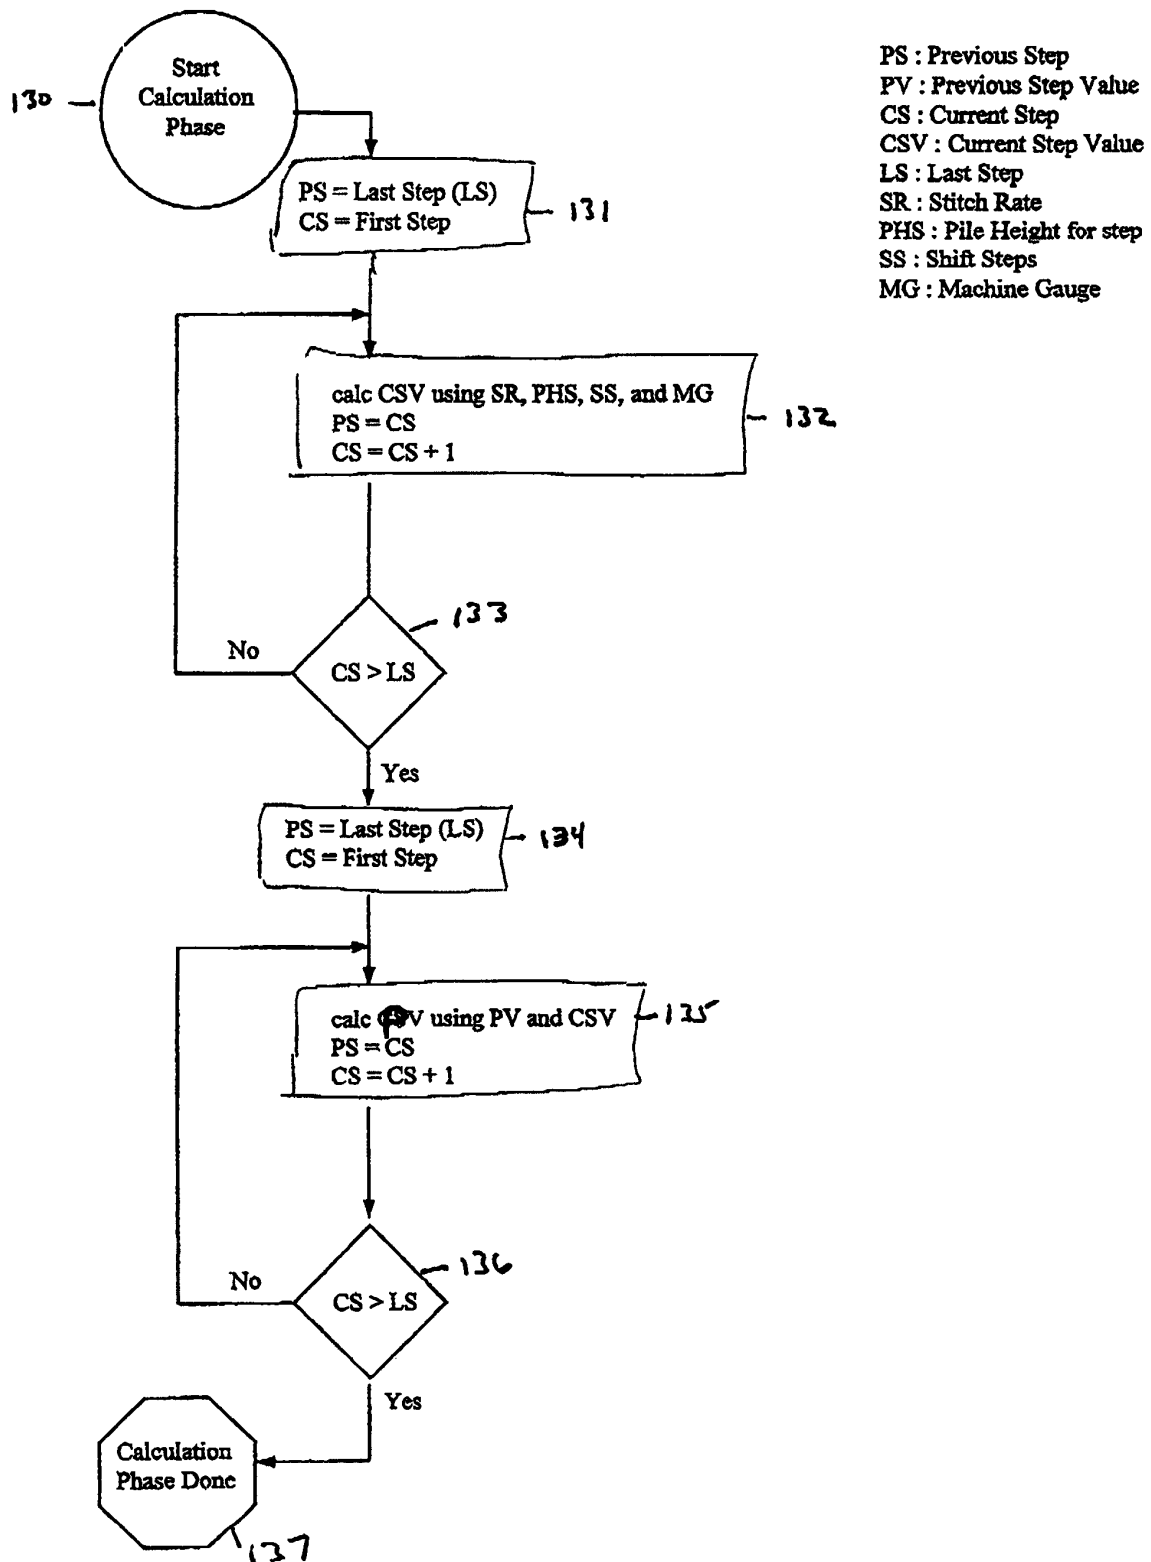


FIGURE 14