



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 147 831 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**24.10.2001 Bulletin 2001/43**

(51) Int Cl.7: **B21B 39/16**

(21) Application number: **00303362.8**

(22) Date of filing: **20.04.2000**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventor: **Fabris, Mario**  
**Stoney Creek, Ontario L8E 5C4 (CA)**

(74) Representative: **Meddle, Alan Leonard et al**  
**FORRESTER & BOEHMERT,**  
**Pettenkoferstrasse 20-22**  
**80336 München (DE)**

(71) Applicant: **Fabris, Mario**  
**Stoney Creek, Ontario L8E 5C4 (CA)**

(54) **Improved roller entry guide for rod mills**

(57) A roller (26) for a steel mill entry guide (18) in which pockets (46) are formed in at least one of the flat annular surfaces (44) on the side of the roller (26). The pockets (46) are used to intersect a stream of moving

fluid projected at the surface (44) of the roller (26) containing the pockets (46) to force the rollers (26) to rotate whilst no work is passing through the guide (18). The pockets (46) are of a rectangular shape and are easy to fabricate and have no preferential direction of rotation.

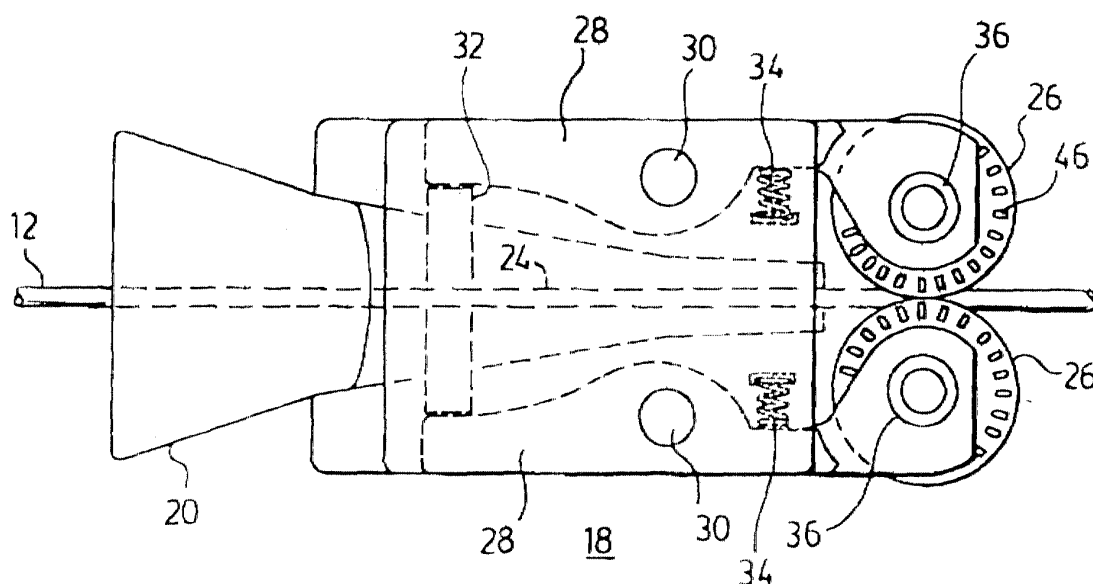


FIG. 2.

EP 1 147 831 A1

## Description

### FIELD OF INVENTION

[0001] This invention is concerned with improving the performance of a roller entry guide used in steel mills for the facilitation of the passage of a steel billet from one roll stand to the next roll stand in a multi-stand roll reduction operation.

### PRIOR ART

[0002] The operation of a multi-stand progressive reduction rolling mill is well known by those skilled in the art. In operation, a rod mill may have in excess of 25 stages where a heated metal billet having an initial cross section of 16-20 square inches is reduced to 40 thousandths of an inch in diameter during its passage through the mill. The velocity of the hot steel workpiece increases in direct proportion to the reduction in cross sectional area. Thus the exit speed of a typical rod being reduced, as described above, is 400 times the entrance velocity of the billet which may approach 100 meters per second. Because the rod impinges on the next roller entry guide (and on the rollers mounted in the entry guide device) with considerable force and momentum, it is desirable to have the rollers in the entry guide device spinning at a speed equal to or slightly greater than the velocity of the rod entering the roller entry guide. This reduces the damage (known as front end pitting) done by the leading end of the swiftly moving rod as it is intercepted by the rollers in the entry guide device. If the rollers are not spinning upon the arrival of high speed rod end, skidding occurs between the roll and the rod which causes damage to the rollers in the entry guide. Damage to the bearings may also occur as the leading rod end repeatedly impacts the rollers in the roller entry guide.

[0003] It is common to have bearings in the roller entry guide damaged by the repeated impacting of the swiftly moving rod end so that the rollers rotate eccentrically as the rod passes therebetween to produce diameter deviations which impair the usefulness of the finished rod.

[0004] Steel mill builders are constantly endeavoring to increase the throughput of each steel mill installation. Because of the improvement in control technology, it is now possible to have in excess of twenty five mill stands operating in a single mill installation. Where present day rod exit speeds of 100 meters per second are not unusual, future mills are presently being planned where rod exit speeds approaching 150 meters per second will be encountered.

[0005] This means that all the rollers in the various mill stages will be subjected to increasing operating speeds and hence the pre spin velocity of each set of rollers of the roller entry guides must increase in a ratio directly proportional to the speed of the product passing there through.

[0006] For the final stage of a present day mill, a rod

exit speed of 100 meters per second represents about 40 to 45,000 r.p.m. rotational speed of the guide rollers. For exit speeds of 150 meters per second, inlet guide rollers must achieve a pre spin velocity of about 60,000 r.p.m.

### PRIOR ART

U.S. Patent 4,295,356 October 20, 1981

[0007] This patent shows a roller entry guide wherein the rollers are provided with a series of scoop-shaped recesses to provide a plurality of reaction surfaces for driving each roller with cooling fluid, usually water.

U.S. Patent 4,373,367 February 15, 1983

[0008] This patent is directed to an assembly for delivering pressurized fluid (usually water) through a guide bracket in such a manner that the pressurized fluid impinges upon the reaction surfaces (scoop-shaped recesses) at the proper angle to drive the rollers to a selected speed before the rod enters the guide.

### SUMMARY OF THE INVENTION

[0009] The roller profile and shape is largely dictated by the shape of the work product passing between the rollers in the roller entry guide, thus the roller diameters (internal and external) are generally predetermined by constraints such as standardization and interchangeability of various rollers.

[0010] This invention therefore has for its object the provision of rollers for roller inlet guides which will operate in present day roller guides at increased rod inlet speeds without any substantial modification to the roller inlet guide construction.

[0011] It is a further object of this invention to provide a roller for an inlet roller guide which has no preferential direction of rotation.

[0012] It is a further object of this invention to provide a roller for an inlet roller entry guide which provides a greatly increased reaction surface for impingement of the driving fluid thereon.

### BRIEF DESCRIPTION OF THE DRAWINGS

#### [0013]

FIGURE 1 is a perspective view of a rolling mill in which this invention is employed;  
FIGURE 2 is a representative view of a typical roller entry guide assembly which shows only the parts which are pertinent to this invention;  
FIGURE 3 is an enlarged sectional view of the roller assembly shown in FIGURE 2.  
FIGURE 4 is a partial perspective of the roller of this invention.

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

**[0014]** Referring to the drawings and FIGURE 1 in particular, a steel mill 10 useful in processing steel billets into steel rods is shown in perspective. The steel mill 10 is equipped with a series of reducing stages, all in the same line, so that an incoming rod 12 is successively reduced as it passes through the various reducing mill stands such as the stage shown at 14. Safety covers 16 are provided to protect operating personnel from damage caused by the impact with fractured components etc. which may result from component failures during a reducing operation. The rod enters at the left side of the mill and exits from the right hand end of mill 10.

**[0015]** FIGURE 2 shows a typical roller entry guide 18 utilizing the rollers of this invention. A funnel shaped input guide 20 provides the initial guiding mechanism for the rod 12 as it enters the roller entry guide 18. Rod 12 is thus directed into the bore 24 of guide 18. The rod 12 subsequently passes between a pair of driven guide rollers 26 and exits to a pair of reducing rolls, generally tungsten carbide (not shown) that reduce the cross section of the rod 12.

**[0016]** Each roller is mounted in a rocker arm 28 which is pivoted in the roller entry guide 18 on pins 30 which have axis in a spaced parallel relationship. The spacing between the rollers (bight) is made to be adjustable by means of a wedge device 32 mounted in entry guide 18 at a point opposite the pivot pins from the rollers 26 in the rocker arms 28. The rocker arms are constantly biased to their final operating position by springs 32 and 34 which tend to keep the rollers 26 at the maximum spacing permitted by wedge 32.

**[0017]** Each roller 26 is mounted in the respective rocker arms 28 on a bolt 36 on which are mounted a pair of bearings 38 (see FIGURE 3), which engage the inner cylindrical surface 40 of the guide rollers 26. The rod engaging surface 42 of rollers 26 is contoured to specifications peculiar to the type of rod being reduced, as shown.

**[0018]** The sidewalls 44 of rollers 26 are provided with a plurality of spaced somewhat rectilinearly shaped pockets 46 which form the reaction surfaces used to drive the rollers 26.

**[0019]** Each arm 28 is provided with a nozzle 48 which allows the driving fluid to exit therefrom and impinge on rollers 26 at pockets 46.

**[0020]** Nozzle 48 is provided with a suitable bore 50 which is connected to a suitable supply of pressurized fluid and which is supplied to guide 18 to cool the guide, and cool and drive rollers 26.

**[0021]** Usually only one side of the rollers 26 is driven, but pockets 46 allow unlimited interchangeability of rollers because of the shape chosen to react with the impinging fluid stream in either direction of rotation.

**[0022]** The detail of the mounting of the rollers 26 in the guide 18 is as follows:

**[0023]** Bolt 36 is mounted in guide 18 in recess 54 at the head end 56 of bolt 36. The bolt passes through a washer 58 and through the inner race of one of the bearings 38, through a second washer 60 and through a second inner race of bearing 32 to which is clamped nut 62.

**[0024]** Nut 62 is engaged by recess 64. Thus nut 62 clamps the whole roller and bearing assembly together and also stabilizes the threaded end of bolt 36 in guide 18.

**[0025]** Bearings 38 are provided with a peripheral lips 66 to engage annular recesses 68 on the inner surface of roller 26. Thus the lips 66 and recesses 68 combine with spacer 60 to accurately mount each roller 26 in the guide 18.

**[0026]** Previous rollers have been capable of being driven in one direction only, and the repeated impingement of the working surfaces of the rollers 26 causes abrasion and wear which is peculiar to the direction of rotation. Reversal of rotation of the rollers can lead to increased life and diminished operating costs for the reducing mill.

**[0027]** It will become apparent that the pockets 46 in rollers 26 may be spaced much closer than pockets shown in the prior art entry guides. The addition of the extra pockets in the rollers 26 allows each roller to present more reaction surfaces to the impinging fluid stream and thus achieve a higher rotational velocity for increasing rod entry speeds.

**[0028]** Pockets 46 in rollers 26 of this invention relieve the steel mill operators and maintenance personnel of the problem of improper installation of inlet guide rollers of the prior art which were sensitive to the direction of the rotation.

**[0029]** In the present specification "comprise" means "includes or consists of" and "comprising" means "including or consisting of".

**[0030]** The features disclosed in the foregoing description, or the following claims, or the accompanying drawings, expressed in their specific forms or in terms of a means for performing the disclosed function, or a method or process for attaining the disclosed result, as appropriate, may, separately, or in any combination of such features, be utilised for realising the invention in diverse forms thereof.

## Claims

1. A roller entry guide for a rod mill comprising:

a body having a passageway formed therein for guiding the passage of a rod as it passes there-through,  
a pair of pivoting arms mounted on said body on opposing sides of the rod passageway,  
a pair of reversible roller guide members mounted on said pivoting arms at the ends thereof for engaging said rod as it passes

through said guide,  
 means to direct a stream of high speed fluid on-  
 to said roller guide members in such a manner  
 as to cause rotation of said roller guide mem-  
 bers,  
 each of said roller guide members having a plu-  
 rality of fluid reaction pockets arranged in a ring  
 on each roller guide member, said pockets be-  
 ing in the form of a slightly rounded parallela-  
 piped.

5

10

2. A roller entry guide as claimed in claim 1 wherein  
 said roller guide members are substantially annular  
 shaped, having an internal aperture of such shape  
 as to receive bearing means,

15

and wherein each roller guide member has an  
 external surface profile suitable for engaging said  
 rod and wherein each roller has a pair of opposing  
 flat annular surfaces extending between said inter-  
 nal aperture and said external surface profile,  
 wherein a plurality of evenly radially spaced sub-  
 stantially rectangularly shaped pockets are formed  
 at a constant diameter of said annular surface.

20

3. A reversible roller guide as claimed in claim 1  
 wherein said roller guide members are substantially  
 annular shaped, having an internal aperture of such  
 shape as to receive bearing means,

25

and wherein each roller guide member has an  
 external surface profile suitable for engaging said  
 rod and wherein each roller has a pair of opposing  
 flat annular surfaces extending between said inter-  
 nal aperture and said external surface profile,  
 wherein a plurality of evenly radially spaced sub-  
 stantially rectangularly shaped pockets are formed  
 at a constant diameter of said annular surface.

30

35

4. A reversible roller guide as claimed in claim 1  
 wherein said roller guide members are substantially  
 annular shaped, having an internal aperture of such  
 shape as to receive bearing means,

40

and wherein each roller guide member has an  
 external surface profile suitable for engaging said  
 rod and wherein each roller has a pair of opposing  
 flat annular surfaces extending between said inter-  
 nal aperture and said external surface profile,  
 wherein a plurality of evenly radially spaced sub-  
 stantially rectangularly shaped pockets are formed  
 at a constant diameter of said annular surface.

45

50

5. A reversible roller guide as claimed in claim 1  
 wherein said roller guide members are substantially  
 annular shaped, having an internal aperture of such  
 shape as to receive bearing means,

55

and wherein each roller guide member has an  
 external surface profile suitable for engaging said  
 rod and wherein each roller has a pair of opposing  
 flat annular surfaces extending between said inter-

nal aperture and said external surface profile,  
 wherein a plurality of evenly radially spaced sub-  
 stantially rectangularly shaped pockets are formed  
 at a constant diameter of said annular surface.

6. A reversible roller as claimed in claim 5 wherein said  
 parallelapiped has corners which are slightly round-  
 ed.




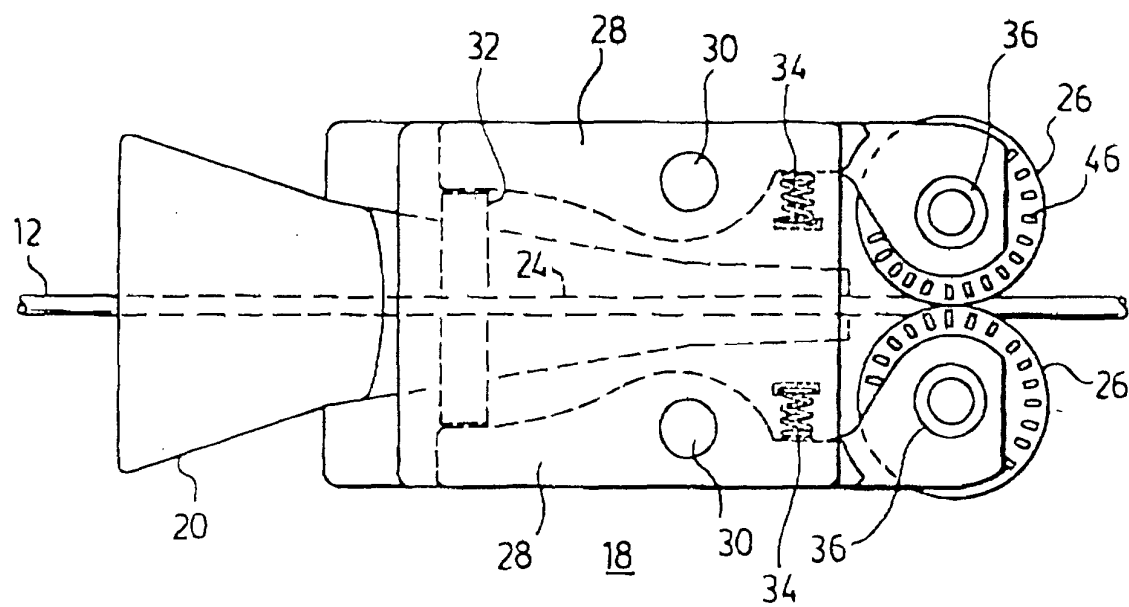


FIG. 2.

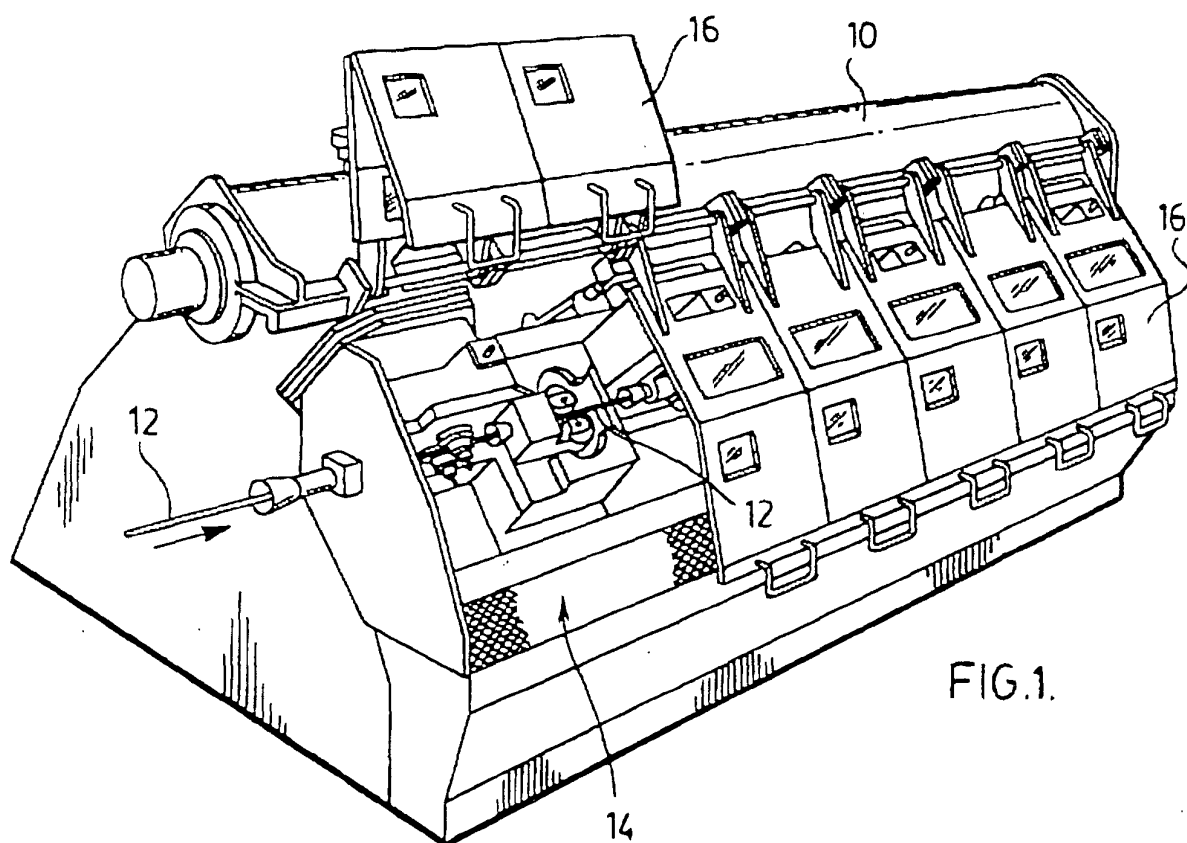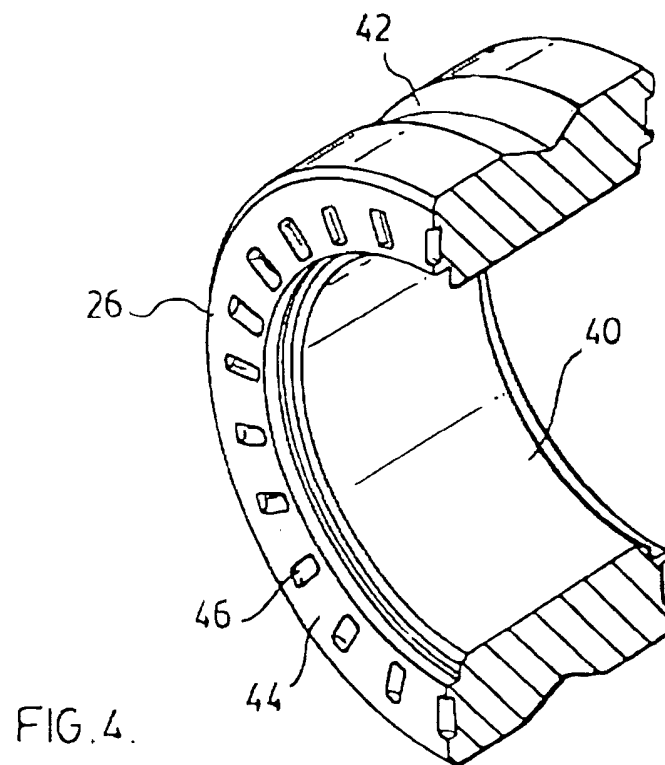

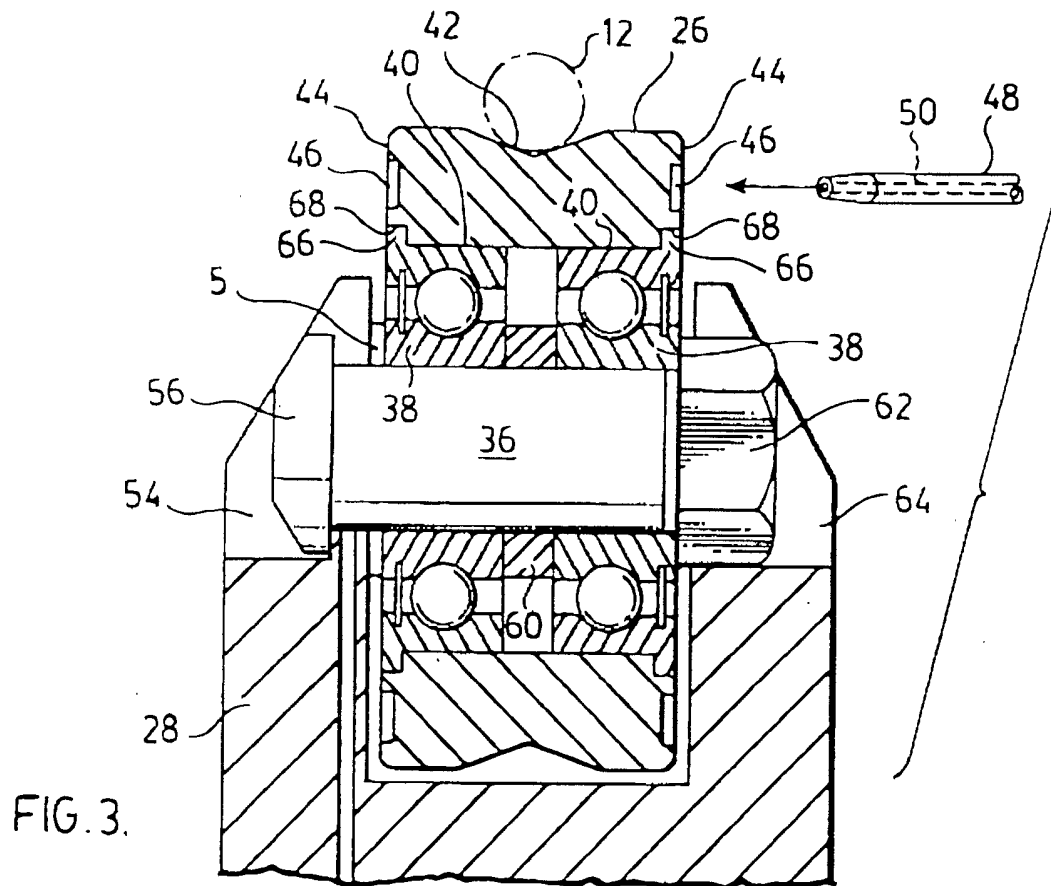

European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 00 30 3362

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
D, Y	US 4 295 356 A (FABRIS MARIO) 20 October 1981 (1981-10-20) * the whole document *	1-6	B21B39/16
Y	DE 11 26 827 B (PREINFALK FRANZ) 5 April 1962 (1962-04-05) * the whole document *	1-6	
D, A	US 4 373 367 A (FABRIS MARIO) 15 February 1983 (1983-02-15) * the whole document *	1-5	
A	US 3 188 847 A (KANICHI KISHIKAWA) 15 June 1965 (1965-06-15) * the whole document *	1-5	
A	US 4 056 873 A (CASSARD JACQUES ET AL) 8 November 1977 (1977-11-08) * the whole document *	1-5	
A	US 3 824 831 A (BOCK N) 23 July 1974 (1974-07-23) * the whole document *	1-5	<b>TECHNICAL FIELDS SEARCHED (Int.Cl.7)</b> B21B
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>2 October 2000</b>	Examiner <b>Rosenbaum, H</b>
<b>CATEGORY OF CITED DOCUMENTS</b> X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.92 (P04/001)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 30 3362

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

02-10-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4295356 A	20-10-1981	CA 1151448 A US 4373367 A	09-08-1983 15-02-1983
DE 1126827 B		NONE	
US 4373367 A	15-02-1983	US 4295356 A DE 3172145 D EP 0052434 A WO 8201672 A CA 1151448 A	20-10-1981 10-10-1985 26-05-1982 27-05-1982 09-08-1983
US 3188847 A	15-06-1965	FR 1329746 A GB 1006234 A	16-12-1963
US 4056873 A	08-11-1977	FR 2335277 A AU 498603 B AU 2057376 A BE 849527 A BR 7608441 A CA 1040900 A DD 127281 A DE 2656934 A ES 454193 A IT 1065029 B JP 52077862 A LU 76404 A NL 7613997 A PT 65976 A, B RO 69536 A SE 7614176 A ZA 7607480 A	15-07-1977 15-03-1979 22-06-1978 17-06-1977 06-12-1977 24-10-1978 14-09-1977 07-07-1977 01-12-1977 25-02-1985 30-06-1977 01-07-1977 21-06-1977 01-01-1977 30-04-1981 20-06-1977 22-02-1978
US 3824831 A	23-07-1974	SE 372898 B AR 201919 A AU 5645873 A CA 979247 A DD 106275 A DE 2327469 A ES 415615 A FR 2187432 A GB 1439276 A NL 7307706 A	20-01-1975 30-04-1975 05-12-1974 09-12-1975 12-06-1974 20-12-1973 01-02-1976 18-01-1974 16-06-1976 11-12-1973

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82