



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 152 912 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
21.06.2006 Bulletin 2006/25

(21) Application number: **00989031.0**

(22) Date of filing: **28.11.2000**

(51) Int Cl.:
B60J 7/22 (2006.01)

(86) International application number:
PCT/NL2000/000867

(87) International publication number:
WO 2001/047733 (05.07.2001 Gazette 2001/27)

(54) **OPEN ROOF CONSTRUCTION FOR A VEHICLE**

KONSTRUKTION EINES ÖFFNUNGSFÄHIGEN FAHRZEUGDACHES

TOIT OUVRANT POUR VEHICULE

(84) Designated Contracting States:
DE FR GB

(30) Priority: **13.12.1999 NL 1013832**

(43) Date of publication of application:
14.11.2001 Bulletin 2001/46

(73) Proprietor: **Inalfa Roof Systems Group B.V.**
5804 AH Venray (NL)

(72) Inventors:
• **NABUURS, Martinus, Wilhelmus, Maria**
NL-5825 JT Overloon (NL)

• **NELISSEN, Gerardus, Petrus, Maria**
NL-5843 AD Westerbeek (NL)

(74) Representative: **Voncken, Bartholomeus Maria**
Ch.
De Vries & Metman,
Overschiestraat 180
1062 XK Amsterdam (NL)

(56) References cited:
EP-A- 0 733 506 **US-A- 5 833 305**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The invention relates to an open roof construction for a vehicle having an opening in its roof, the front part of which can be closed by a first panel which is pivotable about a substantially horizontal axis at the front edge thereof, whilst the remaining part of the roof opening can be closed by means of at least one slidable second panel.

[0002] With prior art open roof constructions of this type the question of how to prevent undesirable inflow of wind into the interior of the vehicle via the roof opening when the second panel is moved to an open position forms a major challenge. After all, such inflow of wind may lead to objectionable resonances, which seriously affect the sense of comfort inside the vehicle. In particular when the second panel is a so-called "topslider", which slides to an open position along the roof of the vehicle on the outside thereof and which is moved slightly upwards prior to such a sliding movement, the phenomenon of undesirable inflow of wind prominently manifests itself.

[0003] Over the years measures have already been proposed to overcome or at least alleviate the problem of such inflow of wind. According to the prior art as represented by EP-A-0 733 506, an upwardly extending air deflection element is also used at the free rear edge of the first panel, which is capable of upward pivoting movement about a front edge thereof ("pop-up") and which performs a wind deflecting function in its upwardly pivoted position. When inflow of wind can already be prevented by pivoting said first panel through a small angle, this is a satisfactory solution. When the aforesaid topslider is used as the second panel, however, the first panel needs to perform its wind deflecting function more pronouncedly, which implies using large pivoting angles. When the front edge of the first panel is contiguous to a windscreen (or a roof part) of a vehicle that has a distinct curvature in transverse direction of the vehicle, and consequently the first panel has a corresponding distinct curvature at the location of its front edge, the pivoting of the first panel through large angles will lead to sealing problems at the location of said front edge, which problems can only be overcome by using complicated and expensive sealing means.

[0004] Another drawback of the prior art open roof constructions wherein the first panel performs a wind deflecting function is the fact that the shape of the first panel must be such that a continuous and aesthetically attractive roof contour is obtained in the closed position thereof. This is at odds with optimizing the shape of said first panel with a view to deflecting the wind, however, and consequently this is hardly possible, if at all.

[0005] The object of the invention is to provide an open roof construction of the present type by which the aforesaid drawbacks are overcome in a simple yet efficient manner.

[0006] In order to accomplish that objective, the invention provides an open roof construction of the type re-

ferred to in the introduction, wherein a wind deflecting arrangement functioning as a wind deflector is used, which can be moved rearwards and upwards, using suitable driving means, from a position of rest under the first panel to an operative position substantially above and behind the first panel.

[0007] In accordance with the inventive concept, the aforesaid wind deflection arrangement is now used for deflecting the wind and no longer primarily the first panel. Of course it remains possible for the first panel to perform a certain function in the deflection of the wind as well, but this is not necessary. Since the wind deflection arrangement is positioned under the first panel in its position of rest, in which position it is hidden from view, its shape can be designed to deflect the wind optimally without there being a need to take aesthetic considerations into account.

[0008] The angle through which the first panel is pivoted may be of relatively limited magnitude. The advantage of the fact that the first panel is pivotable is that thus sufficient room is provided for the wind deflection arrangement, which is initially positioned under said first panel, and the driving means thereof to move. This makes it possible to reduce the vertical distance to be made available for the movement of the wind deflection arrangement and driving means thereof, so that the open roof construction will project as little as possible into the interior of the vehicle (which is called compact "packaging" in the industry).

[0009] There is another advantage to the aforesaid, usually limited, pivotability of the first panel. The upwardly pivoted first panel can already provide wind deflection to a certain extent before the wind deflection arrangement has been moved from its position of rest to its operative position (which movement is not possible until a sufficient distance has been created between the rear edge of the panel and the front edge of the second panel), thus preventing undesirable inflow of wind (in particular if the aforesaid topslider forms the second panel).

[0010] The driving means required for achieving the movement of the wind deflection arrangement may be of any type that is suitable, such as the usual guides that are already being used on a large scale in various embodiments of open roof constructions. In most cases the wind deflection arrangement will have its own, independent drive unit, which can be actuated by automatic means (for example on the basis of the vehicle speed, the wind velocity) or by the driver of the vehicle as desired.

[0011] It is noted that from DE 3916906 there is already known an open roof construction wherein a wind deflection arrangement can be moved rearwards and upwards from a position under a fixed roof portion to a position above the roof. Said open roof construction does not comprise a pivotable second panel, however, so that the concomitant advantages are not obtained.

[0012] An embodiment of the open roof construction according to the invention that is highly effective with a view to deflecting the wind is obtained when the wind

deflection arrangement is pivotable about a horizontal pivot that extends substantially transversely to the vehicle. The horizontal pivot can be moved rearwards and upwards in order to effect the rearward and upward movement of the wind deflection arrangement. By pivoting the wind deflection arrangement about said horizontal pivot it becomes possible to change the angle of the wind deflection arrangement relative to the direction of flow of the oncoming air and thus optimize the obtained flow pattern.

[0013] In this framework it is also conceivable for the wind deflection arrangement to have a changeable contour. This can for example be achieved by configuring the wind deflection arrangement as a number of sections disposed one behind another, which are movable with respect to each other, which makes it possible to change the curvature of the wind deflection arrangement, for example. Such a sectional configuration, as it were, makes it possible to influence the flow pattern in a desired manner.

[0014] The invention will now be explained in more detail with reference to the drawing, which shows an embodiment of the open roof construction according to the invention.

[0015] In the drawing:

Fig. 1 schematically shows an embodiment of the open roof construction according to the invention in completely closed position;

Fig. 2 shows the open roof construction of Fig. 1 in a first intermediate position;

Fig. 3 shows the open roof construction of Fig. 1 in a second intermediate position; and

Fig. 4 shows the open roof construction of Fig. 1 in completely open position.

[0016] The figures only show those parts of the embodiment of the open roof construction according to the invention to be described hereafter that are essential for a direct understanding of the inventive concept. In principle the figures show a longitudinal section of the relevant part of a vehicle, and the illustrated parts of the open roof construction of the vehicle are only shown in contour. Control means, driving means, guide means, seals and the like are not shown, since they form part of the regular technical knowledge of a person skilled in this field of the art.

[0017] In the figures the following parts of a vehicle can be distinguished: a portion of a windscreen 1, a portion of fixed roof part 2, a first panel 3, a second panel 4 and an auxiliary panel 5 which is initially positioned under said first panel and which forms a wind deflection arrangement according to the invention.

[0018] First panel 3 pivots about a substantially horizontal pivot 6 near the front edge of first panel 3. Sealing means (not shown) are present at the location where the first panel 3 joins the windscreen 1. The first panel 3 forms a so-called pop-up in the illustrated embodiment.

[0019] In the position of rest (closed position) of the open roof construction that is shown in Fig. 1, the second panel 4 joins the rear edge of first panel 3 with its front edge. Also here suitable sealing means may be used. In the position that is shown in Fig. 1, the rear edge of second panel 4 joins the front edge of fixed roof part 2. Auxiliary panel 5 is positioned under first panel 3, where it not visible from outside.

[0020] In the position that is shown in Fig. 1, windscreen 1, first panel 3, second panel 4 and fixed roof part 2 form a contiguous contour, whereby aerodynamic and aesthetic considerations can be taken into account.

[0021] Fig. 2 shows a position wherein first panel 3 has been pivoted through a small angle about pivot 6, as indicated by arrow 7. Furthermore, second panel 4 has been moved upwards with respect to fixed roof part 2, as indicated by arrows 8. This upward movement of second panel 4 makes it possible to subsequently slide said second panel 4 to the rear, outside fixed roof part 2, as a so-called topslider (as shown in Figs. 3 and 4).

[0022] Since the first panel 3 has already been pivoted slightly upwards in the situation that is shown in Fig. 2, inflow of wind on the front side of the second panel 4, which has been slightly lifted as indicated by arrows 8, is prevented.

[0023] Fig. 3 shows a situation wherein the second panel 4 has already been moved some distance to the rear, outside fixed roof part 2, as indicated by arrow 9. Furthermore, auxiliary panel 5 has been moved to the rear with respect to the first panel 3, as is indicated by arrow 10.

[0024] Fig. 4 finally shows an end position of the open roof construction, wherein the second panel 4 has reached its completely open position and auxiliary panel 4 has taken up a position wherein it has been moved upwards with respect to first panel 3, as indicated by arrow 11, and wherein it has been pivoted slightly upwards at its rear side about a pivot 13 that extends substantially transversely to the vehicle, as indicated by arrow 12, in order to prevent undesirable inflow of wind into the roof opening 14, which is now completely open.

[0025] It is noted that it is also possible for auxiliary panel 5 to have reached the position that is shown in Fig. 4 already before the second panel 4 has reached the extreme position that is shown in Fig. 4, occupying the position that is shown in Fig. 3, for example.

[0026] As already noted before, a continuous roof contour is obtained in the closed position of the open roof construction, since no projecting parts are present. The use of the auxiliary panel provides various possibilities for controlling the air flow over the roof, however, as a result of which an optimum flow pattern can be created. The use of auxiliary panel 5 furthermore makes it possible to reduce the angle through which first panel 3 pivots, thus enabling an optimum seal at the front edge thereof, at the location of windscreen 1, in spite of the strong curvature that is generally present at that location. Finally, the possibility of pivoting the first panel 3 provides a

great deal of room for the auxiliary panel (which can also be indicated by the term wind deflector) to move, so that little constructional height within the vehicle is taken up (compact "packaging").

[0027] The invention is not restricted to the above-described embodiment, which can be varied in several ways without departing from the scope of the invention as defined in the claims.

Claims

1. An open roof construction for a vehicle having an opening in its roof, at the front part of which a first panel (3) is positioned which is pivotable about a substantially horizontal axis (6) at the front edge thereof for opening and closing said front part, whilst the entire roof opening behind the front part can be closed by means of at least one slidable second panel (4), **characterized in that** a wind deflecting arrangement functioning as a wind deflector (5), is used, which can be moved rearwards and upwards, using suitable driving means, from a position of rest under the first panel (3) to an operative position substantially above and behind the first panel (3).
2. An open roof construction according to claim 1, **characterized in that** said wind deflection apparatus is pivotable about a horizontal pivot (6) that extends substantially transversely to the vehicle.
3. An open roof construction according to claim 1 or 2, **characterized in that** said wind deflection apparatus has a changeable contour.

Patentansprüche

1. Offendach-Konstruktion für ein Fahrzeug mit einer Öffnung in dessen Festdach, wobei an dem Frontabschnitt derselben ein erstes Paneel (3) positioniert ist, welches um eine im wesentlichen horizontale Achse (6) am Frontrand davon zum Öffnen und zum Schließen des Frontabschnitts schwenkbar ist, wohingegen die gesamte Dachöffnung hinter dem Frontabschnitt von mindestens einem verschiebbaren zweiten Paneel (4) verschlossen werden kann, **dadurch gekennzeichnet, dass** eine wind-abweisende Anordnung, welche als Windabweiser (5) funktioniert, verwendet wird, welcher unter Verwendung geeigneter Antriebsmittel rückwärts und aufwärts aus einer Ruheposition unter dem ersten Paneel (3) hin zu einer Betriebsposition bewegt werden kann, welche im wesentlichen über und hinter dem ersten Paneel (3) ist.
2. Offendach-Konstruktion gemäß Anspruch 1, **dadurch gekennzeichnet, dass** die Windabweiser-

Vorrichtung um ein Horizontal-Gelenk (6) schwenkbar ist, welches sich im wesentlichen quer zum Fahrzeug erstreckt.

3. Offendach-Konstruktion gemäß Anspruch 1 oder 2, **dadurch gekennzeichnet, dass** die Windabweiser-Vorrichtung eine veränderbare Kontur aufweist.

Revendications

1. Structure de toit ouvrant pour un véhicule ayant une ouverture dans son toit, sur la partie avant duquel est positionné un premier panneau (3) qui peut pivoter sur un axe sensiblement horizontal (6) sur son bord avant pour l'ouverture et la fermeture de ladite partie avant, tandis que la totalité de l'ouverture de toit derrière la partie avant peut être fermée au moyen d'au moins un second panneau coulissant (4), **caractérisée en ce que** l'on utilise un dispositif de déflexion du vent faisant office de déflecteur de vent (5) qui peut être déplacé vers l'arrière et vers le haut, en utilisant des moyens de commande appropriés, depuis une position de repos sous le premier panneau (3) sur une position opérante sensiblement au-dessus et derrière le premier panneau (3).
2. Structure de toit ouvert selon la revendication 1, **caractérisée en ce que** l'appareil de déflexion de vent peut pivoter autour d'un pivot horizontal (6) qui s'étend sensiblement transversalement par rapport au véhicule.
3. Structure de toit ouvrant selon la revendication 1 ou 2, **caractérisée en ce que** ledit appareil de déflexion de vent présente un contour modifiable.

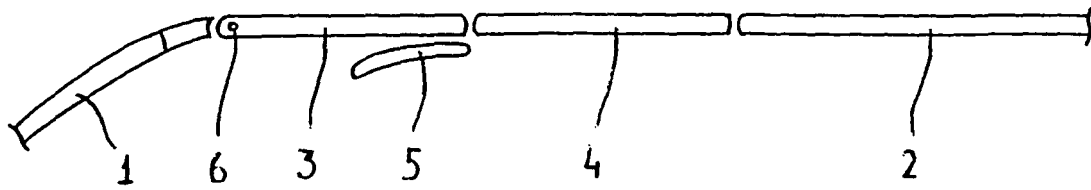


FIG. 1

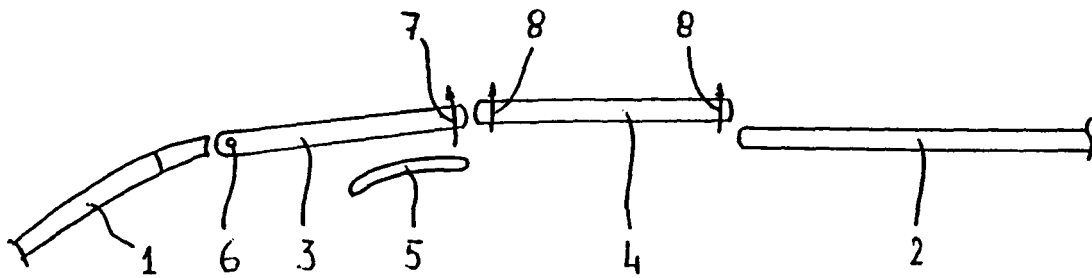


FIG. 2

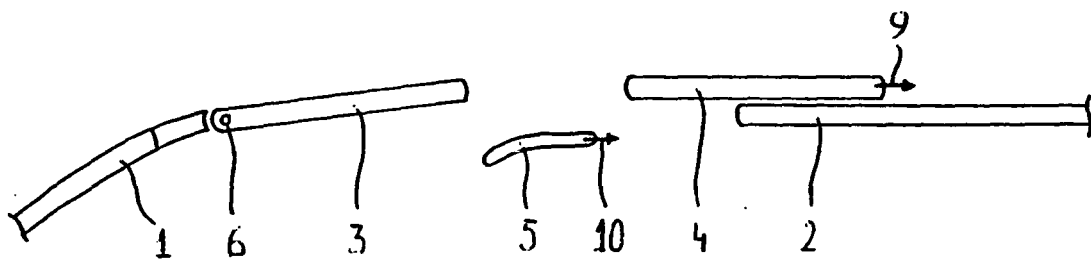


FIG. 3

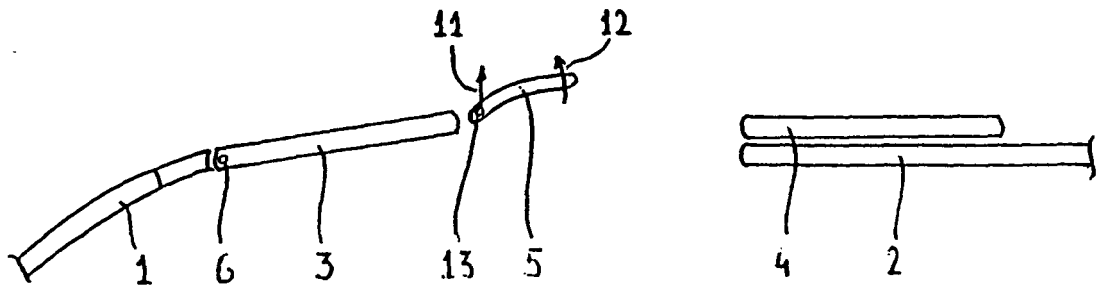


FIG. 4