



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 162 293 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**

Note: Bibliography reflects the latest situation

(15) Correction information:  
**Corrected version no 1 (W1 A1)**  
**INID code(s) 30**

(51) Int Cl.7: **D01H 5/56**, D01H 1/22,  
D01H 5/72

(48) Corrigendum issued on:  
**24.04.2002 Bulletin 2002/17**

(43) Date of publication:  
**12.12.2001 Bulletin 2001/50**

(21) Application number: **01113385.7**

(22) Date of filing: **01.06.2001**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventor: **CAMOZZI, Attilio**  
**I-25121 Brescia (IT)**

(74) Representative: **Fioravanti, Corrado et al**  
**Jacobacci & Partners S.p.A.,**  
**Corso Regio Parco 27**  
**10152 Torino (IT)**


(30) Priority: **08.06.2000 IT TO000548**

(71) Applicant: **MARZOLI S.p.A.**  
**25036 Palazzolo Sull'Oglio (Brescia) (IT)**

(54) **A locating frame for units for drawing and compacting bundles of textile fibres**

(57) A locating frame (27) for drawing and compacting units of a pair of adjacent spinning stations in a spinning machine where each drawing unit has a pressure roller (12) which supplies the bundle of fibres to the compacting unit and which rotates a pressure roller (19) of the compacting unit, by means of a belt transmission (20). The frame comprises:

- two pairs of seats (29) for housing and keeping parallel and spaced apart two axles (21, 22) on which the pressure rollers (12) of the drawing units and the pressure rollers (19) of the compacting units of the two adjacent stations are mounted rotatably,
- longitudinal arms (42) acting on the axles (21, 22) in order to keep the pressure rollers (12, 19) of the same spinning station aligned longitudinally, and
- transverse arms (43) for keeping the transmission belts (20) of the two adjacent stations, respectively, aligned with ring gears (25, 26) fixed for rotation with the pressure rollers.

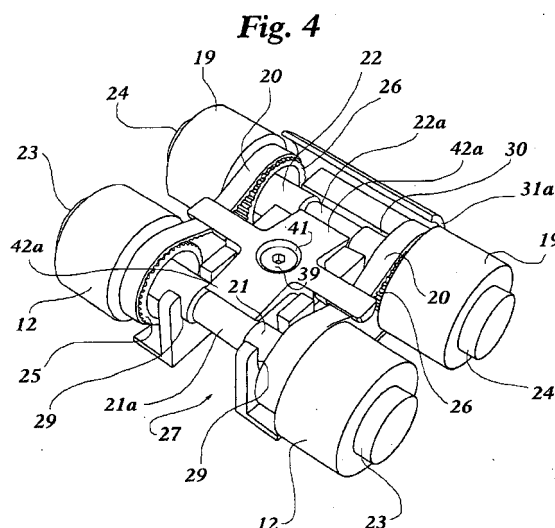

EP 1 162 293 A8