



(19)

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 170 505 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**27.10.2004 Bulletin 2004/44**

(51) Int Cl.<sup>7</sup>: **F04B 33/00**

(21) Application number: **01116244.3**

(22) Date of filing: **04.07.2001**

**(54) Vacuum Pump**

Vakuumpumpe

Pompe à vide

(84) Designated Contracting States:  
**ES GR IT**

• **Nishda, Junichi**  
**Kurita-gun, Shiga 520-3034 (JP)**

(30) Priority: **04.07.2000 JP 2000201887**

(74) Representative: **Grünecker, Kinkeldey,**  
**Stockmair & Schwanhäusser Anwaltssozietät**  
**Maximilianstrasse 58**  
**80538 München (DE)**

(43) Date of publication of application:  
**09.01.2002 Bulletin 2002/02**

(56) References cited:  
**EP-A- 0 041 225** **US-A- 5 494 410**  
**US-A- 5 788 463**

(73) Proprietor: **MATSUSHITA ELECTRIC INDUSTRIAL**  
**CO., LTD.**  
**Kadoma-shi, Osaka 571-8501 (JP)**

(72) Inventors:

• **Numoto, Hironao**  
**Otsu-shi, Shiga 520-2101 (JP)**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

**[0001]** The present invention relates to a vacuum pump. In particular, it relates to a vacuum pump used for suctioning air from an indoor unit of air conditioner prior to charging the indoor unit with refrigerant gas during installation of the air conditioner.

**[0002]** From document US-A-5494410 there is already known a vacuum pump comprising a cylinder provided with a top end plate covering a top end of said cylinder and a bottom end plate covering a bottom end of said cylinder, a piston for reciprocating between a top position and a bottom position in said cylinder, said position having an upper surface and a lower surface, and dividing an interior of said cylinder into two chambers, a piston shaft 3 connected to the upper surface of said piston, said piston shaft protruding outwardly from said cylinder through the top end plate of said cylinder, a suction check valve disposed to the top end plate of said cylinder for allowing suction air to said cylinder pass through, but not allowing discharge air from said cylinder pass through, a discharge check valve disposed to the bottom end plate of said cylinder, for allowing discharge air from said cylinder pass through, but not allowing suction air to said cylinder pass through, wherein an upper chamber and a lower chamber in said cylinder alternatively suctions air from a subject of suctioning through said suction check valve on the top end plate, and discharge the suctioned air through the outer space through said discharge check valve on the bottom end plate in synchronization with the reciprocatory movement of said piston.

**[0003]** Charging of an indoor unit with refrigerant gas has been made heretofore in a manner that a main outdoor unit is filled with an amount of refrigerant gas that is more than the regular amount with an extra portion reserved for air-purge, the refrigerant gas is used to expel air in the indoor unit and its connecting tubes through a two-way valve on a liquid side, and thereby the air is discharged into the atmosphere together with the refrigerant gas from a service port in a three-way valve on a gas side. However, this charging method releases the refrigerant gas into the atmosphere, which is the concern for depletion of ozone layer and global warming. Another charging method using a motor-driven vacuum pump is a method, in which refrigerant gas is introduced into connecting tubes and the indoor unit through the two-way valve on the liquid side, after the connecting tubes and the indoor unit are decompressed sufficiently by suctioning air with the motor-driven vacuum pump from the service port in the three-way valve on the gas side. This charging method using the motor-driven vacuum pump is desirable because it does not release the refrigerant gas into the atmosphere. However, it is quite difficult to use the motor-driven vacuum pump on such place as rooftop where the work condition is not right. In addition, the charging method using motor-driven vacuum pump generally takes a longer time as com-

pared to the charging method using the refrigerant gas in the outdoor unit to purge air.

**[0004]** The present invention is intended to provide an easy-to-use vacuum pump that simplifies the work of suctioning air from the indoor unit.

**[0005]** In a vacuum pump of the present invention, there are provided with a suction check valve and a discharge check valve attached to a top end plate of a cylinder. In the like manner, another suction check valve and another discharge check valve are also attached to a bottom end plate. The suction check valve on the top end plate and the suction check valve on the bottom end plate are connected together into one hose, which is then connected to an indoor unit. Both the discharge check valve on the top end plate and the discharge check valve on the bottom end plate are kept open to the outer space. A piston divides an interior of a cylinder into two chambers, an upper chamber and a lower chamber. When the piston is forced to reciprocate, the upper chamber and the lower chamber in the cylinder suction air alternately from the indoor unit through the suction check valves, and discharge the suctioned air to the outer space through the discharge check valves. Subsequently, as the piston continues its reciprocal motion, a difference in pressure between the two chambers decreases gradually from the initial start, and the interior of the cylinder and the indoor unit is decompressed sufficiently. Using the vacuum pump of this invention, there can be achieved a reduction of deleterious oxygen in the air remaining in the refrigeration cycle to a level sufficient to maintain reliability of the refrigeration cycle, and completion of installing the air conditioner within a short period of time. Besides, the vacuum pump of this invention can be operated manually.

**35** Fig. 1 is a diagrammatic illustration of an air conditioner in connection with an exemplary embodiment of the present invention;

**40** Fig. 2 is a schematic view depicting a vacuum pump of an exemplary embodiment of this invention, and hose connections thereto;

Fig. 3 is a sectional view of a check valve used in this exemplary embodiment of the invention;

**45** Fig. 4 is a sectional view of the check valve taken along a line A-A in Fig. 3;

Fig. 5 is a schematic illustration showing an example of shaft seal in the vacuum pump of this invention;

**50** Fig. 6 is a structural illustration of a filter used in the exemplary embodiment of this invention;

Fig. 7 is a graph showing a relation between number of piston strokes and internal pressure of a cylinder as measured in a third exemplary embodiment of this invention;

Fig. 8 is a schematic view depicting hose connections routing a vacuum pump of a fourth exemplary embodiment of this invention;

Fig. 9 is a structural illustration of a check valve

used in the fourth exemplary embodiment of this invention;

Fig. 10 is an enlarged view showing an essential portion of the vacuum pump of Fig. 8;

Fig. 11 is a schematic illustration showing another example of shaft seal in the vacuum pump of this invention;

Fig. 12 is a structural illustration of an airflow detector used in the exemplary embodiments of this invention;

Fig. 13 is a structural illustration of another airflow detector; and

Fig. 14 is a structural illustration of still another airflow detector.

### (First Exemplary Embodiment)

**[0006]** Fig. 1 illustrates an overall configuration of a split type air conditioner of this exemplary embodiment. An outdoor unit A is provided with a compressor 1, a four-way valve 2, an outdoor heat exchanger 3, a choking unit 4, a drier 5, a two-way valve 7 on liquid side, and a three-way valve 8 on gas side. An indoor unit B is provided with an indoor heat exchanger 6.

**[0007]** The drier 5 removes moisture present in the indoor unit B and connecting tubes 9 and 10. The connecting tubes 9 and 10 used for connecting the outdoor unit A and the indoor unit B are connected respectively to the two-way valve 7 on the liquid side and the three-way valve 8 on the gas side of the outdoor unit A. The two-way valve 7 on the liquid side is provided with a threaded tap 7a, and the connecting tube 9 is connected to the outdoor unit A by opening this threaded tap 7a. On the other hand, the three-way valve 8 on the gas side is provided with a threaded tap 8a and a service port 8b, and the connecting tube 10 is connected to the outdoor unit A by opening this threaded tap 8a.

**[0008]** Fig. 2 shows a structure of a vacuum pump and hose connections necessary for the operation of charging refrigerant gas. A center port 12a of a gauge manifold 12 is connected to the service port part 8b in the three-way valve 8 on the gas side with a pressure-tight hose 11, and a low-pressure side port 12b of the gauge manifold 12 is connected to the vacuum pump with another pressure-tight hose 13. A piston 15 of the vacuum pump is placed within a cylinder 14 made of aluminum in a manner that it divides an interior of the cylinder 14 into two chambers. The piston 15 is connected with a manual handlebar 17 via a piston shaft 16 made of stainless steel which extends from an upper surface of it. Suction / discharge ports 14a and 14b are disposed respectively to exterior surfaces of the top end plate and the bottom end plate of the cylinder 14. The suction / discharge port 14a connects the cylinder 14 to the low-pressure side port 12b of the gauge manifold 12 through a suction check valve 18a, a filter 19a, and the pressure-tight hose 13. The suction check valve 18a stops discharge air from the cylinder 14, but it passes only air

suctioned into the cylinder 14. A discharge check valve 20a, which diverges from there, stops air from being suctioned into the cylinder 14, and passes only the air discharged from the cylinder 14. The suction / discharge port 14b connects the cylinder 14 to the low-pressure side port 12b of the gauge manifold 12 through a suction check valve 18b, another filter 19b, and the pressure-tight hose 13. The suction check valve 18b stops air discharged from the cylinder 14, but it passes only air suctioned into the cylinder 14. A discharge check valve 20b, which diverges from there, stops air from being suctioned into the cylinder 14, and passes only the air discharged from the cylinder 14.

**[0009]** Fig. 3 and 4 depict a structure of the check valves 18a, 18b, 20a, and 20b. A copper tube 181 is provided with roll-formed grooves in two locations, and a valve retainer seat 182 made of brass is fixed to a groove 181a. When there is a flow of air in a direction shown by an arrow, the airflow is not obstructed, although a valve body 183 made of nylon is pressed against a groove 181b by the airflow. When the air flows in an opposite direction of the arrow, the nylon valve body 183 stops the airflow, as it is pressed against the valve retainer seat 182 by the airflow. Thus, the air flows only in the direction of the arrow.

**[0010]** As shown in Fig. 5, there are O-rings 21a and 21b disposed doubly to a part of the top end plate of the cylinder 14, where the piston shaft 16 penetrates through, for sealing the shaft. The double O-ring prevents foreign particles, which tend to cause bites into the O-rings, from adhering to the piston shaft 16.

**[0011]** Fig. 6 shows an internal structure of the filter 19. The filter 19 has a cylindrical configuration. The air entering inside of the filter 19 is deflected into radial direction as it immediately strikes on a wall, and eventually led to an exit after passing through a pulp film 191 placed in it. The pulp film 191 thus catches dust. In addition, the dust caught in it can be examined visually, if the cylinder of the filter 19 is made of glass or resin having transparency.

**[0012]** The piston 15 is moved to reciprocate between a top position and a bottom position in the cylinder 14. When the manual handlebar 17 is pulled to shift the piston 15 toward a direction "A", air in the indoor unit B and the connecting tube 9 is pulled into a lower chamber 14B within the cylinder from the service port 8b through the pressure-tight hose 11, the gauge manifold 12, the pressure-tight hose 13, the filter 19b, the suction check valve 18b and the suction / discharge port 14b. On the other hand, air in an upper chamber 14A within the cylinder is discharged into the outer space from the suction / discharge port 14a through the discharge check valve 20a. Next, when the manual handlebar 17 is pushed to move the piston 15 toward another direction "B", air in the indoor unit B and the connecting tube 9 is pulled into the cylinder chamber 14A from the service port 8b through the pressure-tight hose 11, the gauge manifold 12, the pressure-tight hose 13, the filter 19b, the suction check

valve 18a and the suction / discharge port 14a. On the other hand, air within the cylinder chamber 14B is discharged into the atmosphere from the suction / discharge port 14b through the discharge check valve 20b. The interior of the cylinder is continuously decompressed in this manner, regardless of which direction the piston 15 is moved between the direction "A" and the direction "B". A satisfiable state of negative pressure can be attained eventually by repeating the reciprocating motion of the piston 15.

**[0013]** In the initial stage of using the vacuum pump, there produces a large difference in pressure between the upper chamber 14A and the lower chamber 14B within the cylinder. However, this difference of pressure decreases gradually as the piston continues to reciprocate. The shaft seal is doubled with the O-rings in order to maintain sufficiently the difference in pressure between the negative pressure (30torr or less) within the cylinder 14 and the atmosphere (760torr), and to keep the leakage of air as small as possible (Fig. 5).

**[0014]** The following procedure describes the work involved in charging the indoor unit with refrigerant gas, using the vacuum pump of this invention.

1) The pressure-tight hose 11 is connected at its one end to the service port 8b, to make it in continuity with the indoor unit B, and the connecting tubes 9 and 10, as shown in Fig. 1. Another end of the pressure-tight hose 11 is connected with a center port 12a of the gauge manifold 12, as shown in Fig. 2. The pressure-tight hose 13 is connected at its one end to a low-pressure side port 12b of the gauge manifold 12, and another end to the hoses of the vacuum pump. A low-pressure side knob 12c of the gauge manifold 12 is turned to an open position to render the pressure-tight hose 13 in communication with the pressure-tight hose 11.

2) As the manual handlebar 17 is reciprocated in the directions of "A" and "B", the interior of the cylinder 14, and therefore the interiors of the indoor unit B and the connecting tubes 9 and 10, gradually reaches a state of sufficient negative pressure. This state of sufficient negative pressure is checked with a low-pressure gauge 12d on the gauge manifold 12. The low-pressure side knob 12c of the gauge manifold 12 is turned to a close position immediately thereafter.

3) An internal pressure of the connecting tubes 9 and 10, and tubing in the indoor unit B is raised by a small extent (approx. 0.2 kgf/cm<sup>2</sup>) by slightly loosening the threaded tap 7a of the two-way valve 7 on the liquid side, and introducing refrigerant gas from the outdoor unit A.

4) The pressure-tight hose 11 is detached from the service port 8b, and the threaded tap 7a of the two-way valve 7 on the liquid side is turned open completely. Finally, a threaded tap 8a of the three-way valve 8 on the gas side is also opened completely.

**[0015]** Here, a ratio of C1/C2 defines an efficiency value of the vacuum pump of this invention, in which C1 represents a capacity bounded from a lower surface of the piston to the two check valves 18b and 20b when

5 the piston is at its top position, and C2 represents another capacity from the lower surface of the piston to the two check valves 18b and 20b when the piston is at its bottom position.

**[0016]** As described above, the vacuum pump of this 10 invention uses the upper chamber formed above the piston and the lower chamber formed below the piston, to suction air from the indoor unit. An air suctioning efficiency of the upper chamber is smaller than that of the lower chamber, because a maximum capacity of the 15 upper chamber is smaller than that of the lower chamber by a portion of the space occupied by the piston shaft. It is desirable to increase the capacity from the upper surface of the piston to the two check valves 18a and 20a, when the piston is at its top position, nearly equal 20 to the C2 capacity, in order to bring up the air suctioning efficiency of the upper chamber close to that of the lower chamber.

#### (Second Exemplary Embodiment)

**[0017]** In this exemplary embodiment, an interior volume of indoor unit B, including an indoor heat exchanger 6, and connecting tubes 9 and 10 measures 1.5 liters. The capacities C1 and C2 that determine an efficiency 30 value of the vacuum pump are: C1 = 205ml; and C2 = 5ml. Of the capacity C1, a capacity of the cylinder is 200ml (i.e. 27mm in diameter by 350mm). An efficiency value of the vacuum pump is thus calculated as C1/C2 = 205/5 = 41. The interior of the cylinder can be decompressed to 30torr, when operated according to the steps 35 1) and 2) of the above-described procedure for charging refrigerant gas.

#### (Third Exemplary Embodiment)

**[0018]** In this exemplary embodiment, an interior volume of indoor unit B, including an indoor heat exchanger 6, and connecting tubes 9 and 10 measures 1.5 liters. The capacities C1 and C2 that determine an efficiency 45 value of the vacuum pump are: C1 = 302ml; and C2 = 5ml. Of the capacity C1, a capacity of the cylinder is 297ml (i.e. 29mm in diameter by 450mm). An efficiency value of the vacuum pump is calculated as C1/C2 = 302/5 = 60.4. The interior of the cylinder can be decompressed to 22torr, when operated according to the steps 50 1) and 2) of the above-described procedure for charging refrigerant gas.

**[0019]** A progress of decompression in this operation is shown in Fig. 7 with a relation between number of 55 strokes and internal pressure. For the refrigeration cycles of the second and the third exemplary embodiments containing refrigerant of R410A and refrigeration oil of ester group, reliability tests were performed for

5000 hours under the conditions that a discharge temperature from the compressor is set to 115°C, and both the indoor unit and the outdoor unit are kept at 40°C as a high-temperature cooling condition. No abnormality of especial importance was produced as the result.

#### (Fourth Exemplary Embodiment)

**[0020]** Fig. 8 shows hose connections of the vacuum pump of this exemplary embodiment. Like numerals have been used throughout to represent like components as in Fig. 2, and their description will be skipped.

**[0021]** In this exemplary embodiment, a gauge manifold 12 and a pressure-tight hose 11 are omitted as opposed to that shown in Fig. 2, and a pressure-tight hose 13 is connected to the service port 8b shown in Fig. 1. A discharge check valve 23a and a suction check valve 25a are mounted directly to a top end plate of a cylinder, and another discharge check valve 23b and another suction check valve 25b are mounted directly to a bottom end plate of the cylinder. Airflow detectors 24a and 24b are attached to the discharge check valves 23a and 23b respectively. The above-described structure shown in Fig. 3 and 4 is employed for the discharge check valves 23a and 23b. The structure shown in Fig. 9 is employed for the suction check valves 25a and 25b.

**[0022]** Fig. 9 depicts a longitudinal section of the suction check valve, in which grooves are roll-formed in a copper pipe 231 at two places. A valve retainer seat 232 made of brass is fixed to one groove 231a, and another valve retainer seat 235 also made of brass is fixed to another groove 231b. A thin plate 234 made of nylon film and connected to a helical spring 233 is thrust against the valve retainer seat 235 with the spring force to block an airflow passage in an opposite direction of an arrow. Therefore, the air flows only in a direction of the arrow when the air pressure exceeds the force of spring. An airflow passage in the upstream side of the valve retainer seat 235 is tapered to increase the air pressure to some extent by throttling the suctioned air.

**[0023]** In this exemplary embodiment, capacities C1 and C2 that determine an efficiency value of the vacuum pump are: C1 = 203.5ml; and C2 = 3.5ml. Of the capacity C1, a capacity of the cylinder is 200ml (i.e. 27mm in diameter by 350mm). An efficiency value of the vacuum pump is calculated as  $C1/C2 = 203.5/3.5 = 58.1$ .

**[0024]** Fig. 10 shows definitively the capacity C2 bounded from a lower surface of the piston 15 to the suction check valve 25b and the discharge check valve 23b when the piston 15 is at its lowest position. This exemplary embodiment reduces the capacity C2, by mounting the suction check valve 25b and the discharge check valve 23b directly to the bottom end plate of the cylinder 14.

**[0025]** A ring 21 C having a gourd-shaped cross section is placed as a shaft seal in a part where the piston shaft 16 penetrates the top end plate of the cylinder 14, as shown in Fig. 11. The gourd-shaped ring 21 C seals

the shaft doubly.

**[0026]** Fig. 12 depicts an internal structure of flow detectors 24a and 24b. A shaft 241 is positioned in a center of a film 242 along its orthogonal direction. An arrow indicates a direction of airflow from the cylinder to a discharge port. The film 242 moves when air from the check valve strikes upon it. An operator is able to see if there still exists a certain amount of air to be discharged by observing a movement of the film 242. He then stops operation of the vacuum pump when he so judges that there hardly is any air remaining to be discharged from the discharge port. In this exemplary embodiment, it is judged that there hardly exists any air to be discharged from the discharge port, when an internal pressure of the cylinder reaches 20torr or lower.

**[0027]** Other airflow detectors having such internal structures as shown in Fig. 13 and 14 may also be used. In Fig. 13, a silicone film 244 is arranged in a manner to confront the direction of airflow. The silicone film deforms into a convexed dome-like shape as shown by a numeral 245 when there is a flow of air. The operator is able to see if there is a certain amount of air to be discharged according to a shape of the silicone film. In Fig. 14, a float 243 having a rather flat triangular pyramid shape moves by the air flowing toward it from the check valve. The operator is able to see if there is a certain amount of air to be discharged by observing a movement of the float 243.

**[0028]** The efficiency value of C1/C2 is important for the vacuum pump of this invention. An internal pressure of 30torr or lower in the cylinder can be attained when the formula of  $C1/C2 \geq 40$  is satisfied in designing. Furthermore, the formula of  $C1/C2 \geq 40$  is necessary in order to assure reliability of the refrigeration cycle for an extended period of time. If the value of C1/C2 is too large, it gives rise to a problem in workability, although it makes no difficulty in gaining a degree of vacuum.

**[0029]** The vacuum pump of this invention is provided with a double seal for the piston shaft, using double O-ring or a gourd-shaped ring made of elastomer having approximately 60 to 90 in hardness as measured by a spring type instrument of A-type (Japanese Industrial Standard K6301), such as HNBR (Hydrogenated nitrile-butadiene rubber), CR (Chloroprene rubber), EPDM (Ethylene propylene-diene), NBR (Nitrile-butadiene rubber), and the like. An outside seal of the double seal fulfills the function of removing dust that adheres to the piston shaft when the piston shaft travels outside of the cylinder. In addition, the double seal can maintain airtightness with any one of the seals even if air leakage occurs through another of the seals due to an abrupt movement of the piston shaft.

**[0030]** As an alternate structure of the check valves, a light-weight small metallic ball movably placed in a pipe may be used to construct a closing valve structure. In addition, such resins as nylon, fluorine series resins like PFA (Perfluoro-alkoxy-fluoro plastics) and PVDF (Polyvinylidene fluoride), PPS (Polyphenylene sulfide),

and the like may also be suitable to use for the check valves. It is desirable that the check valve for the inlet port is capable of blocking airflow with a difference in pressure as small as 10torr or less, and more desirably 1torr or less, since there decreases the difference between an internal pressure of the indoor unit and the connecting tubes, and an internal pressure of the cylinder, as the piston is continued to operate. In addition, it is also desirable to keep 1 ml/min or less the amount of gas leakage under the condition of 1 kgf/cm<sup>2</sup> in the difference of pressure. The reason for this is to avoid a rapid decrease in degree of vacuum theretofore attained, just as the operator stops operating the piston.

**[0031]** The piston of the vacuum pump is adaptable for operation with a foot treadle, although the piston in the above exemplary embodiments is illustrated as being operable with hand. When the earth environment is considered, this provides an advantageous effect to reduction of the environmental burden during installation of the air conditioner, because the satisfactory level of vacuum is attainable with human power using the handlebar or the treadle, as opposed to the conventional motor-driven pump.

## Claims

### 1. A vacuum pump comprising:

a cylinder (14) provided with a top end plate covering a top end of said cylinder (14) and bottom end plate covering a bottom end of said cylinder (14);

a piston (15) for reciprocating between a top position and a bottom position in said cylinder (14), said piston (15) having an upper surface and a lower surface, and dividing an interior of said cylinder into two chambers (14A, 14B);

a piston shaft (16) connected to the upper surface of said piston (15), said piston shaft (16) protruding outwardly from said cylinder through the top end plate of said cylinder;

a suction check valve (18a,25a) disposed to the top end plate of said cylinder (14), for allowing suction air to said cylinder pass through, but not allowing discharge air from said cylinder pass through;

a discharge check valve (20a,23a) disposed to the top end plate of said cylinder (14), for allowing discharge air from said cylinder pass through, but not allowing suction air to said cylinder pass through;

a suction check valve (18b,25b) disposed to the

bottom end plate of said cylinder (14), for allowing suction air to said cylinder pass through, but not allowing discharge air from said cylinder (14) pass through; and

a discharge check valve (20b,23b) disposed to the bottom end plate of said cylinder (14), for allowing discharge air from said cylinder pass through, but not allowing suction air to said cylinder pass through,

wherein an upper chamber (14A) and a lower chamber (14B) in said cylinder alternately suction air from a subject of suctioning through said suction check valve (18a,25a) on the top end plate and said suction check valve (18b,25b) on the bottom end plate, and discharge the suctioned air to the outer space through said discharge check valve (20a,23a) on the top end plate and said discharge check valve (20b,23b) on the bottom end plate, in synchronization with the reciprocatory movement of said piston (15).

### 2. The vacuum pump as set forth in claim 1 having a structure satisfying a formula, which is $C1/C2 \geq 40$ , where

C1 represents a capacity bounded from the lower surface of said piston (15) to said suction check valve (18b,25b) and said discharge check valve (20b,23b) disposed to the bottom end plate of said cylinder (14) when said piston (15) is at the top position, and

C2 represents a capacity bounded from the lower surface of said piston (15) to said suction check valve (18b,25b) and said discharge check valve (20b,23b) disposed to the bottom end plate of said cylinder (14) when said piston (15) is at the bottom position.

### 3. The vacuum pump as set forth in any of claim 1 and claim 2, wherein an airflow passage (14a) to said suction check valve disposed (18a,25a) to the top end plate of said cylinder (14) and another airflow passage (14b) to said suction check valve (18b, 25b) disposed to the bottom end plate of said cylinder (14) are connected together into one airflow passage outside said cylinder.

### 4. The vacuum pump as set forth in any one of claim 1 through claim 3 further having a handlebar (17) attached to a top end of said piston (15) shaft protruding outwardly from said cylinder (14) for manual operation.

### 5. The vacuum pump as set forth in any one of claim 1 through claim 4 further having filters (19a,19b),

- each of said filters connected detachably to a hose comprising the airflow passage to said suction check valve (18,25a) disposed to the top end plate of said cylinder (14), and another hose comprising the airflow passage to said suction check valve (18b,25b) disposed to the bottom end plate of said cylinder.
6. The vacuum pump as set forth in claim 5, wherein said filter (19a,19b) has a transparent container. 10
7. The vacuum pump as set forth in any one of claim 1 through claim 6 further having an airflow detector (24a,24b) connected to at least one of said discharge check valve (23a) disposed to the top end plate of said cylinder and said discharge check valve (23b) disposed to the bottom end plate of said cylinder (14). 15
8. The vacuum pump as set forth in claim 7, wherein said airflow detector (24a,24b) is provided with a film or a movable element moved by the airflow. 20
9. The vacuum pump as set forth in any one of claim 1 through claim 8 further comprising a shaft seal (21a,21b) disposed to a part of the top end plate of said cylinder (14) where said piston shaft (16) passes through. 25
10. The vacuum pump as set forth in claim 9, wherein said shaft seal (21a,21b) is formed of elastomer, and seals said piston shaft (16) at least double. 30
11. The vacuum pump as set forth in any one of claim 1 through claim 10 wherein a minimum operable pressure difference of said suction check valve is (10 torr)  $1,3 \cdot 10^3$  Pa or less. 35
12. The vacuum pump as set forth in claim 11, wherein said suction check valve (25a,25b) has a structure comprising a thin plate (234) made of resin film and a spring (233) for blocking the airflow when said thin plate (234) is thrust against the airflow passage with said spring (233). 40
13. The vacuum pump as set forth in claim 12, wherein said airflow passage is tapered in an upstream side of a point where the airflow is blocked. 45
- Patentansprüche**
1. Vakuumpumpe mit:
- einem Zylinder (14) mit einer oberen Endplatte, die das obere Ende des Zylinders (14) bedeckt, und einer unteren Endplatte, die ein unteres Ende des Zylinders (14) bedeckt;
- 5
- 50
- einem Kolben (15), der sich zwischen einer oberen Position und einer unteren Position im Zylinder (14) hin- und herbewegt, wobei der Kolben (15) eine Oberseite und eine Unterseite aufweist und das Innere des Zylinders in zwei Kammern (14A, 14B) unterteilt;
- einer Kolbenwelle (16), die mit der Oberseite des Kolbens (15) verbunden ist, wobei die Kolbenwelle (16) durch die obere Endplatte des Zylinders aus dem Zylinder nach außen herausragt;
- einem Ansaug-Absperrventil (18a, 25a), das an der oberen Endplatte des Zylinders (14) angeordnet ist und das Hindurchleiten von Ansaugluft zu dem Zylinder ermöglicht, jedoch nicht das Hindurchleiten von Abluft aus dem Zylinder gestattet;
- einem Auslass-Absperrventil (20a, 23a), das an der oberen Endplatte des Zylinders (14) angeordnet ist und das Hindurchleiten von Abluft aus dem Zylinder ermöglicht, jedoch nicht das Hindurchleiten von Ansaugluft zu dem Zylinder gestattet;
- einem Ansaug-Absperrventil (18b, 25b), das an der unteren Endplatte des Zylinders (14) angeordnet ist und das Hindurchleiten von Ansaugluft zu dem Zylinder ermöglicht, jedoch nicht das Hindurchleiten von Abluft aus dem Zylinder (14) gestattet, und
- einem Auslass-Absperrventil (20b, 23b), das an der unteren Endplatte des Zylinders (14) angeordnet ist und das Hindurchleiten von Abluft aus dem Zylinder ermöglicht, jedoch nicht das Hindurchleiten von Ansaugluft zu dem Zylinder gestattet,
- wobei eine obere Kammer (14A) und eine untere Kammer (14B) in dem Zylinder synchron zu der Hin- und Herbewegung des Kolbens (15) abwechselnd Luft durch das Ansaug-Absperrventil (18a, 25a) auf der oberen Endplatte und durch das Ansaug-Absperrventil (18b, 25b) auf der unteren Endplatte aus einem Saugobjekt ansaugen und die angesaugte Luft durch das Auslass-Absperrventil (20a, 23a) auf der oberen Endplatte und das Auslass-Absperrventil (20b, 23b) auf der unteren Endplatte an die äußere Umgebung abgeben.
2. Vakuumpumpe nach Anspruch 1 mit einem Aufbau, der eine Formel erfüllt, die  $C1/C2 \geq 40$  lautet, wobei
- 55
- C1 eine Kapazität darstellt, die von der Unterseite des Kolbens (15) bis zum Ansaug-Ab-

sperrventil (18b, 25b) und zum an der unteren Endplatte des Zylinders (14) angeordneten Auslass-Absperrventil (20b, 23b) begrenzt ist, wenn sich der Kolben (15) in der oberen Position befindet, und

C2 eine Kapazität darstellt, die von der Unterseite des Kolbens (15) bis zum Ansaug-Absperrventil (18b, 25b) und zum an der unteren Endplatte des Zylinders (14) angeordneten Auslass-Absperrventil (20b, 23b) begrenzt ist, wenn sich der Kolben (15) in der unteren Position befindet.

3. Vakuumpumpe nach Anspruch 1 oder 2, wobei sich ein Luftstromkanal (14a) zu dem Ansaug-Absperrventil (18a, 25a) auf der oberen Endplatte des Zylinders (14) und ein weiterer Luftstromkanal (14b) zu dem Ansaug-Absperrventil (18b, 25b) auf der unteren Endplatte des Zylinders (14) außerhalb des Zylinders zu einem Luftstromkanal vereinigen.

4. Vakuumpumpe nach einem der Ansprüche 1 bis 3, die weiterhin eine Griffstange (17) aufweist, die am oberen Ende der Welle von Kolben (15) befestigt ist und zur manuellen Betätigung aus dem Zylinder (14) herausragt.

5. Vakuumpumpe nach einem der Ansprüche 1 bis 4, die weiterhin Filter (19a, 19b) aufweist, von denen jeder abnehmbar mit einem Schlauch verbunden ist, der den Luftstromkanal zum Ansaug-Absperrventil (18, 25a) auf der oberen Endplatte des Zylinders (14) umfasst, und mit einem weiteren Schlauch, der den Luftstromkanal zum Ansaug-Absperrventil (18b, 25b) auf der unteren Endplatte des Zylinders umfasst.

6. Vakuumpumpe nach Anspruch 5, wobei der Filter (19a, 19b) einen transparenten Behälter aufweist.

7. Vakuumpumpe nach einem der Ansprüche 1 bis 6, die weiterhin einen Luftstromdetektor (24a, 24b) aufweist, der wenigstens entweder mit dem Auslass-Absperrventil (23a) an der oberen Endplatte des Zylinders oder dem Auslass-Absperrventil (23b) an der unteren Endplatte des Zylinders (14) verbunden ist.

8. Vakuumpumpe nach Anspruch 7, wobei der Luftstromdetektor (24a, 24b) einen Film oder ein bewegliches Element aufweist, die von dem Luftstrom bewegt werden.

9. Vakuumpumpe nach einem der Ansprüche 1 bis 8, die weiterhin eine Wellendichtung (21a, 21b) umfasst, die an einem Teil der oberen Endplatte des Zylinders (14) angeordnet ist, durch den die Kol-

benwelle (16) verläuft.

10. Vakuumpumpe nach Anspruch 9, wobei die Wellendichtung (21a, 21b) aus einem Elastomer besteht und die Kolbenwelle (16) wenigstens doppelt abdichtet.

11. Vakuumpumpe nach einem der Ansprüche 1 bis 10, wobei ein Mindestbetriebsdruckunterschied des Ansaug-Absperrventils (10 Torr)  $1,3 \times 10^3$  Pa oder weniger beträgt.

12. Vakuumpumpe nach Anspruch 11, wobei das Ansaug-Absperrventil (25a, 25b) einen Aufbau hat, der eine dünne Platte (234) aus einem Harzfilm und eine Feder (233) zum Absperren des Luftstroms umfasst, wenn die dünne Platte (234) mit der Feder (233) gegen den Luftstromkanal geschoben wird.

13. Vakuumpumpe nach Anspruch 12, wobei der Luftstromkanal stromaufwärts von einem Punkt, an dem der Luftstrom abgesperrt wird, konisch zuläuft.

## 25 Revendications

### 1. Pompe à vide comprenant :

un cylindre (14) muni d'une plaque d'extrémité de sommet recouvrant une extrémité de sommet dudit cylindre (14) et d'une plaque d'extrémité de fond recouvrant une extrémité de fond dudit cylindre (14) ;

un piston (15) pour déplacement en va-et-vient entre une position de sommet et une position de fond dans ledit cylindre (14), ledit piston (15) comprenant une surface supérieure et une surface inférieure, et divisant un intérieur dudit cylindre en deux chambres (14A, 14B) ;

un arbre de piston (16) raccordé à la surface supérieure dudit piston (15), ledit arbre de piston (16) dépassant vers l'extérieur dudit cylindre à travers la plaque d'extrémité de sommet dudit cylindre ;

un clapet de non-retour d'aspiration (18a, 25a) disposé au niveau de la plaque d'extrémité de sommet dudit cylindre (14), pour permettre que passe l'air d'aspiration arrivant audit cylindre, mais ne permettant pas que passe l'air d'évacuation provenant dudit cylindre ;

un clapet de non-retour d'évacuation (20a, 23a) disposé au niveau de la plaque d'extrémité de sommet dudit cylindre (14), pour permettre que passe l'air d'évacuation provenant dudit cylin-

dre, mais ne permettant pas que passe l'air d'aspiration arrivant audit cylindre ;

un clapet de non-retour d'aspiration (18b,25b) disposé au niveau de la plaque d'extrémité de fond dudit cylindre (14), pour permettre que passe l'air d'aspiration arrivant audit cylindre , mais ne permettant pas que passe l'air d'évacuation provenant dudit cylindre (14) ; et

un clapet de non-retour d'évacuation (20b, 23b) disposé au niveau de la plaque d'extrémité de sommet dudit cylindre (14), pour permettre que passe l'air d'évacuation provenant dudit cylindre, mais ne permettant pas que passe l'air d'aspiration arrivant audit cylindre,

dans lequel une chambre supérieure (14A) et une chambre inférieure (14B) dans ledit cylindre aspirent en alternance l'air provenant d'un objet d'aspiration à travers ledit clapet de non-retour d'aspiration (18a, 25a) sur la plaque d'extrémité de sommet et à travers ledit clapet de non-retour d'aspiration (18a, 25a) sur la plaque d'extrémité de fond, et évacuent l'air aspiré vers l'espace extérieur à travers ledit clapet de non-retour d'évacuation (20a, 23a) sur la plaque d'extrémité de sommet et à travers ledit clapet de non-retour d'évacuation (20a, 23a) sur la plaque d'extrémité de fond, en synchronisation avec le déplacement en va-et-vient dudit piston (15).

2. Pompe à vide selon la revendication 1, possédant une structure satisfaisant une formule, laquelle est  $C1/C2 \geq 40$ , où

$C1$  représente une capacité délimitée de la surface inférieure dudit piston (15) audit clapet de non-retour d'aspiration (18b, 25b) et audit clapet de non-retour d'évacuation (20b, 23b) disposé au niveau de la plaque d'extrémité de fond dudit cylindre (14) lorsque ledit piston (15) occupe la position de sommet, et

$C2$  représente une capacité délimitée de la surface inférieure dudit piston (15) audit clapet de non-retour d'aspiration (18b, 25b) et audit clapet de non-retour d'évacuation (20b, 23b) disposé au niveau de la plaque d'extrémité de fond dudit cylindre (14) lorsque ledit piston (15) occupe la position de fond.

3. Pompe à vide selon l'une quelconque de la revendication 1 et 2, dans laquelle un passage d'écoulement d'air (14a) vers ledit clapet de non-retour d'aspiration(18b,25b) disposé au niveau de la plaque d'extrémité de sommet dudit cylindre (14) et un autre passage d'écoulement d'air (14b) vers ledit clapet de non-retour d'aspiration(18b, 25b) disposé

au niveau de la plaque d'extrémité de fond dudit cylindre (14) sont raccordés ensemble en un seul passage d'écoulement d'air à l'extérieur dudit cylindre.

- 5 4. Pompe à vide selon l'une quelconque des revendications 1 à 3, comprenant en outre une barre de manipulation (17) fixée à une extrémité de sommet dudit arbre de piston (15) dépassant vers l'extérieur dudit cylindre (14) pour actionnement manuel.
- 10 5. Pompe à vide selon l'une quelconque des revendications 1 à 4, comprenant en outre des filtres (19a, 19b), chacun desdits filtres raccordés de manière amovible à un tuyau souple comprenant le passage d'écoulement d'air vers ledit clapet de non-retour d'aspiration (18b,25b) disposé au niveau de la plaque d'extrémité de fond dudit cylindre.
- 15 6. Pompe à vide selon la revendication 5, dans lequel ledit filtre (19a, 19b) comprend un conteneur transparent.
- 20 7. Pompe à vide selon l'une quelconque des revendications 1 à 6, comprenant en outre un détecteur d'écoulement d'air (24a, 24b) raccordé à au moins l'un dudit clapet de non-retour d'évacuation (23a) disposé au niveau de la plaque d'extrémité de sommet dudit cylindre et dudit clapet de non-retour d'évacuation (23b) disposé au niveau de la plaque d'extrémité de fond dudit cylindre (14).
- 25 8. Pompe à vide selon la revendication 7, dans laquelle ledit détecteur d'écoulement d'air (24a, 24b) est muni d'un film ou d'un élément mobile déplacé par l'écoulement d'air.
- 30 9. Pompe à vide selon l'une quelconque des revendications 1 à 8, comprenant en outre un joint d'étanchéité d'arbre (21a,21b) disposé au niveau d'une partie de la plaque d'extrémité de sommet dudit cylindre (14) que traverse ledit arbre de piston (16).
- 35 10. Pompe à vide selon la revendication 9, dans laquelle ladite joint d'étanchéité d'arbre (21a,21b) est formé d'élastomère, et étanchéifie ledit arbre de piston (16) au moins en double.
- 40 11. Pompe à vide selon l'une quelconque des revendications 1 à 10, dans laquelle une différence de pression fonctionnelle minimale dudit clapet de non-retour d'aspiration est de (10 torr)  $1,3 \cdot 10^3$  Pa ou moins.
- 45 12. Pompe à vide selon la revendication 11, dans laquelle ledit clapet de non-retour d'aspiration (25a, 25b) possède une structure comprenant une plaque mince (234) constituée d'un film résinique et d'un ressort (233) pour bloquer l'écoulement d'air lors-

que le ladite plaque mince (234) est poussé contre  
le passage d'écoulement d'air par ledit ressort  
(233).

- 13.** Pompe à vide selon la revendication 12, dans laquelle ledit passage d'écoulement d'air est de forme conique dans un côté amont d'un point où l'écoulement d'air est bloqué. 5

10

15

20

25

30

35

40

45

50

55

FIG. 1

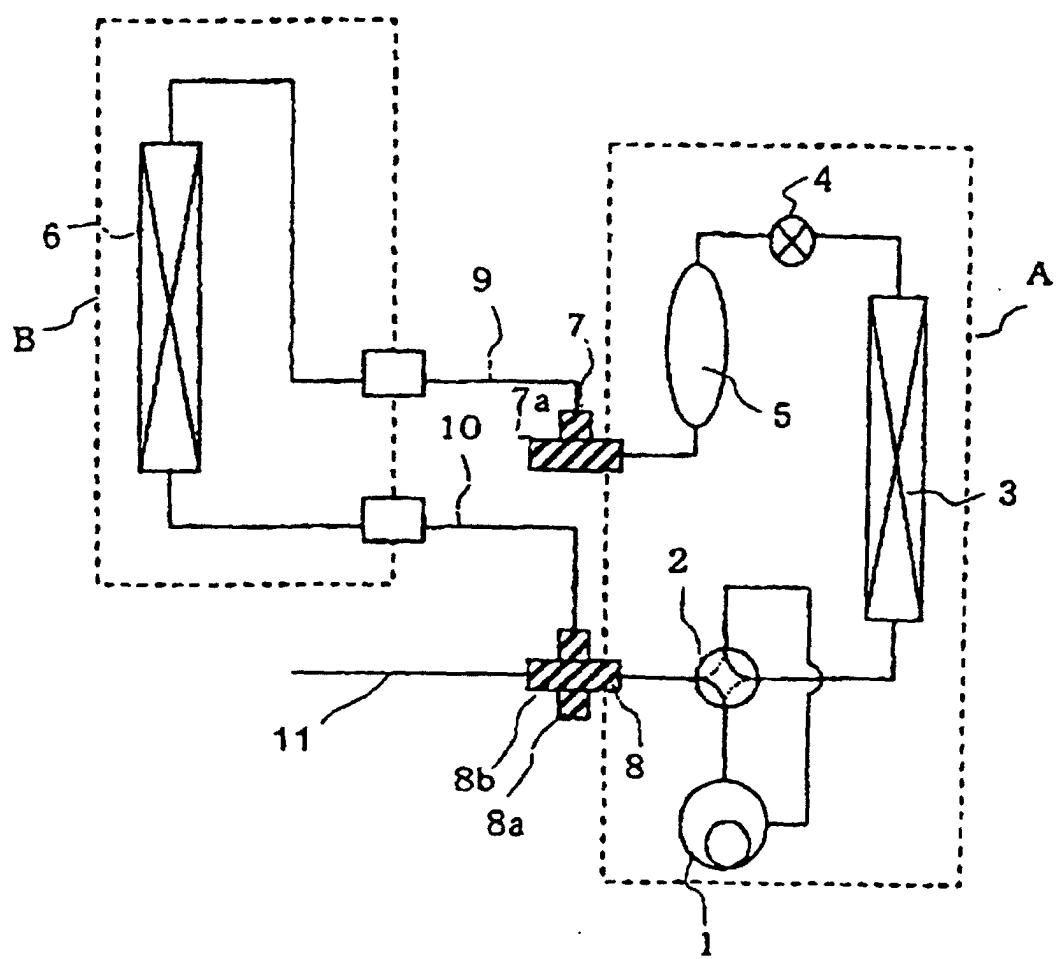


FIG. 2

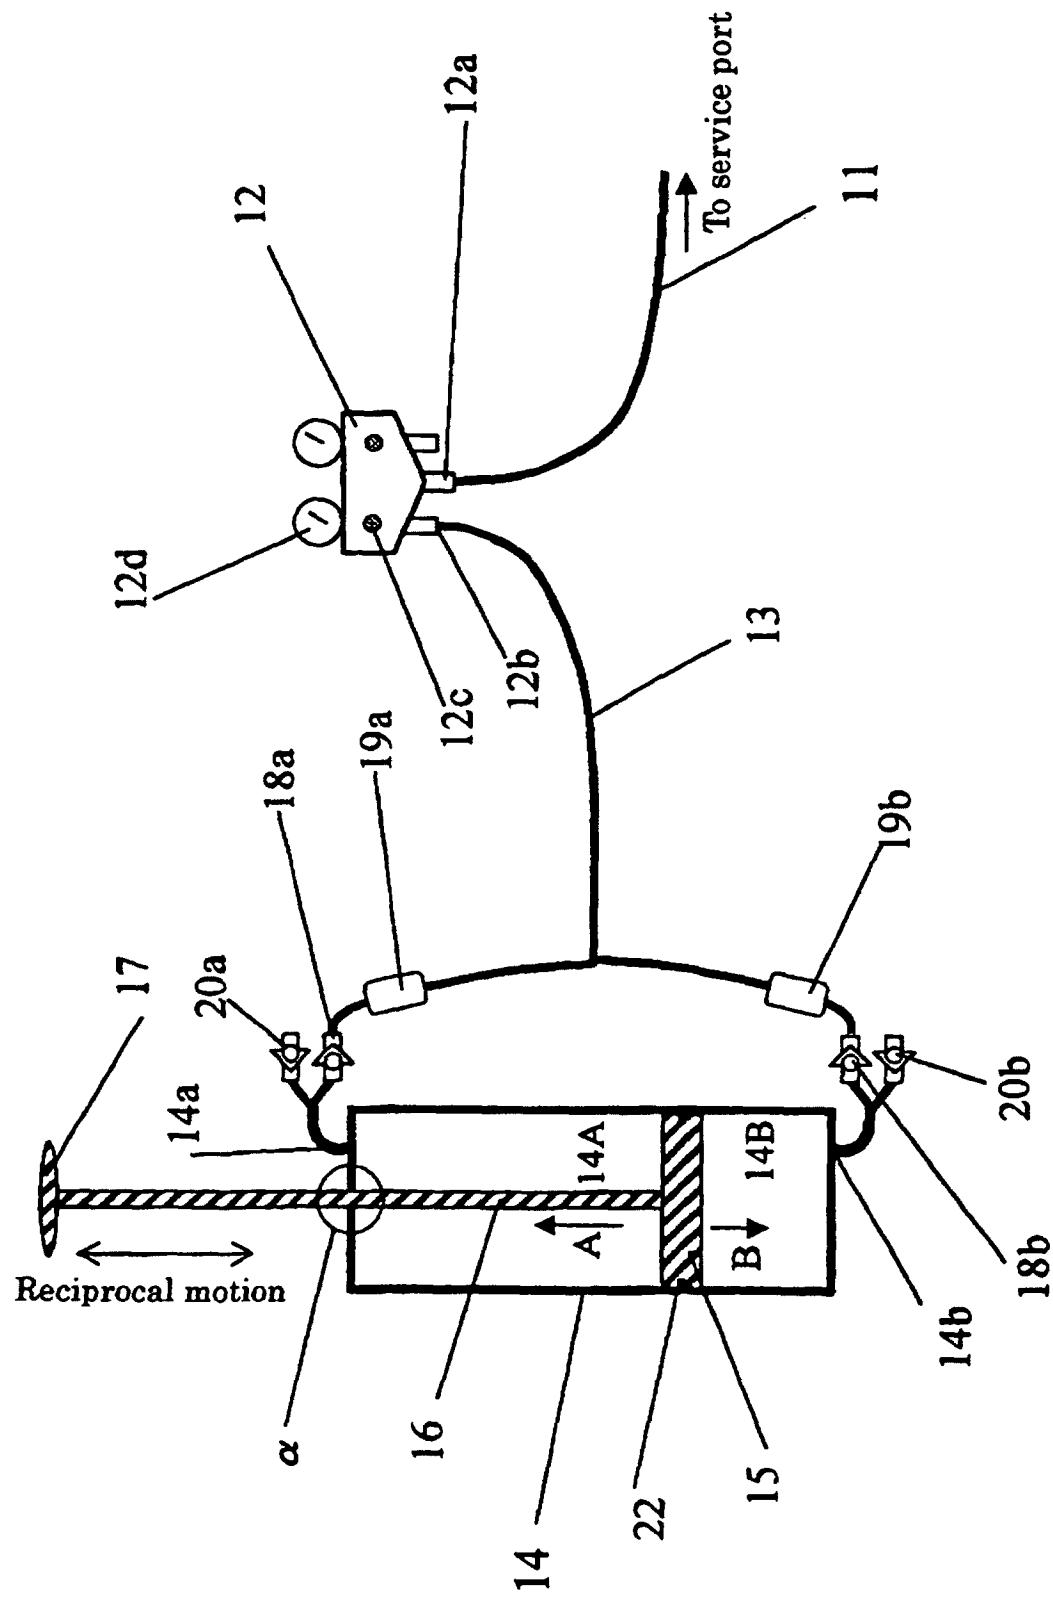


FIG. 3

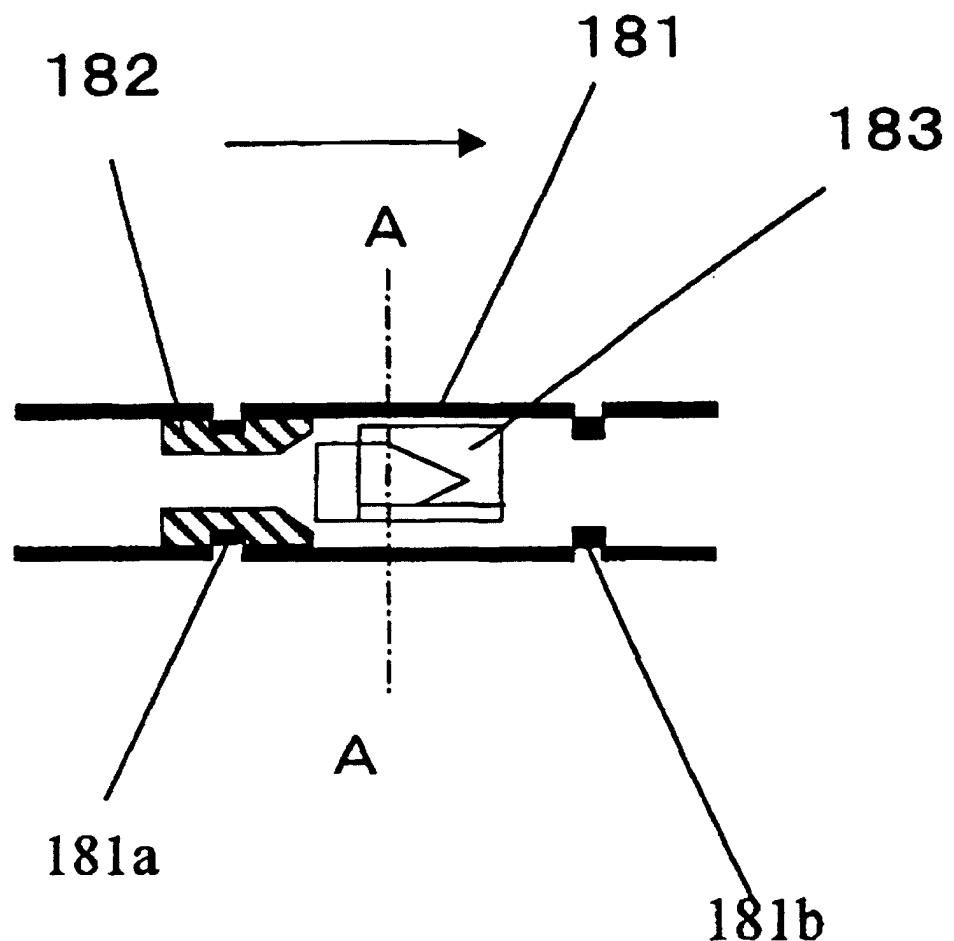


FIG. 4





FIG. 5

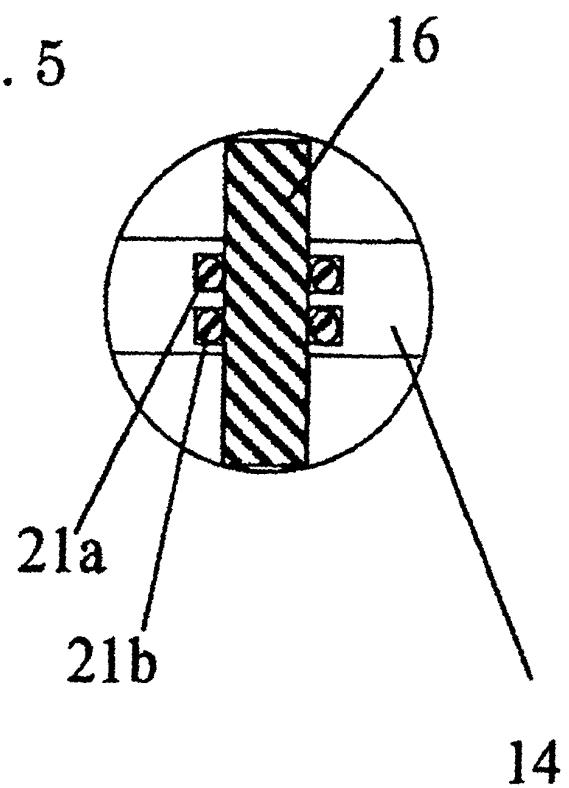

14

FIG. 6

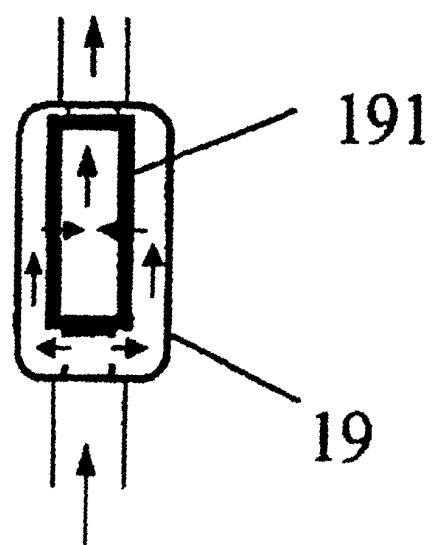


FIG. 7

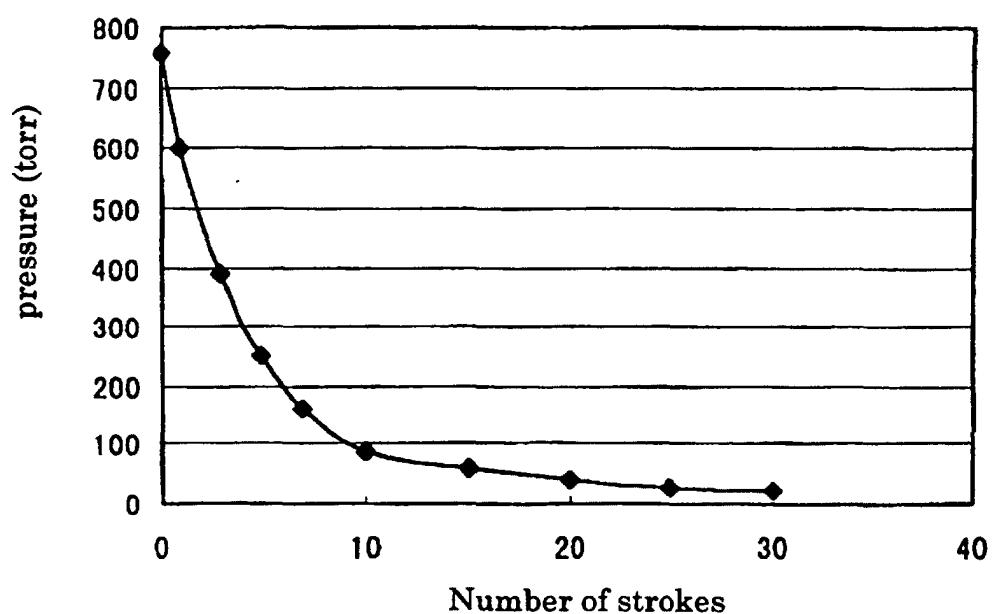


FIG. 8

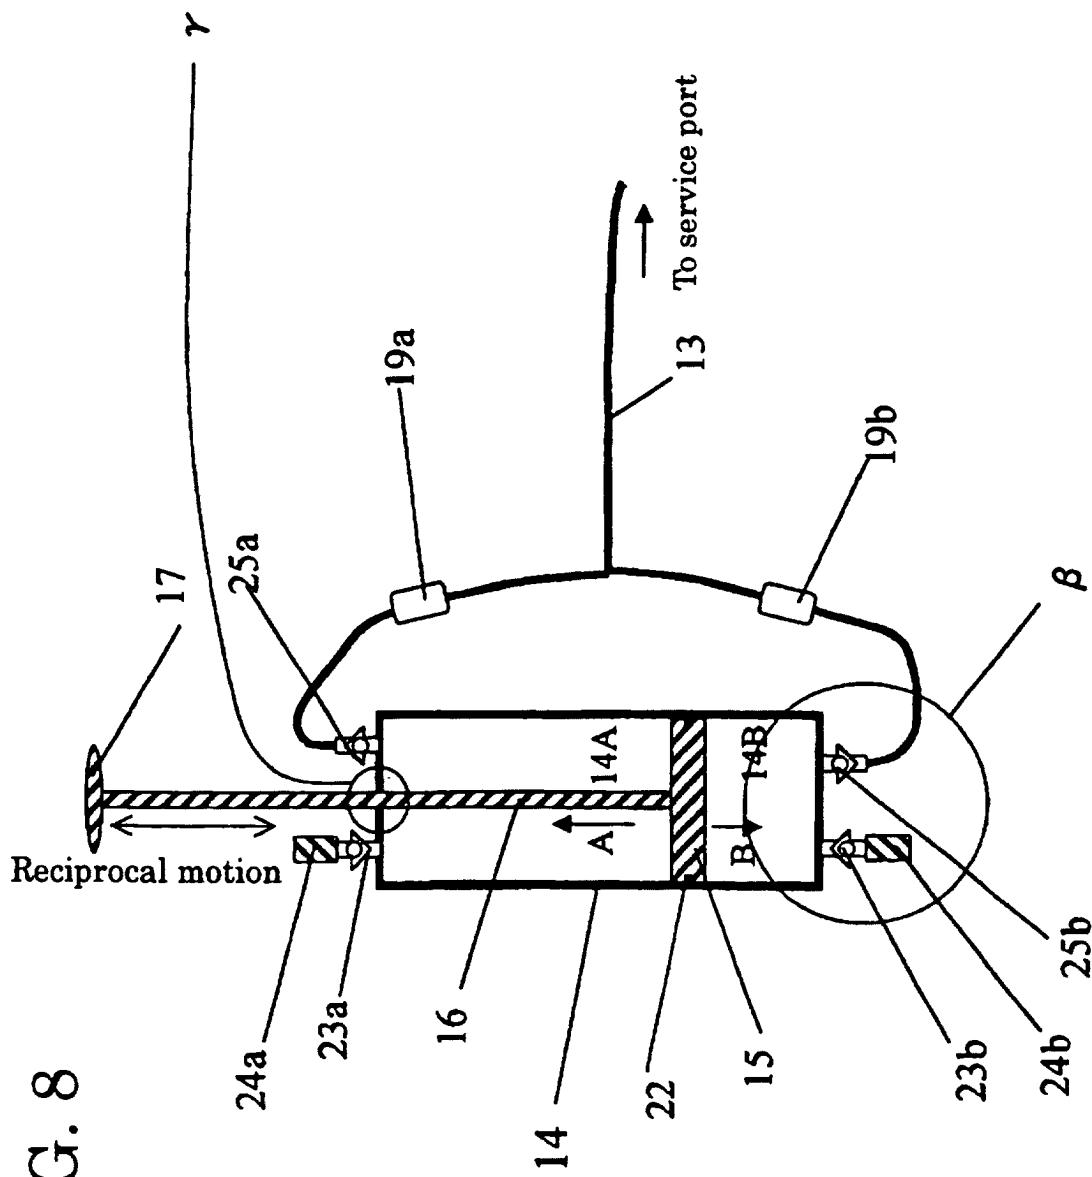


FIG. 9

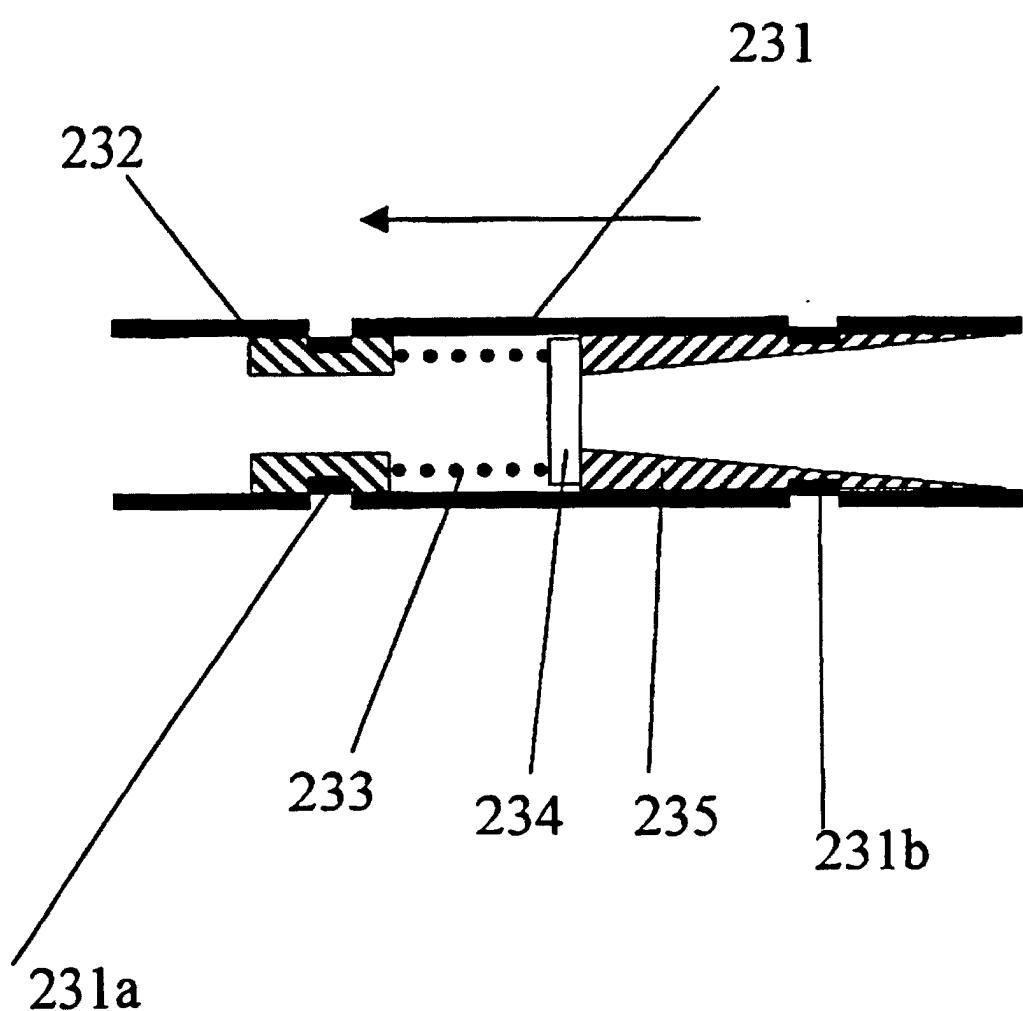


FIG. 10

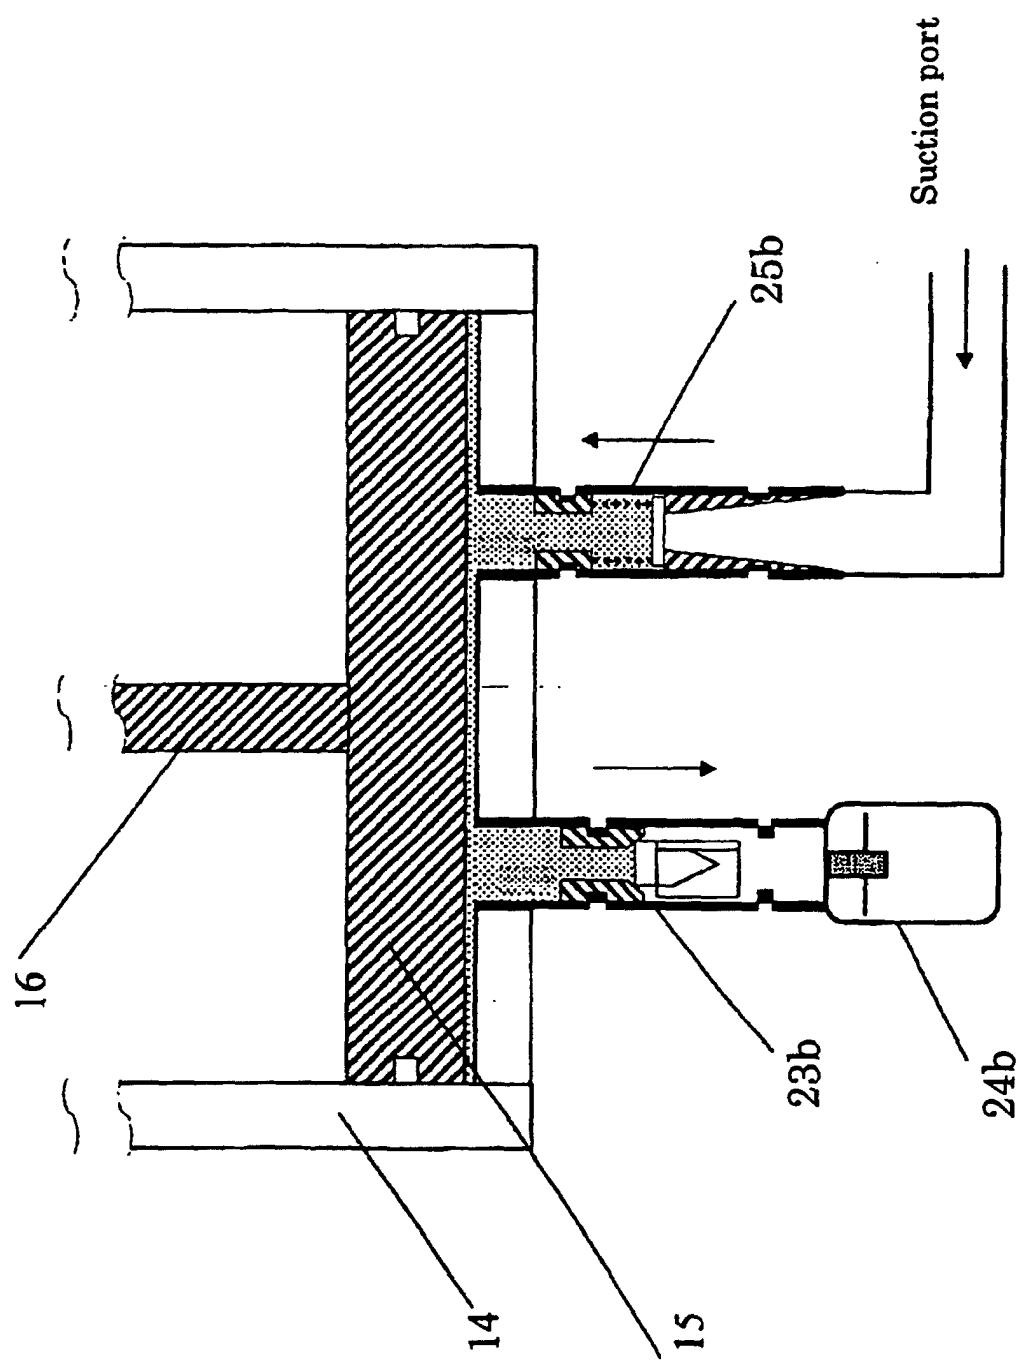


FIG. 11

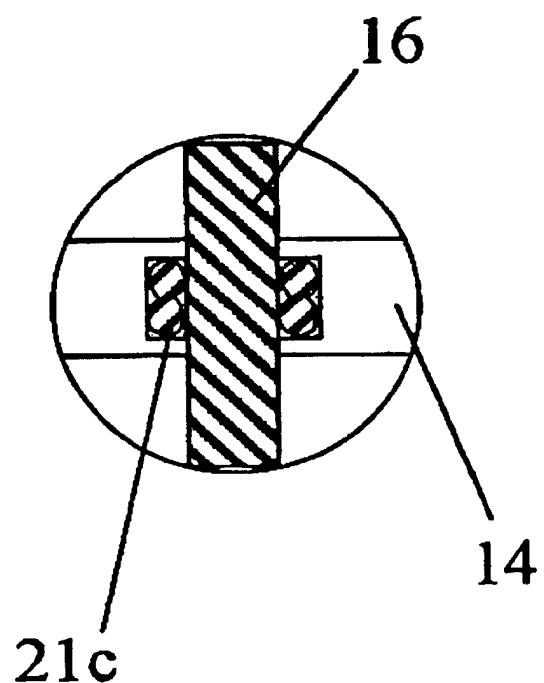


FIG. 12

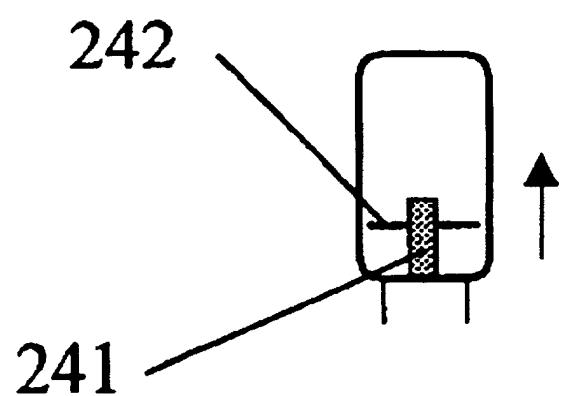


FIG. 13

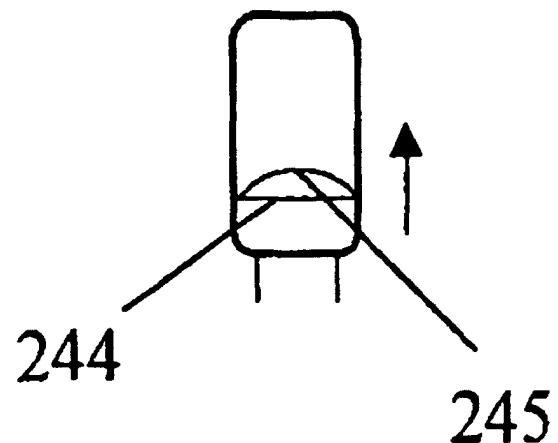


FIG. 14

