



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**23.01.2002 Bulletin 2002/04**

(51) Int Cl.7: **H01J 7/22, H01J 9/38,**  
**H01J 17/49**

(21) Application number: **00402030.1**

(22) Date of filing: **17.07.2000**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventor: **Normanni, Alain**  
**92648 Boulogne cedex (FR)**


(74) Representative: **Kohrs, Martin et al**  
**Thomson multimedia 46, quai A. Le Gallo**  
**92648 Boulogne-Billancourt Cedex (FR)**

(71) Applicant: **THOMSON PLASMA S.A.S.**  
**92100 Boulogne-Billancourt (FR)**

(54) **Pumping tube for flat display panel**

(57) The invention proposes a pumping tube shape which makes it possible, on the one hand, to guide the pumping tube (23) when positioning the latter on the tile (25) and when producing the seal (24) by heating and, on the other hand, to prevent runs inside the pumping

hole. Moreover, the pumping tube (23) of the invention makes it possible to produce an almost ideally distributed homogeneous seal (24), thereby ensuring that the latter seals reliably. The invention also relates to a plasma display panel having the pumping tube (23) of the invention.

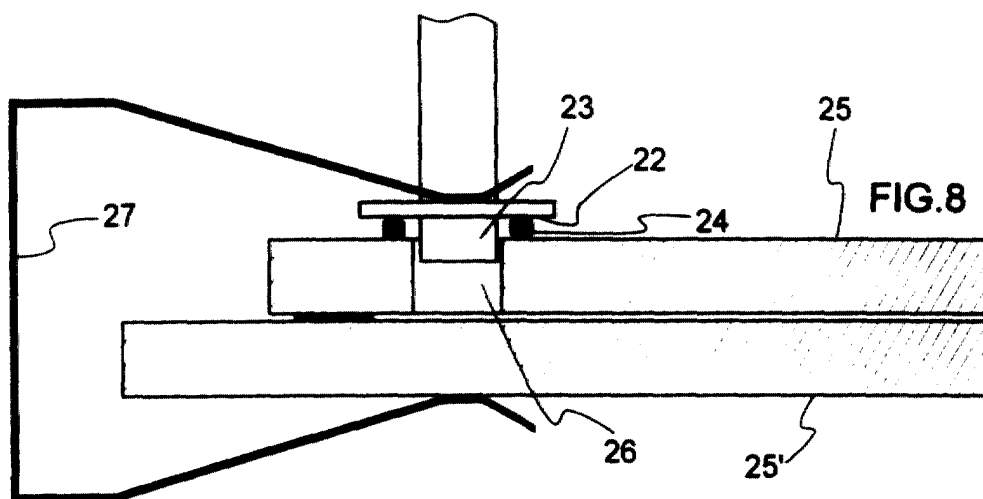

## Description

**[0001]** The invention relates to a pumping tube. More particularly, the invention relates to the pumping tube used for pumping and filling a flat display panel of the plasma display panel type.

**[0002]** Plasma panels are flat display screens in which the displayed image consists of a set of light discharge points. The light discharges are produced in a gas contained between two insulating tiles, generally made of glass. Each discharge point is generated by a discharge cell defined by an intersection between arrays of electrodes carried by at least one of the tiles. The gas contained between the two tiles is generally a gas mixture which emits visible or invisible radiation when a discharge is produced. To obtain sufficient light emission, it is necessary to have a gas or gas mixture as pure as possible.

**[0003]** Pumping tubes are used for evacuating and then filling plasma display panels. Conventionally, the pumping tubes are made of glass so as to be sealed onto one tile of the panel, this tile having been provided beforehand with a hole. The pumping tube is mounted after the two tiles forming the panel have been joined together.

**[0004]** Figure 1 shows a pumping tube 1 according to the prior art, which comprises a tubular part 2, for carrying out the pumping, and a plane part 3 intended to bear on one face of the tile of the panel.

**[0005]** To be able to seal the pumping tube 1 onto the panel, a bead 4 of glass paste is placed on the plane part 3, as shown in Figure 2. The glass paste is a mixture consisting of a glass frit and an organic resin.

**[0006]** After the bead 4 has been deposited, the pumping tube 1 is positioned on the rear tile 5 of the panel and held in place by means of a clip 6, as shown in Figure 3. The pumping tube 1 is positioned so that it faces a hole 7.

**[0007]** The panel is then heated to a temperature of between 400°C and 550°C so as to melt the glass frit and completely burn off the resin of the paste forming the bead 4.

**[0008]** After localized heating, the bead 4 is converted into an impermeable seal 8. Figure 4 shows an ideal case of a seal for the pumping tube 1 facing the hole 7. Unfortunately, in reality, many problems arise when positioning the pumping tube 1 and when producing the seal 8. Thus, one or more of the defects shown in Figure 5 may be encountered.

**[0009]** A first defect is an axial offset 9 between the hole 7 and the pumping tube 1. The axial offset has the effect of reducing the pumping area. This defect occurs when positioning the clip 6.

**[0010]** A second defect is an angular offset 10 with respect to the perpendicular. The angular offset 10 causes non-uniform flattening of the sealing bead, which is manifested in a sealing problem.

**[0011]** A third defect consists of runs 11 of sealing ma-

terial in the hole 7. This defect is magnified by the angular offset. The main drawback of the runs is a reduction in the pumping orifice and therefore an increase in the pumping time.

**[0012]** Most of these defects may be minimized by greater and expensive precision in positioning the various elements involved in placing the pumping tube 1 on the tile 5.

**[0013]** The invention proposes to remedy the various problems mentioned by reducing the precision needed for mounting the pumping tube. The invention proposes a pumping tube shape which makes it possible, on the one hand, to guide the pumping tube when positioning the latter on the tile and when producing the seal by heating and, on the other hand, to prevent runs inside the pumping hole. Moreover, the pumping tube of the invention makes it possible to produce an almost ideally distributed homogeneous seal, thereby ensuring that the latter seals reliably.

**[0014]** The subject of the invention is a pumping tube for a flat display panel, which pumping tube comprises a plane part intended to bear on an external plane of a tile of the said panel, in order to be sealed thereto, and comprises a tubular part which extends perpendicular to the plane part, the said tubular part being intended to fit into a hole in the tile.

**[0015]** The invention also relates to a plasma display panel comprising two tiles bonded together and forming a cavity, one of the two tiles being provided with a hole making it possible to create a vacuum in the cavity and then to fill the cavity with a gas, and a pumping tube comprising a plane part sealed around the hole, which pumping tube comprises a tubular part which extends perpendicular to the plane part, the said tubular part being inside the hole.

**[0016]** The invention will be more clearly understood and further features and advantages will appear on reading the description which follows, the description referring to the appended drawings among which:

- Figure 1 shows a pumping tube according to the prior art;
- Figures 2 to 5 show the steps in mounting a pumping tube according to the prior art on a plasma display panel;
- Figure 6 shows a pumping tube according to the invention;
- Figures 7 to 11 show the steps in mounting a pumping tube according to the invention on a plasma display panel;
- Figure 12 shows, in front and side view, a plasma panel having a pumping tube according to the invention.

**[0017]** Figure 6 shows a pumping tube 20 according to the invention. This pumping tube is essentially made of glass and comprises:

- a first tubular part 21 intended to be connected to a vacuum pump;
- a plane part 22 intended to bear on the tile of the panel so as to seal the pumping tube onto the said tile; and
- a second tubular part 23 which is intended to fit into the hole in the tile and extends perpendicular to the plane part.

**[0018]** The second tubular part provides, on the one hand, a guiding function, by guiding the pumping tube with respect to the tile which supports it, and, on the other hand, a seal edge function.

**[0019]** Such a pumping tube 21 is mounted by depositing a bead 24 on the plane part 22, as shown in Figure 7. Compared with the prior art, the bead 24 may be greater in volume and be placed relatively imprecisely. The glass-frit paste of which the bead is composed may use a more fluid resin, which allows the bead 24 to be deposited more quickly. This is because the presence of the second tubular part prevents the paste from being accidentally deposited inside the pumping tube.

**[0020]** Next, the pumping tube 20 is positioned on one of the two tiles 25 and 25' of a plasma display panel, the second tubular part 23 being loosely fitted into a hole 26 produced beforehand in the tile 25. Next, a clip 27 is put into place in order to hold the pumping tube 20 against the tile 25 and to flatten the bead 24 during a heating step which converts the bead 24 into a seal.

**[0021]** Various functions are to be taken into account when determining the dimensions of the pumping tube. In order to be able to guide the latter, it is necessary to have, on the one hand, a long enough length of the second tubular part 23 and, on the other hand, a small enough gap between the tubular part 23 and the hole 26. In order to allow the pumping tube to be mounted without any force, it is necessary to have, on the one hand, a sufficiently short length of the second tubular part and, on the other hand, a sufficiently large difference between the external diameter of the second tubular part 23 and the diameter of the hole 26. It is also necessary to have a length of the second tubular part 23 which is longer the wider the gap between the second tubular part 23 and the hole 26 so as to limit any flow of molten glass by capillary effect to a distance of less than the length of the tubular part 23. Preferably, the length of the second tubular part 23 is between one half of the thickness of the tile 25 and the thickness of the tile 25 and the difference between the external diameter of the second tubular part 23 and the diameter of the hole is between 50 and 300  $\mu\text{m}$ .

**[0022]** The second tubular part 23 fitted into the hole 26 and the plane part 22 bearing on the tile around this hole cooperate in order to position the pumping tube 20 easily and precisely; advantageously, the width of the bearing surface of the plane part 22 extending beyond the tubular part is at least equal to the depth of penetration into the hole 26 of the second tubular part 23; this

is equivalent to saying that half the difference between the external diameter of this plane part 22 and the diameter of the hole is at least equal to the said depth of penetration of the second tubular part 23. The shape and the dimensions of the pumping tube 20 thus defined make it possible to limit the forces to be applied to this pumping tube in order to hold it in position and to seal it, thereby limiting the risks of breaking this piece, generally made of glass.

**[0023]** After the heating step, during which the bead 24 liquefies, a perfect and gastight seal 28 is obtained between the pumping tube 20 and the tile 25, as shown in Figure 9. The process then continues with a vacuum pumping step followed by a step of filling the panel with a gas mixture, for example a mixture of argon and neon. The panel is filled until a pressure below atmospheric pressure is obtained, for example approximately  $5 \times 10^4$  pascals (500 millibar).

**[0024]** The first tubular part 21 is then heated locally, for example at a distance of approximately 1 to 2 cm from the tile 25, until it softens, as shown in Figure 10. Due to the difference in pressure between the inside and the outside of the pumping tube, the first tubular part narrows down locally until it is completely closed off, as shown in Figure 11. In order to achieve closure, it is necessary to have a wall thickness of the first tubular part 21 large enough to be able to deform without being punctured. Conventionally, a thickness preferably 25% greater than the internal diameter, for example a thickness of about 1 mm for an internal diameter of 3 mm, is used.

**[0025]** Next, the plasma display panel is mounted in a frame with its electronic drive circuits. The pumping tube 20 is then concealed in the frame, generally in one corner of the said panel, as shown in Figure 12, which illustrates a plasma display panel with its frame, in front view and in side view.

**[0026]** Of course, many variants of the invention are conceivable without departing from the scope of the invention. In particular, the mouth of the first tubular part, which is intended to be connected into the pumping and filling machine, may have a shape completely different from that shown in Figure 6. By way of example, this mouth may be flared so as to correspond to the mouth of the machine.

**[0027]** Likewise, the example described relates to a plasma display but it goes without saying that the invention can be transposed to other types of flat screens which use glass tiles and have to be vacuum-pumped and possibly filled with another gas.





## Claims




1. Pumping tube (20) for a flat display panel, which pumping tube comprises a plane part (22) intended to bear against an external plane of a tile (25) of the said panel, in order to be sealed thereto, **charac-**




**terized in that** it comprises a tubular part (23) which extends perpendicular to the plane part (22) and is intended to fit into a hole (26) in the tile (25).

2. Pumping tube according to Claim 1, **characterized in that** it is essentially made of glass. 5
3. Pumping tube according to either of Claims 1 and 2, **characterized in that** half the difference between the external diameter of the plane part (22) and the diameter of the hole (26) is at least equal to the depth to which the second part (23) is intended to fit into the hole (26). 10
4. Pumping tube according to any one of Claims 1 to 3, **characterized in that** the tubular part (23) extends from the plane part (22) over a length less than or equal to the thickness of the tile (25) and greater than one half of the thickness of the tile (25). 15  
20
5. Pumping tube according to any one of Claims 1 to 4, **characterized in that** the difference between the diameter of the hole (26) and the external diameter of the tubular part (23) is small enough to limit any flow of molten glass to a distance of less than the length of the tubular part (23). 25
6. Plasma display panel comprising:
  - two tiles (25 and 25') bonded together and forming a cavity, one (25) of the two tiles being provided with a hole (26) making it possible to create a vacuum in the cavity and then to fill the cavity with a gas; 30
  - a pumping tube (20) comprising a plane part (22) sealed around the hole (26), **characterized in that** the pumping tube (20) comprises a tubular part (23) which extends perpendicular to the plane part (22) and is fitted into the hole (26). 35  
40
7. Panel according to Claim 6, **characterized in that** the said pumping tube is essentially made of glass.
8. Panel according to either of Claims 6 and 7, **characterized in that** one half of the difference between the external diameter of the plane part (22) and the diameter of the hole (26) is at least equal to the depth to which the second part (23) fits into the hole (26). 45  
50
9. Panel according to any one of Claims 6 to 8, **characterized in that** the tubular part (23) extends from the plane part (22) over a length less than or equal to the thickness of the tile (25) and greater than one half of the thickness of the tile (25). 55
10. Panel according to any one of Claims 6 to 9, **char-**

**acterized in that** the difference between the diameter of the hole (26) and the external diameter of the tubular part (23) is small enough to limit any flow of molten glass to a distance of less than the length of the tubular part (23).

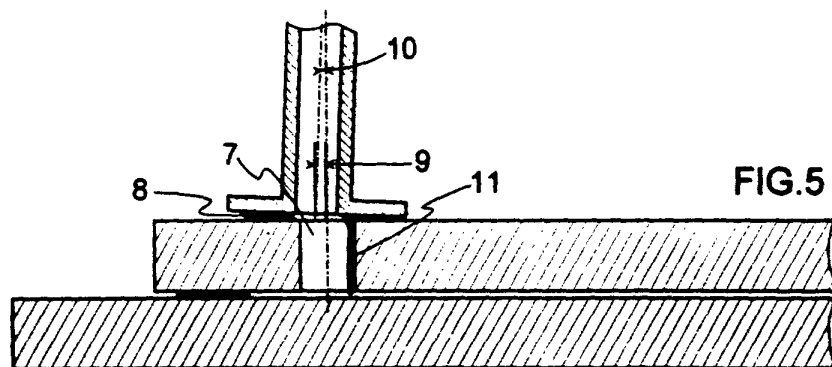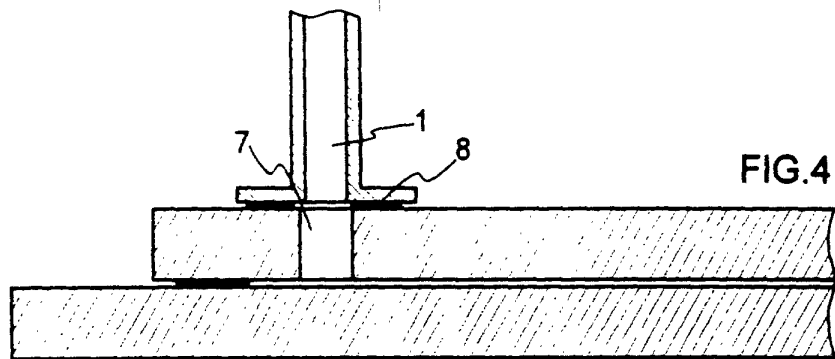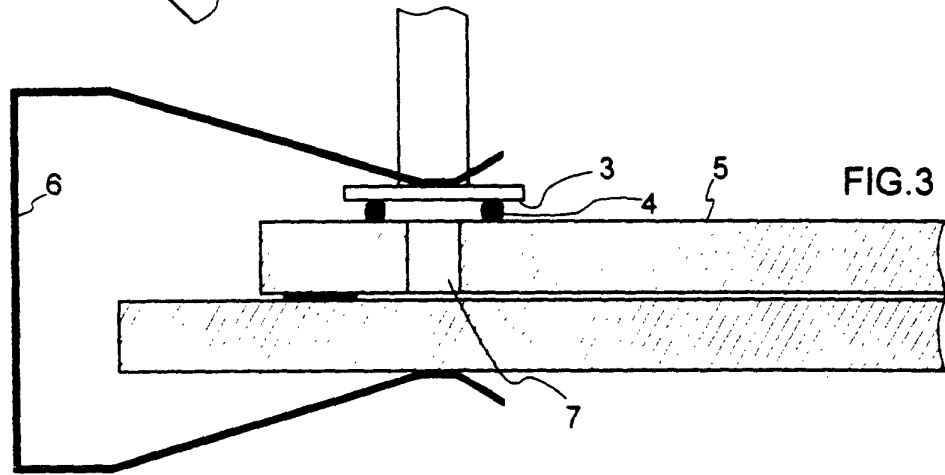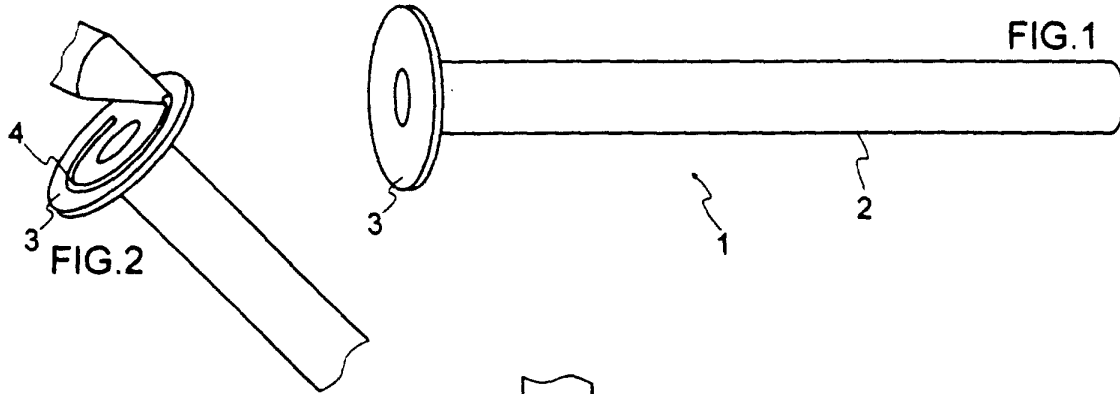

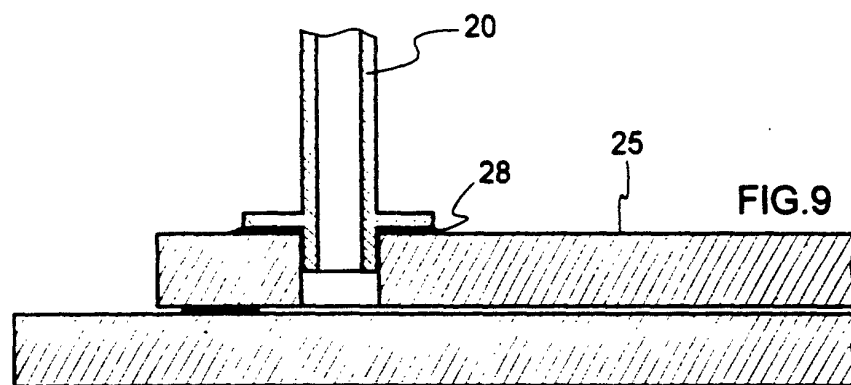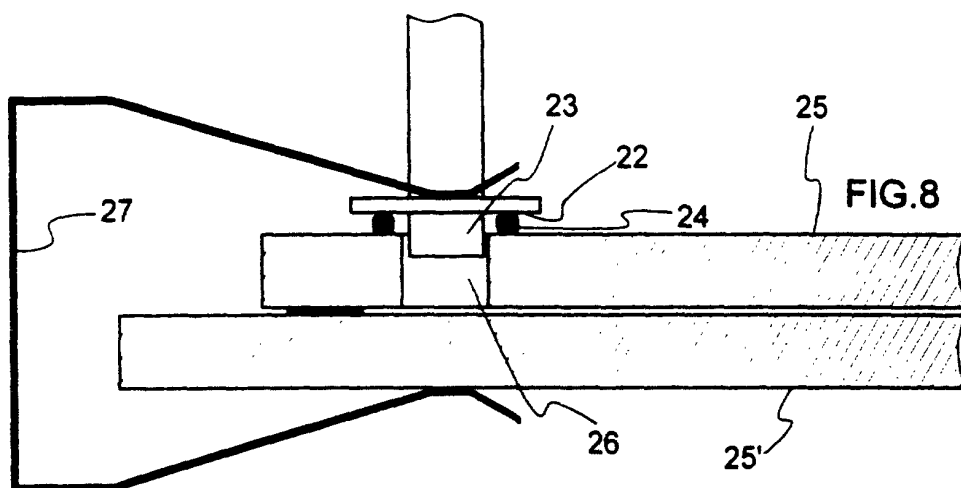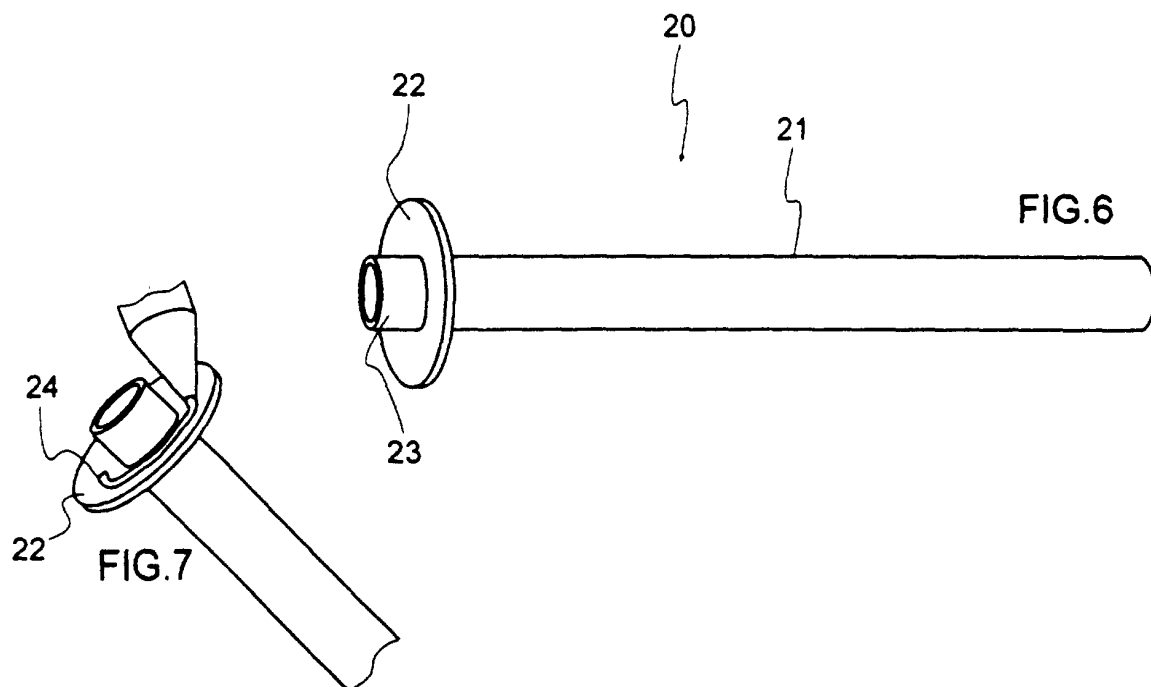

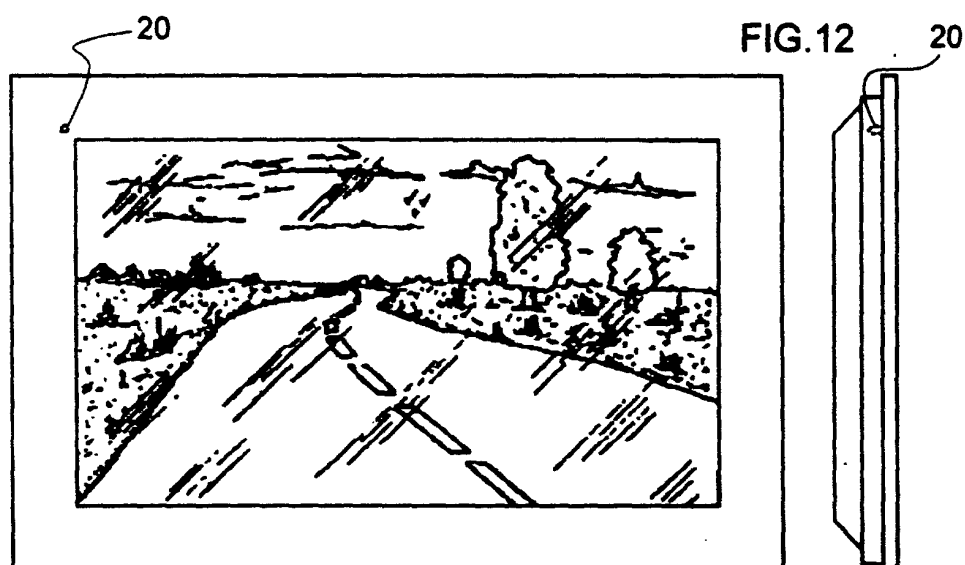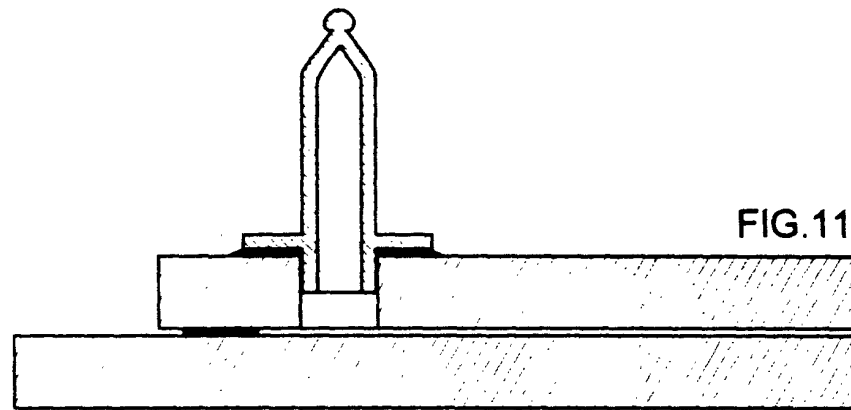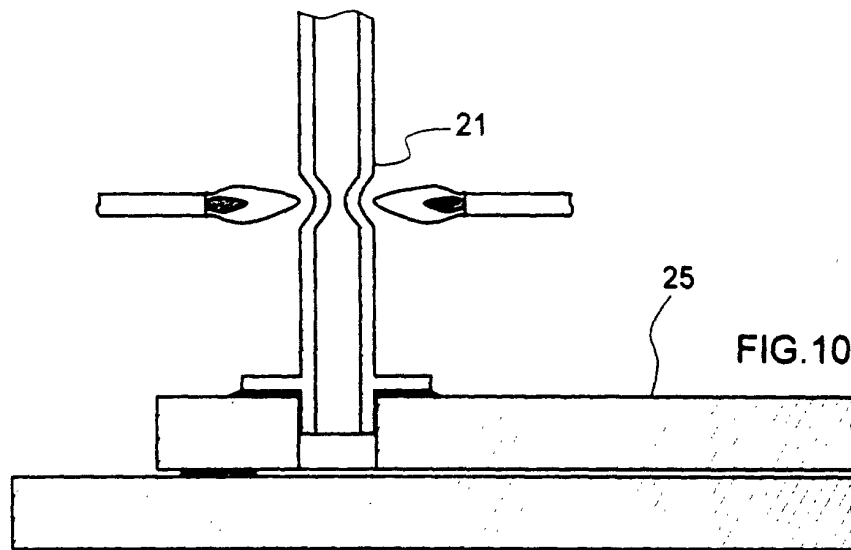



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 00 40 2030

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 3 821 584 A (SCOVRONEK J) 28 June 1974 (1974-06-28) * column 3, line 22 - line 31; figure 2 *	1,6	H01J7/22 H01J9/38 H01J17/49
Y	---	2,7	
Y	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 05, 31 May 1999 (1999-05-31) & JP 11 054052 A (KYOCERA CORP), 26 February 1999 (1999-02-26) * abstract *	2,7	
A	---	1	
A	PATENT ABSTRACTS OF JAPAN vol. 001, no. 119 (E-052), 11 October 1977 (1977-10-11) -& JP 52 050683 A (MITSUBISHI ELECTRIC CORP), 22 April 1977 (1977-04-22) * abstract *	1	
A	---	1	
A	PATENT ABSTRACTS OF JAPAN vol. 014, no. 451 (E-0984), 27 September 1990 (1990-09-27) & JP 02 181348 A (MATSUSHITA ELECTRIC IND CO LTD), 16 July 1990 (1990-07-16) * abstract *	1	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H01J
A	---	1	
A	PATENT ABSTRACTS OF JAPAN vol. 013, no. 235 (E-766), 30 May 1989 (1989-05-30) -& JP 01 041142 A (FUJITSU LTD), 13 February 1989 (1989-02-13) * abstract *	1	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 20 October 2000	Examiner DE RUIJTER, F
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P04C01)



**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 40 2030

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-10-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3821584 A	28-06-1974	FR 2191249 A	01-02-1974
		JP 1072560 C	30-11-1981
		JP 49092978 A	04-09-1974
		JP 56012980 B	25-03-1981
		NL 7308590 A	02-01-1974
JP 11054052 A	26-02-1999	NONE	
JP 52050683 A	22-04-1977	NONE	
JP 02181348 A	16-07-1990	NONE	
JP 01041142 A	13-02-1989	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82