



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
02.05.2002 Bulletin 2002/18

(51) Int Cl.7: **H05H 1/34**

(21) Application number: **01308236.7**

(22) Date of filing: **27.09.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

- **Turner, Tommie Zack**
Darlington, South Carolina 29532 (US)
- **Lynch, Rue Allen**
Florence, South Carolina 29501 (US)
- **Stokes, Larry Wade**
Timmons ville, South Carolina 29161 (US)

(30) Priority: **24.10.2000 US 694962**
16.04.2001 US 835698

(74) Representative:
MacDougall, Donald Carmichael et al
Cruikshank & Fairweather
19 Royal Exchange Square
Glasgow G1 3AE, Scotland (GB)

(71) Applicant: **The Esab Group, Inc.**
Florence, South Carolina 29501 (US)

(72) Inventors:
• **Quian, Ding**
Alpharetta, Georgia 30005 (US)

(54) **Electrode with brazed separator and method of making same**

(57) An electrode for a plasma arc torch and method of fabricating the same are disclosed, and wherein the electrode comprises a copper holder defining two coaxial cavities. An emissive element is secured to one of the cavities and serves as the cathode terminal for the arc during operation. A relatively non-emissive separator is disposed about the emissive element within the other cavity, and acts to separate the copper holder and the emissive element, as well as resisting detachment of the arc from the emissive element and attachment to the copper holder.

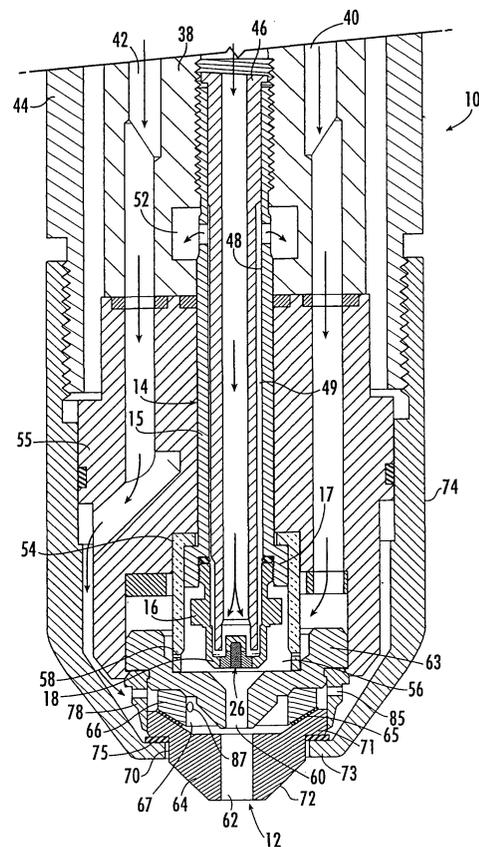


FIG. 1.

Description

FIELD OF THE INVENTION

[0001] The present invention relates to plasma arc torches and, more particularly, to an electrode for supporting an electric arc in a plasma arc torch.

BACKGROUND OF THE INVENTION

[0002] Plasma arc torches are commonly used for the working of metals, including cutting, welding, surface treatment, melting, and annealing. Such torches include an electrode which supports an arc which extends from the electrode to the workpiece in the transferred arc mode of operation. It is also conventional to surround the arc with a swirling vortex flow of gas, and in some torch designs it is conventional to also envelope the gas and arc with a swirling jet of water.

[0003] The electrode used in conventional torches of the described type typically comprises an elongate tubular member composed of a material of high thermal conductivity, such as copper or a copper alloy. The forward or discharge end of the tubular electrode includes a bottom end wall having an emissive element embedded therein which supports the arc. The element is composed of a material which has a relatively low work function, which is defined in the art as the potential step, measured in electron volts (eV), which permits thermionic emission from the surface of a metal at a given temperature. In view of its low work function, the element is thus capable of readily emitting electrons when an electrical potential is applied thereto. Commonly used emissive materials include hafnium, zirconium, tungsten, and their alloys. The emissive element is typically surrounded by a relatively non-emissive separator, which acts to prevent the arc from migrating from the emissive element to the copper holder.

[0004] A problem associated with torches of the type described above is the short service life of the electrode, particularly when the torch is used with an oxidizing gas, such as oxygen or air. More particularly, the gas tends to rapidly oxidize the copper of the electrode that surrounds the emissive element, and as the copper oxidizes, its work function decreases. As a result, a point is reached at which the oxidized copper surrounding the emissive element begins to support the arc, rather than the element. When this happens, the copper oxide and the supporting copper melt, resulting in early destruction and failure of the electrode.

[0005] The assignee of the present application has previously developed an electrode with significantly improved service life, as described in U.S. Patent No. 5,023,425, the entire disclosure of which is hereby incorporated by reference, and a method for making such an electrode, as described in U.S. Patent No. 5,097,111, the entire disclosure of which is hereby incorporated by reference. The '425 patent discloses an electrode com-

prising a metallic tubular holder supporting an emissive element at a front end thereof, and having a relatively non-emissive separator or sleeve surrounding the emissive element and interposed between the emissive element and the metallic holder. The sleeve thereby separates the emissive element from the holder. The '425 patent describes the sleeve as preferably being composed of silver, which has a high resistance to formation of an oxide. The silver and any oxide thereof which does form are poor emitters, and thus the arc will continue to emit from the emissive element rather than from the sleeve or the metallic holder. Service life is thereby significantly extended.

[0006] The '111 patent discloses a method for making an electrode which includes the step of forming a single cavity in the front face of a cylindrical blank of copper or copper alloy, the cavity including an annular outer end portion for receiving a non-emissive member. In particular, a metal blank of relatively non-emissive material, preferably silver, is formed to substantially fit within the cavity. The non-emissive blank is then metallurgically bonded into the cavity by first inserting a disk of silver brazing material into the cavity, then inserting the non-emissive blank. The assembly is then heated to a temperature only sufficient to melt the brazing material, and during the heating process the non-emissive blank is pressed into the cavity, which causes the brazing material to flow upwardly and cover the entirety of the interface between the non-emissive blank and the cavity. The assembly is then cooled, resulting in the brazing material metallurgically bonding the element into the non-emissive blank. Next, the non-emissive blank is axially drilled and a cylindrical emissive element is force-fitted into the resulting opening. To complete fabrication of the electrode, the front face of the assembly is machined to provide a smooth outer surface, which includes a circular outer end face of the emissive element, a surrounding annular ring of the non-emissive blank, and an outer ring of the metal of the holder.

[0007] In addition, the torches described by the '425 and '111 patents define a rear cavity that extends forwardly towards the front end of the holder such that the emissive element, non-emissive separator, and a portion of the metallic holder form a cylindrical post extending into the rear cavity. A cooling medium, such as water, is circulated in the rear cavity and about the cylindrical post so that heat is transferred from the arc to the cooling water and out of the torch. More specifically, heat is transferred from the arc through the emissive element, non-emissive separator, the copper holder, and any layers of brazing material therebetween to the cooling water. Although this design allows greater heat transfer compared to having no rear cavity, several materials and material interfaces must be crossed, which decreases efficiency.

[0008] One particular design defines a rear cavity wherein the cylindrical post includes no portion of the copper holder so that the silver separator is exposed di-

rectly to the rear cavity and cooling water circulated therein. For example, Figure 10 shown in both the '425 and '111 patents discloses a plasma arc torch wherein the holder **16b** has a through bore in the lower wall, and the non-emissive insert **32b** extends through the bore and is exposed so as to directly contact the cooling water in the rear cavity of the holder. This design is advantageous for two reasons: first, silver has a greater thermal conductivity than copper, which increases the heat transfer between the arc and the cooling water; second, the interface between the silver separator and the copper holder is eliminated, which further improves heat transfer. However, the torch shown in Figure 10 of the '425 and '111 patents is not easily formed in that, in addition to the rear cavity being formed in the holder, the lower wall of the holder is bored out and the non-emissive separator is press fit therein.

[0009] Thus, while both the electrode described in the '425 patent and the method of making an electrode described by the '111 patent provide substantial advances in the art, further improvements are desired. In particular, one method described by the '425 and '111 patents provides boring or drilling out a portion of the non-emissive blank, which is typically silver, along a central axis so that the emissive element or insert can be press-fitted therein. While providing a close-fitting relationship between the emissive element and the non-emissive separator, this method disadvantageously results in a loss of silver drilled from the separator to accommodate the emissive element.

[0010] Another method used in forming conventional torches provides securing the emissive element in the non-emissive blank or separator by way of brazing. According to this method, the temperature of the silver alloy brazing material must be above its melting point, and thus the temperature of the silver or silver alloy separator is raised almost to its melting point, which can soften the separator material. If this approach were tried in connection with the embodiment of Figure 10 of the '425 patent or 111 patent, however, the softened silver separator may be unable to adequately radially restrain the emissive element when inserted into the silver separator, which could result in the emissive element being "off-center" relative to the central longitudinal axis of the electrode.

SUMMARY OF THE INVENTION

[0011] The present invention was developed to improve upon conventional electrodes and methods of making electrodes, and more particularly electrodes and methods of making electrodes disclosed in the above-referenced '425 and '111 patents. It has been discovered that the difficulties of the electrodes described above, namely the loss of silver from the relatively non-emissive separator and the positioning of the emissive element along the central longitudinal axis of the electrode, can be overcome by positioning the emissive el-

ement in the metallic holder before the separator is installed. In one advantageous embodiment, the present invention provides an electrode and method of making an electrode having an emissive element and a generally non-emissive separator disposed in a front cavity defined by the metallic holder, whereby a brazing material is disposed therebetween such that the emissive element's position along the central longitudinal axis is not affected by the brazing process. In another embodiment, the present invention provides an electrode and method for making an electrode wherein the metallic holder also defines a rear cavity that is sized so that a portion of the separator is exposed to the rear cavity, which thereby improves heat transfer between an arc and a cooling fluid circulated in the rear cavity.

[0012] More particularly, in accordance with one preferred embodiment of the invention, an electrode for supporting an arc in a plasma arc torch comprises a metallic holder having a front end and rear end, the front end defining a front cavity. A generally non-emissive separator is positioned in the front cavity and includes an inner peripheral wall. An emissive element is also positioned in the front cavity and includes an outer peripheral wall that is only partially surrounded by the inner peripheral wall of the separator. According to one embodiment, part of the brazing material is disposed between the emissive element and the separator, and also between the separator and the metallic holder. The brazing layer has a melting temperature no greater than the melting temperature of the separator. Thus, the separator and emissive element are metallurgically bonded together such that separator totally separates the emissive element from contact with the outer surface of the metallic holder.

[0013] The separator which surrounds the emissive element is preferably composed of a metallic material, such as silver, which has a high resistance to the formation of an oxide. This serves to increase the service life of the electrode, since the silver and any oxide which does form are very poor emitters. As a result, the arc will continue to emit from the emissive element, rather than from the metallic holder or the separator, which increases the service life of the electrode.

[0014] In one embodiment, the rear end of the metallic holder defines a rear cavity that extends towards the front end of the holder to expose the separator. The rear cavity can be formed by trepanning or other types of machining, and the exposed separator provides an improved medium for heat transfer from the arc to the cavity, particularly if a cooling medium, such as water, is circulated in the cavity while the torch is in operation.

[0015] The present invention also includes a method fabricating the above-described electrode which comprises the steps of forming a front cavity in a generally planar front face of a metallic blank and fixedly securing an emissive element in the front cavity. A relatively non-emissive separator is then positioned in the front cavity of the metallic holder such that the separator is inter-

posed between and separates the metallic holder from the emissive element at the front face of the holder. In one embodiment, the separator has a tubular shape and sized such that the separator and the emissive element have a close-fitting relationship. In addition, the emissive element and separator can be brazed together using a brazing material, such as silver.

[0016] Preferably, the front face of the metallic holder is then finished to form a substantially planar surface which includes the metallic holder, the emissive element, and the separator. In one embodiment, a rear cavity is formed in the rear face of the metallic holder such that the separator is exposed to the cavity. In this regard, the metallic holder is trepanned or machined to remove a portion of the holder to thereby expose the separator, which improves the heat transfer from the arc to the cavity. Water or other cooling medium can be circulated within the cavity to further conduct and remove heat from the electrode.

[0017] Thus, the electrode of the present invention provides an electrode and method of making an electrode having improved heat transfer properties over conventional plasma arc torches. By positioning the emissive element in the metallic holder before the separator is installed, the position of the emissive element is not affected by a subsequent brazing process. In addition, by exposing the silver separator by trepanning or machining the rear cavity, the front end of the holder is not required to be bored out and the silver separator press fitted therein.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] Having thus described the invention in general terms, reference will now be made to the accompanying drawings, which are not necessarily drawn to scale, wherein:

Figure 1 is a sectioned side elevational view of a plasma arc torch which embodies the features of the present invention;

Figure 2 is an enlarged perspective view of an electrode in accordance with the present invention;

Figure 3 is an enlarged sectional side view of an electrode in accordance with the present invention;

Figures 4-8 are schematic views illustrating the steps of a preferred method of fabricating the electrode in accordance with the invention;

Figure 9 is an end elevational view of the finished electrode; and

Figure 10 is an enlarged sectional side view of an electrode according to an alternative embodiment of an electrode in accordance with the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0019] The present invention now will be described

more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Like numbers refer to like elements throughout.

[0020] With reference to Figure 1, a plasma arc torch **10** embodying the features of the present invention is depicted. The torch **10** includes a nozzle assembly **12** and a tubular electrode **14**. The electrode **14** preferably is made of copper or a copper alloy, and is composed of an upper tubular member **15** and a lower cup-shaped member or holder **16**. The upper tubular member **15** is of elongate open tubular construction and defines the longitudinal axis of the torch **10**. The upper tubular member **15** includes an internally threaded lower end portion **17**. The holder **16** is also of tubular construction, and includes a lower front end and an upper rear end. A transverse end wall **18** closes the front end of the holder **16**, and the transverse end wall **18** defines an outer front face **20** (Figure 2). The rear end of the holder **16** is externally threaded and is threadedly joined to the lower end portion **17** of the upper tubular member **15**.

[0021] With primary reference to Figures 2 and 3, the holder **16** is open at the rear end **19** thereof such that the holder is of cup-shaped configuration and defines an internal cavity **22**. The internal cavity **22** has a surface **31** that includes a cylindrical post **23** extending into the internal cavity along the longitudinal axis. Advantageously, the cylindrical post **23** is formed to have improved heat transfer properties compared to conventional designs, as discussed below. Two coaxial cavities **24, 25** are formed in the front face **20** of the end wall **18** and extend rearwardly along the longitudinal axis and into a portion of the holder **16**. The cavities **24, 25** are generally cylindrical, wherein the first cavity **24** has a diameter less than the second cavity **25**. The cavities **24, 25** include inner side surfaces **27a, 27b**, respectively.

[0022] An emissive element or insert **28** is mounted in the small cavity **24** and is disposed coaxially along the longitudinal axis. The emissive element **28** has a circular outer end face **29** lying in the plane of the front face **20** of the holder **16**. The emissive element **28** also includes a generally circular inner end face **30** which is disposed in the small cavity **24** and is opposite the outer end face **29**. The inner end face **30**, however, can have other shapes, such as pointed, polygonal, or spherical, in order to assist in securing the emissive element to the small cavity **24**, as discussed below. The emissive element **28** is composed of a metallic material which has a relatively low work function, in a range of about 2.7 to 4.2 eV, so that it is adapted to readily emit electrons upon an electrical potential being applied thereto. Suitable examples of such materials are hafnium, zirconium, tung-

sten, and alloys thereof. According to one embodiment, the emissive element **28** is secured to the small cavity **24** by an interference fit, although other securing methods can also be used, such as pressing or crimping.

[0023] A relatively non-emissive separator **32** is positioned in the large cavity **25** coaxially about the emissive element **28**. The separator **32** has a peripheral wall **33** (Figures 4-5) extending the length of the emissive element **28**. The peripheral wall **33** is illustrated as having a substantially constant outer diameter over the length of the separator, although it will be appreciated that other geometric configurations would be consistent with the scope of the invention, such as frustoconical.

[0024] The separator **32** also includes an outer end face **36** which is generally flush with the circular outer end face **29** of the emissive element **28**, and is also generally flush with the front face **20** of the holder **16**. The separator **32** preferably has a radial thickness of at least about 0.25 mm (0.01 inch) at the outer end face **36** and along its entire length, and preferably the diameter of the emissive insert **28** is about 30-80 percent of the outer diameter of the end face **36** of the separator **32**. As a specific example, the emissive element **28** typically has a diameter of about 0.08" and a length of about 0.25", and the outer diameter of the separator **32** is about 0.25".

[0025] The separator **32** is composed of a metallic material having a work function that is greater than that of the material of the holder **16**, and also greater than that of the material of the emissive element **28**. More specifically, it is preferred that the separator be composed of a metallic material having a work function of at least about 4.3 ev. In a preferred embodiment, the separator **32** comprises silver as the primary material, although other metallic materials, such as gold, platinum, rhodium, iridium, palladium, nickel, and alloys thereof, may also be used.

[0026] For example, in one particular embodiment of the present invention, the separator **32** is composed of a silver alloy material comprising silver alloyed with about 0.25 to 10 percent of an additional material selected from the group consisting of copper, aluminum, iron, lead, zinc, and alloys thereof. The additional material may be in elemental or oxide form, and thus the term "copper" as used herein is intended to refer to both the elemental form as well as the oxide form, and similarly for the terms "aluminum" and the like.

[0027] With reference again to Figure 1, the electrode **14** is mounted in a plasma torch body **38**, which includes gas and liquid passageways **40** and **42**, respectively. The torch body **38** is surrounded by an outer insulated housing member **44**. A tube **46** is suspended within the central bore **48** of the electrode **14** for circulating a liquid cooling medium, such as water, through the electrode **14**. The tube **46** has an outer diameter smaller than the diameter of the bore **48** such that a space **49** exists between the tube **46** and the bore **48** to allow water to flow therein upon being discharged from the open lower end

of the tube **46**. The water flows from a source (not shown) through the tube **46**, inside the internal cavity **22** and the holder **16**, and back through the space **49** to an opening **52** in the torch body **38** and to a drain hose (not shown). The passageway **42** directs injection water into the nozzle assembly **12** where it is converted into a swirling vortex for surrounding the plasma arc, as further explained below. The gas passageway **40** directs gas from a suitable source (not shown), through a gas baffle **54** of suitable high temperature material into a gas plenum chamber **56** via inlet holes **58**. The inlet holes **58** are arranged so as to cause the gas to enter in the plenum chamber **56** in a swirling fashion. The gas flows out of the plenum chamber **56** through coaxial bores **60** and **62** of the nozzle assembly **12**. The electrode **14** retains the gas baffle **54**. A high-temperature plastic insulator body **55** electrically insulates the nozzle assembly **12** from the electrode **14**.

[0028] The nozzle assembly **12** comprises an upper nozzle member **63** which defines the first bore **60**, and a lower nozzle member **64** which defines the second bore **62**. The upper nozzle member **63** is preferably a metallic material, and the lower nozzle member **64** is preferably a metallic or ceramic material. The bore **60** of the upper nozzle member **63** is in axial alignment with the longitudinal axis of the torch electrode **14**.

[0029] The lower nozzle member **64** is separated from the upper nozzle member **63** by a plastic spacer element **65** and a water swirl ring **66**. The space provided between the upper nozzle member **63** and the lower nozzle member **64** forms a water chamber **67**.

[0030] The lower nozzle member **64** comprises a cylindrical body portion **70** which defines a forward or lower end portion and a rearward or upper end portion, with the bore **62** extending coaxially through the body portion **70**. An annular mounting flange **71** is positioned on the rearward end portion, and a frustoconical surface **72** is formed on the exterior of the forward end portion coaxial with the second bore **62**. The annular flange **71** is supported from below by an inwardly directed flange **73** at the lower end of the cup **74**, with the cup **74** being detachably mounted by interconnecting threads to the outer housing member **44**. A gasket **75** is disposed between the two flanges **71** and **73**.

[0031] The bore **62** in the lower nozzle member **64** is cylindrical, and is maintained in axial alignment with the bore **60** in the upper nozzle member **63** by a centering sleeve **78** of any suitable plastic material. Water flows from the passageway **42** through openings **85** in the sleeve **78** to the injection ports **87** of the swirl ring **66**, which injects the water into the water chamber **67**. The injection ports **87** are tangentially disposed around the swirl ring **66**, to impart a swirl component of velocity to the water flow in the water chamber **67**. The water exits the water chamber **67** through the bore **62**.

[0032] A power supply (not shown) is connected to the torch electrode **14** in a series circuit relationship with a metal workpiece, which is usually grounded. In opera-

tion, a plasma arc is established between the emissive element **28** of the electrode, which acts as the cathode terminal for the arc, and the workpiece, which is connected to the anode of the power supply and is positioned below the lower nozzle member **64**. The plasma arc is started in a conventional manner by momentarily establishing a pilot arc between the electrode **14** and the nozzle assembly **12**, and the arc is then transferred to the workpiece through the bores **60** and **62**.

METHOD OF FABRICATION

[0033] The invention also provides a simplified method for fabricating an electrode of the type described above. Figures 4-8 illustrate a preferred method of fabricating the electrode in accordance with the present invention. As shown in Figure 4, a cylindrical blank **94** of copper or copper alloy is provided having a front face **95** and an opposite rear face **96**. A pair of generally cylindrical coaxial bores are then formed, such as by drilling, in the front face **95** so as to form the small cavity **24** and large cavity **25**, as described above. The emissive element **28** is then fixedly secured to the small cavity **24** by press-fitting the emissive element therein. Other methods of securing the emissive element into the small cavity **24** can also be used, such as crimping, radially compressing, or utilizing electromagnetic energy. The emissive element **28** extends outwardly from the small cavity **24** towards the front face **95** of the cylindrical blank **94** and defines an open space **97** between the emissive element and inner wall **27b** of the large cavity **25**.

[0034] As previously described, a separator **32** is composed of a silver alloy material. In one embodiment, for example, the silver alloy material comprises silver alloyed with about 0.25 to 10 percent of copper. The separator **32** is configured and sized to substantially occupy the open space **97** defined by the inner wall **27b** of the large cavity **25** and the emissive element **28**. In this regard, the separator **32** may be shaped by machining or forming.

[0035] Next, as shown in Figure 5, the separator **32** is inserted into the large cavity **25** such that the peripheral wall **33** of the separator slideably engages the inner wall **27b** of the large cavity, and the cylindrical cavity **35** defined by the separator is disposed about the emissive element **28** to define an interface therebetween. In one embodiment, the separator **32** is disposed about the emissive element **28** in a close fitting or interference fit, although other methods of securing the separator to the emissive element can be used, as described below.

[0036] According to one embodiment shown in Figure 6, a tool **98** having a generally planar circular working surface **100** is placed with the working surface in contact with the end faces **29** and **36** of the emissive element **28** and separator **32**, respectively. The outer diameter of the working surface **100** is slightly smaller than the diameter of the large cavity **25** in the cylindrical blank

94. The tool **98** is held with the working surface **100** generally coaxial with the longitudinal axis of the torch **10**, and force is applied to the tool so as to impart axial compressive forces to the emissive element **28** and the separator **32** along the longitudinal axis. For example, the tool **98** may be positioned in contact with the emissive element **28** and separator **32** and then struck by a suitable device, such as the ram of a machine. Regardless of the specific technique used, sufficient force is imparted so as to cause the emissive element **28** and the separator **32** to be deformed radially outwardly such that the emissive element is tightly gripped and retained by the separator, and the separator is tightly gripped and retained by the large cavity **25**, as shown in Figure 7.

[0037] In a preferred embodiment, the separator **32** is metallurgically bonded to the emissive element **28**. Advantageously, the emissive element **28** is already secured to the small cavity **24** when the brazing step is performed (as discussed above) so that the emissive element remains centered along the longitudinal axis even if the separator is softened by the high temperatures associated with brazing. The brazing process is preferably conducted by first inserting a ring **99** (Figures 5 and 7) of silver brazing material about the emissive element **28** after the emissive element has been secured to the small cavity **24** such that the ring occupies a portion of the open space **97** between the emissive element and inner wall **27b** of the large cavity **25**. In one example, the brazing material comprises an alloy composed mostly of silver with one or more other elements, such as nickel, lithium, and/or copper. Also, a small amount of flux may be included, so as to remove oxides from the surface of the copper.

[0038] The separator **32** is introduced after the ring **99** is inserted into the open space **97**, and the resulting assembly is then heated to a temperature only sufficient to melt the brazing material, which has a melting temperature no greater than the separator **32**. However, with the present invention, the temperature does not have to be significantly lower than the melting temperature of the separator because the emissive element **28** is secured to the small cavity **24** as described above. During the heating process, the separator **32** is pressed into the large cavity **25**, which causes the melted brazing material to flow upwardly and cover the entirety of the interface between the separator and the emissive element **28** and between the peripheral wall **33** of the separator **32** and the inner wall **27b** of the large cavity **25**. Upon cooling, the brazing material provides a relatively thin coating which serves to bond the separator **32** to the emissive element **28**, with the coating having a thickness on the order of between about 0.001 to 0.005 inches. Alternatively, the brazing step can be performed by melting a disk of brazing material that is placed on the separator **32** and the emissive element **28** after the two have been pressed into the cavities. In this manner, capillary action pulls the brazing material between the separator **32** and emissive element **28** so that the a rela-

tively thin coating is disposed therebetween as discussed above.

[0039] To complete the fabrication of the holder 16, the rear face 96 of the cylindrical blank 94 is machined to form an open cup-shaped configuration shown in Figure 8 defining the cavity 22 therein. Advantageously, the cavity 22 includes an internal annular recess 82 which defines the cylindrical post 23 and coaxially surrounds portions of the separator 32 and emissive element 28. In particular, the internal annular recess 82 includes an internal surface 83 comprising a portion of the peripheral wall 33 of the separator 32. In other words, the internal annular recess 82 is formed, such as by trepanning or other machining operation, so that a portion of the peripheral wall 33 of the separator 32 is directly exposed to the cavity 22. As such, the exposed separator 32 improves the heat transfer between the cooling medium circulated in the cavity 22 and the arc. Further, the brazing material surrounding the peripheral wall 33 of the separator 32 at the internal surface 83 of the annular recess 82 is preferably eliminated, thus further improving heat transfer.

[0040] The improved heat transfer properties mentioned above result from two primary circumstances. First, silver has a greater thermal conductivity than copper, namely 4.29 W/(cm·K) versus 4.01 W/(cm·K), respectively. Second, there are fewer boundaries over which the heat must pass. More specifically, by eliminating the boundary or interface between the separator 32 and the brazing material (as well as the boundary between the brazing material and the blank 94), the rate of heat transfer of the electrode according to the present invention is significantly greater than conventional electrodes. In addition, the path the heat must travel is shorter than conventional electrodes since the separator 32 is directly exposed to the cavity 22.

[0041] As discussed above, the surface 31 of the internal cavity 22 includes the cylindrical post 23. In one embodiment shown in Figures 3 and 8, the surface 31 includes a cap-shaped portion 92 of the blank 94 disposed about the emissive element 28. The portion 92 is tightly secured to the emissive element 28, although not directly attached to the remainder of the blank 94. Thus, the portion 92 is formed by the trepanning operation for ease of manufacturing, since by leaving the portion 92 the post 23 has a uniform cylindrical shape. However, the portion 92 can also be partially or completely machined away to expose the emissive element 28 to the cavity 22 (see Figure 10).

[0042] The external periphery of the cylindrical blank 94 is also shaped as desired, including formation of external threads 102 at the rear end 19 of the holder 16. Finally, the front face 95 of the blank 94 and the end faces 29 and 36 of the emissive element 28 and separator 32, respectively, are machined so that they are substantially flat and flush with one another. Any brazing material present on the front face 95 and end faces 29 and 36 is also removed during this machining process.

[0043] Figure 9 depicts an end elevational view of the holder 16. It can be seen that the end face 36 of the separator 32 separates the end face 29 of the emissive element 28 from the front face 20 of the holder 16. The end face 36 is annular having an inner perimeter 104 and an outer perimeter 106. Because the separator 32 is composed of the silver alloy material having a higher work function than that of the emissive element 28, the separator 32 serves to discourage the arc from detaching from the emissive element and becoming attached to the holder 16.

[0044] Thus, the present invention provides an electrode 14 for use in a plasma arc torch and a method of making an electrode wherein the emissive element 28 is secured along the longitudinal axis and thus prevented from moving while brazing the emissive element to the separator 32. In addition, the separator 32 has a tubular shape, thus eliminating the need for drilling an opening in the separator, which results in a loss of silver.

[0045] Many modifications and other embodiments of the invention will come to mind to one skilled in the art to which this invention pertains having the benefit of the teachings presented in the foregoing descriptions and the associated drawings. For example, the separator and or emissive element can have other shapes and configurations, such as conical or rivet-shaped, without departing from the spirit and scope of the invention. Therefore, it is to be understood that the invention is not to be limited to the specific embodiments disclosed and that modifications and other embodiments are intended to be included within the scope of the appended claims. Although specific terms are employed herein, they are used in a generic and descriptive sense only and not for purposes of limitation.

Claims

1. A method of fabricating an electrode adapted for supporting an arc in a plasma torch, comprising the steps of:

forming a front cavity in a generally planar front face of a metallic holder, the front cavity extending along an axis generally normal to the front face;

fixedly securing an emissive element to the front cavity of the metallic holder;

positioning a relatively non-emissive separator in the front cavity of the metallic holder such that the separator is interposed between and separates a portion of the metallic holder from the emissive element at the front face of the holder; and

forming a rear cavity in the metallic holder such that a portion of the separator is exposed to the cavity.

2. A method according to Claim 1, wherein the separator is positioned in the front cavity of the holder such that only a portion of the emissive element is in contact with the separator.
3. A method according to Claim 1, wherein the emissive element is fixedly secured to the front cavity of the holder by press-fitting.
4. A method according to Claim 1, wherein positioning the separator comprises positioning a separator having a tubular shape over the emissive element in a close-fitting relationship.
5. A method according to Claim 1, wherein forming the front and rear cavities comprises machining the metallic holder.
6. A method according to Claim 1, wherein forming the rear cavity includes exposing the emissive element to the cavity.
7. A method of fabricating an electrode adapted for supporting an arc in a plasma torch, comprising the steps of:
- forming a front cavity in a generally planar front face of a metallic holder, the front cavity extending along an axis generally normal to the front face;
- fixedly securing an emissive element to the front cavity of the metallic holder;
- inserting a relatively non-emissive separator into the front cavity of the metallic holder such that only a portion of the emissive element is in contact with the separator; and
- introducing a brazing material in the front cavity such that some of the brazing material is between the emissive element and the separator and also between the separator and the metallic holder.
8. A method according to Claim 7, wherein the brazing material is introduced by inserting a disk of brazing material about the emissive element in the front cavity, heating the brazing material until the brazing material becomes at least partially flowable, and pressing the separator into the front cavity.
9. A method according to Claim 7, wherein the emissive element is fixedly secured in the front cavity before the separator is inserted in the front cavity.
10. An electrode adapted for supporting an electric arc in a plasma arc torch, comprising:
- a metallic holder having a front end and a rear end, the front end defining a front cavity;
- a generally non-emissive separator positioned in the front cavity, the separator having an inner peripheral wall;
- an emissive element also positioned in the front cavity, the emissive element having an outer peripheral wall that is only partially surrounded by the inner peripheral wall of the separator; and
- a brazing material disposed between the emissive element and the separator, and between the separator and the metallic holder.
11. An electrode according to Claim 10, wherein a portion of the outer peripheral wall of the emissive element is free from any contact with the brazing material.
12. An electrode according to Claim 10, wherein the front cavity comprises a proximal portion and a distal portion, the proximal portion having a diameter smaller than the diameter of the distal portion, the brazing material being disposed only in the distal portion of the cavity.
13. An electrode according to Claim 10, wherein the separator is constructed of silver alloyed with an additional material selected from the group consisting of copper, aluminum, iron, lead, zinc, and alloys thereof.
14. An electrode according to Claim 10, wherein the emissive element has a cylindrical shape and the separator has a tubular shape.
15. An electrode adapted for supporting an electric arc in a plasma arc torch, comprising:
- a metallic holder having a front end and a rear end, the front end defining a front cavity and the rear end defining a rear cavity;
- a generally non-emissive separator positioned in the front cavity, the separator having an outer peripheral wall; and
- an emissive element also positioned in the front cavity coaxially with the separator, the emissive element having an outer peripheral wall that is only partially in contact with the separator, wherein a portion of the outer peripheral wall of the separator is exposed to the rear cavity.
16. An electrode according to Claim 15, wherein the emissive element has a cylindrical shape and the separator has a tubular shape.
17. An electrode according to Claim 15, wherein the front cavity comprises a proximal portion and a distal portion, the proximal portion having a diameter smaller than the diameter of the distal portion,

wherein the emissive element and the proximal portion of the front cavity have an interference fit therebetween.

18. An electrode according to Claim 15, wherein the separator is constructed of silver alloyed with an additional material selected from the group consisting of copper, aluminum, iron, lead, zinc, and alloys thereof.

19. An electrode according to Claim 15, wherein a portion of the emissive element is exposed to the rear cavity.

20. A plasma arc torch, comprising:

an electrode which includes:

a metallic holder having a front end and a rear end, the front end defining a front cavity and the rear end defining a rear cavity; a generally non-emissive separator positioned in the front cavity, the separator having an outer peripheral wall; and an emissive element also positioned in the front cavity coaxially with the separator, the emissive element having an outer peripheral wall that is only partially in contact with the separator;

a nozzle mounted adjacent the front end of the holder and having a flow path therethrough that is aligned with the longitudinal axis;

an electrical supply for creating an arc extending from the emissive element of the electrode through the nozzle flow path and to a workpiece located adjacent the nozzle; and

a gas supply for creating a flow of a gas between the electrode and the nozzle and so as to create a plasma flow outwardly through the nozzle flow path and to the workpiece.

21. A plasma arc torch according to Claim 20, further comprising a brazing layer disposed between the emissive element and the separator, and between the separator and the second cavity.

22. A plasma arc torch according to Claim 20, wherein a portion of the emissive element, the portion being in contact with the first cavity, is substantially free of the brazing material.

23. A plasma arc torch according to Claim 20, wherein the separator is constructed of silver alloyed with an additional material selected from the group consisting of copper, aluminum, iron, lead, zinc, and alloys thereof.

24. A plasma arc torch according to Claim 20, wherein the emissive element and the separator are flush with the front end of the metallic holder.

25. A plasma arc torch according to Claim 20, wherein the metallic holder includes a rear end defining a rear cavity that is at least partially shaped such that the separator is at least partially exposed to the cavity.

26. A plasma arc torch according to Claim 25, wherein the metallic holder is at least partially shaped such that the emissive element is at least partially exposed to the cavity.

27. A method of fabricating an electrode adapted for supporting an arc in a plasma torch, comprising the steps of:

forming an opening in a front end of a holder; securing an emissive element into the opening of the holder such that a portion of the emissive element extends frontwardly from the holder; securing a relatively non-emissive member about the emissive element in a position such that the non-emissive member and the emissive element will together define at least part of a front face of the electrode for supporting an arc; and

forming a cavity in a rear end of the holder such that at least a portion of the non-emissive member is exposed to the cavity and cooling liquid can be circulated therethrough to cool the non-emissive member.

28. A method according to Claim 27, wherein the method causes the emissive element to be also at least partially exposed to the cavity.

29. A method of fabricating an electrode adapted for supporting an arc in a liquid cooled plasma torch, comprising the steps of:

providing an emissive element and a relatively non-emissive member defining an opening therein sized to fit around the emissive element; bonding the non-emissive member to a holder having a front opening therein such that the emissive element extends from the non-emissive member and into the opening of the holder; and

forming a rear cavity in the holder such that at least a portion of the non-emissive member is exposed to the cavity and cooling liquid can be circulated therethrough to cool the non-emissive member.

30. A method according to Claim 29, wherein the meth-

od causes the emissive element to be also at least partially exposed to the cavity.

31. A method according to Claim 29, further comprising removing at least a portion of the non-emissive member to define a front face where the emissive element and the non-emissive member are substantially flat and flush with one another at the front face of the non-emissive member.

32. A method according to Claim 29, wherein said bonding step comprises thermally bonding the non-emissive member to the holder.

33. A method according to Claim 32, wherein said bonding step comprises brazing the non-emissive member to the holder.

34. A method according to Claim 29, wherein said providing step includes providing a metallic holder.

35. An electrode adapted for supporting an arc in a liquid cooled plasma arc torch, comprising:

a holder having a front end and a rear end, the front end defining a front opening and the rear end defining a rear cavity;

an emissive element positioned such that a portion of the emissive element is within the front opening of the holder; and

a relatively non-emissive member being secured to said holder and surrounding a portion of the emissive element in a position such that the non-emissive member and the emissive element together define at least part of a front face of the electrode for supporting an arc,

wherein a portion of the non-emissive member is exposed to the rear cavity and cooling liquid can be circulated therethrough to cool the non-emissive member.

36. An electrode according to Claim 35, wherein at least a portion of the emissive element is also exposed to the rear cavity.

37. An electrode according to Claim 35, further comprising a brazing layer disposed between the emissive element and the non-emissive member.

38. An electrode adapted for supporting an arc in a plasma arc torch, comprising:

a holder defining a rear cavity therein, the rear cavity extending along a longitudinal axis defined by the holder;

a relatively non-emissive member secured to the holder and at least partially exposed to the

rear cavity defined by the holder, the non-emissive member defining an opening at least partially therethrough;

an emissive element positioned in the opening defined by the non-emissive member such that the emissive element and the non-emissive member together define at least part of a front face of the electrode for supporting an arc; and a brazing material disposed between at least a portion of the emissive element and the relatively non-emissive member.

39. An electrode according to Claim 38, wherein the relatively non-emissive member is brazed to the holder.

40. An electrode according to Claim 38, wherein the non-emissive member is formed of silver or alloys thereof and the brazing material is formed of silver or alloys thereof, and the non-emissive member and brazing material have melting points that are approximately the same.

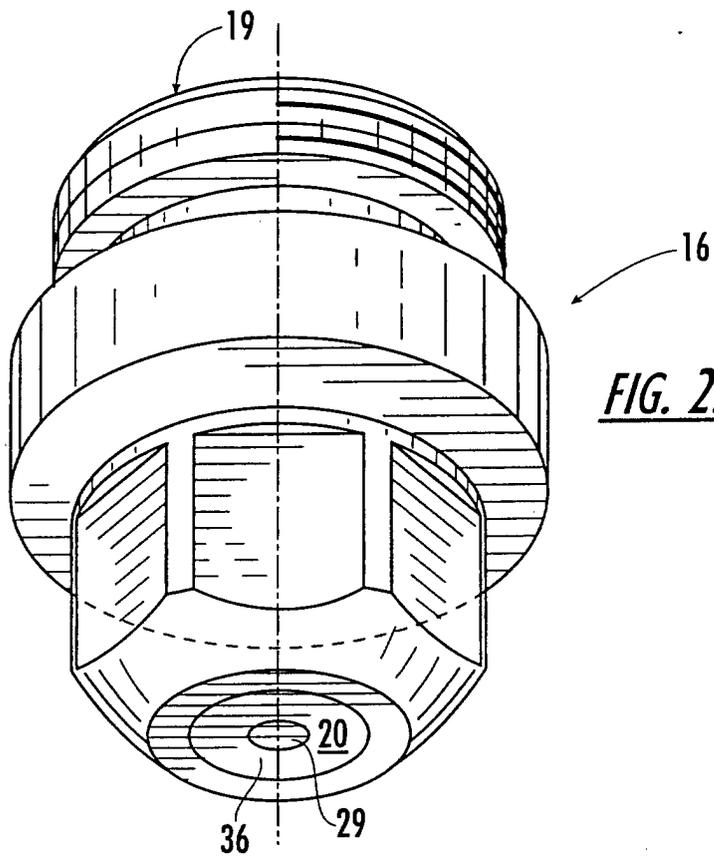


FIG. 2.

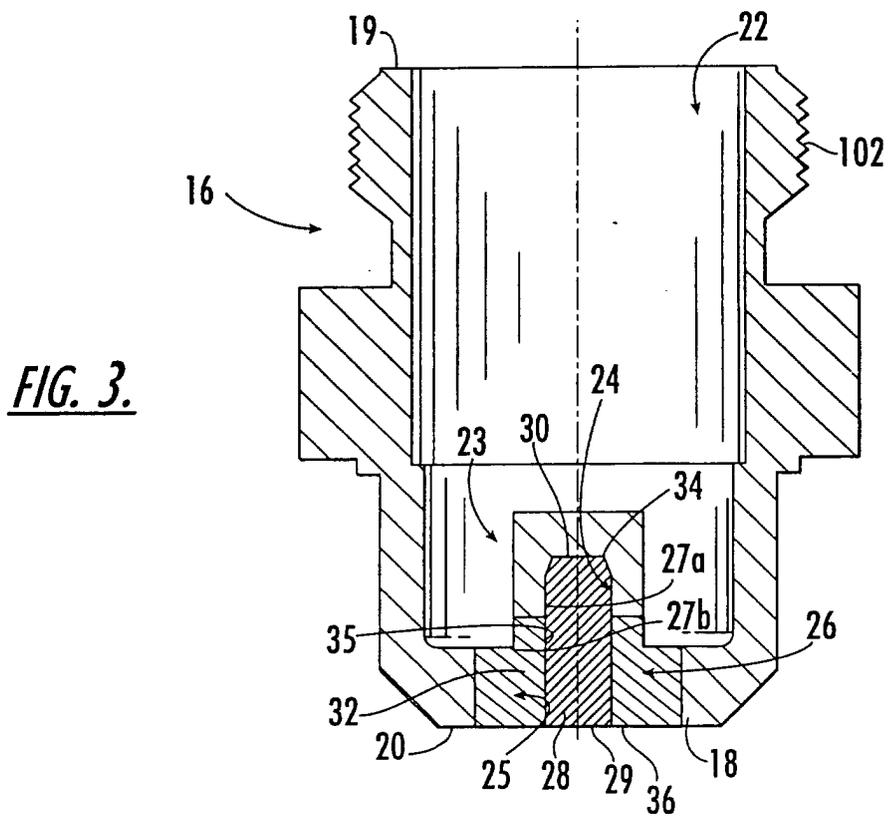


FIG. 3.

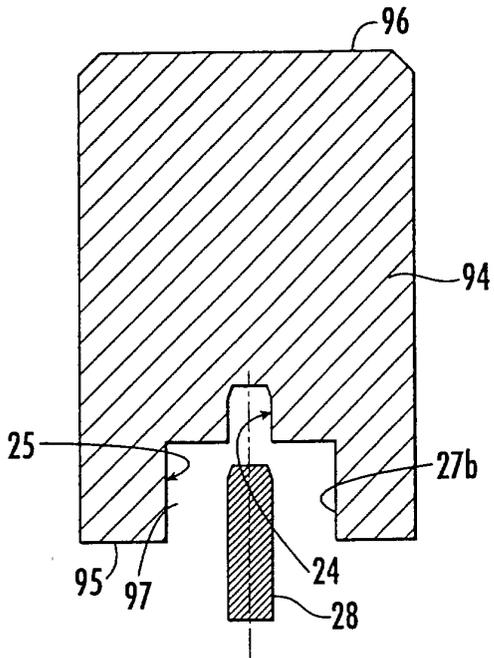


FIG. 4.

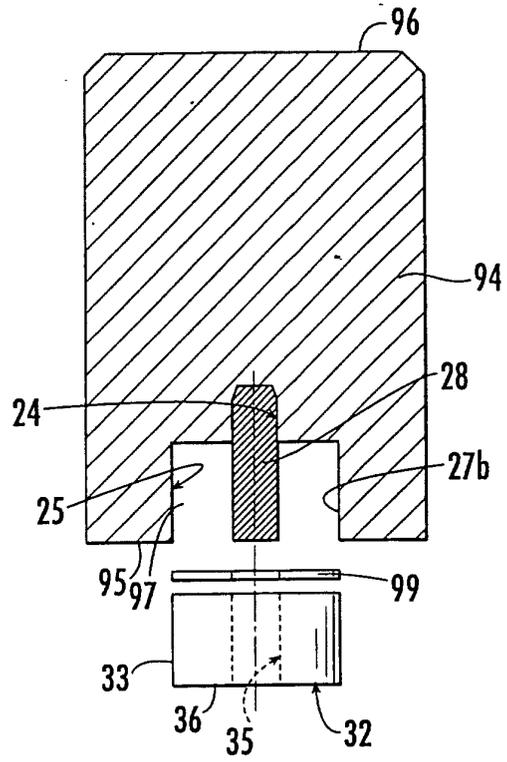


FIG. 5.

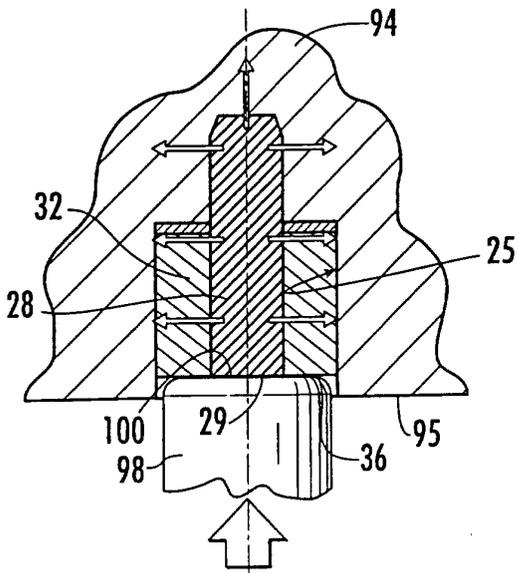


FIG. 6.

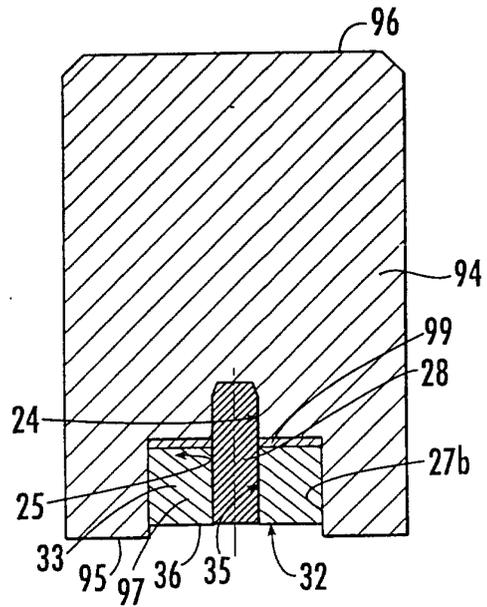


FIG. 7.

FIG. 8.


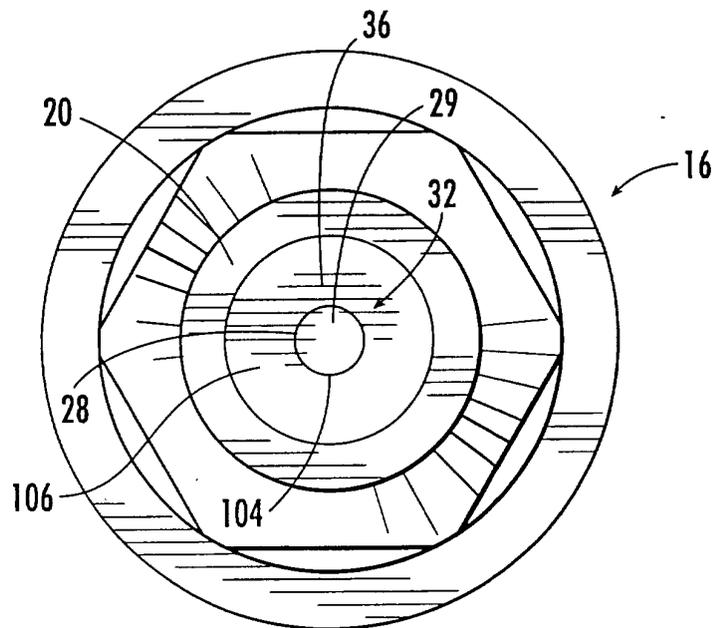


FIG. 9.

FIG. 10.

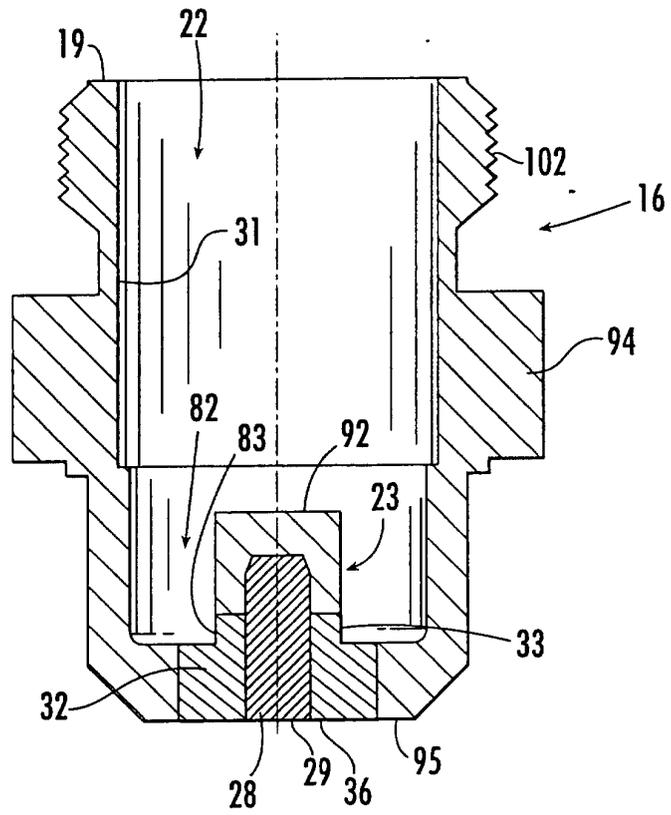