

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 203 804 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

08.05.2002 Bulletin 2002/19

(21) Application number: **00124058.9**

(22) Date of filing: **06.11.2000**

(51) Int Cl.7: **C10M 163/00**, C10M 141/10

// (C10M163/00, 135:18,
137:10, 159:22),
(C10M141/10, 129:54, 135:18,
137:10),
(C10N10/04, 10:12, 30:06,
40:25)

(84) Designated Contracting States:

**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

Designated Extension States:

AL LT LV MK RO SI

(71) Applicant: **Tonen Corporation**

Tokyo (JP)

(72) Inventors:

• **Ogano, Satoshi**

Iruma-gun, Saitama-ken (JP)

• **Kuribayashi, Toshiaki**

Iruma-gun, Saitama-ken (JP)

• **Kawagoishi, Nobuchika**

Iruma-gun, Saitama-ken (JP)

(74) Representative: **Dew, Melvyn John et al**

ExxonMobil Chemical Europe Inc.

1830 Machelen (BE)

(54) **Lubricant oil composition for diesel engines**

(57) The present invention provides a lubricant oil composition, having enhanced wear-preventive characteristics for a diesel engine operating with large quantities of soot in the oil (soot content: 0.2 to 4.0 wt. %), and is especially suitable for a pressure-accumulating (common rail) type diesel engine equipped with an EGR system. The lubricant oil composition containing a base oil composed of a mineral and/or synthetic oil incorporated with at least three additives that are a sulfurized oxymo-

lybdenum dithiocarbamate at 0.03 to 0.50 wt. % as Mo; a zinc dialkyl dithiophosphate at 0.04 to 0.50 wt. % as P; and at least one metallic salt of alkyl salicylate selected from the group consisting of a Ca salt of alkyl salicylate at 0.004 to 1.0 wt. % as Ca, Mg salt of alkyl salicylate at 0.002 to 0.60 wt. % as Mg, and Zn salt of alkyl salicylate at 0.006 to 1.60 wt. % as Zn, all percentages being based on the whole composition.

EP 1 203 804 A1

Description**FIELD OF THE INVENTION**

5 **[0001]** This invention relates to a lubricant oil composition for diesel engines, more particularly the composition excellent in wear-preventive characteristics for a diesel engine operating under the lubricating conditions with large quantities of soot in the oil, especially suitable for a pressure-accumulating type (which may be referred to as common rail type) diesel engine equipped with an exhaust gas recycle (referred to as "EGR") system.

BACKGROUND OF THE INVENTION

10 **[0002]** Lubricant oils have been used to lubricate internal combustion engines, devices in driving systems (e.g., automatic transmissions, shock absorbers and power steering) and gears having sliding mechanical members for their smooth operation. In particular, lubricant oil for internal combustion engines are used mainly for piston rings, cylinder liners, bearings for crank shafts and connecting rods, valve trains including cams and valve lifters, and other sliding members. They are also used for cooling the engines, cleaning and dispersing combustion products, and prevention of rust and corrosion, in addition to the lubricating purposes. As described above, lubricant oils for internal combustion engines are required to exhibit a variety of functions. These requirements are becoming even more severe, as the engines become more functional, produce higher power and are operated under more severe conditions.

20 **[0003]** In order to satisfy these requirements, lubricant oils for internal combustion engines are incorporated with a variety of additives, such as antiwear agent, metallic detergent, ashless dispersant and antioxidant. The essential functions of a lubricant oil for internal combustion engines are to prevent wear and seizure by helping the engine operate smoothly under all conditions. Hydrodynamic lubrication prevails in lubricated engine members, but boundary lubrication tends to occur in some sections, e.g., valve trains and dead centers in the cylinders. In general, zinc dithiophosphate or the like is added to prevent wear in the boundary lubrication areas.

25 **[0004]** More recently, reduction in quantities of spent automobile lubricant oils has been increasingly attracting attention for environmental preservation. In particular, Association of European Automobile Manufacturers is including serviceability of lubricant oils in the specifications of lubricant oils for internal combustion engines. Improved serviceability of the lubricant oils is being required also in Japan.

30 **[0005]** Air pollution by exhaust gases (in particular, NO_x) from diesel engines is becoming severer worldwide, and there are movements to introduce more stringent regulations on NO_x and particulate matter emissions from diesel engines. Engine makers are responding to these regulations by an EGR system, which is already adopted for gasoline engines, to clear the NO_x regulations. Some of the problems involved in use of an EGR system are still increased quantities of soot in the lubricant oil to aggravate wear of valve trains and piston-cylinder interfaces by soot, making it more difficult to improve serviceability of the lubricant oil.

35 **[0006]** Moreover, it should be noted that abatement of NO_x and particulate matter run counter to each other, when an EGR system is adopted for NO_x abatement. One of the methods trying to solve problems of increased particulate matter in an EGR-equipped engine is use of high-pressure fuel injection, where high-pressure fuel is stored in a pressure-accumulating piping system (referred to as common rail) by means of a fuel supply pump and then injected into each engine cylinder under pressure from the common rail via a valve, to improve combustion conditions. It is considered to be essential that the future diesel engine must be equipped with an EGR system and pressure-accumulating type fuel injector simultaneously to clear the more stringent exhaust gas regulations.

40 **[0007]** It is difficult for the current techniques for preventing wear of valve trains and piston-cylinder interfaces by soot to drastically solve the problems of improving lubricant oil serviceability.

45 **[0008]** A variety of techniques have been proposed to prevent wear of internal combustion engines, e.g., incorporation of 4 types of additives including zinc dithiophosphate (Japanese Laid-open Patent Application No. 54-103404), a combination of organomolybdenum compound and zinc dithiophosphate (Japanese Laid-open Patent Application No. 54-113604), a combination of organomolybdenum compound, salicylate and bis type succinimide (Japanese Laid-open Patent Application No. 5-230485). The techniques trying to improve serviceability include a combination of organomolybdenum compound, zinc dithiophosphate and polysulfide (Japanese Laid-open Patent Application No. 8-73878, EP699739)

50 **[0009]** However, in a diesel engine, unlike gasoline engine, the engine oil tends to be contaminated with large quantities of soot evolving as a result of incomplete combustion of diesel fuel oil. It is reported that the soot, having surface activity, may adsorb a polar additive in the engine oil and scrape a coating film away from the friction surface. The required functions of an antiwear agent for diesel engines, therefore, should be much different from those of the agent for gasoline engines under the severe friction conditions with the engine oil contaminated with soot. Therefore, the conventional techniques for compounding antiwear agents, e.g., use of zinc dithiophosphate, may not exhibit sufficient effect of preventing wear under the lubricating conditions with large quantities of soot in the oil. A combination of

molybdenum dialkyl dithiophosphate (Mo content: 200 to 400 ppm), zinc primary alkyl dithiophosphate and salicylate (Japanese Laid-open Patent Application No. 7-207290) and combination of specific contents of sulfurized oxymolybdenum dithiocarbamate and zinc dialkyl dithiophosphate, are some of few additives proposed so far to improve wear-preventive characteristics of the lubricant oils for diesel engines operating under the above conditions.

[0010] However, these lubricant oils may not exhibit sufficient effects of preventing wear in an EGR-equipped diesel engine, i.e., under the lubricating conditions with large quantities of soot in the oil. Therefore, the technological development has been strongly demanded for diesel engine lubricant oil compositions which can prevent wear of valve trains and piston-cylinder interfaces.

SUMMARY OF THE INVENTION

[0011] One embodiment of the present invention provides for a lubricant oil composition comprising a base oil composed of a mineral and/or synthetic oil incorporated with at least three additives (A), (B) and (C) below, for a diesel engine operating under the lubricating conditions with large quantities of soot in the oil:

(A): a sulfurized oxymolybdenum dithiocarbamate at 0.03 to 0.50 wt.% as Mo,

(B): a zinc dialkyl dithiophosphate at 0.04 to 0.50 wt.% as P, and

(C): at least one metallic salt of alkyl salicylate selected from the group consisting of a Ca salt of alkyl salicylate at 0.004 to 1.0 wt.% as Ca, Mg salt of alkyl salicylate at 0.002 to 0.60 wt.% as Mg, and Zn salt of alkyl salicylate at 0.006 to 1.60 wt.% as Zn, all percentages being based on the whole composition.

[0012] The preferred embodiments also include a method for enhancing wear prevention in an engine and of a lubricating oil by adding the above composition thereto.

[0013] The invention may comprise, consist or consist essentially of the steps or elements recited herein.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0014] The inventors have found that a lubricant oil composition incorporated with specific contents of organomolybdenum compound, zinc dithiophosphate and metallic salt of alkyl salicylate (referred to herein as salicylate) surprisingly shows high wear-preventive characteristics even under the lubricating conditions with soot in the lubricant oil, reaching the present invention.

[0015] One embodiment of the present invention provides for a lubricant oil composition having enhanced wear-preventive characteristics for a diesel engine operating under lubricating conditions with soot, preferably in large quantities, in the oil, especially suitable for a pressure-accumulating (common rail) type diesel engine equipped with an EGR system.

[0016] One embodiment of this invention provides a lubricant oil composition comprising a base oil composed of a mineral and/or synthetic oil incorporated with at least three additives (A), (B) and (C) below, for a diesel engine operating under the lubricating conditions with large quantities of soot in the oil:

(A): a sulfurized oxymolybdenum dithiocarbamate at 0.03 to 0.50 wt.% as Mo,

(B): a zinc dialkyl dithiophosphate at 0.04 to 0.50 wt.% as P, and

(C): at least one metallic salt of alkyl salicylate selected from the group consisting of a Ca salt of alkyl salicylate at 0.004 to 1.0 wt.% as Ca, Mg salt of alkyl salicylate at 0.002 to 0.60 wt.% as Mg, and Zn salt of alkyl salicylate at 0.006 to 1.60 wt.% as Zn.

[0017] The present invention also provides the above lubricant oil composition, which is used for a pressure-accumulating (common rail) type diesel engine equipped with an exhaust gas recycle system.

[0018] This invention relates, as described above, to the lubricant oil composition comprising a base oil incorporated with specific contents of sulfurized oxymolybdenum dithiocarbamate, zinc dialkyl dithiophosphate and metallic salt (Ca, Mg or Zn) of alkyl salicylate, for a diesel engine operating under the lubricating conditions with large quantities of soot in the oil, especially a pressure-accumulating (common rail) type diesel engine equipped with an EGR system.

[0019] Preferred embodiments of the present invention include:

[0020] A lubricant oil composition of one of the above, wherein the base oil is incorporated with a sulfurized oxymolybdenum dithiocarbamate at 0.04 to 0.20 wt.% (400 to 2000 ppm) as Mo.

[0021] A lubricant oil composition of one of the above, wherein the base oil is incorporated with a zinc dialkyl dithiophosphate at 0.07 to 0.20 wt.% (700 to 2000 ppm) as P.

[0022] A lubricant oil composition of one of the above, wherein the base oil is incorporated with at least one metallic salt of alkyl salicylate selected from the group consisting of a Ca salt of alkyl salicylate having a total base number of 150 mg KOH/g at 0.007 to 0.20 wt.% as Ca, Mg salt of alkyl salicylate having a total base number of 150 mg KOH/g at 0.004 to 0.127 wt.% as Mg, and Zn salt of alkyl salicylate having a total base number of 150 mg KOH/g at 0.012 to 0.20 wt.% as Zn.

[0023] A lubricant oil composition of one of the above, which is used under the lubricating condition with 0.2 to 4.0 wt.% of soot in the oil.

[0024] A lubricant oil composition of one of the above, wherein the zinc dialkyl dithiophosphate is characterized by a mixed alkyl group with a primary and secondary alkyl group.

[0025] A method of enhancing the wear-preventive characteristics of a lubricating oil by adding to a base oil of lubricating viscosity an effective amount of the above composition.

[0026] A method of enhancing wear-prevention in an engine by operating the engine in the presence of a lubricating oil composition described above.

[0027] With respect to the present invention:

Lubricant base oil

[0028] The base oil for the lubricant oil composition of the present invention is not limited, and any one which is normally used as a lubricant base oil can be used. In other words, it may be a mineral oil, synthetic oil or a mixture thereof.


[0029] The mineral oils useful for the present invention include lubricant stocks, obtained by atmospheric or vacuum distillation of crude, which are treated by various processes, e.g., raffinate from solvent extraction with an aromatic extractant such as phenol, furfural and N-methyl pyrrolidone; hydrotreated oil obtained by treating lubricant stocks with hydrogen under hydrotreatment conditions in the presence of a hydrotreatment catalyst; isomate obtained by isomerizing wax with hydrogen under isomerization conditions in the presence of an isomerization catalyst; and those lubricant fractions obtained by a combination of solvent refining, hydrotreatment or isomerization. Any process described above can be optionally combined with dewaxing, hydrofinishing, clay treatment or the like operated in a normal manner. More specifically, the mineral oils for the present invention include light, medium and heavy neutral oils, and bright stocks. These base oils can be mixed with one another, to satisfy the requirements of the present invention.

[0030] The examples of synthetic base oils useful for the present invention include poly- α -olefin, α -olefin oligomer, polybutene, alkylbenzene, polyol ester, dibasic acid ester, polyoxyalkylene glycol, polyoxyalkylene glycol ether, and silicone oil.

[0031] These base oils may be used individually or in combination. A mineral oil may be combined with a synthetic oil. The base oil for the present invention generally has a kinematic viscosity of 2 to 20mm²/s at 100°C, preferably 3 to 15mm²/s. Viscosity beyond the above range causes problems, e.g., excessively increased agitation resistance and coefficient of friction in the hydrodynamic lubrication region to deteriorate fuel-saving characteristics when it exceeds the above range, and increased wear at sliding members (e.g., valve trains, pistons, rings and bearings of diesel engines) when it is below the above range.

Sulfurized oxymolybdenum dithiocarbamate

[0032] The sulfurized oxymolybdenum dithiocarbamate (MoDTC) as one of the essential components for the lubricant oil composition of the present invention is shown by the general formula [1]:

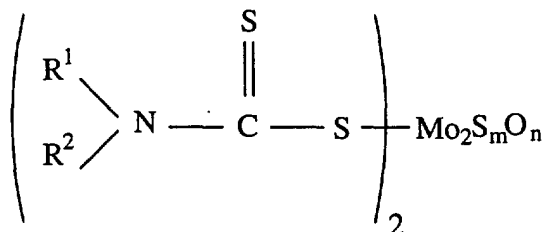


wherein, R¹ and R² are each a hydrocarbon group having a carbon number of 4 to 18, and may be the same or different;

and (m) and (n) are each an integer making 4. The hydrocarbon groups of R¹ and R² having a carbon number of 4 to 18 include an alkyl group having a carbon number of 4 to 18, alkenyl group having a carbon number of 4 to 18, cycloalkyl group having a carbon number of 4 to 18, and aryl, alkyl aryl and aryl alkyl group having a carbon number of 6 to 18. These alkyl and alkenyl groups may be of straight-chain or branched. The hydrocarbon group shown by R¹ or R² for the present invention particularly preferably has a carbon number of 4 to 13. The concrete examples of the hydrocarbon groups shown by R¹ and R² include butyl, pentyl, hexyl, heptyl, 2-ethyl hexyl, octyl, nonyl, decyl, undecyl, dodecyl, tridecyl, octenyl, nonenyl, decenyl, undecenyl, dodecenyl, tridecenyl, tetradecenyl, hexadecenyl, octadecenyl, dimethyl cyclohexyl, ethyl cyclohexyl, methyl cyclohexylmethyl, cyclohexylethyl, propyl cyclohexyl, butyl cyclohexyl, heptyl cyclohexyl, dimethyl phenyl, methyl benzyl, phenetyl, naphthyl, and dimethyl naphthyl. These sulfurized oxymolybdenum dithiocarbamates may be used either individually or in combination for the present invention. The sulfurized oxymolybdenum dithiocarbamate is incorporated at 0.03 to 0.50 wt.% (300 to 5000 ppm) as molybdenum (Mo) derived therefrom, based on the whole composition, preferably 0.04 to 0.20 (400 to 2000 ppm). At below 0.03 wt.%, the lubricant oil may not sufficiently exhibit its wear-preventive effect. At above 0.50 wt.%, on the other hand, the effect is not increased for the quantity of the dithiocarbamate used, and sludge may be formed more easily.

Zinc dialkyl dithiophosphate

[0033] The zinc dialkyl dithiophosphate (ZnDTP) as one of the essential components for the lubricant oil composition of the present invention is shown by the general formula [2]:

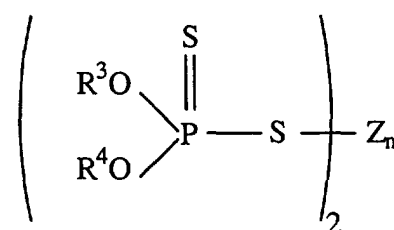



[2]

wherein, R³ and R⁴ are each a primary or secondary alkyl group having a carbon number of 1 to 18, and may be the same or different. The primary or secondary alkyl groups of R³ and R⁴ having a carbon number of 1 to 18, shown by the general formula [2], include methyl, ethyl, propyl, butyl, pentyl, hexyl, heptyl, 2-ethyl hexyl, octyl, nonyl, decyl, undecyl, dodecyl, tridecyl, tetradecyl, pentadecyl, hexadecyl, heptadecyl, and octadecyl. However, the preferable zinc dialkyl dithiophosphate for the lubricant oil composition of the present invention has a mixed alkyl group of primary and secondary alkyl groups having a carbon number of 3 to 12. The primary alkyl group would be mainly used when resistance of the lubricant oil composition to heat and oxidation are of critical importance. However, it may cause increased wear at valve trains and other members as content of soot in the oil increases as a result of exhaust gas recycling used for cleaning the exhaust gases, and hence normally used in combination with the secondary alkyl to control the wear. The zinc dialkyl dithiophosphates having a mixed alkyl group of primary and secondary alkyl groups may be used either individually or in combination for the lubricant oil composition of the present invention. The zinc dialkyl dithiophosphate is incorporated at 0.04 to 0.50 wt.% as phosphorus (P) derived therefrom, based on the whole composition, preferably 0.07 to 0.20 wt.%. At below 0.04 wt.%, the lubricant oil may not sufficiently exhibit its wear-preventive effect under the lubricating conditions with soot in the oil. At above 0.50 wt.%, on the other hand, the effect is not increased for the quantity of the dithiophosphate used.

Metallic salt of alkyl salicylate

[0034] The metallic salt of alkyl salicylate as one of the essential components for the lubricant oil composition of the present invention is shown by the general formula [3] or [4], the latter representing a sulfide of the metallic salt of the former:

[3]

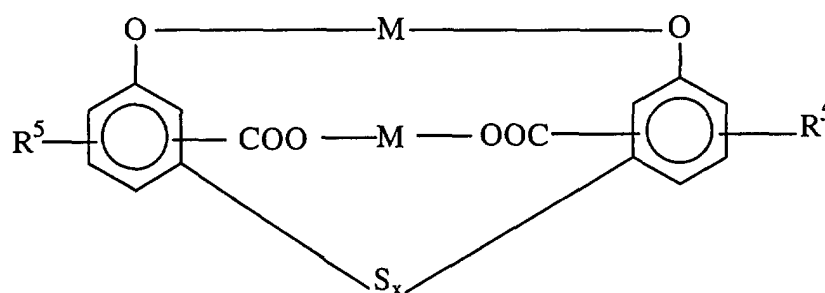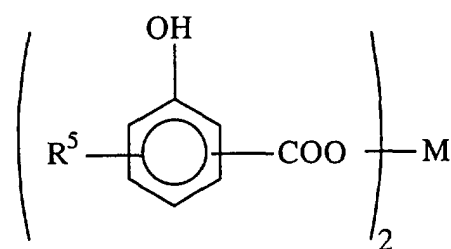

[4]

wherein, R⁵ is an alkyl group having a carbon number of 1 to 18; M is calcium or magnesium as an alkaline-earth metal, or zinc as a Group 2B metal; and (x) is an integer of 1 to 4. The alkyl groups of R⁵ in the general formula [3] or [4] include methyl, ethyl, propyl, butyl, pentyl, hexyl, heptyl, 2-ethyl hexyl, octyl, nonyl, decyl, undecyl, dodecyl, tridecyl, tetradecyl, pentadecyl, hexadecyl, heptadecyl, and octadecyl. However, the especially preferable alkyl group for the lubricant oil composition of the present invention is of straight chain or branched, having a carbon number of 4 to 20. A boron derivative of the above metallic salt of alkyl salicylate may be also used.

[0035] The metallic (Ca, Mg or Zn) salt of alkyl salicylate for the present invention preferably has a total base number of 150 mg KOH/g or less, more preferably 30 to 150 mg KOH/g. Total base number is determined by the perchloric acid method, in accordance with JIS K2501.

[0036] The metallic (Ca, Mg or Zn) salt of alkyl salicylate is incorporated at 0.004 to 1.0 wt.% as calcium (Ca) derived therefrom in the case of Ca salt, based on the whole composition, preferably 0.007 to 0.20 wt.%; and/or at 0.002 to 0.60 wt.% as magnesium (Mg) derived therefrom in the case of Mg salt, preferably 0.004 to 0.13 wt.%; and/or at 0.006 to 1.60 wt.% as zinc (Zn) derived therefrom in the case of Zn salt, preferably 0.012 to 0.20 wt.%. At below 0.004 wt.% in the case of the Ca salt, 0.002 wt.% in the case of the Mg salt or 0.006 wt.% in the case of Zn salt, the lubricant oil may not sufficiently exhibit its wear-preventive effect under the lubricating conditions with soot in the oil. On the other hand, at above 1.0 wt.% in the case of the Ca salt, 0.60 wt.% in the case of the Mg salt or 1.60 wt.% in the case of Zn salt, the effect is not increased for the quantity of the metallic salt used.

[0037] The lubricant oil composition of the present invention may not sufficiently exhibit its wear-preventive effect under the lubricating conditions with soot in the oil, unless its base oil is incorporated simultaneously with the sulfurized oxymolybdenum dithiocarbamate, zinc dialkyl dithiophosphate and metallic salt of alkyl salicylate at a specific content.

[0038] The mechanisms involved in prevention of wear under the lubricating conditions with soot in the oil in the simultaneous presence of the sulfurized oxymolybdenum dithiocarbamate, zinc dialkyl dithiophosphate and metallic salt of alkyl salicylate are not fully substantiated. It is however considered that the zinc dialkyl dithiophosphate as the antiwear agent is adsorbed by the metallic surface to form thereon an inorganic extreme pressure coating film, containing sulfur, phosphorus and zinc, which functions wear prevention, and that the sulfurized oxymolybdenum dithiocarbamate as the friction-reducing agent is thermally decomposed on the friction surface to form molybdenum disulfide in the interface, thereby reducing wear and friction. Formation of the extreme pressure coating film of the zinc dialkyl dithiophosphate and that of molybdenum disulfide from the sulfurized oxymolybdenum dithiocarbamate in the interface compete with other, and, at the same time, they are coexisting. However, a lubricating oil is contaminated with soot in a diesel engine, in particular an EGR-equipped one. The soot tends to scrape the coating film away from the friction surface. The lubricant oil composition incorporated only with the zinc dialkyl dithiophosphate cannot exhibit sufficient

wear-preventive effect, because the extreme pressure coating film is scraped away by soot faster than it is formed. Similarly, the lubricant oil composition incorporated only with the sulfurized oxymolybdenum dithiocarbamate cannot exhibit sufficient friction-reducing and wear-preventive effects provided by the film of molybdenum disulfide formed on the friction surface, because it is scraped away by soot faster than it is formed.

[0039] Surprisingly, it is considered that, in the presence of the three essential additives for the lubricant oil of the present invention, soot acts only on molybdenum disulfide formed on the friction surface of the sulfurized oxymolybdenum dithiocarbamate to scrape away the coating film on the friction surface, leaving the extreme pressure film of the zinc dialkyl dithiophosphate essentially unaffected. This can be backed up by the observation that, in the simultaneous presence of these two additives, the friction-reducing effect is affected by the presence of soot, whereas the wear-preventive effect is relatively insensitive to the presence of soot.

[0040] The lubricant oil composition of the present invention is used for a diesel engine which operates under the lubricating conditions with large quantities of soot in the oil. Content of soot in the lubricating oil is in a range from 0.2 to 4.0 wt.%, preferably 0.5 to 4.0 wt.%. Soot content (wt.%) in the oil, described in this specification, means content of n-hexane-insolubles, determined by the ultracentrifugation method (centrifugal force: 36,790 G, speed of rotation: 17,500 rpm, time: 30 min, number of runs: 3, temperature: 0°C).

Other additive components

[0041] The lubricant oil composition of the present invention comprises a base oil incorporated with the essential components of sulfurized oxymolybdenum dithiocarbamate, zinc dialkyl dithiophosphate and metallic salt of alkyl salicylate. The base oil may be optionally incorporated further with one or more types of additives, in order to meet various functions the lubricant oil for diesel engines is required to exhibit, so long as the object of the present invention is not damaged. These additives include viscosity index improver, pour point depressant, ashless dispersant, metallic detergent, antioxidant, friction-reducing agent, antiwear agent, extreme pressure agent, metal deactivator, rust inhibitor, antifoamant, corrosion inhibitor and coloring agent.

[0042] The viscosity index improvers useful for the present invention generally include a polymethacrylate-based one, olefin copolymer-based one (e.g., polyisobutylene-based and ethylene-propylene copolymer-based one), polyalkyl styrene-based one, hydrogenated styrene-butadiene copolymer-based one, and styrene-maleic anhydride ester copolymer-based one. It is incorporated normally at 1 to 30wt.%.

[0043] The pour point depressants useful for the present invention generally include an ethylene-vinyl acetate copolymer, condensate of chlorinated paraffin and naphthalene, condensate of chlorinated paraffin and phenol, polymethacrylate, and polyalkyl styrene. Of these, a polymethacrylate is preferably used. It is incorporated normally at 0.01 to 5wt.%.

[0044] The ashless dispersants useful for the present invention include those based on a polyalkenyl succinimide, polyalkenyl succinamide, benzyl amine, succinic acid ester, and succinic acid-amide, and those containing boron. Of these, a polyalkenyl succinimide (polybutenyl succinimide)-based one is preferably used. It is incorporated normally at 0.1 to 15wt.%.

[0045] The metallic detergents useful for the present invention include those based on sulfonate, phenate, salicylate and phosphonate of Ca, Mg, Ba, Na or the like, in addition to the salicylate of Ca, Mg or Zn as the essential component for the lubricant oil composition of the present invention. It is incorporated normally at 0.05 to 5 wt.%.

[0046] The antioxidants useful for the present invention generally include an amine-based one, e.g., alkylated diphenyl amine, phenyl- α -naphthyl amine and alkylated phenyl- α -naphthyl amine; phenol-based one, e.g., 2,6-ditertiary butyl phenol and 4,4'-methylene bis-(2,6-ditertiary butyl phenol); sulfur-based one, e.g., dilauryl-3,3'-thiodipropionate; phosphorus-based one, e.g., phosphite; and zinc dithiophosphate. Of these, an amine-based and phenol-based one are preferably used. It is incorporated normally at 0.05 to 5 wt.%.

[0047] The friction-reducing agents useful for the present invention include a fatty acid, higher alcohol, fatty acid ester, partial ester of polyhydric alcohol, fatty acid ester, oil and fat, amine, amide, sulfurized ester, phosphate ester, phosphite ester and phosphate ester amine, in addition to the organomolybdenum compound as the essential component for the present invention. It is incorporated normally at 0.05 to 3 wt.%.

[0048] The antiwear agents useful for the present invention include a metallic (e.g., Pb, Sb or Mo) salt of dithiophosphate, metallic (e.g., Zn, Pb, Sb or Mo) salt of dithiocarbamate, metallic (e.g., Pb) salt of naphthenate, metallic (e.g., Pb) salt of fatty acid, boron compound, phosphate ester, phosphite ester and phosphate amine, in addition to the zinc dithiophosphate as the essential component for the present invention. It is incorporated normally at 0.1 to 5 wt.%.

[0049] The extreme pressure agents useful for the present invention generally include an ashless-based sulfide compound, sulfurized oil and fat, phosphate ester, phosphite ester and phosphate ester amine. It is incorporated normally at 0.05 to 3 wt.%.

[0050] The metal deactivators useful for the present invention include benzotriazole, and a triazole, benzotriazole and thiadiazole derivative. It is incorporated normally at 0.001 to 3 wt.%.

[0051] The rust inhibitors useful for the present invention include a fatty acid, alkenyl succinic acid half ester, fatty acid soap, alkyl sulfonate, ester of a fatty acid and polyhydric alcohol, fatty acid amine, oxidized paraffin and alkyl polyoxyethylene ether. It is incorporated normally at 0.01 to 3 wt. %.

[0052] The antifoaming agents useful for the present invention include a dimethyl polysiloxane and polyacrylate. It is incorporated normally at a very small content, e.g., around 0.002wt. %.

[0053] The lubricant oil composition of the present invention may be further incorporated, as required, with other types of additives, e.g., corrosion inhibitor and coloring agent.

EXAMPLES

[0054] The present invention is described further in detail by EXAMPLES and COMPARATIVE EXAMPLES, which do not limit the present invention. The wear-preventive characteristics were measured on a specimen (friction material) using a reciprocating type (SRV) friction/wear tester under the following conditions in EXAMPLES and COMPARATIVE EXAMPLES: Test conditions: Plate: 24 mm in diameter, 7 mm thick, Cylinder: 15 mm in diameter, 22 mm long, Temperature: 80°C, Load: 150 N, Amplitude: 1.5 mm, Frequency: 50 Hz, Testing period: 30 min.

EXAMPLES 1 to 2, and REFERENCE EXAMPLE 1

[0055] REFERENCE EXAMPLE 1 used a solvent-refined paraffinic mineral oil (viscosity: 5.6mm²/s at 100°C) as the base oil, which was incorporated with a zinc dialkyl dithiophosphate, whose alkyl group was a mixture of primary C8 and secondary C3/C6 (primary/secondary alkyl ratio: 10/9 by weight) at 0.14 wt. % as phosphorus, based on the whole composition; sulfurized oxymolybdenum dithiocarbamate at 0.07 wt. % (700 ppm) as molybdenum; calcium salt of alkyl salicylate (Ca salicylate) having a total base number (TBN) of 70 mg KOH/g at 0.004 wt. % (40 ppm) as calcium; and other types of additives, e.g., metallic detergent, ashless dispersant, viscosity index improver, pour point depressant, antioxidant and antifoaming agent at a total content of 15.0 wt. %. A commercial diesel engine was operated with the base oil to collect the soot, and the concentrated soot was incorporated in the above lubricant oil compositions at 2.0 wt. % for EXAMPLE 1 and 4.0 wt. % for EXAMPLE 2. These lubricant oil compositions were tested to determine wear scar diameter by an SRV friction/wear tester. The results are given in Table 1.

EXAMPLES 3 to 14, and REFERENCE EXAMPLES 2 to 7

[0056] These examples used a solvent-refined paraffinic mineral oil (viscosity: 5.6mm²/s at 100°C) as the base oil, as were the cases with EXAMPLES 1 and 2, which was incorporated with a zinc dialkyl dithiophosphate, whose alkyl group was a mixture of primary C8 and secondary C3/C6 (primary/secondary alkyl ratio: 10/9 by weight), sulfurized oxymolybdenum dithiocarbamate; and Ca, Mg or Zn salt of alkyl salicylate (having a TBN of 70, 345 or 132 mg KOH/g in the case of the Ca, Mg or Zn salt, respectively) at contents given in Tables 1 to 3. The base oil was further incorporated with other types of additives, e.g., metallic detergent, ashless dispersant, viscosity index improver, pour point depressant, antioxidant and antifoaming agent at a total content of 15.0 wt. %, also as were the cases with EXAMPLES 1 and 2. A commercial diesel engine was operated with the base oil to collect the soot, and the concentrated soot was incorporated in the above lubricant oil composition at a content given in Table 1 to 3. These lubricant oil compositions were tested to determine wear scar diameter by an SRV friction/wear tester. The results are given also in Tables 1 to 3.

COMPARATIVE EXAMPLES 1 to 13, and REFERENCE EXAMPLES 8 to 11

[0057] These examples prepared the lubricant oil compositions given in Tables 3 to 4, which show the lubricant base oil component, additive components and soot content for each example. In particular, COMPARATIVE EXAMPLE 13 used sulfurized oxymolybdenum dithiophosphate (MoDTP) in place of sulfurized oxymolybdenum dithiocarbamate. These lubricant oil compositions were tested to determine wear scar diameter by an SRV friction/wear tester, as were the cases with EXAMPLES 1 to 14. The results are given in Tables 3 to 4.

[Table 1]

	REFERENCE EXAMPLE 1	EXAMPLE 1	EXAMPLE 2	REFERENCE EXAMPLE 2	EXAMPLE 3	EXAMPLE 4	REFERENCE EXAMPLE 3	EXAMPLE 5	EXAMPLE 6
Base oil: Mineral oil, Viscosity: 5.6 mm ² /s at 100°C	Balance	Balance	Balance	Balance	Balance	Balance	Balance	Balance	Balance
ZnDTP(as P)	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14
MoDTC(as Mo)	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07
MoDTP(as Mo)	0	0	0	0	0	0	0	0	0
Ca salicylate, TBN: 70 mg KOH/g (as Ca)	0.004	0.004	0.004	0	0	0	0	0	0
Zn salicylate, TBN: 132 mg KOH/g (as Zn)	0	0	0	0.006	0.006	0.006	0	0	0
Mg salicylate, TBN: 345 mg KOH/g (as Mg)	0	0	0	0	0	0	0.002	0.002	0.002
Ca sulfonate, TBN: 80 mg KOH/g (as Ca)	0	0	0	0	0	0	0	0	0
Ca phenate, TBN: 90 mg KOH/g (as Ca)	0	0	0	0	0	0	0	0	0
Other additives*1	Added	Added	Added	Added	Added	Added	Added	Added	Added
Soot content in oil (wt.%)	0	2.0	4.0	0	2.0	4.0	0	2.0	4.0
Wear scar diameter (mm), determined by an SRV friction/wear tester*2	0.143	0.175	0.177	0.149	0.179	0.177	0.147	0.176	0.178

*1: Other additives used were a metallic detergent, ashless dispersant, viscosity index improver, pour point of depressant and antifoaming agent.

*2: Wear scar diameter was determined by an SRV friction/wear tester under the conditions of temperature: 80°C, time: 30 min., load: 150 N, amplitude: 1.5 mm and frequency: 50 Hz.

[Table 2]

	REFERENCE EXAMPLE 4	EXAMPLE 7	EXAMPLE 8	REFERENCE EXAMPLE 5	EXAMPLE 9	EXAMPLE 1 0 0 0	REFERENCE EXAMPLE 6	EXAMPLE 1 1 0 0	EXAMPLE 1 2 0 0
	Balance	Balance	Balance	Balance	Balance	Balance	Balance	Balance	Balance
Base oil: Mineral oil, Viscosity: 5.6 mm ² /s at 100°C	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14
Additive components, wt %	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07
	0	0	0	0	0	0	0	0	0
	0.007	0.007	0.007	0	0	0	0	0	0
	0	0	0	0.012	0.012	0.012	0	0	0
	0	0	0	0	0	0	0.004	0.004	0.004
	0	0	0	0	0	0	0	0	0
	0	0	0	0	0	0	0	0	0
Other additives*1	Added	Added	Added	Added	Added	Added	Added	Added	Added
Soot content in oil (wt.%)	0	2.0	4.0	0	2.0	4.0	0	2.0	4.0
Wear scar diameter (mm), determined by an SRV friction/wear tester*2	0.143	0.173	0.176	0.147	0.179	0.178	0.145	0.175	0.177

*1: Other additives used were a metallic detergent, ashless dispersant, viscosity index improver, pour point depressant and antifoaming agent.

*2: Wear scar diameter was determined by an SRV friction/wear tester under the conditions of temperature: 80°C, time: 30 min., load: 150 N, amplitude: 1.5 mm and frequency: 50 Hz.

[Table 3]

	REFERENCE EXAMPLE 7	EXAMPLE 1 3 0 0	EXAMPLE 1 4 0 0	REFERENCE EXAMPLE 8	COMPARATIVE EXAMPLE 1	COMPARATIVE EXAMPLE 2	COMPARATIVE EXAMPLE 3	REFERENCE EXAMPLE 9	COMPARATIVE EXAMPLE 4	COMPARATIVE EXAMPLE 5	COMPARATIVE EXAMPLE 6
	Balance	Balance	Balance	Balance	Balance	Balance	Balance	Balance	Balance	Balance	Balance
Base oil: Mineral oil, Viscosity: 5.6 mm ² /s at 100°C	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14
ZnDTP(as P)	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0	0	0	0
MoDTC(as Mo)	0	0	0	0	0	0	0	0	0	0	0
MoDTP(as Mo)	0	0	0	0	0	0	0	0	0	0	0
Ca salicylate, TBN: 70 mg KOH/g (as Ca)	0.176	0.176	0.176	0	0	0	0	0	0	0	0
Zn salicylate, TBN: 132 mg KOH/g (as Zn)	0	0	0	0	0	0	0	0	0	0	0
Mg salicylate, TBN: 345 mg KOH/g (as Mg)	0	0	0	0	0	0	0	0	0	0	0
Ca sulfonate, TBN: 80 mg KOH/g (as Ca)	0	0	0	0	0	0	0	0	0	0	0
Ca phenate, TBN: 90 mg KOH/g (as Ca)	0	0	0	0	0	0	0	0	0	0	0
Other additives*1	Added	Added	Added	Added	Added	Added	Added	Added	Added	Added	Added
Soot content in oil (wt.%)	0	2.0	4.0	0	2.0	4.0	5.0	0	2.0	4.0	5.0
Wear scar diameter (mm), determined by an SRV friction/wear tester*2	0.140	0.172	0.171	0.144	0.200	0.226	0.234	0.161	0.262	0.276	0.278

*1: Other additives used were a metallic detergent, ashless dispersant, viscosity index improver, pour point depressant and antifoaming agent.

*2: Wear scar diameter was determined by an SRV friction/wear tester under the conditions of temperature: 80°C, time: 30 min., load: 150 N, amplitude: 1.5 mm and frequency: 50 Hz.

[Table 4]

	REFERENCE EXAMPLE 1 0 0 0	COMPARATIVE EXAMPLE 7	COMPARATIVE EXAMPLE 8	COMPARATIVE EXAMPLE 9	REFERENCE EXAMPLE 1 1 0 0	COMPARATIVE EXAMPLE 1 0 0 0	COMPARATIVE EXAMPLE 1 1 0 0	COMPARATIVE EXAMPLE 1 2 0 0	COMPARATIVE EXAMPLE 1 3 0 0
Base oil: Mineral oil, Viscosity: 5.6 mm ² /s at 100°C	Balance	Balance	Balance	Balance	Balance	Balance	Balance	Balance	Balance
Additive components, wt. %	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14
	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0
	0	0	0	0	0	0	0	0	0.07
	0	0	0	0	0	0	0	0	0.004
	0	0	0	0	0	0	0	0	0
	0	0	0	0	0	0	0	0	0
	0	0	0	0	0	0	0	0	0
	0.377	0.377	0.377	0.377	0	0.271	0.271	0.271	0
	0	0	0	0	0.271	Added	Added	Added	Added
	Added	Added	Added	Added	Added	Added	Added	Added	Added
Soot content in oil (wt. %)	0	2.0	4.0	5.0	0	2.0	4.0	5.0	2.0
Wear scar diameter (mm), determined by an SRV friction/wear tester*2	0.156	0.195	0.197	0.198	0.168	0.197	0.198	0.198	0.196

*1: Other additives used were a metallic detergent, ashless dispersant, viscosity index improver, pour point depressant and antifoaming agent.

*2: Wear scar diameter was determined by an SRV friction/wear tester under the conditions of temperature: 80°C, time: 30 min., load: 150 N, amplitude: 1.5 mm and frequency: 50 Hz.

[0058] The results of EXAMPLES and COMPARATIVE EXAMPLES demonstrate that a lubricant oil composition whose base oil was incorporated with, as the essential components, (A) sulfurized oxymolybdenum dithiocarbamate, (B) zinc dialkyl dithiophosphate and (C) metallic salt of alkyl salicylate (having a TBN of 70, 345 or 132 mg KOH/g in the case of Ca, Mg or Zn salt, respectively) at a specific content exhibits enhanced wear-preventive characteristics for valve trains and other members under the lubricating conditions with soot in the oil. It is particularly noted that the lubricant oil composition incorporated with the three types of additives, a sulfurized oxymolybdenum dithiocarbamate, zinc dialkyl dithiophosphate and metallic (Ca, Mg or Zn) salt of alkyl salicylate, exhibits enhanced wear-preventive characteristics in comparison to the one incorporated with a sulfurized oxymolybdenum dithiocarbamate and zinc dialkyl dithiophosphate, prepared by COMPARATIVE EXAMPLE.

[0059] It is therefore apparent that a lubricant oil composition may not sufficiently exhibit its wear-preventive effect under the lubricating conditions with soot in the oil, and hence may not have sufficient quality as the lubricant oil for diesel engines, particularly a pressure-accumulating type one equipped with an EGR system, unless its base oil is incorporated simultaneously with a specific sulfurized oxymolybdenum dithiocarbamate, zinc dialkyl dithiophosphate and metallic salt of alkyl salicylate at a specific content. In other words, a lubricant oil composition for diesel engines exhibiting enhanced wear-preventive effect for valve trains and other members under the lubricating conditions with soot in the oil can be obtained by incorporating its base oil with (A) sulfurized oxymolybdenum dithiocarbamate, (B) zinc dialkyl dithiophosphate and (C) metallic (Ca, Mg or Zn) salt of alkyl salicylate at a specific content.

[0060] The lubricant oil composition of the present invention exhibits enhanced wear-preventive effect for valve trains and other members under the lubricating conditions with 0.5 to 4.0 wt.% of soot in the oil by incorporating its base oil with (A) sulfurized oxymolybdenum dithiocarbamate, (B) zinc dialkyl dithiophosphate and (C) metallic (Ca, Mg or Zn) salt of alkyl salicylate at a specific content, and hence suitable for a diesel engine operating under the conditions with large quantities of soot in the oil, particularly pressure-accumulating type ones equipped with an EGR system.

Claims

1. A lubricant oil composition for a diesel engine operating under the lubricating conditions with large quantities of soot in the oil comprising: a base oil selected from a mineral or synthetic oil incorporated with at least three additives selected from the group consisting of a sulfurized oxymolybdenum dithiocarbamate at 0.03 to 0.50 wt.% as Mo; a zinc dialkyl dithiophosphate at 0.04 to 0.50 wt.% as P; and at least one metallic salt of alkyl salicylate selected from the group consisting of a Ca salt of alkyl salicylate at 0.004 to 1.0 wt.% as Ca, Mg salt of alkyl salicylate at 0.002 to 0.60 wt.% as Mg, and Zn salt of alkyl salicylate at 0.006 to 1.60 wt.% as Zn, all percentages being based on the whole composition.
2. A method for enhancing wear prevention in a pressure-accumulating diesel engine equipped with an exhaust gas recycle system and operating under the lubricating conditions with large quantities of soot in the oil by providing to the internal combustion engine a lubricating oil composition comprising a base oil selected from a mineral or synthetic oil incorporated with at least three additives selected from the group consisting of a sulfurized oxymolybdenum dithiocarbamate at 0.03 to 0.50 wt.% as Mo; a zinc dialkyl dithiophosphate at 0.04 to 0.50 wt.% as P; and at least one metallic salt of alkyl salicylate selected from the group consisting of a Ca salt of alkyl salicylate at 0.004 to 1.0 wt.% as Ca, Mg salt of alkyl salicylate at 0.002 to 0.60 wt.% as Mg, and Zn salt of alkyl salicylate at 0.006 to 1.60 wt.% as Zn, all percentages being based on the whole composition.



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 12 4058

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 906 969 A (FYFE KIM ELIZABETH) 25 May 1999 (1999-05-25) * abstract * * column 1, line 66 - column 2, line 7 * * column 3, line 26 - column 4, line 4 * * column 5, line 3 - column 5, line 5 * * column 5, line 53 - column 5, line 57 * * examples B,C,D * * claims 1-5 *	1,2	C10M163/00 C10M141/10 //(C10M163/00, 135:18,137:10, 159:22), (C10M141/10, 129:54,135:18, 137:10), C10N10:04, 10:12,30:06, 40:25
X	US 5 458 807 A (TAMOTO YOSHITAKA) 17 October 1995 (1995-10-17) * abstract * * column 1, line 56 - column 2, line 9 * * column 2, line 66 - column 3, line 25 * * column 3, line 37 - column 3, line 57 * * column 4, line 12 - column 4, line 18 * * tables 1,2 * * column 5, line 51 - column 6, line 2 * * claims 1,4,5,7 *	1,2	
A	US 4 178 258 A (PAPAY ANDREW G ET AL) 11 December 1979 (1979-12-11) * abstract * * column 1, line 37 - column 2, line 6 * * column 2, line 46 - column 2, line 65 * * column 3, line 4 - column 3, line 22 * * claims 1-13 *	1,2	TECHNICAL FIELDS SEARCHED (Int.Cl.7) C10M
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 8 March 2001	Examiner Perakis, N
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 12 4058

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-03-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5906969 A	25-05-1999	EP 0955353 A	10-11-1999
		JP 2000001690 A	07-01-2000
US 5458807 A	17-10-1995	JP 2911668 B	23-06-1999
		JP 5163497 A	29-06-1993
		CA 2085074 A	13-06-1993
		DE 69228677 D	22-04-1999
		DE 69228677 T	22-07-1999
		EP 0562172 A	29-09-1993
US 4178258 A	11-12-1979	NONE	