

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 208 991 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
03.05.2006 Bulletin 2006/18

(51) Int Cl.:
B41J 2/21 ^(2006.01) **B41J 2/15** ^(2006.01)

(21) Application number: **01204321.2**

(22) Date of filing: **09.11.2001**

(54) Inkjet colour printing method and printer

Farbtintenstrahldruckmethode und Drucker

Procédé d'impression à jets d'encre en couleurs et imprimante

(84) Designated Contracting States:
DE ES FR GB NL

(30) Priority: **23.11.2000 EP 00204159**

(43) Date of publication of application:
29.05.2002 Bulletin 2002/22

(73) Proprietor: **Océ-Technologies B.V.**
5914 CC Venlo (NL)

(72) Inventor: **Weijkamp, Clemens Theodorus**
5943 BB Lomm (NL)

(74) Representative: **Rongen, Josephus Wilhelmus et al**
Océ-Technologies B.V.,
Corporate Patents,
P.O. Box 101
5900 MA Venlo (NL)

(56) References cited:
EP-A- 0 955 174 EP-A- 1 088 670
US-A- 4 528 576

- **PATENT ABSTRACTS OF JAPAN** vol. 008, no. 069
(M-286), 31 March 1984 (1984-03-31) & JP 58
215351 A (CANON KK), 14 December 1983
(1983-12-14)

EP 1 208 991 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The invention relates to a method of colour printing with an ink jet printer having a printhead which is reciprocatingly moved in forward and return scan passes in a main scanning direction, in which an even number of nozzle arrays is provided for each of at least two colours, and said nozzle arrays are in a symmetrical sequence of colours arranged in the main scanning direction. The invention further relates to an ink jet printer for carrying out this method.

[0002] The printhead of an ink jet colour printer typically has at least one nozzle array for each colour. For example, in three-colour printing, three nozzle arrays will be provided for the colours cyan (C), magenta (M) and yellow (Y). Each nozzle array comprises a plurality of nozzles which, in case of a linear array, for example, are arranged equidistantly on a line that extends in a direction orthogonal to the main scanning direction. Then, the distance between neighbouring nozzles corresponds to the distance between adjacent pixels of the image to be printed, so that the number of pixel lines that can be printed in one scan pass corresponds to the number of nozzles in the array. The nozzle arrays for the various colours are sequentially arranged in the main scanning direction, for example in the order C-M-Y. In order to print a pixel that is composed of several colours, the corresponding nozzles of the various arrays are energized at appropriate timings, so that ink droplets jetted out from the various nozzles impinge on the recording sheet essentially at the same location, i.e. the location of the pixel to be printed. Thus, the ink droplets of different colours composing the pixel will be superposed one upon the other or will at least overlap with each other. During a forward scan pass of the printhead, the ink droplets of different colours will be superposed on the recording sheet in the order C-M-Y, and during a return stroke or scan pass of the printhead, the ink droplets will be superposed in reverse order.

[0003] It has been found however that the order in which the ink droplets are superposed one upon the other has an influence on the hue of the printed pixel. This effect is particularly marked for green colours composed of cyan and yellow ink. When a cyan droplet is superposed on a yellow droplet and both droplets have the same volume, then the cyan component forming the top layer will be predominant and the hue of the printed green pixel will be shifted to the blue side of the spectrum. Conversely, when the yellow droplet is superposed on the cyan one, then the hue will be shifted to the yellow side. As a result, when a solid green area is to be printed, the shifts in the hue will be visible to the human eye in the form of bands extending in the main scanning direction and having a width corresponding to the height of the nozzle arrays.

[0004] In order to eliminate this undesirable artefact, US-A-4 528 576 discloses a printing method according to the preamble of claim 1 in which two nozzle arrays are provided for each colour, and the nozzle arrays are sym-

metrically arranged in the main scanning direction, for example in the nested sequence C-M-Y-Y-M-C. When the nozzle head moves in forward direction, only the first three nozzle arrays are used, so that the colours are superposed in the order C-M-Y. In the return scan pass of the printhead, the other three nozzle heads are used, so that the colours are again superposed in the same order. This avoids the creation of bands with different hue but has the disadvantage that the nozzle arrays are utilized quite inefficiently, because only one half of the total number of nozzle arrays is used in each scan pass.

[0005] It is an object of the present invention to provide an ink jet colour printing method and printer in which the hue of the printed colours does not depend on the direction of the scan pass and which at the same time permit high resolution and high density printing with efficient use of the nozzle arrays.

[0006] According to the invention, this object is achieved by a method as described in the preamble of claim 1, in which, for printing a single pixel composed of at least two colours with high density, ink dots of each of these colours are formed in even numbers by activating the corresponding nozzles of the symmetrically arranged arrays at appropriate timings in the same scan pass of the printhead; the pixel being elongated in either the main scanning direction or a sub-scanning direction, resulting in an unisotropic printing resolution.

[0007] Thus, if a green pixel is to be printed, for example, then the pixel will be composed of at least four ink droplets two of which are formed by yellow ink and the other two of which are formed by cyan ink. The order in which these ink droplets are printed and superposed will for example be C-Y-Y-C, irrespective of the direction of the scan pass.

[0008] This method has the advantage that it permits a high printing resolution without degrading the image density of the printed image.

[0009] Document EP 1 088 670, which is only relevant regarding the novelty of the present invention as claimed in claims 1 to 7 according to Art. 54(3) EPC, describes a printing method wherein the application orders of ink of different colours are symmetric in each pixel. For example, one pixel is made of dots in sequence of colours cyan-magenta-magenta-cyan (C1-M1-M2-C2), printed with printheads 1 and 2. Within a pixel of a resolution of 360dpi x 360dpi, one group of dots may be offset with respect to the other dots by an amount of half the pixel size in a main scanning direction, or in a main and a sub scanning direction. However, such a pixel, the primary colours of which are to be printed in a symmetrical order, is always printed in an isotropic resolution of, e.g., 360dpi x 360dpi.

[0010] It is generally known that, when the printing resolution of an ink jet printer is increased, the volume of the ink droplet becomes so small that the density of the image may become insufficient. This can be understood from the following simplified consideration. As has been mentioned above, the size of the pixels to be printed, and

hence the printing resolution, is determined by the pitch of the nozzles in the array. Each nozzle is connected to an ink channel or cavity in which the ink liquid is pressurized by means of a piezoelectric actuator or the like. Thus, the space available for the various cavities is limited by the pitch of nozzles. Further, the cross section of the nozzle orifice must be smaller than the cross section of the cavity in order to achieve a nozzle action which is necessary for forming the ink droplets. As a result, the maximum diameter of the nozzle orifice is roughly proportional to the pitch of the nozzles. If the printing resolution is to be increased by a certain factor r , then, roughly speaking, the whole nozzle array should be scaled down by the factor $1/r$. The diameter of the ink droplet expelled from the nozzle is roughly proportional to the diameter of the nozzle orifice, so that the volume of the ink droplets will be decreased by a factor $1/r^3$. However, the surface area of the pixels to be printed will be decreased only by the factor $1/r^2$, so that the image density, i.e. the ink volume per unit surface area will decrease approximately with $1/r$.

[0011] It is generally known that this decrease of the image density can be compensated for by employing a multi-pass system in which, even in a single colour printer, a pixel to be printed is composed of two or more ink droplets which are generated in successive scan passes.

[0012] The invention combines this principle for improving the image density with the known method of eliminating shifts of the hue in colour printing and thereby makes more efficient use of the nozzle arrays which must be provided at least two-fold for each colour, anyway.

[0013] An ink jet printer suitable for carrying out the method according to the invention is claimed in claim 4.

[0014] More specific optional features of the invention are indicated in the dependent claims.

[0015] In a preferred embodiment, the printhead comprises two nozzle arrays for each colour, and the nozzle arrays are arranged in two blocks, so that each block comprises a complete set of nozzle arrays for each colour, and one block is the mirror image of the other.

[0016] Preferably, the nozzle blocks themselves are mirror-symmetric with respect to a median plane which intersects the linear nozzle arrays at right angles. Then, the two nozzle blocks may have an identical construction and may be manufactured in exactly the same procedure, and when the blocks are mounted to the printhead, one of them is mounted in an orientation rotated by 180° . This increases not only the production efficiency but has the further advantage that the effect of certain defects of the nozzle arrays may be mitigated. Such defects may for example consist of a slight misalignment of the nozzles within the nozzle arrays or of minor defects of the nozzle orifices which cause the ink droplets to be jetted out not exactly along the axis of the nozzle but under a slight scew angle. When the two nozzle blocks are obtained in the same production process, these defects will be essentially the same for both blocks, and when the two blocks are mounted on the printhead in mutually opposite

orientation, the dot misplacements caused by these defects in the one nozzle block will be opposite to those caused in the other nozzle block, and by superposing these dots, the dot misplacements will be smoothened out.

[0017] Elongated pixels are created by providing a slight offset between the first and the second dot of the same colour, so that these dots still overlap but are not exactly congruent. As a result, the printing resolution will be unisotropic, which may be beneficial in certain applications as a compromise between highest possible printing speed and reproduction of sufficient details of the printed image.

[0018] The offset between the dots may be either in the main scanning direction or in sub-scanning direction. In both cases, the offset can be brought about by a corresponding physical offset of the two nozzle blocks. If the offset is in the main scanning direction, it may alternatively be brought about by a corresponding shift between the timings at which the nozzles of the two blocks are energized.

[0019] With elongated pixels, it is also possible to operate the printer in a mode in which the two nozzle blocks are controlled independently from one another, so that the resolution in longitudinal direction of the pixels is increased.

[0020] Preferred embodiments of the invention will now be described in conjunction with the accompanying drawings, in which:

Fig. 1 is a schematic perspective view of an ink jet colour printer according to the invention;
 Fig. 2A-D are schematic top plan views of the printer shown in figure 1, illustrating the formation of a colour pixel during one scan pass of the printhead;
 Figs. 3A-D are schematic cross-sectional views of a recording sheet, illustrating a formation of pixels, that are elongated in the main scanning direction, during a forward scan pass of the printhead;
 Figs. 4A-D are cross-sectional views corresponding to figures 3A-D and showing the formation of pixels during a return scan pass;
 Fig. 5 is a pixel pattern illustrating the shape of partially overlapping colour dots forming a pixel; and
 Figs. 6A-D show longitudinal sections of the recording sheet and illustrate the formation of pixels that are elongated in the sub-scanning direction.

[0021] As is shown in figure 1, an ink jet colour printer comprises a platen 10 on which a recording sheet 12 is advanced in a sub-scanning direction Y. A printhead 14 is moved back and forth along the platen 10 in a main scanning direction X and comprises a carriage 16 mount-

ed on guide bars 18, 20 and carries a number of nozzle arrays C1, M1, Y1, Y2, M2 and C2 which are arranged in that order in the main-scanning direction X. Each nozzle array comprises a number N of nozzles 22 which, in the example shown, are arranged on a single straight line extending in the sub-scanning direction Y. The pitch of the nozzles 22, i.e. the vertical distance of neighbouring nozzles, corresponds to the height of the pixels to be printed on the recording sheet 12. These pixels are printed by ejecting droplets of coloured ink from the nozzles 22 in a direction Z normal to the plane of the recording sheet 12 where it faces the printhead. As is well known in the art, the droplets may be generated by means of thermal actuators (bubble-jet) or by means of piezoelectric actuators, for example.

[0022] When the printhead 14 makes a forward scan pass in the +X-direction, a number N of image lines is printed simultaneously on the recording sheet 12. Then, the recording sheet 12 is advanced by a distance corresponding to the height of the nozzle arrays, and another N lines are printed during the return scan pass of the printhead 14.

[0023] The nozzle arrays are arranged in two blocks 24, 26, and each of these blocks comprises three nozzle arrays, one for each of the basic colours cyan, magenta and yellow. The reference signs for the nozzle arrays indicate the colour of the ink: C1 and C2 stand for the colour "cyan", M1 and M2 stand for the colour "magenta" and Y1 and Y2 stand for the colour "yellow". The two blocks 24 and 26 have an identical construction and are mirror-symmetric with respect to a median plane E which is parallel to the X-Z plane. Compared to the block 24, the block 26 is mounted on the carriage 16 "top down" so that the order of colours in the block 26 is the mirror image of the order of colours in the block 24.

[0024] The printhead 14 is connected to a control unit 28 which controls the actuators for the various nozzles 22 in accordance with the image information of the image to be printed.

[0025] The operation of the printer according to a first embodiment of the invention will now be described in conjunction with figures 2A-D. In these figures, a part of the recording sheet 12 is shown in cross-section, and the position of a pixel P to be printed is indicated by a rectangle within the cross-section of the recording sheet 12.

[0026] In figures 2A to 2D, the printhead 14 makes a forward scan pass in the +X-direction. It is assumed that the colour of the pixel P to be printed shall be green, i.e. the pixel is to be composed of cyan and yellow colour components.

[0027] Figure 2A illustrates the situation in which the first cyan nozzle array C1 of the printhead has reached the position of the pixel P, and a first cyan dot 30 has been formed on the recording sheet. In figure 2B, the first yellow nozzle array Y1 has reached the position of the pixel P, and a first yellow dot 32 has been formed on top of the dot 30, so that the colour of the pixel P becomes the mixed colour "green". However, since the volume of

the ink droplets expelled from the nozzles 22 is relatively small, the colour density of the dots 30, 32 is not sufficient for giving a saturated green pixel, so that the resulting printed image would look faint.

5 **[0028]** In figure 2C, the second yellow nozzle array Y2 has reached the position of the pixel P and a second yellow dot 34 is superposed on the dot 32. Then, in figure 2D, another cyan dot 36 is superposed on top of the dot 34, so that a pixel P with the mixed colour "green" and with a satisfactorily high image density is obtained.

10 **[0029]** As is shown in figure 2D, the pixel P has a symmetric layer structure with the bottom layer and the top layer being formed by cyan ink and the two innermost layers being formed by yellow ink. It will be understood that the thickness of the layers as well as the thickness of the recording sheet 12 are grossly exaggerated in the drawing. In practice, the ink layers formed successively by the nozzle arrays C1, Y1, Y2 and C2 will not be strictly separated from one another, because the ink will not have completely dried-out when it is deposited on the recording sheet 12. However, since the mixing of the ink is not complete, the hue or colour impression visible to the human eye is influenced by the order of the ink layers forming the pixel P. The symmetric order of the ink layers shown in figure 2D has the advantage that a good balance between the colour components cyan and yellow is achieved. The main advantage, however, results from the fact that exactly the same order of ink layers is obtained when a green pixel P is printed in the return scan pass of the printhead 14. Then, the only difference would be that the nozzle arrays are energized in reverse order, i.e. C2-Y2-Y1-C1, but the order of colours would be same. Thus, when a solid green surface area is to be printed on the recording sheet, the hue or colour impression of this area will be uniform even if the height of the area is larger than the height of the nozzle arrays, and, accordingly, the area is composed of stripes printed alternately in forward and return scan passes.

35 **[0030]** It will be understood that the same holds true for other mixed colours formed by other combinations of the three basic colour components.

40 **[0031]** The printhead 10 may comprise additional nozzle arrays for black ink, which have not been shown here for simplicity.

45 **[0032]** The invention is not limited to the case that a pixel P is formed by two dots of the same colour. If the printing resolution is increased further and, accordingly, the volume of the ink droplets is decreased further, it may be possible to employ a printhead with four nozzle arrays for each colour. Again, these arrays would be arranged such that the sequence of colours is mirror-symmetric.

50 **[0033]** In the example shown in figures 2A-D, for reasons of simplicity, it has been assumed that each pixel P has essentially the same dimensions in the main scanning direction X and the sub-scanning direction Y, so that the printed image would consist of a pattern of square pixels. This is however not part of the invention. Figures 3A-D and figures 4A-D illustrate an embodiment, in which

a pattern of elongated rectangular pixels is used, as is shown in figure 5. In this embodiment, the pixels P are elongated in the main scanning direction X, so that the printing resolution in the sub-scanning direction Y would be higher than in the main scanning direction. As is further shown in figure 5, the ink dots 34, 36 formed by individual ink droplets have an essentially circular shape, and the elongated shape of the pixel P is obtained by a slight offset of the dots 34, 36. In other words, the dots superposed one on the other are not exactly congruent, although at there is still a significant overlap between these dots.

[0034] As is further shown in figure 5, there is also a certain overlap of the dots 34, 36 with the neighbouring pixels. This is necessary in order to be able to print solid areas without any voids between the adjacent pixels. In figures 3A-D and 4A-D, however, this overlap from pixel to pixel has been neglected for simplicity.

[0035] Figures 3A-D and 4A-D illustrate the locations of four subsequent pixels P1, P2, P3 and P4 in the main scanning direction X, and it is assumed that a green line is to be printed which has width in the X-direction of three pixel, but which is centered on the boarder line between the pixels P2 and P3. It may further be assumed that the ink dots printed with the nozzles of the block 24 are slightly offset from the center positions of the pixels in the -X-direction (to the right in figure 3), whereas the ink dots printed with the block 26 are offset in +X-direction. These offsets may be obtained either by the physical arrangement of the blocks 24, 26 on the carriage 16 or by a suitable time delay between the timings at which the nozzles of the two blocks are energized.

[0036] In figures 3A-D, the printhead 14 moves in the +X-direction (to the left) in a forward scan pass. In figure 3A, the first cyan nozzle array C1 has passed over the pixels P1-P4 and has printed cyan dots 30 in each of the pixels P2, P3 and P4. In figure 3B, the first yellow nozzle array Y1 has passed over the pixels and has printed yellow dots 32 right on top of each of the dots 30. The nozzles of the block 24 are not energized for the pixel P1.

[0037] In figure 3C, the second yellow nozzle array Y2 has passed over the pixels and has been energized for printing the second yellow dot 34 in the pixels P1-P3 but not in the pixel P4. It will be observed that the dots 34 are shifted to the left end of the respective pixels. In figure 3D, the second cyan nozzle array C2 has passed over the pixels and has printed the top-layer cyan dots 36 in each of the pixels P1-P3.

[0038] As a result, the pixels P2 and P3 are formed by four partly overlapping colour layers with symmetric colour sequence. The pixels P1 and P4 are each formed by only two dots or colour layers with mutually opposite colour sequence, and these dots are placed directly adjacent to the pixels P2 and P3, respectively. The optical density of the pixels P1 and P4 is smaller than that of the pixels P2 and P3, and the overall impression will be that of a green line having a width of approximately 3 pixel. Thus, the offset of the dots formed by the nozzle blocks

24 and 26 is used to improve the printing resolution in the main scanning direction X.

[0039] Figures 4A-D illustrate the printing procedure for another section of the green line, which is printed during a return scan pass of the printhead. It can be seen that the arrangement of dots and the layer structure of the pixels in figures 4A-D is just the mirror image of what is shown in figures 3A-D. In the internal parts of the green line, i.e. in the pixels P2 and P3, the resulting hue or colour impression will be the same in the forward and return scan passes, i.e. the hue is independent of the direction of the scan pass. A shift in hue occurs only for the pixels P1 and P4 which form the edge of the green line. However, since these shifts in hue are limited to less than one pixel in the direction normal to the edge, they are not perceptible to the human eye, and the formation of visible artefacts due to the opposite scan pass directions is prevented as in the first embodiment.

[0040] Figures 6A-D illustrate an embodiment in which the pixels P, Q are elongated in the sub-scanning direction Y. This may be achieved for example by an appropriate offset of the blocks 24, 26 in the sub-scanning direction. Figures 6A-D illustrate the process of printing a two-pixel wide green line which extends in the main scanning direction.

[0041] In figure 6A, the first cyan and yellow dots 30, 32 for the pixel P have been printed with the lowermost nozzles 22 of the nozzle arrays C1, Y1 of the block 24. In figure 6B, the second yellow and cyan dots 34, 36 have been printed with the block 26, and the forward scan pass has been completed.

[0042] Then, the recording sheet 12 is advanced, so that the pixels Q of the next line can be printed with the uppermost nozzles 22 in the return scan pass. In figure 6C, the first cyan and yellow dots 30, 32 have been printed with the nozzle arrays C2, Y2 of the block 26 moving in -X-direction. Finally, in figure 6D, the second yellow and cyan dots 34, 36 for the pixel Q are printed with the block 24. It can be seen that the pixels Q and P in figure 6D have the same sequence of colour layers and are mirror images of each other only in respect to the offset of the dots. This offset, however, does not have a noticeable influence of the colour impression, so that no change in hue will be observed and the boarder between the image lines printed in the forward and return scan passes. Just as in the previous embodiment, it is possible in the embodiment shown in figures 6A-D to improve the resolution (but this time in the sub-scanning direction Y) by printing "half pixels" with only the block 24 and only the block 26, respectively.

Claims

1. Method of colour printing with an ink jet printer having a printhead (10) which is reciprocatingly moved in forward and return scan passes in a main scanning direction (X), in which an even number of nozzle ar-

rays (C1, M1, Y1; Y2, M2, C2) is provided for each of at least two colours, and said nozzles arrays are in a symmetrical sequence of colours arranged in the main scanning direction (X), **characterized in that**, for printing a single pixel (P; P2; P3; Q) composed of at least two colours with high density, ink dots (30, 32, 34, 36) of each of these colours are formed in even numbers by activating the corresponding nozzles (22) of the symmetrically arranged arrays at appropriate timings in the same scan pass of the printhead (14), wherein said single pixel (P; P2; P3; Q) is elongated in either the main scanning direction (X) or a sub-scanning direction (Y), resulting in an unisotropic printing resolution.

2. Method according to claim 1, wherein ink dots (30, 36; 32, 34) of the same colour and composing the same pixel (P2, P3) are formed with substantial overlap but slightly offset in the main scanning direction (X), and said pixel (P2, P3) is elongated in the main scanning direction (X).

3. Method according to claim 1, wherein ink dots (30, 36; 32, 34) of the same colour and composing the same pixel (P, Q) are formed with substantial overlap but slightly offset in the sub-scanning direction (Y), and said pixel (P, Q) is elongated in the sub-scanning direction (Y).

4. Ink jet colour printer comprising:

- a printhead (14) which is reciprocatingly moved in forward and return scan passes in a main scanning direction (X), in which an even number of nozzles arrays (C1, M1, Y1; Y2, M2, C2) is provided for each of at least two colours, and said nozzle arrays are in a symmetrical sequence of colours arranged in the main scanning direction, and
- a control unit (28) energizing the nozzles (22) of the nozzle arrays in accordance with the image information to be printed,

characterized in that the control unit (28) is arranged for activating the nozzles (22) of the arrays at appropriate timings such that, for printing a single pixel (P; P2, P3; Q) composed of at least two colours with high density said single pixel (P; P2, P3; Q) being elongated in either the main scanning direction (X) or a sub-scanning direction (Y), resulting in an unisotropic printing resolution, ink dots (30, 32, 34, 36) of each of said colours are formed in even numbers in the same scan pass of the printhead (14).

5. Printer according to claim 4, wherein the nozzle arrays (C1, M1, Y1; Y2, M2, C2) are arranged in the main scanning direction (X) in an even number of blocks (24, 26) which each include one nozzle array

of each colour.

6. Printer according to claim 5, wherein the blocks (24, 26) have an identical construction and are mirror-symmetric with respect to the median plane (E) extending in parallel with the main scanning direction (X) and normal to the sub-scanning direction (Y), and one half of the total number of blocks (24, 26) is mounted to the printhead (14) in reserve orientation relative to the other half of the blocks.
7. Printer according to any of the claims 4 to 6, wherein the nozzle arrays (C1, C2; M1, M2; Y1, Y2) of the same colour are arranged such that their nozzles (22) are offset from one another in the sub-scanning direction (Y) by an amount smaller than the dimension of the pixel (P, Q) in that direction.

Patentansprüche

1. Farbdruckverfahren mit einem Tintenstrahldrucker, der einen Druckkopf (10) hat, welcher hin- und hergehend in Vorwärts- und Rückkehrabtastdurchgängen in einer Hauptabtastrichtung (X) bewegt wird, welcher mit einer geraden Anzahl von Düsenaufreihungen (C1, M1, Y1; Y2, M2, C2) für jede von wenigstens zwei Farben versehen ist, und in welchem die genannten Düsenaufreihungen in der Hauptabtastrichtung (X) in einer symmetrischen Reihenfolge von Farben angeordnet sind, **dadurch gekennzeichnet, daß** zum Drucken eines einzelnen, aus wenigstens zwei Farben zusammengesetzten Pixels (P; P2; P3; Q) mit hoher Dichte Tintenpunkte (30, 32, 34, 36) jeder dieser Farben in geraden Anzahlen durch Aktivieren der entsprechenden Düsen (22) der symmetrisch angeordneten Aufreihungen an geeigneten Zeitpunkten in demselben Abtastdurchgang des Druckkopfes (14) gebildet werden, wobei das genannte einzelne Pixel (P; P2; P3; Q) in entweder der Hauptabtastrichtung (X) oder einer Unterabtastrichtung (Y) verlängert ist, resultierend in einer nichtisotropen Druckauflösung.

2. Verfahren nach Anspruch 1, wobei Tintenpunkte (30, 36; 32, 34) derselben Farbe, die dasselbe Pixel (P2, P3) bilden, mit wesentlicher Überlappung, aber geringfügig in der Hauptabtastrichtung (X) versetzt gebildet werden und das genannte Pixel (P2, P3) in der Hauptabtastrichtung (X) verlängert ist.

3. Verfahren nach Anspruch 1, wobei Tintenpunkte (30, 36; 32, 34) derselben Farbe, die dasselbe Pixel (P, Q) bilden, mit wesentlicher Überlappung, aber geringfügig in der Unterabtastrichtung (Y) versetzt gebildet werden und das genannte Pixel (P, Q) in der Unterabtastrichtung (Y) verlängert ist.

4. Tintenstrahlfarbdrucker, aufweisend:

- einen Druckkopf (14), der hin- und hergehend in Vorwärts- und Rückkehrabtastrichtungen in einer Hauptabtastrichtung (X) bewegt wird, welcher mit einer geraden Anzahl von Düsenaufreihungen (C1, M1, Y1; Y2, M2, C2) für jede von wenigstens zwei Farben versehen ist, und in welchem die genannten Düsenaufreihungen in einer symmetrischen Reihenfolge von Farben in der Hauptabtastrichtung angeordnet sind, und
- eine Steuereinheit (28), die die Düsen (22) der Düsenaufreihungen entsprechend der zu druckenden Bildinformation erregt,

dadurch gekennzeichnet, daß die Kontrolleinheit (28) dazu eingerichtet ist, die Düsen (22) der Aufreihungen an geeigneten Zeitpunkten zu aktivieren, so daß zum Drucken eines einzelnen, aus wenigstens zwei Farben zusammengesetzten Pixels (P; P2, P3; Q) mit hoher Dichte, wobei das genannte einzelne Pixel (P; P2; P3; Q) in entweder der Hauptabtastrichtung (X) oder einer Unterabtastrichtung (Y) verlängert ist, resultierend in einer nichtisotropen Druckauflösung, Tintenpunkte (30, 32, 34, 36) jeder der Farben in geraden Anzahlen in demselben Abtastrichtungsdurchgang des Druckkopfs (14) gebildet werden.

5. Drucker nach Anspruch 4, wobei die Düsenaufreihungen (C1, M1, Y1; Y2, M2, C2) in der Hauptabtastrichtung (X) in einer geraden Anzahl von Blöcken (24, 26) angeordnet sind, die jeweils eine Düsenaufreihung jeder Farbe umfassen.
6. Drucker nach Anspruch 5, wobei die Blöcke (24, 26) einen identischen Aufbau haben und spiegelsymmetrisch in Bezug auf die Mittelebene (E) sind, welche sich parallel mit der Hauptabtastrichtung (X) und senkrecht zu der Unterabtastrichtung (Y) erstreckt, und eine Hälfte der Gesamtanzahl von Blöcken (24, 26) an dem Druckkopf (14) in umgekehrter Orientierung relativ zu der anderen Hälfte der Blöcke angebracht ist.
7. Drucker nach einem der Ansprüche 4 bis 6, wobei die Düsenaufreihungen (C1, C2; M1, M2; Y1, Y2) derselben Farbe so angeordnet sind, daß ihre Düsen (22) zueinander in der Unterabtastrichtung (Y) um einen Betrag versetzt sind, welcher kleiner ist als die Ausdehnung des Pixels (P, Q) in dieser Richtung.

Revendications

1. Procédé d'impression en couleurs au moyen d'une imprimante à jet d'encre ayant une tête d'impression (10) qui se déplace alternativement selon des cycles

de balayage aller et retour dans une direction de balayage principale (X), où un nombre pair de rangées de buses (C1, M1, Y1; Y2, M2, C2) est prévu pour chacune des au moins deux couleurs et lesdites rangées de buses sont disposées selon un ordre symétrique des couleurs dans la direction de balayage principale (X), **caractérisé en ce que**, pour imprimer un seul pixel (P; P2; P3; Q) composé d'au moins deux couleurs en obtenant une forte densité, les points d'encre (30, 32, 34, 36) de chacune de ces couleurs sont formés par nombres pairs en activant les buses correspondantes (22) des rangées de buses disposées symétriquement à des rythmes appropriés au cours du même cycle de balayage de la tête d'impression (14), où ledit pixel unique (P; P2; P3; Q) est allongé soit dans la direction de balayage principale (X) soit dans une direction de balayage mineure (Y), ce qui permet d'obtenir une résolution d'impression non isotrope.

2. Procédé selon la revendication 1, dans lequel les points d'encre (30, 36; 32, 34) de même couleur et composant le même pixel (P2, P3) sont formés avec un chevauchement important mais avec un léger décalage dans la direction de balayage principale (X) et ledit pixel (P2, P3) est allongé dans la direction de balayage principale (X).
3. Procédé selon la revendication 1, dans lequel les points d'encre (30, 36; 32, 34) de même couleur et composant le même pixel (P, Q) sont formés avec un chevauchement important mais avec un léger décalage dans la direction de balayage mineure (Y) et ledit pixel (P, Q) est allongé dans la direction de balayage mineure (Y).
4. Imprimante couleur à jet d'encre comprenant :

une tête d'impression (14) qui se déplace alternativement selon des cycles de balayage aller et retour dans une direction de balayage principale (X), dans laquelle un nombre pair de rangées de buses (C1, M1, Y1; Y2, M2, C2) est prévu pour chacune des au moins deux couleurs et lesdites rangées de buses sont disposées selon un ordre symétrique de couleurs dans la direction de balayage principale, et une unité de commande (28) activant les buses (22) des rangées de buses selon l'information imagée à imprimer,

caractérisée en ce que l'unité de commande (28) est aménagée pour activer les buses (22) des rangées à des rythmes appropriés de sorte que, pour imprimer un pixel unique (P; P2; P3; Q) composé d'au moins deux couleurs en obtenant une forte densité, ledit pixel unique (P; P2; P3; Q) étant allongé soit dans la direction de balayage principale (X) soit

dans une direction de balayage mineure (Y), ce qui donne une résolution d'impression non isotrope, les points d'encre (30, 32, 34, 36) de chacune desdites couleurs sont formés en nombres pairs au cours du même cycle de balayage de la tête d'impression (14). 5

5. Imprimante selon la revendication 4, dans laquelle les rangées de buses (C1, M1, Y1 ; Y2, M2, C2) sont disposées dans la direction de balayage principale (X) en nombre pair de blocs (24, 26) qui comprennent chacun une rangée de buses de chaque couleur. 10

6. Imprimante selon la revendication 5, dans laquelle les blocs (24, 26) ont une configuration identique et sont symétriques en miroir par rapport au plan médian (E) s'étendant parallèlement à la direction de balayage principale (X) et perpendiculairement à la direction de balayage mineure (Y) et la moitié du nombre total des blocs (24, 26) est fixée sur la tête d'impression (14) selon une orientation inverse par rapport à l'autre moitié des blocs. 15 20

7. Imprimante selon l'une quelconque des revendications 4 à 6, dans laquelle les rangées de buses (C1, C2 ; M1, M2 ; Y1, Y2) de même couleur sont disposées de sorte que leurs buses (22) soient décalées l'une par rapport à l'autre dans la direction de balayage mineure (Y) d'une quantité inférieure à la dimension du pixel (P, Q) dans cette direction. 25 30

35


40





45

50

55

Fig. 1

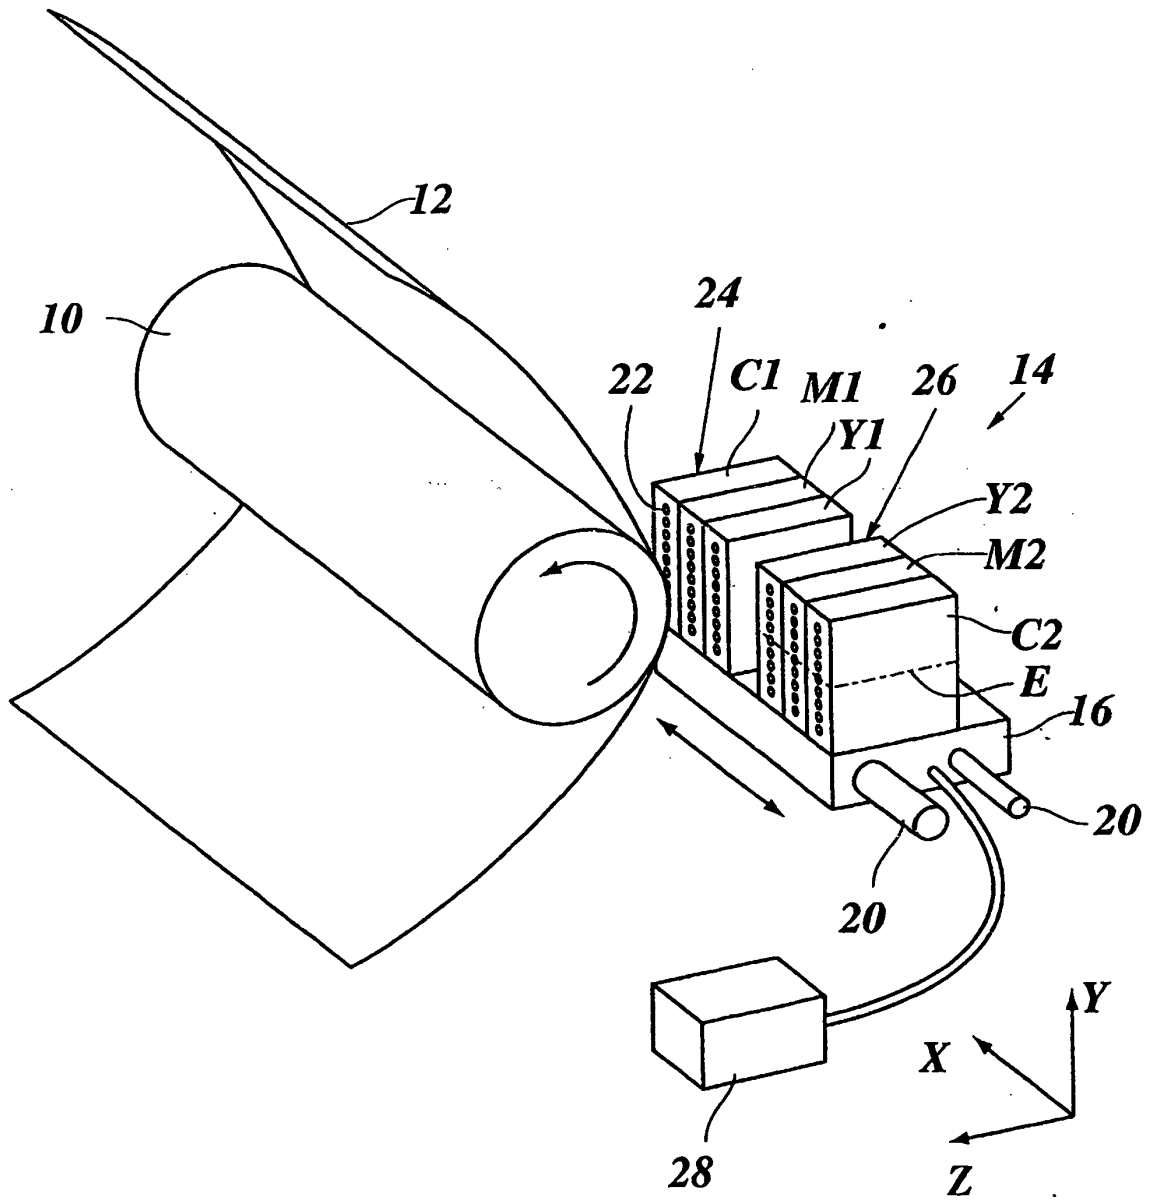

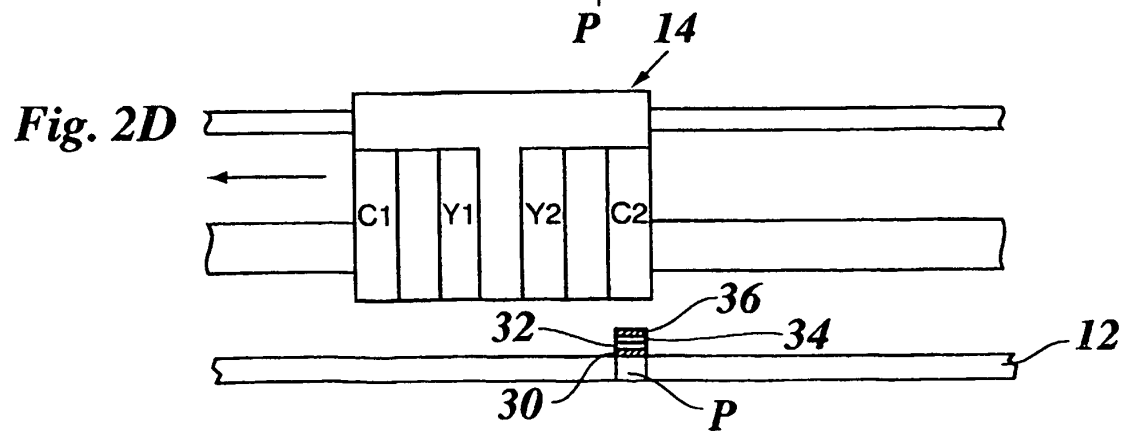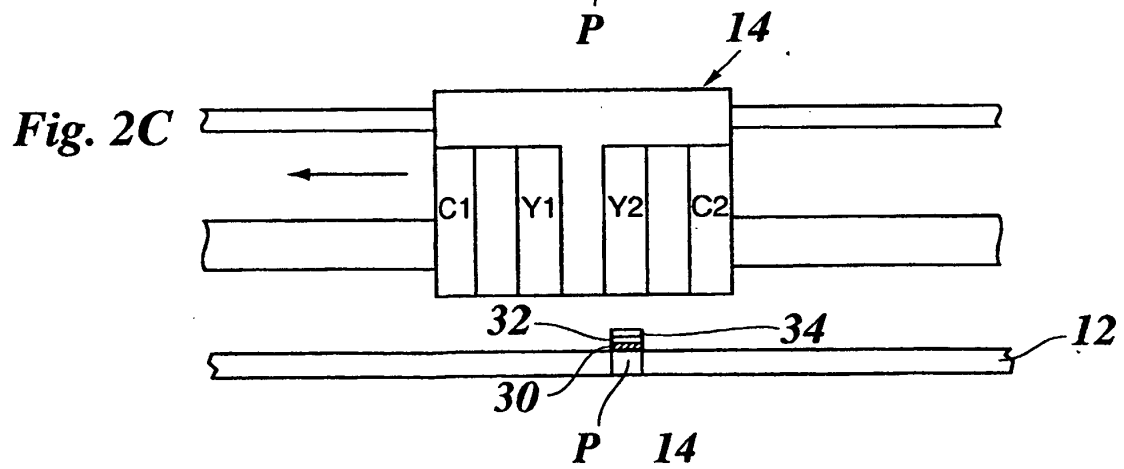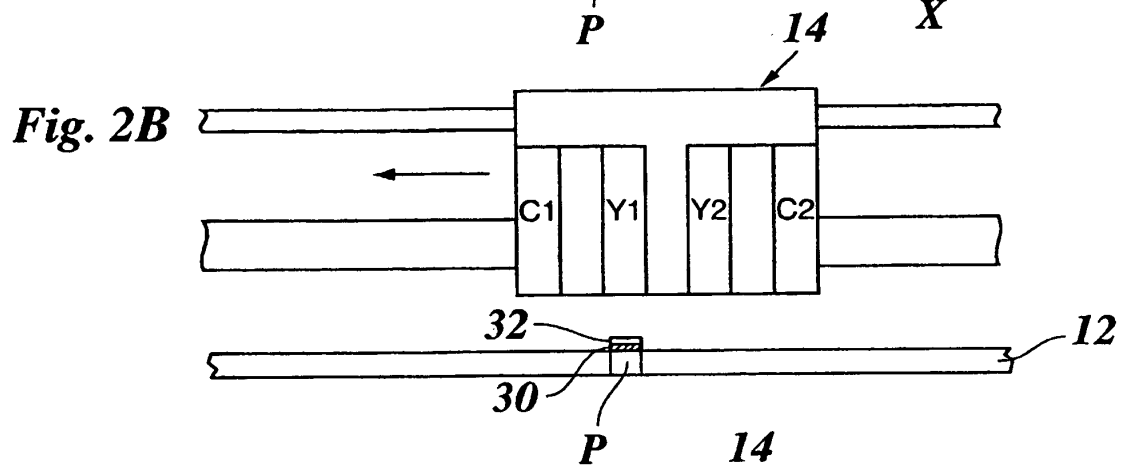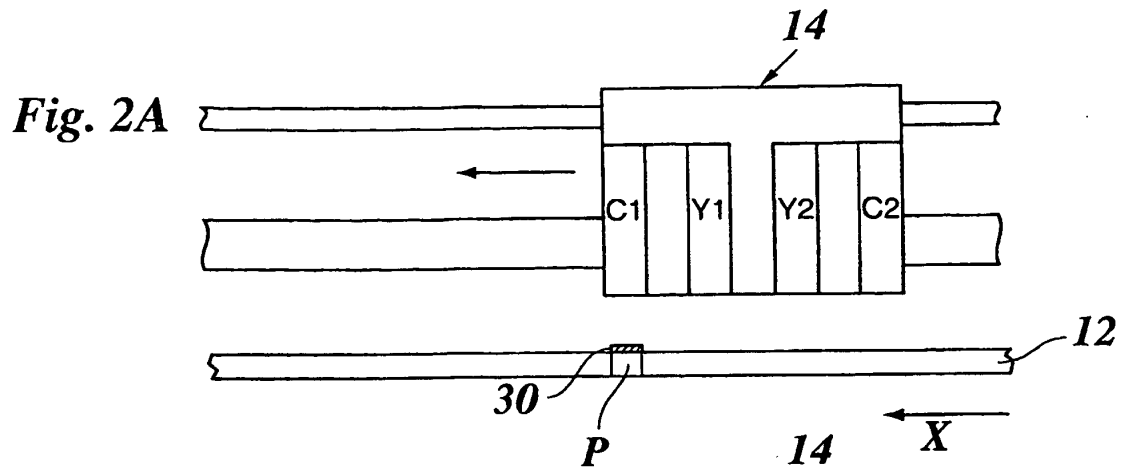

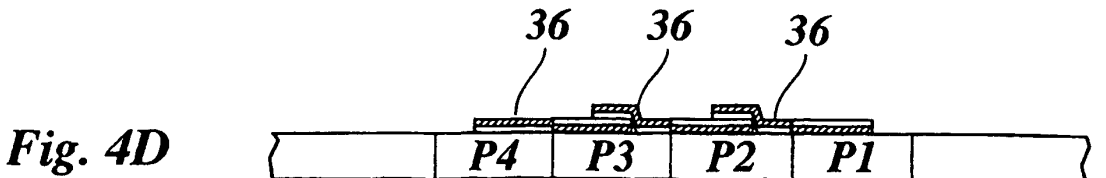
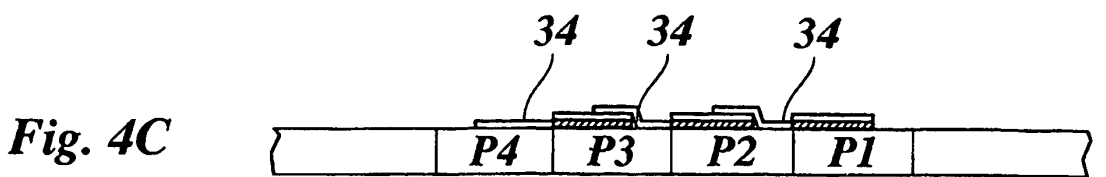
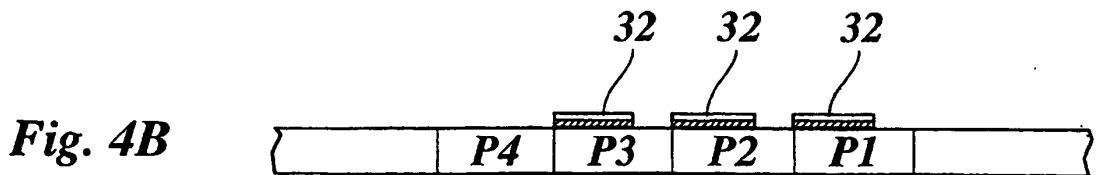
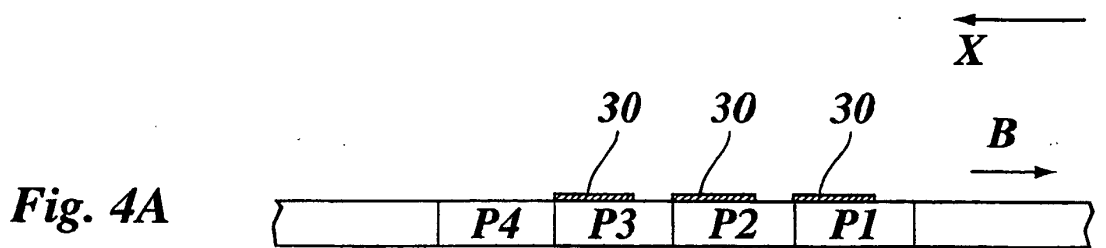
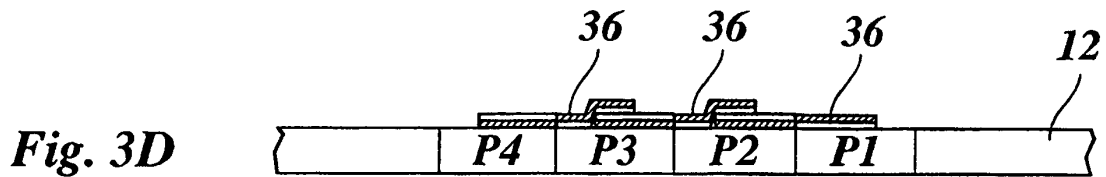
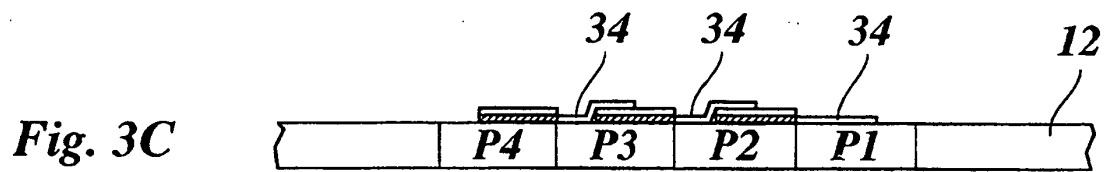
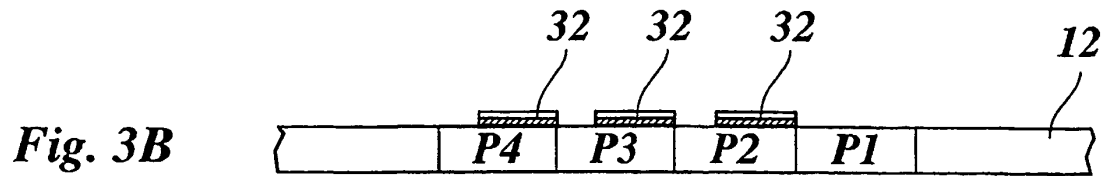
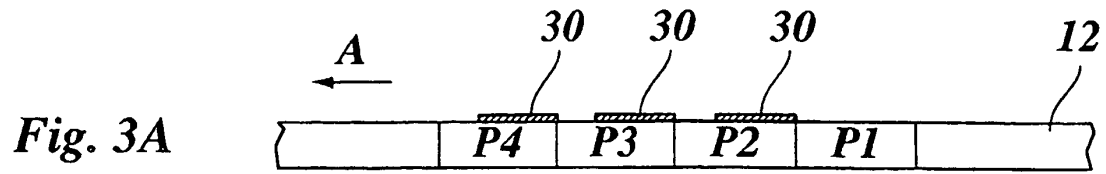


Fig. 5

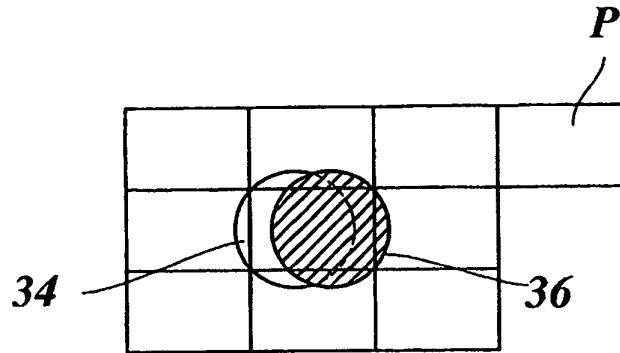


Fig. 6A

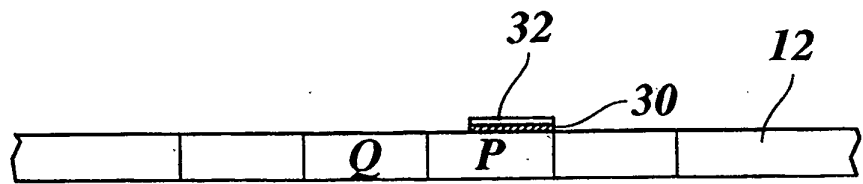


Fig. 6B

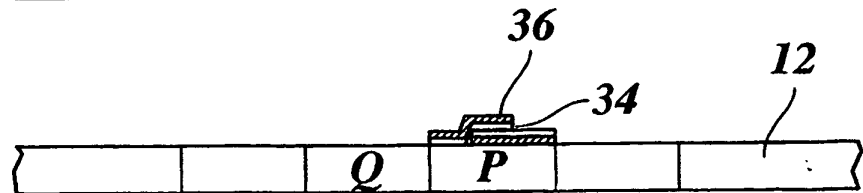


Fig. 6C

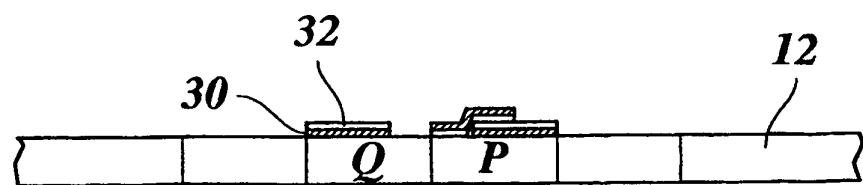


Fig. 6D

