

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 216 319 B1**

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:  
**07.04.2004 Bulletin 2004/15**

(51) Int Cl.7: **D04B 1/14**, D03D 15/00,  
D04C 1/02

(21) Application number: **00960844.9**

(86) International application number:  
**PCT/GB2000/003586**

(22) Date of filing: **19.09.2000**

(87) International publication number:  
**WO 2001/023653 (05.04.2001 Gazette 2001/14)**

(54) **ABSORPTIVE FABRIC**

ABSORBIERENDER STOFF

TISSU ABSORBANT

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**

(30) Priority: **27.09.1999 US 406490**  
**07.07.2000 US 612038**

(43) Date of publication of application:  
**26.06.2002 Bulletin 2002/26**

(73) Proprietor: **BHK Holding Ltd.**  
**Grand Cayman (KY)**

(72) Inventor: **Hudson, John Overton**  
**Glenfield, Leicester LE3 8AG (GB)**

(74) Representative: **Stevens, Ian Edward**  
**Eric Potter Clarkson,**  
**Park View House,**  
**58 The Ropewalk**  
**Nottingham NG1 5DD (GB)**

(56) References cited:  
**EP-A- 0 878 204 WO-A-93/14724**  
**WO-A-98/09590 WO-A-98/46818**  
**WO-A-99/64080 DE-A- 3 100 466**  
**US-A- 3 561 441**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 1 216 319 B1**

## Description

### FIELD OF INVENTION

**[0001]** The present invention pertains to fabrics that are capable of absorbing a relatively large quantity of a fluid. Certain embodiments of such fabrics are particularly useful for the control of bleeding.

### BACKGROUND OF INVENTION

**[0002]** It is known to use, for various medical and other purposes, fibrous materials, including yarns, which gel when wet and which absorb body fluids. Such materials are used as swabs during surgery, as hemostatic agents and wound dressings. The problem with such materials is that they tend to become weak when wet. Structures formed from these materials tend to break or lose integrity upon absorption of blood or body fluids.

**[0003]** Among the materials used for this purpose are collagen, oxidized cellulose, calcium alginate and hemostatic gelatin. Such materials will be referred to generically herein as gel-forming materials and yarns made therefrom as gel-forming yarns.

**[0004]** One particular material of this kind is sodium carboxymethylcellulose (CMC), staple fibre forms of which are used in non-woven fabrics that are commonly used in post-trauma and post-surgical situations as wound dressings. CMC gels upon contact with water, blood or body fluids, and swells to absorb such materials. CMC also facilitates blood clotting while absorbing any exude and is, therefore, hemostatic. In addition, it is well known that CMC is hygroscopic so it does not readily dry into clotted blood, and therefore can be removed easily without causing re-bleeding. If it does dry, it can be easily re-gelled by wetting with water or saline solution.

**[0005]** A composite structure, incorporating gel-forming fibres and conventional textile fibres, is disclosed in international patent application, WO 98/46818. The materials described in WO 98/46818 as gel-forming fibres are essentially the same as those which are useful, in yarn form, in the present invention.

**[0006]** In the structure disclosed in WO 98/46818, the gel-forming fibres are said to be "laid-in" to a knitted fabric. Applicant believes, however, that a knitted structure as disclosed there would, to a significant degree, lose its physical integrity upon gelling of the gel-forming fibres and would not be suitable in an application in which the fabric is stretched when the gel forming fibres are gelled.

### SUMMARY OF INVENTION

**[0007]** The present invention provides a composite knit, woven or braided fabric comprised of a combination of gel-forming yarn and reinforcing yarn, wherein the reinforcing yarn is knit, woven or braided such that the fab-

ric is capable of retaining its structural integrity independent of the gel-forming yarn.

**[0008]** In one embodiment of the present invention, the gel-forming yarn is composed of a hemostatic material such as sodium carboxymethylcellulose (CMC).

**[0009]** Typically the reinforcing yarn is a thin strong synthetic material, such as nylon.

**[0010]** In the knit, woven or braided fabric of this invention, the gel-forming yarn may follow the same yarn path as some or all of the reinforcing yarn courses. The gel-forming yarn may also follow a different path by which it is laid in or interwoven with the reinforcing yarn.

**[0011]** In one form of the present invention, the fabric may be made by weaving, knitting or braiding a composite fabric comprised of reinforcing yarn and a gel-forming yarn such as oxidized cellulose or CMC. Alternatively, such a fabric may be made by weaving, knitting or braiding, with a reinforcing yarn, a cellulosic yarn, the woven, knit or braided structure being such that the structural integrity of the fabric is dependent on the reinforcing yarn only, and then converting the cellulosic yarn therein to oxidized cellulose or sodium carboxymethylcellulose.

**[0012]** This conversion process is conventional and requires only that the reinforcing yarn be resistant to chemical attack in the conversion process. The cellulosic yarn thus converted is in fact gel-forming, highly absorptive and may be hemostatic. In knit form, the resultant fluid absorbing fabric is stretchable, to the degree the reinforcing yarn and/or the structure of the fabric is stretchable. Such a fabric retains its structural integrity even when stretched and when the gel-forming yarn has absorbed water or blood or body fluid and formed a gel therewith.

**[0013]** This conversion process may be useful also with unreinforced knitted, woven or braided cellulosic fabric, that is cellulosic fabrics without reinforcing yarn, and to non-woven structures comprised of precursors of gel-forming fibres or yarns.

**[0014]** Still another form of reinforced gel-forming absorbent fabric, within the scope of this invention, may be made by forming the fabric or other structure with a composite yarn, the yarn itself comprising a composite or combination of gel-forming fibre (or a precursor thereof, convertible as described above) with a reinforcing fibre. Such a composite yarn may comprise a yarn spun from a combination of such fibres or a core spun yarn, wherein the core fibre is a continuous strand of a reinforcing filament, or filaments, made of a material such as nylon.

### BRIEF DESCRIPTION OF DRAWINGS

**[0015]**

Figure 1 is a diagrammatic view of one knitted embodiment of the present invention.

Figure 2 is a diagrammatic view of another knitted embodiment of the present invention.

#### DETAILED DESCRIPTION OF INVENTION

**[0016]** The present invention, in one embodiment, comprises a composite fabric, which retains its structural integrity while absorbing a large quantity of fluid, and particularly to such a fabric useful for the control of bleeding. One application for such a fabric is in an expandable hemostatic device for the control of bleeding in body cavities, as disclosed and claimed in a separate patent application of partial common inventorship herewith, U.S. Application Serial No. 09/406/166, filed September 27, 1999.

**[0017]** As used herein, the term "hemostatic" refers to a material that retards or prevents bleeding. Some gel-forming materials, such as CMC, are hemostatic. The term "reinforcing" yarn refers to a yarn that has greater tensile strength in a wet phase than a gel-forming yarn with which it is combined.

**[0018]** The word "yarn," as used herein, refers to an indefinite length of material suitable for weaving, knitting or braiding, typically comprised of one or more continuous strands of material or a multiplicity of relatively short length fibres spun into a fibre bundle of indefinite length, or some combination of continuous strands and spun fibres.

**[0019]** Gel-forming materials or yarns, of the type generally referred to herein, typically soften to form a gel or partially dissolve when brought into contact with a suitable liquid such as blood. Such a material absorbs liquid and will absorb many times its own weight. Certain gel-forming materials are referred to as hemostatic because they tend to cause blood to clot while absorbing any exudate. Hemostatic, gel-forming materials, such as CMC, are particularly useful for medical purposes wherein the absorption of body fluids is important. Such materials are also used during surgery, or other medical procedures, as hemostatic agents and wound dressings.

**[0020]** The composite fabric of the present invention comprises a reinforcing yarn woven, knitted or braided with a gel-forming yarn. Typically, the reinforcing yarn is a relatively strong synthetic material, with which the gel-forming yarn is placed side by side during the weaving, knitting or braiding of the gel-forming and reinforcing yarns into a woven, knitted or braided fabric. Alternatively, all or less than all of the yarn courses of the reinforcing yarn may be accompanied by gel-forming yarn. Alternatively also, still other yarn courses or picks of the woven or knitted fabric may comprise gel-forming yarn only, so long as the network of woven or knitted reinforcing yarn retains its structural integrity independent of the gel-forming yarn.

**[0021]** In general, it is preferred for present purposes to maximize the proportion of gel-forming yarn in the fabric and incorporate as little as possible of the reinforcing

yarn, while still ensuring adequate strength in the fabric after the gel-forming yarns have gelled. As a practical matter, at least 5% (by weight) of reinforcing yarn is required but a larger proportion of reinforcing yarn may be used to yield a fabric of greater strength.

**[0022]** CMC, a preferred gel-forming material in the present invention, may be made by the chemical conversion of a variety of cellulosic materials, such as viscose rayon, cotton, etc. One cellulosic yarn suitable for the present invention is a Lyocell yarn. It is available from Spinneroff Streif AG, Zurichstrasse 170, Uthal, Switzerland. Lyocell is a solvent spun cellulose, produced from the natural cellulose in wood pulp by dissolution of the pulp in a solvent and then extruding the solution through a multiple-hole die, called a spinneret, to form a yarn comprised of a plurality of continuous strands. The solvent is vaporized in the process, leaving a continuous multi-filament yarn composed of pure cellulose.

**[0023]** The filaments in such a yarn may be chopped into staple form and spun into a yarn in a way similar to that used in processing cotton fibre.

**[0024]** In accordance with one aspect of the present invention, such an unconverted cellulose yarn is readily woven, knit or braided into a precursor fabric, from which the fabric of the present invention is made by conversion of the cellulose to sodium carboxymethylcellulose or to oxidized cellulose, in accordance with well-known techniques.

**[0025]** In the conversion of cellulose to sodium carboxymethylcellulose, less than all of the cellulose building blocks may be converted to the sodium carboxymethylcellulose form and the degree of this conversion will dictate the degree to which a resultant CMC yarn will absorb water and form a gel therewith. This proportion is sometimes referred to as the conversion factor. While the present invention is not limited to sodium carboxymethylcellulose of any particular conversion factor, such materials with a conversion factor of 50 to 70% are preferred in the fabric of the present invention.

**[0026]** Oxidized cellulose, which is conventionally used in knitted form as a hemostatic agent during surgery, may also be used in the reinforced fabric of the present invention and may also be converted (oxidized) after cellulosic yarn is first woven, knit or braided into a precursor fabric.

**[0027]** Yet another hemostatic material, useful in the present invention, is calcium alginate, which is a material derived from seaweed, and, in matted fibre form, is also used as a wound dressing. Other fibrous polysaccharides, with similar chemistry and properties to CMC, may also be used.

**[0028]** Combinations of different gel-forming agents may be used within the scope of the present invention. Such combinations may be made by forming a yarn from different gel-forming or hemostatic fibres and/or by weaving, knitting or braiding combinations of different gel-forming yarns.

**[0029]** In the case where a precursor fabric is first formed with cellulose yarn, and the knitted, woven or braided cellulose yarn is then converted to gel-forming oxidized cellulose or sodium carboxymethylcellulose, the reinforcing yarn must be non-reactive with the reactants and the products of the process of converting the cellulosic material into the gel-forming, chemically modified form thereof.

**[0030]** Referring to Figure 1, the step of weaving, knitting or braiding involves conventional methods, which are known. In accordance with the present invention, each of the multiple yarn end feeds to a weaving loom, knitting machine or braiding machine may comprise, in effect, two yarn ends, fed in parallel, one the gel-forming yarn (or a precursor yarn suitable for subsequent conversion to a gel-forming yarn), and one the reinforcing yarn. With a weft knit fabric constructed in this way as an example, the knit fabric product would include, as shown in Figure 1, a thin reinforcing yarn 2, combined in all yarn courses with a thicker (but weaker) yarn 1, which is either a gel-forming fibre or is convertible to a gel-forming yarn (i.e. a gel-forming yarn precursor).

**[0031]** In such a structure, at least some of the gel-forming yarn courses may be omitted, depending on the relative degree of strength and absorptive capacity desired. Shown in Figure 2 is another knit fabric of the present invention. Reinforcing yarns 3 are knit so as to provide structural integrity to the fabric, while gel-forming (or precursor to gel-forming) yarns 4 are inlaid therewith. The inlaying of gel-forming yarns 4 is such that even if the gel-forming yarns 4 are fully dissolved, the network of reinforcing yarns will maintain the structural integrity of the fabric.

**[0032]** Knit forms of the composite fabric of this invention have some inherent stretchability. In certain embodiments of the fabrics, such as those shown in Figures 1 and 2, still more stretchability may be provided. More specifically, the reinforcing yarn itself may be stretchable so that the fabric itself is more stretchable. This is particularly useful when the fabric is intended for disposition around a balloon-expanding device, as described in the above-referenced co-pending U.S. patent application. For that purpose, a tubular fabric is preferred.

**[0033]** In fact, one particularly effective use for the fabric of the present invention is as a hemostatic shroud covering an expansible device, adapted for disposition in a body cavity or passageway, such as a nasal passageway, to control bleeding therein, as disclosed in the above-referenced U.S. Patent Application Serial No. 09/406,166, filed September 27, 1999.

**[0034]** While the range of fabrics required for different applications is very wide, an exemplary fabric, made for use in a nasal hemostatic device, comprises a knit construction, as illustrated in Figure 1, knitted into a tubular form in accordance with well-known methods. In this exemplary fabric, a gel forming precursor yarn (12 tex lyocell spun yarn is knit together with a reinforcing yarn comprised of 17 decitex 3 filament nylon. The fabric

structure is a plain weft, knitted in circular form with 36 needles. The loop length is 5 mm and the weight of the finished fabric is 1.6 grams per metre (wet relaxed and dried to normal moisture regain). The reinforcing yarn comprises about 12%, by weight, of this fabric before conversion of the Lyocell to CMC and about 11% after that conversion.

**[0035]** The conversion of the Lyocell in this exemplary fabric is accomplished by methods well known in the art.

**[0036]** While the nylon reinforcing yarn used in this embodiment would not be considered stretchable, the fabric structure itself is stretchable and deformable, that is it will expand in diameter at the expense of its length.

**[0037]** Apart from the composite fabric as described above, the present invention also includes the process of making a gel-forming or hemostatic structure, including a matted fibre or laid-in knit structure, as disclosed in the above-referenced WO 98/46818, by first forming the structure with gel-forming fibre precursors, such as cellulose fibre or yarn, and then converting the structure to the gel-forming state thereof, namely oxidized cellulose or CMC.

**[0038]** Still other composites and fabrics within the scope of this invention comprise a composite yarn, the structure of which includes both reinforcing fibres, such as nylon, and gel-forming fibres (or precursors thereof).

**[0039]** The most elementary method of combining two different fibres within one yarn is to simply spin the yarn from a mixture of the two fibres in staple form. However, this may lead to an overly weakened yarn once the gelling has taken place.

**[0040]** A preferred example of such a composite yarn is a core spun yarn, that is a yarn wherein staple fibres are spun around a preformed yarn. This preformed yarn may be another spun yarn, or, more commonly, a continuous filament yarn. This preformed yarn may comprise a reinforcing material, such as nylon. Gel-forming, or precursors of gel-forming, fibres comprise a second component of the final yarn product. The gel-forming fibres therein (converted from precursor materials either prior to or after spinning) provide absorptive and hemostatic capacity to the yarn and the reinforcing fibres or central filament of the preformed yarn provide strength. Such a yarn may be woven, knit or otherwise incorporated into a fabric or other structure, wherein fluid or blood absorption are important.

**[0041]** While the product and method of making the product of this invention have been described in connection with several specific embodiments, it should be understood that numerous modifications could be made by persons of skill in this art without departing from the true spirit and scope of the invention. Accordingly, the above description is intended to be merely illustrative and not limiting.

**Claims**

1. A composite knitted, woven or braided fabric comprising a combination of:

yarn (1, 4) which is either gel-forming or is a precursor yarn, capable of being converted to a gel-forming yarn; said gel-forming yarn or gel-forming yarn precursor (1, 4) being woven, knitted or braided with a reinforcing yarn (2, 3), the knitting, weaving or braiding of such reinforcing yarn (2, 3) comprising a network capable of providing physical integrity to said fabric independent of said gel-forming yarn or gel-forming yarn precursor (1, 4).

2. The fabric of Claim 1 wherein said gel-forming yarn precursor (1, 4) is a cellulosic yarn.

3. The fabric of Claim 1 wherein said gel-forming yarn (1, 4) is comprised of sodium carboxymethylcellulose.

4. The fabric of Claim 1 wherein said gel-forming yarn (1, 4) is selected from the group consisting of sodium carboxymethylcellulose, oxidized cellulose, and calcium alginate.

5. The fabric of any one of Claims 1 to 4 wherein said reinforcing filament (2, 3) is a nylon continuous mono or multifilament yarn.

6. The fabric of any one of Claims 1 to 5 comprising one or more yarns (1, 4) capable of gelling upon contact with liquid, and one or more reinforcing yarns (2, 3), wherein said reinforcing yarn (2, 3) has greater tensile strength than said gelling yarn (1, 4) in a wet phase, and wherein said fabric is highly absorbent to blood and body fluids.

7. A method of making a composite fabric comprised of a combination of gel-forming yarn (1, 4) and reinforcing yarn (2, 3) said method comprising the steps of:

weaving, knitting or braiding together a plurality of courses of said gel-forming (1, 4) and said reinforcing yarns (2, 3),  
said plurality of yarns including at least one said yarn having hemostatic properties (1, 4) and at least one said yarn (2, 3) having a tensile strength greater than the tensile strength of said hemostatic yarn in a wet phase, said higher strength yarn (2, 3) being woven, knit or braided so as to provide structural integrity to said fabric independent of said hemostatic yarn (1, 4).

8. The method of Claim 7 wherein said yarn (1, 4) having hemostatic properties is converted cellulose yarn.

9. The method of Claim 8 wherein said converted cellulose yarn (1, 4) is sodium carboxymethylcellulose, converted after the knitting, weaving or braiding of a cellulose precursor yarn.

10. The method of Claim 8 wherein said cellulose yarn (1, 4) is oxidized to produce oxidized cellulose fibre.

11. The method of Claim 10 wherein said cellulose yarn (1, 4) is oxidized after the step of said weaving, knitting or braiding.

12. The method of Claim 7 wherein said yarn (1, 4) having hemostatic properties is calcium alginate.

13. A precursor fabric capable of being converted into a composite woven, knitted or braided fabric of any one of Claims 1 to 6, said precursor fabric comprising a network of woven, knitted or braided yarns capable of retaining the structural integrity thereof in the presence of said selected fluid and, combined therewith, precursor yarn (1, 4) capable of being converted to gel-forming yarn (1, 4), which gel-forming yarn (1, 4) has a capacity to absorb said preselected fluid by forming a gel therewith.

14. A method of making a fabric of any one of Claims 1 to 6 by first making a structure of a material including fibrous material which is chemically convertible to a gel-forming absorptive material (1, 4), and then chemically converting said material to its gel-forming, absorptive form (1, 4).

15. A method, as recited in Claim 14, wherein said precursor material (1, 4) is a cellulosic yarn.

16. A method, as recited in Claim 15, wherein said converted material (1, 4) is CMC.

17. A method, as recited in any one of Claims 14 to 16, wherein the finished structure is a knitted fabric.

18. A method, as recited in any one of Claims 14 to 16 wherein the finished structure is a woven fabric.

19. A method, as recited in any one of Claims 14 to 16, wherein the finished structure is a braided fabric.

20. A structure, as recited in Claims 17, 18 or 19 wherein the fabric is in a tubular form.

## Patentansprüche

1. Ein zusammengesetzter gestrickter, gewirkter, gewebter oder geflochtener Stoff, der folgende Merkmale aufweist:
 

ein Garn (1, 4), das entweder gelbildend ist oder ein Zwischengarn aufweist, welches geeignet ist, in ein gelbildendes Garn umgewandelt zu werden; das gelbildende Garn oder das Zwischengarn (1, 4) mit einem verstärkenden Garn (2, 3) verwebt, verstrickt oder verflochten ist, wobei das verstrickte, verwebte oder verflochtene verstärkende Garn (2, 3) ein Netzwerk bildet, das die physikalische Intaktheit des Stoffes unabhängig von dem gelbildenden Garn oder dem Zwischengarn bereitstellt.
2. Der Stoff nach Anspruch 1, **dadurch gekennzeichnet, dass** das gelbildende Zwischengarn (1, 4) ein Cellulosegarn ist.
3. Der Stoff nach Anspruch 1, **dadurch gekennzeichnet, dass** das gelbildende Zwischengarn (1, 4) Natriumcarboximethylcellulose aufweist.
4. Der Stoff nach Anspruch 1, **dadurch gekennzeichnet, dass** das gelbildende Zwischengarn (1, 4) aus der Gruppe Natriumcarboximethylcellulose, Oxidcellulose und Kalziumalginat ausgewählt ist.
5. Der Stoff nach einem der Ansprüche 1 bis 4, **dadurch gekennzeichnet, dass** das verstärkende Garn (2, 3) ein endloses Monofilamentgarn oder ein Multifilamentgarn aus Nylon ist.
6. Der Stoff nach einem der Ansprüche 1 bis 5, **dadurch gekennzeichnet, dass** er ein oder mehrere, bei Kontakt mit Flüssigkeit gelbildende Garne (1, 4) und ein oder mehrere verstärkende Garne (2, 3) aufweist, wobei das verstärkende Garn (2, 3) eine größere Zugfestigkeit als das gelbildende Garn in feuchtem Zustand aufweist und der Stoff Blut und Körperflüssigkeiten absorbierend ausgebildet ist.
7. Ein Verfahren zur Herstellung eines zusammengesetzten Stoffes aus einer Kombination eines gelbildenden Garns (1, 4) und eines verstärkenden Garns (2, 3) mit folgenden Verfahrensschritten:
 

Weben, Stricken, Wirken oder Flechten des gelbildenden Garns (1, 4) und des verstärkenden Garns (2, 3),

wobei mindestens ein Garn (1, 4) mit blutstillenden Eigenschaften und mindestens ein Garn (2, 3) mit einer höheren Zugfestigkeit als das blutstillende Garn in feuchtem Zustand eingesetzt wird
8. Das Verfahren nach Anspruch 7, **dadurch gekennzeichnet, dass** das Garn (1, 4) mit den blutstillenden Eigenschaften zu Cellulosegarn umgewandelt wird.
9. Das Verfahren nach Anspruch 8, **dadurch gekennzeichnet, dass** das umgewandelte Cellulosegarn (1, 4) Natriumcarboximethylcellulose ist, welches aus einem Cellulose enthaltenden Zwischengarn nach dem Weben, Stricken, Wirken oder Flechten umgewandelt wird.
10. Das Verfahren nach Anspruch 8, **dadurch gekennzeichnet, dass** das Cellulosegarn (1, 4) unter Bereitstellung oxidierter Cellulosefasern oxidiert wird.
11. Das Verfahren nach Anspruch 10, **dadurch gekennzeichnet, dass** das Cellulosegarn (1, 4) nach dem Weben, Stricken, Wirken oder Flechten oxidiert wird.
12. Das Verfahren nach Anspruch 7, **dadurch gekennzeichnet, dass** das Cellulosegarn (1, 4) mit den blutstillenden Eigenschaften Kalziumalginat ist.
13. Ein Zwischenstoff, der zur Umwandlung in einen gewebten, gestrickten, gewirkten oder geflochtenen Stoff nach einem der Ansprüche 1 bis 6 geeignet ist, **dadurch gekennzeichnet, dass** der Zwischenstoff ein Netzwerk aus gewebten, gestrickten, gewirkten oder geflochtenen Garnen, die geeignet sind, die strukturelle Intaktheit in Anwesenheit von Flüssigkeit bereitzustellen, und in Kombination damit aus einem Zwischengarn (1, 4), das zur Umwandlung in ein gelbildendes Garn (1, 4) geeignet ist, aufweist, wobei das gelbildende Garn (1, 4) die Eigenschaft hat, die Flüssigkeit unter Gelbildung zu absorbieren.
14. Ein Verfahren zur Herstellung eines Stoffes nach einem der Ansprüche 1 bis 6, **dadurch gekennzeichnet, dass** zuerst eine Struktur aus einem Material mit Fasern, die chemisch in ein gelbildendes absorbierendes Material (1, 4) umwandelbar sind, erstellt wird und dann dieses Material in seine gelbildende absorbierende Form umgewandelt wird.
15. Ein Verfahren nach Anspruch 14, **dadurch gekennzeichnet, dass** das Material (1, 4) des Zwischenstoffs ein Cellulosegarn ist.
16. Ein Verfahren nach Anspruch 15, **dadurch gekennzeichnet, dass** das umgewandelte Material

(1, 4) CMC ist.

17. Ein Verfahren nach einem der Ansprüche 14 bis 16, **dadurch gekennzeichnet, dass** die Endstruktur ein gestrickter oder gewirkter Stoff ist.

5

18. Ein Verfahren nach einem der Ansprüche 14 bis 16, **dadurch gekennzeichnet, dass** die Endstruktur ein gewebter Stoff ist.

10

19. Ein Verfahren nach einem der Ansprüche 14 bis 16, **dadurch gekennzeichnet, dass** die Endstruktur ein geflochtener Stoff ist.

20. Eine Struktur nach einem der Ansprüche 17, 18 oder 19, **dadurch gekennzeichnet, dass** der Stoff Schlauchform aufweist.

15

## Revendications

20

1. Tissu composite tricoté, tissé ou tressé comprenant une combinaison de :

fil (1, 4) qui est soit du fil gélifiant ou qui est un fil précurseur pouvant être transformé en fil gélifiant ; ledit fil gélifiant ou ledit précurseur de fil gélifiant (1, 4) étant tissé, tricoté ou tressé avec un fil de renforcement (2, 3), le tricotage, le tissage ou le tressage d'un tel fil de renforcement (2, 3) comprenant un réseau capable de fournir une intégrité physique audit tissu indépendant dudit fil gélifiant ou dudit précurseur de fil gélifiant (1, 4).

25

30

2. Tissu selon la revendication 1, dans lequel ledit précurseur de fil gélifiant (1, 4) est un fil cellulosique.

35

3. Tissu selon la revendication 1, dans lequel ledit fil gélifiant (1, 4) est composé de carboxyméthylcellulose de sodium.

40

4. Tissu selon la revendication 1, dans lequel ledit fil gélifiant (1, 4) est choisi dans le groupe constitué du carboxyméthylcellulose de sodium, de la cellulose oxydée, et de l'alginate de calcium.

45

5. Tissu selon l'une quelconque des revendications 1 à 4, dans lequel ledit filament de renforcement (2, 3) est un fil continu de nylon mono ou multifilament.

50

6. Tissu selon l'une quelconque des revendications 1 à 5 comprenant un ou plusieurs fils (1, 4) pouvant se gélifier suite au contact avec du liquide, et un ou plusieurs fils de renforcement (2, 3), dans lequel ledit fil de renforcement (2, 3) a une résistance à la traction supérieure à celle du fil gélifiant (1, 4) dans une phase humide, et dans lequel ledit tissu est très

absorbant au sang et aux fluides corporels.

7. Procédé de fabrication d'un tissu composite comprenant une combinaison de fil gélifiant (1, 4) et de fil de renforcement (2, 3), ledit procédé comprenant les étapes consistant à :

tisser, tricoter ou tresser ensemble une pluralité de rangées desdits fils gélifiants (1, 4) et desdits fils de renforcement (2, 3), ladite pluralité de fils comprenant au moins l'un desdits fils ayant des propriétés hémostatiques (1, 4) et au moins l'un des fils (2, 3) ayant une résistance à la traction supérieure à la résistance à la traction dudit fil hémostatique dans une phase humide, ledit fil (2, 3) à résistance supérieure étant tissé, tricoté ou tressé, afin de fournir une intégrité structurelle audit tissu indépendant dudit fil hémostatique (1, 4).

8. Procédé selon la revendication 7, dans lequel ledit fil (1, 4) ayant des propriétés hémostatiques est du fil cellulosique transformé.

9. Procédé selon la revendication 8, dans lequel ledit fil (1, 4) cellulosique transformé est du, carboxyméthylcellulose de sodium, transformé après le tricotage, le tissage ou le tressage d'un fil précurseur cellulosique.

10. Procédé selon la revendication 8, dans lequel ledit fil (1, 4) cellulosique est oxydé pour produire une fibre cellulosique oxydée.

11. Procédé selon la revendication 10, dans lequel ledit fil (1, 4) cellulosique est oxydé après l'étape dudit tissage, tricotage ou tressage.

12. Procédé selon la revendication 7, dans lequel ledit fil (1, 4) ayant des propriétés hémostatiques est de l'alginate de calcium.

13. Tissu précurseur pouvant être transformé en un tissu composite tissé, tricoté ou tressé selon l'une quelconque des revendications 1 à 6, ledit tissu précurseur comprenant un réseau de fils tissés, tricotés ou tressés pouvant conserver son intégrité structurelle en présence dudit fluide choisi et combiné avec celui-ci, le fil précurseur (1, 4) pouvant être transformé en fil gélifiant (1, 4), dont le fil gélifiant (1, 4) présente une capacité à absorber ledit fluide présélectionné en formant un gel avec celui-ci.

55

14. Procédé de fabrication d'un tissu selon l'une quelconque des revendications 1 à 6, en fabriquant dans un premier temps une structure d'un matériau comprenant un matériau fibreux qui est chimique-

ment transformable en un matériau absorbant gélifiant (1, 4), et ensuite en transformant chimiquement ledit matériau en sa forme absorbante, gélifiante (1, 4).

5

15. Procédé selon la revendication 14, dans lequel ledit matériau précurseur (1, 4) est un fil cellulosique.

16. Procédé selon la revendication 15, dans lequel ledit matériau transformé (1, 4) est du CMC.

10

17. Procédé selon l'une quelconque des revendications 14 à 16, dans lequel la structure finie est un tissu tricoté.

15

18. Procédé selon l'une quelconque des revendications 14 à 16, dans lequel la structure finie est un tissu tissé.

19. Procédé selon l'une quelconque des revendications 14 à 16, dans lequel la structure finie est un tissu tressé.

20

20. Structure selon les revendications 17, 18 ou 19, dans laquelle le tissu se présente sous forme tubulaire.

25

30


35

40


45

50

55

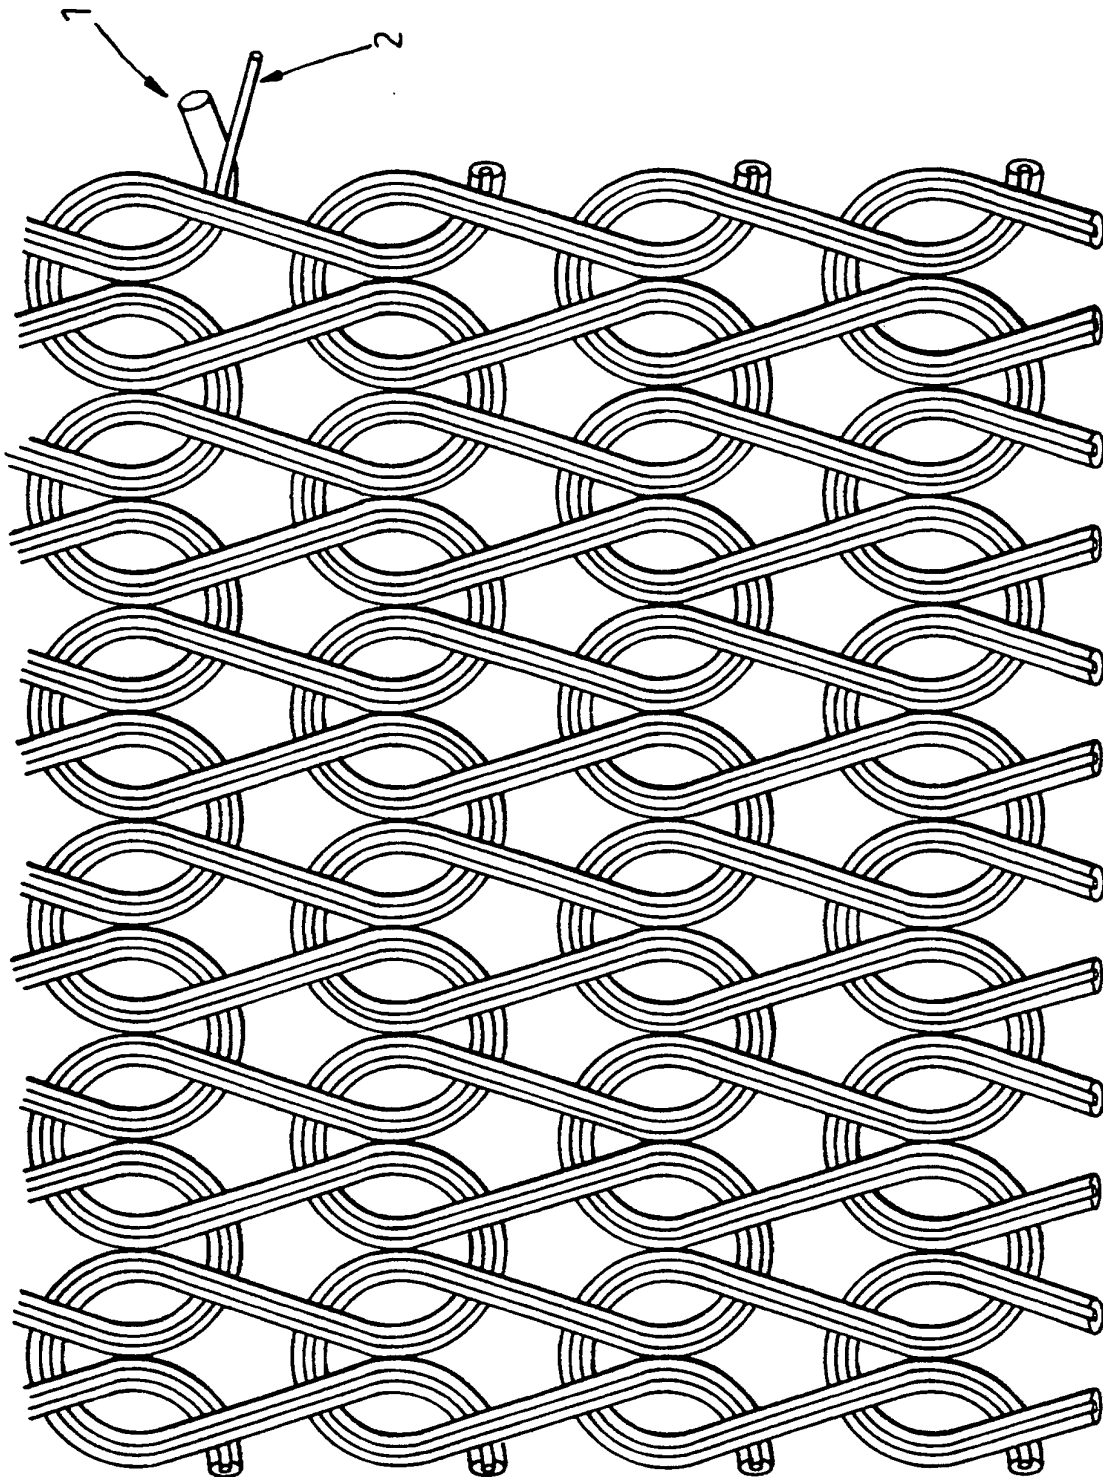

**Fig. 1**

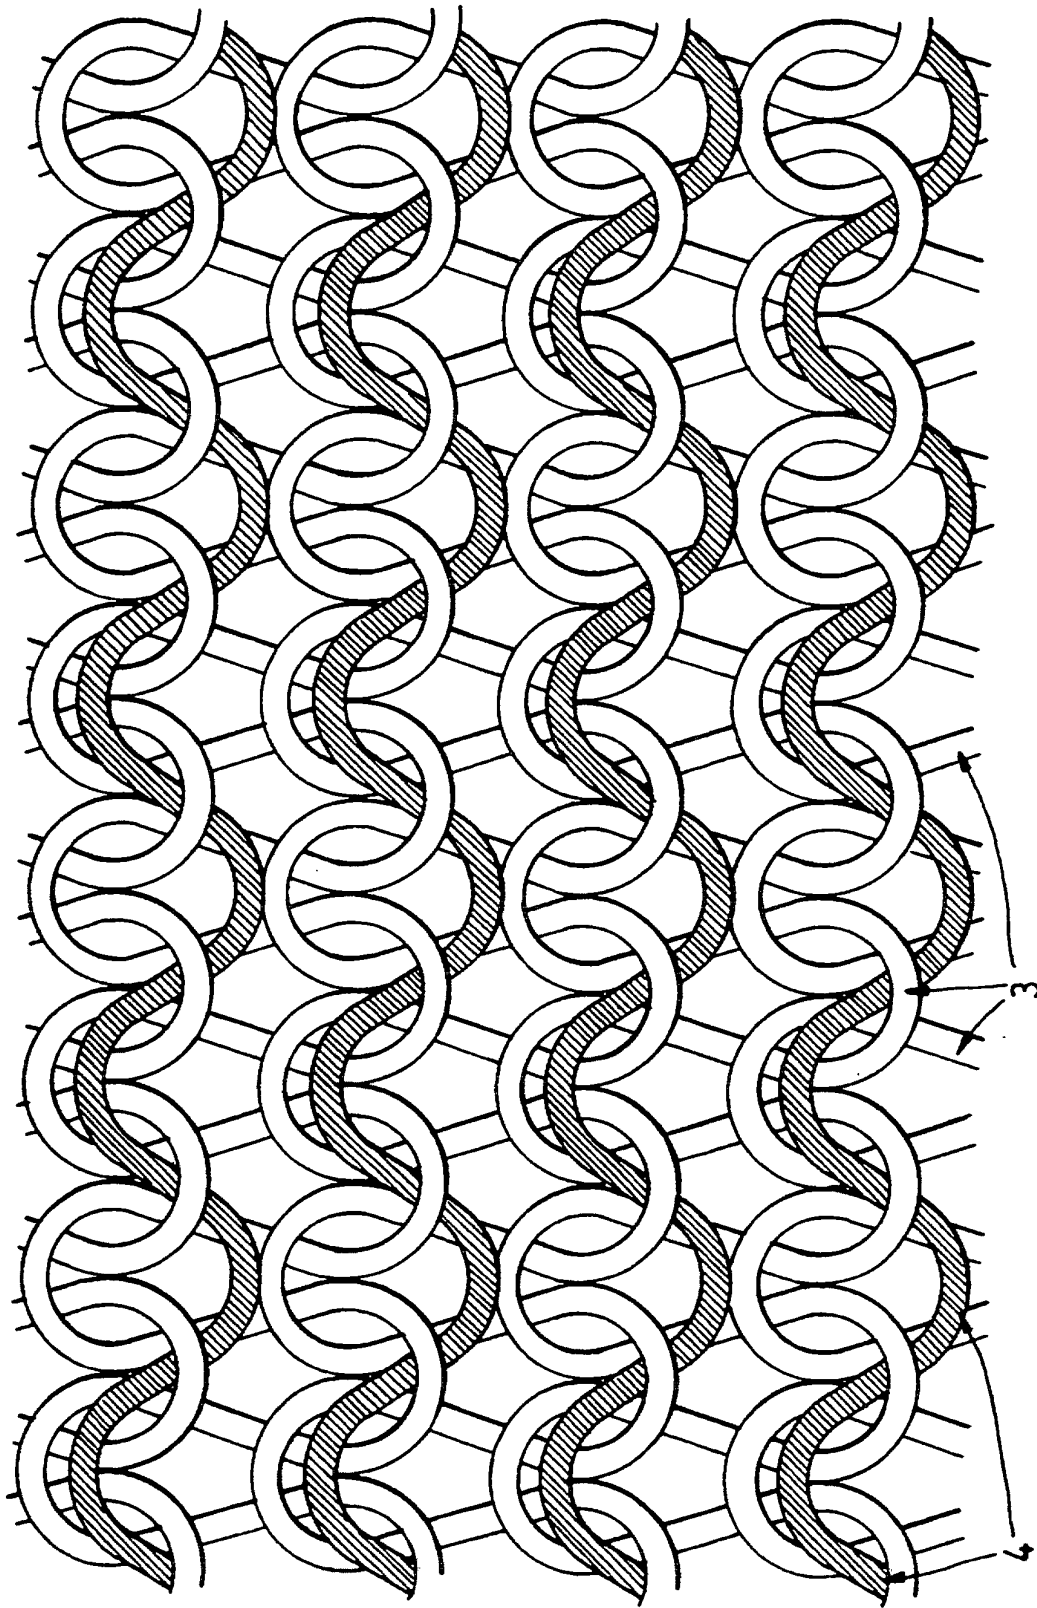

*Fig. 2*