



(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
26.06.2002 Bulletin 2002/26

(51) Int Cl.7: B41J 2/51

(21) Application number: 01000701.1

(22) Date of filing: 04.12.2001

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 22.12.2000 EP 00204699

(71) Applicant: AGFA-GEVAERT
2640 Mortsel (BE)

(72) Inventors:
• Verhoest, Bart
2640, Mortsel (BE)
• De Ruyter, Dirk
2640, Mortsel (BE)
• Van den Wyngaert, Hilbrand
2640, Mortsel (BE)
• Verlinden, Bart
2640, Mortsel (BE)

(54) An ink jet printer with nozzle arrays that are moveable with respect to each other

(57) An ink jet printer including a first (101) and a second (101') nozzle array, arranged one after another in the printing direction (A), wherein the second nozzle array (101') is movably arranged in the printer for being

displaced so that the number (N') of nozzles in the second nozzle array (101') experience a displacement having a component in a direction (M') orthogonal to the printing direction (A).

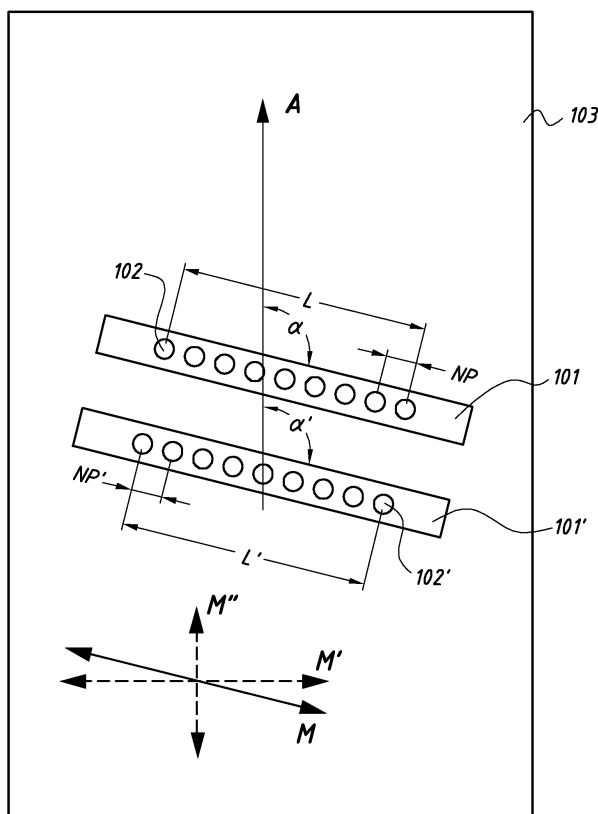


FIG. 1

Description

FIELD OF THE INVENTION

[0001] The invention relates to an ink jet printer, especially to an ink jet printer useful in multimode printing.

BACKGROUND OF THE INVENTION

[0002] The requirements for an ink jet printer used for printing images, such as pictures and photographs, and for an ink jet printer used for text reproduction are quite different. In the former case the quality of the print is, provided that a minimum resolution is achieved, more determined by the absence of banding in even density parts and by the number of density levels printable per pixel than by the resolution. In the latter case, the image quality is more determined by the resolution and less by the absence of banding in even density parts and the number of density levels printable per pixel. This means that it is quite difficult to design a single printer that can print pages containing both images - e.g. photographs - and text with high image quality.

[0003] In the art of ink jet printing, it is well known how to increase the resolution of a printer. E.g. in **US-A-4 922 271** a matrix printer, a.o. an ink jet printer, is disclosed having multiple printing heads positioned so as to enhance the resolution of the printer beyond the basic resolution of the individual printheads.

[0004] Also in **US-A-5 719 601** and **US-A-5 844 585** methods for enhancing the resolution in an ink jet printer beyond the basic resolution of the individual printheads are disclosed.

[0005] Also the problem of banding, especially in even density portions of an image, e.g. a picture or photograph, is well known and several measures to avoid this phenomenon have been disclosed; e.g. in **US-A-4 999 646** it is disclosed that by providing complementary and overlying swath patterns of ink jet print, and utilizing super pixeling in the overlying printed areas to generate dot-next-to-dot (DND) printed images, the uniformity and consistency of dot formation over the ink jet printed image could be enhanced. In various documents it is described to solve the problem of banding by printing a single line using more than one nozzle or by printing every dot with more than one nozzle, e.g. by printing half of the density needed with one nozzle and the other half with another nozzle. Also in **US-A-5 844 585** an enhanced form of shingling is disclosed. In **US-A-6 124 940** it is recognized that shingling demands a high data flow from the host computer to the printer - which requires a more expensive printing system - and a method for diminishing the data flow is presented.

[0006] Although the printers as disclosed in the referenced documents are well suited to have high resolution printing or low banding, there is still a need for a improved printer that can easily be tuned to the needs of the printing job at hand.

SUMMARY OF THE INVENTION

[0007] The present invention is an ink jet printer as claimed in independent claim 1. Preferred embodiments of the invention are set out in the dependent claims.

[0008] Fig. 1 schematically shows an ink jet printer in accordance with the invention. The ink jet printer includes two nozzle arrays 101 and 101', that may be maintained in a frame (not shown). The receiving substrate 103, upon which the image, the text or both are to be printed, is moved along a receiving substrate path in the direction of arrow A, the printing direction. In Fig. 1, the shown portion of the receiving substrate path is rectilinear. In general, the receiving substrate path may have other forms; the receiving substrate may e.g. be guided by a drum, the receiving substrate path may comprise a number of rectilinear portions and a number of curved portions, etc. The first and second nozzle arrays 101, 101' are arranged one after another in the printing direction (i.e. either the receiving substrate first passes nozzle array 101' and then nozzle array 101 - as shown in Fig. 1 - or it first passes nozzle array 101 and then nozzle array 101' - as shown in Fig. 2). Preferably, the first nozzle array 101 is positioned at a constant first ink-throwing distance from the receiving substrate path. Preferably, the second nozzle array 101' is positioned at a constant second ink-throwing distance from the receiving substrate path, that may be different from the first ink-throwing distance. The first nozzle array 101 has a length L and a number N of nozzles 102 that are positioned in the array with a nozzle pitch NP; the second nozzle array 101' has a length L' and a number N' of nozzles 102' that are positioned in the array with a nozzle pitch NP'. The first nozzle array 101 is positioned so that its length L makes an angle α with the printing direction A, chosen so that $20^\circ \leq \alpha \leq 160^\circ$, and the second nozzle array 101' is positioned so that its length L' makes an angle α' with the printing direction A, also chosen so that $20^\circ \leq \alpha' \leq 160^\circ$. In the embodiment shown in Fig. 1, the nozzle arrays 101, 101' each have only one row of nozzles. In general, a nozzle array may comprise several rows of nozzles. The "length" L, L' of a nozzle array is determined as the largest distance between the first and the last nozzle of a row of nozzles of the array (e.g. in case of an array consisting of 5 equidistant rows of 1000 equidistant nozzles, wherein the distance between the nozzles is NP and the distance between the rows is also NP, $L = (1000 - 1) \cdot NP$).

[0009] In the best mode of the invention, angle $\alpha = \alpha' = 90^\circ$ and the nozzle arrays 101, 101' are "page wide printhead assemblies". A page wide printhead assembly is defined as follows. The receiving substrate has a width W (not shown in Fig. 1) orthogonal to the printing direction A, and a printable width W_p (not shown in Fig. 1) that may be smaller than W in case there is at least one unprinted border. In a page wide printhead assembly, the number of nozzles N and the length L are so large that the printable width W_p is covered, eliminating

the need to shuttle the printhead assembly as is the case in shuttle printers. In a so-called shuttle printer, a printhead assembly has a length L that is substantially smaller than the printable width W_P of the receiving substrate (or, in case the printhead assembly is at an angle α to the printing direction A that is different from 90° , $L \cdot \sin \alpha$ is substantially smaller than W_P), so that the printhead has to scan the receiving substrate, i.e. to reciprocate, in order to cover the printable width W_P .

[0010] A page wide printhead assembly can be obtained in different ways, e.g. by means of a single, "monolithic" printhead, by means of a number of staggered printheads, etc.

[0011] In an ink jet printer according to the invention, the second nozzle array 101' is arranged so as to be movable back and forth as indicated by arrow M . When moving the second nozzle array along the direction indicated by arrow M , the nozzles experience a displacement that has a non-zero component in a direction M' orthogonal to the printing direction A and a component (that is zero if $\alpha = 90^\circ$) in a direction M'' parallel to the printing direction; this allows to change the mode, e.g. text or image mode, of the printer.

[0012] A first advantage of an ink jet printer in accordance with the invention is the availability of multimode printing: the user has the possibility to switch the printer in an easy way between two or, which is preferred, three of the following modes: pure image mode, pure text mode and mixed text/image mode.

[0013] Another advantage of the invention is that the amount of data that has to be sent to the printer may be minimized for each printing mode.

[0014] Yet another advantage is that the change-over from mode to mode can proceed during printing, i.e. without stopping the printer.

[0015] Further advantages and embodiments of the present invention will become apparent from the following description and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] The invention is described with reference to the following drawings without the intention to limit the invention thereto, and in which:

Figure 1 schematically shows a printer according to this invention;

Figure 2 schematically shows the operation of a printer according to this invention in "image mode" with shingling in one direction;

Figure 3 schematically shows the operation of a printer according to this invention in "image mode" with shingling in two directions;

Figure 4 schematically shows the operation of a printer according to this invention in "text mode";

Figures 5a and 5b schematically show the operation of a printer according to this invention wherein shingling and high resolution are combined.

DETAILED DESCRIPTION OF THE INVENTION

[0017] Figure 1 schematically shows a printer according to the invention, as discussed already above. In a preferred embodiment, the second nozzle array 101' is movably arranged in the printer for being displaced in the direction M' over a distance that equals at least $(\sin \alpha' \cdot NP')/2$, which corresponds to a distance of at least $NP'/2$ in the direction of arrow M . This makes it possible, by using two nozzle arrays 101, 101', to double the resolution that can be attained with a single nozzle array 101, as will also be clarified below.

[0018] In a further preferred embodiment, the angle α equals the angle α' . Preferably, in a printer according to the invention, $L = L'$, $N = N'$ and $NP = NP'$. It is preferred that both the angles α and α' are chosen so that $75^\circ \leq \alpha \leq 105^\circ$ and $75^\circ \leq \alpha' \leq 105^\circ$. In a most preferred embodiment of the invention, $\alpha = \alpha' = 90^\circ$, $L = L'$, $N = N'$ and $NP = NP'$.

[0019] In a further embodiment, the nozzle arrays are stationary with respect to the printing direction A .

[0020] In a further preferred embodiment, said first and second nozzle array are equipped to eject ink with substantially equal chromaticity. Chromaticity describes objectively hue and saturation of a color, and may be measured in terms of CIE x, y or u', v' (cf. "The reproduction of colour in photography, printing & television" by R. W.G. Hunt, 4th edition 1987, ISBN 0 86343 088 0, pp. 71-72). The term "substantially equal" means that, as expressed in the approximately uniform CIE $L^*a^*b^*$ color space, the following holds :

$$\sqrt{(\Delta a^*)^2 + (\Delta b^*)^2} \leq \text{delta}$$

wherein delta = 20, preferably delta = 10, more preferably delta = 5.

[0021] A printer according to this invention can be used in "image mode", with shingling in the printing direction. This is schematically shown in figure 2. In this figure, the number N and N' of dots in each array is restricted to 4 for sake of clarity, the nozzle pitch $NP = NP' = 70 \mu\text{m}$ i.e. 360 dpi. The angles α and α' are both equal to 90° . The receiving substrate travels under the nozzle arrays at a speed so as to achieve a resolution, in the printing direction A , equal to the nozzle pitch of the arrays of apertures. Both nozzle arrays are equipped for ejecting ink with substantially equal chromaticity. The first nozzle array 101 having a plurality of nozzles 102a, 102b, 102c, 102d, is placed so that each of the nozzles is positioned to correspond to a desired, different, print location, the second nozzle array 101' having a plurality of nozzles 102'a, 102'b, 102'c, 102'd, is movably arranged (in the direction of arrow M) and for "image mode" printing placed so that the print location of each of the nozzles of the second array corresponds to one of the print locations of the first array such that the first and second arrays each have one nozzle corresponding

to each desired print location. The dots printed by the nozzles of the first array are indicated by the number 1 and the dots printed by the second array by the number 2. The arrays of nozzles are addressed so that the first row of dots is printed by the nozzles 102a, 102b, 102c and 102d. The second row is printed by nozzles 102'a, 102'b, 102'c and 102'd, the third row is printed by the nozzles 102a, 102b, 102c and 102d, and so on. By doing so dots adjacent in the columns of the image are printed with a different nozzle and thus is shingling in the columns of the image (parallel to the printing direction) achieved and banding diminished. When both nozzle arrays are positioned as shown in figure 2, the second of the nozzle arrays can be used as redundant array. In this case the second nozzle array is used to print only when the corresponding nozzle of the first nozzle array does not print (i.e. is defective). E.g. when nozzle 102b of the first array is defective, then nozzle 102'b is used to print.

[0022] In figure 3, a printer according to this invention used in "image mode" and addressed to achieve shingling both in the columns and the rows of the image is shown. The printer schematically shown in figure 3 is basically the same as the one schematically shown in figure 2, only the way of addressing the various nozzles is changed.

[0023] The arrays of nozzles are addressed so that the first row of dots is printed by the nozzles 102a, 102'b, 102c and 102'd. The second row is printed by nozzles 102'a, 102b, 102'c and 102d, the third row is printed by the nozzles 102a, 102'b, 102c and 102'd, and so on. The result is that in every row and column the dots are printed by the alternation between the two nozzle arrays so that shingling is achieved in the columns (parallel to the printing direction) : the adjacent dots are printed with different nozzles and banding is diminished. In the rows of dots (orthogonal to the printing direction) interlacing is achieved.

[0024] In figure 4, the printer as schematically shown in figure 2, is used in "text mode". The second array 101' is moved over a distance equal to $(\sin \alpha' \cdot NP)/2$, which is with $\alpha' = 90^\circ$ over half the nozzle pitch so that the nozzles of the second array are placed for printing, in a row of dots, dots between the dots printed by the nozzles of the first array, thus the resolution is doubled and with a printer having printheads with a "native" resolution of 360 dpi a resolution of 720 dpi is realized. The result is that in every row of dots the alternate dots are still printed by a different nozzle so that interlacing is still achieved in that direction, but every dot in a column of dots is printed with a single nozzle, in figure 4: the outermost left column is printed by nozzle 102'a, the following column by nozzle 102a, the next column by nozzle 102'b, and so on. Thus no shingling is achieved.

[0025] The movement of the second nozzle array can proceed by any means known in the art, e.g., a stepping motor. When both the first and second nozzle array have a "native" resolution of 360 dpi, then the nozzle pitch is

70 μm , thus when the second array is displaced, it is displaced over 35 μm . This can proceed very accurately using stepping motors that have steps in the micrometer range (steps of 2 to 5 μm). To enhance the reproducibility of the displacement, dampening springs can be used.

[0026] One of the advantages of a printer construction according to this invention is the simplicity and the possibility to easily change the physical resolution of the printer, e.g. by providing a button on the control panel of the printer for switching between "image mode", "text mode" or "mixed text/image mode", without need to have special image processing and thus the need to send an excessive amount of data to the printer. Another advantage of this printer is the ease with which the printing speed and image quality can be exchanged : e.g. in the printing mode shown in figure 2 the printing speed is high but the image has only shingling, whereas in the printing mode shown in figure 3 the printing speed is lower (since it is limited by the maximum nozzle firing rate) but the image has shingling and interlacing. This means that the printer gives the user more freedom to adapt the performance of the printer to the requirements of the job at hand than in other printers.

[0027] Another advantage of the concept of constructing an ink jet printer with a physically movable nozzle array is the versatility of the concept.

[0028] It can be used to manufacture a single pass monochrome printer having three possible printing modes, pure "image mode", pure "text mode" and "mixed text/image mode". When introducing four nozzle arrays, paired two by two with in each pair one movable array, it is possible to have both pairs of the nozzle arrays in "image mode" and thus having a high speed image printing with shingling, it is possible to have both pairs in "text mode" and thus having a high speed text printing without shingling, and it is possible to operate the printer in "mixed text/image mode" when images and text have to be printed. In that case one of the pairs of nozzle arrays is placed in "image mode" and the other one in "text mode" so that both text portions and image portions can be printed in a single pass with adapted quality, i.e. image portions wherein a minimum resolution is achieved and more emphasis is placed on the absence of banding in even density parts and the number of density levels printable per pixel and text portions with high resolution and less emphasis on by the absence of banding in even density parts and by the number of density levels printable per pixel.

[0029] The concept of constructing an ink jet printer with a physically movable nozzle array, as per this invention, can be used to manufacture a single pass multicolor printer. When introducing 5 pairs of nozzle arrays with in each pair one movable array, e.g. one pair designed for printing Y (yellow), one pair designed for printing M (magenta), one pair designed for printing C (cyan), and two pairs designed for printing K (black) it is possible to have an "image mode" printing with shingling using

the YMC pairs of nozzle arrays and one of the pairs of nozzle arrays designed for printing K, in the way as schematically shown in figure 2 for 1 pair of nozzle arrays. It is also possible with such a printer to switch one or more of the pairs of nozzle arrays - depending on the color of the text to be printed - in "text mode" in the way as schematically shown in figure 4 for 1 pair of nozzle arrays. The printer can also be switched in "mixed text/image mode" when the YMC pairs of nozzle arrays and one of the pairs of nozzle arrays designed for printing K are switched to "image mode" and one of the nozzle arrays designed for printing K (black) to "text mode".

[0030] In a further embodiment of an ink jet printer according to this invention, not only said second nozzle array 101' is movably arranged, but also said first nozzle array 101 is movably arranged in said printer for being displaced so that said number N of nozzles experience a displacement that has a non-zero component in the direction M' orthogonal to the printing direction A. The displacement of the N nozzles 102 of the first nozzle array may be different from the displacement of the N' nozzles 102' of the second array, and the components in the direction M' may also be different from each other. In such a printer, as discussed above, it is preferred that $L = L'$, $N = N'$, $NP = NP'$ and $\alpha = \alpha'$. It is then preferred that the second nozzle array 101' is movably arranged in said printer for being displaced in the direction M' over a distance that equals at least $(\sin \alpha' \cdot NP')/2$, whereas the first nozzle array 101 is movably arranged in the printer for being displaced in the direction M' over a distance that equals at least $(\sin \alpha \cdot NP)/2$. When in a very preferred embodiment $\alpha = \alpha' = 90^\circ$, both arrays of nozzles are movably arranged for being displaced over a distance of at least half the nozzle pitch, and preferably over a distance equal to half the nozzle pitch.

[0031] With such a printer it is not only possible to the print with shingling and somewhat lower resolution or to print with high resolution without shingling as described in figure 2 and 3 and above, but it is possible to combine shingling with the high resolution, when the possibility to switch the printer from a single to a double pass printer is present in the printer. This possibility is shown in figure 5a and 5b. In figure 5a, the first pass in the printer is shown. In this figure, the number N and N' of dots in each array is restricted to 4 for sake of clarity, the nozzle pitch $NP = NP' = 70 \mu\text{m}$ i.e. 360 dpi. The angles α and α' both are equal to 90° . The receiving substrate travels under the nozzle arrays at a speed so as to achieve a resolution, in the printing direction A, equal to half to the nozzle pitch of the arrays of apertures. The dots printed through the nozzles 102a, 102b, 102c, 102d of the first nozzle array 101 during the first pass are indicated by 11 and the dots printed through the nozzles 102'a, 102'b, 102'c, 102'd of the second nozzle array 101' during the first pass are indicated by 12. Both nozzle arrays are placed at an angle $\alpha = \alpha' = 90^\circ$ with respect to the printing direction A. The second nozzle array 101' is moved - in the figure to the left - over half the nozzle pitch so

that the nozzles of the second array are placed between nozzles of the first array. During the first pass the receiving substrate travels at a speed so as to have rows of dots printed at intervals equal to half the nozzle pitch. During that pass a first row of dots is printed by the first nozzle array, a second row of dots is printed by the second nozzle array, the third row of dots is printed again by the first nozzle array, the fourth row of dots is printed by the second nozzle array and so on. The rows of dots are shifted with respect to each other over half the nozzle pitch, $NP = NP'$.

[0032] In figure 5b, the second pass in the printer is shown. The second nozzle array 101' is shifted half a nozzle pitch back to the right and the first nozzle array 101 is shifted half a nozzle pitch to the left. The dots printed by the first nozzle array during the second pass are indicated by 21, and the dots printed by the second nozzle array during the second pass are indicated by 22. Again a first row of dots is printed by the first nozzle array, a second row of dots is printed by the second nozzle array, the third row of dots is printed again by the first nozzle array, the fourth row of dots is printed by the second nozzle array and so on. Because of the shift of the nozzle arrays during the second pass, the first row of dots is printed by the nozzles 102a, 102a, 102b, 102b, 102c, 102c, 102d and 102d; the second row is printed by nozzles 102'a, 102'a, 102'b, 102'b, 102'c, 102'c, 102'd and 102'd; the third row is printed by the nozzles 102a, 102a, 102b, 102b, 102c, 102c, 102d and 102d; and so on. The result is that in every column the dots are printed by the alternation between the two nozzle arrays so that shingling is achieved: the adjacent dots are printed with different nozzles and banding is diminished.

[0033] Depending on the number of pairs of nozzle arrays and the provided colors, a ink jet printer in accordance with the invention can operate as a monochrome single pass printer, as a monochrome double pass printer, as a multicolor single pass printer, as a multicolor double pass printer. If, in a pair of nozzle arrays, both arrays are movably arranged in the printer, and if enough pairs of nozzle arrays and colors are provided, the printer can be switched between single pass monochrome "image mode", single pass monochrome "text mode", single pass monochrome "mixed mode", single pass multicolor "image mode", single pass multicolor "text mode", single pass multicolor "mixed mode", double pass monochrome "image mode", double pass monochrome "text mode", double pass monochrome "mixed mode", double pass multicolor "image mode", double pass multicolor "text mode", double pass multicolor "mixed mode".

[0034] In a particular embodiment of the invention, the first and second nozzle arrays of a pair of nozzle arrays are both incorporated in a single printhead assembly, preferably in a single page wide printhead assembly. As discussed above, the first or the second or both nozzle arrays are movably arranged in the printer. An advan-

tage of this particular embodiment is that cleaning is simplified, e.g. in case two nozzle arrays are used for printing a specific color, and these two nozzle arrays are incorporated in a single printhead.

[0035] Those skilled in the art will appreciate that numerous modifications and variations may be made to the embodiments disclosed above without departing from the scope of the present invention.

Claims

1. An ink jet printer having a printing direction (A), the printer comprising:

- a first nozzle array (101) having a length L and a number N of nozzles (102), positioned so that said length L makes an angle α with said printing direction (A) wherein $20^\circ \leq \alpha \leq 160^\circ$;
- a second nozzle array (101') having a length L' and a number N' of nozzles (102'), positioned so that said length L' makes an angle α' with said printing direction (A) wherein $20^\circ \leq \alpha' \leq 160^\circ$;

wherein said first and said second nozzle array are arranged one after another in said printing direction (A); and

wherein said second nozzle array (101') is movably arranged in said printer for being displaced so that said number N' of nozzles (102') experience a displacement having a component in a direction M' orthogonal to said printing direction (A).

2. The ink jet printer according to claim 1 wherein said first (101) and second (101') nozzle arrays are page wide printhead assemblies (101, 101').

3. The ink jet printer according to any of the preceding claims wherein said first (101) and second (101') nozzle arrays are incorporated in a single printhead assembly.

4. The ink jet printer according to any one of the preceding claims wherein said second nozzle array (101') has a nozzle pitch NP' and wherein said component in said direction M' has a magnitude of at least $(\sin \alpha' \cdot NP')/2$.

5. The ink jet printer according to any one of the preceding claims wherein said first nozzle array (101) is movably arranged in said printer for being displaced so that said number N of nozzles (102) experience another displacement having another component in said direction M'.

6. The ink jet printer according to claim 5 wherein said first nozzle array (101) has a nozzle pitch NP and wherein said other component in said direction M' has a magnitude of at least $(\sin \alpha \cdot NP)/2$.

7. The ink jet printer according to claim 6 when dependent on claim 4 wherein $NP = NP'$.

8. The ink jet printer according to any one of the preceding claims wherein $N = N'$, $L = L'$ and $\alpha = \alpha'$.

9. The ink jet printer according to claim 8 wherein $\alpha = \alpha' = 90^\circ$.

10. The ink jet printer according to any of the preceding claims wherein said first (101) and second (101') nozzle arrays are equipped to eject ink having a substantially equal chromaticity.

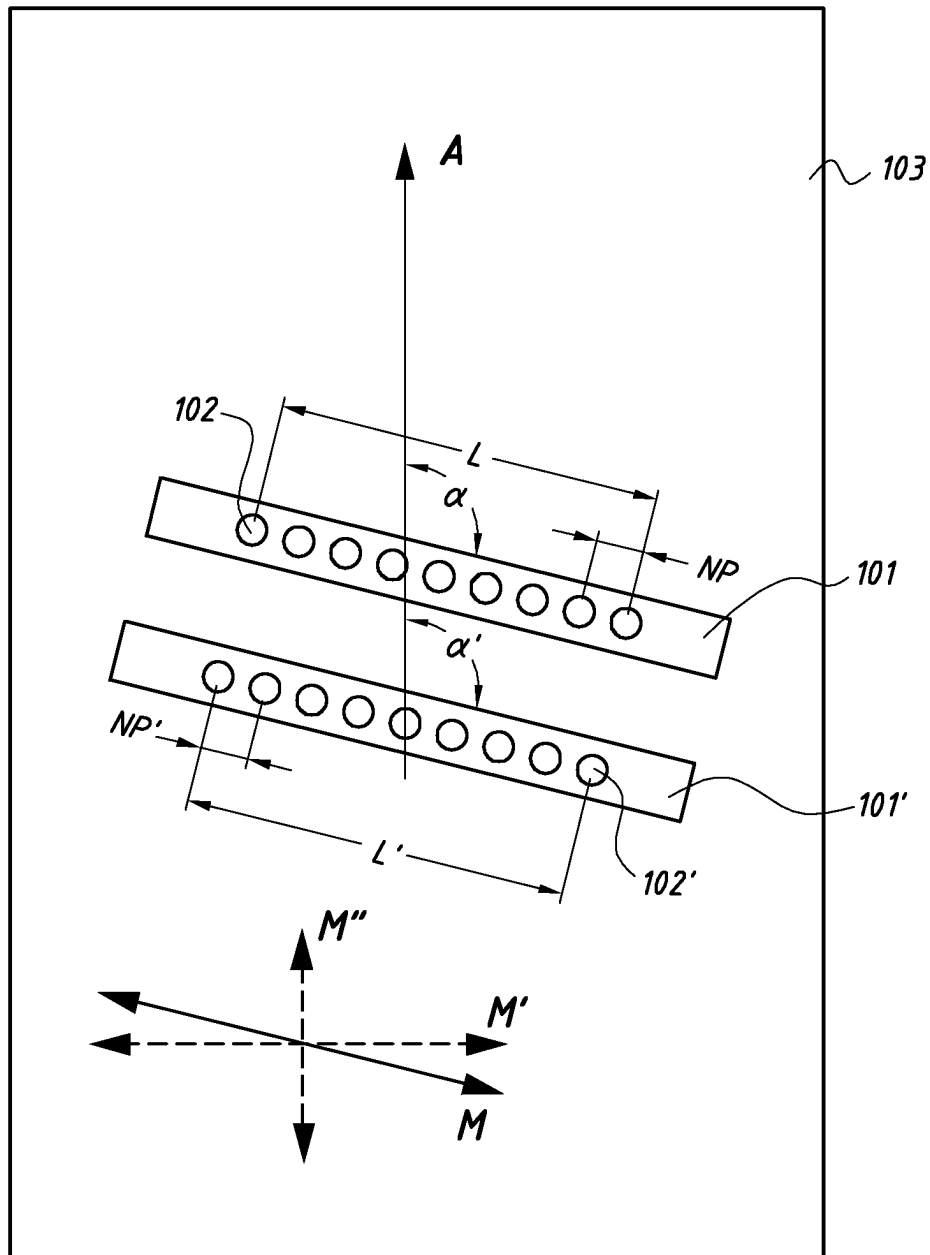


FIG. 1

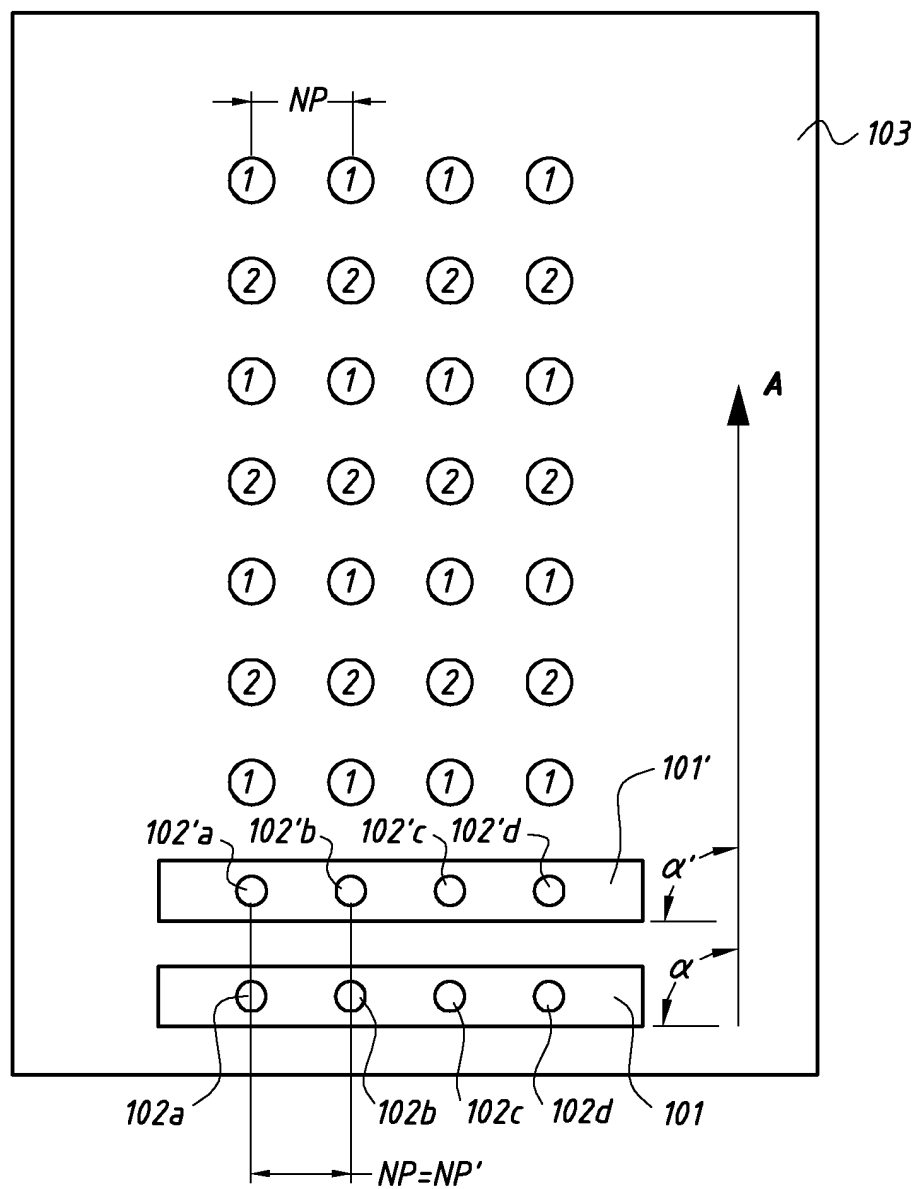


FIG. 2

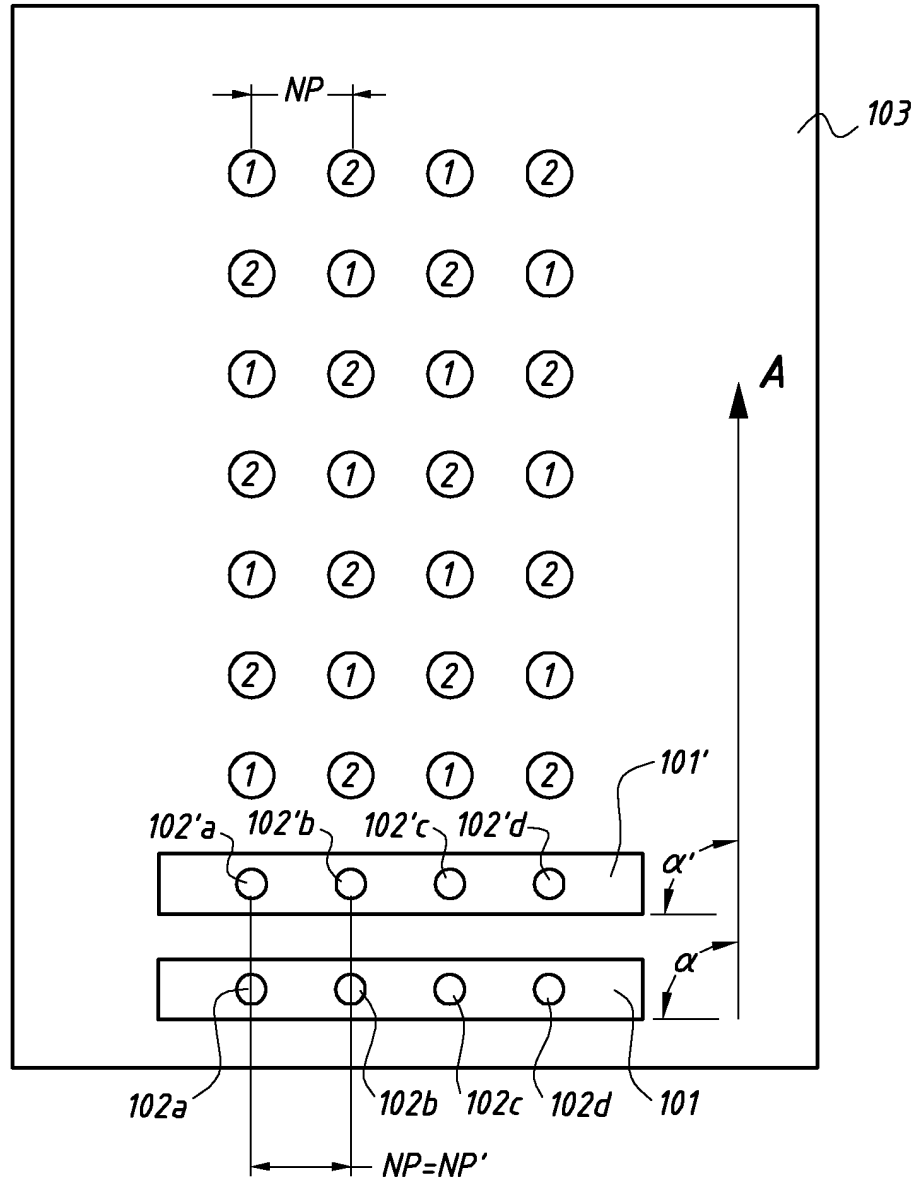


FIG. 3

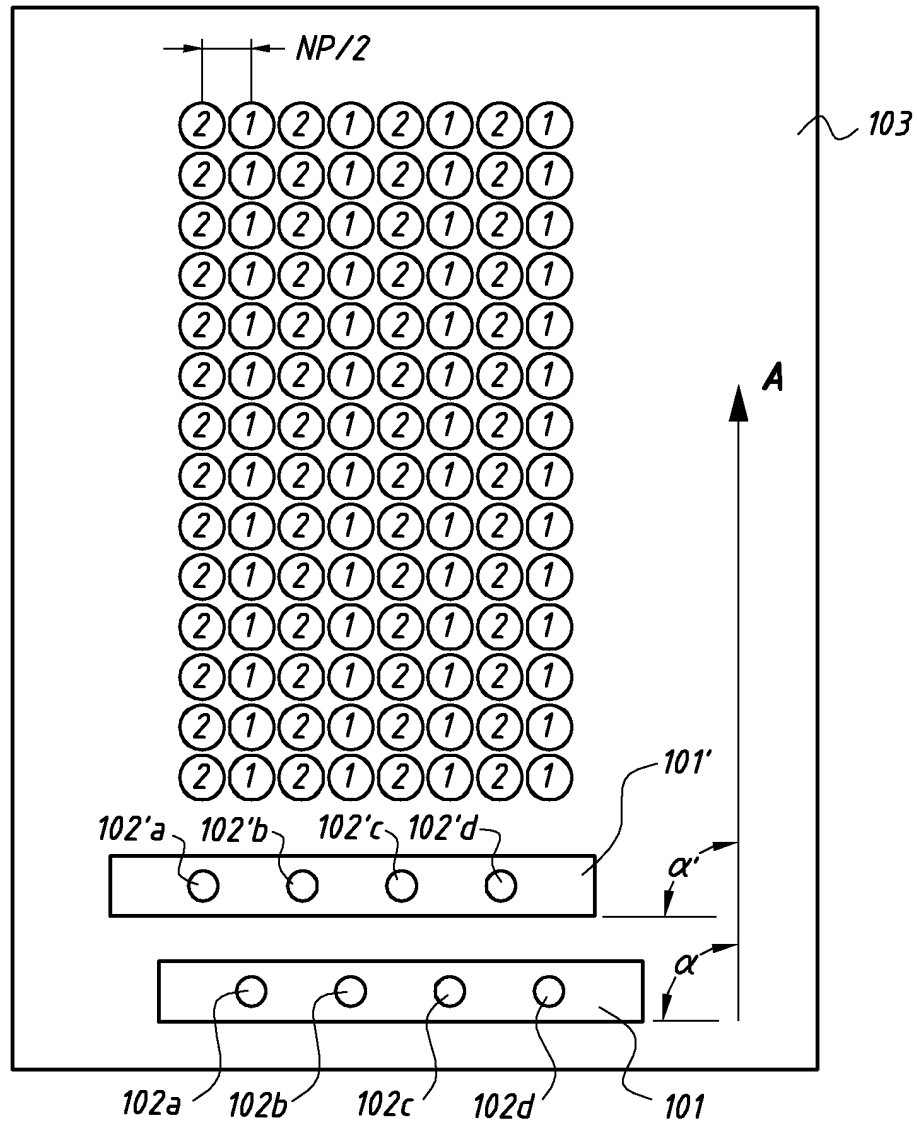


FIG. 4

First pass

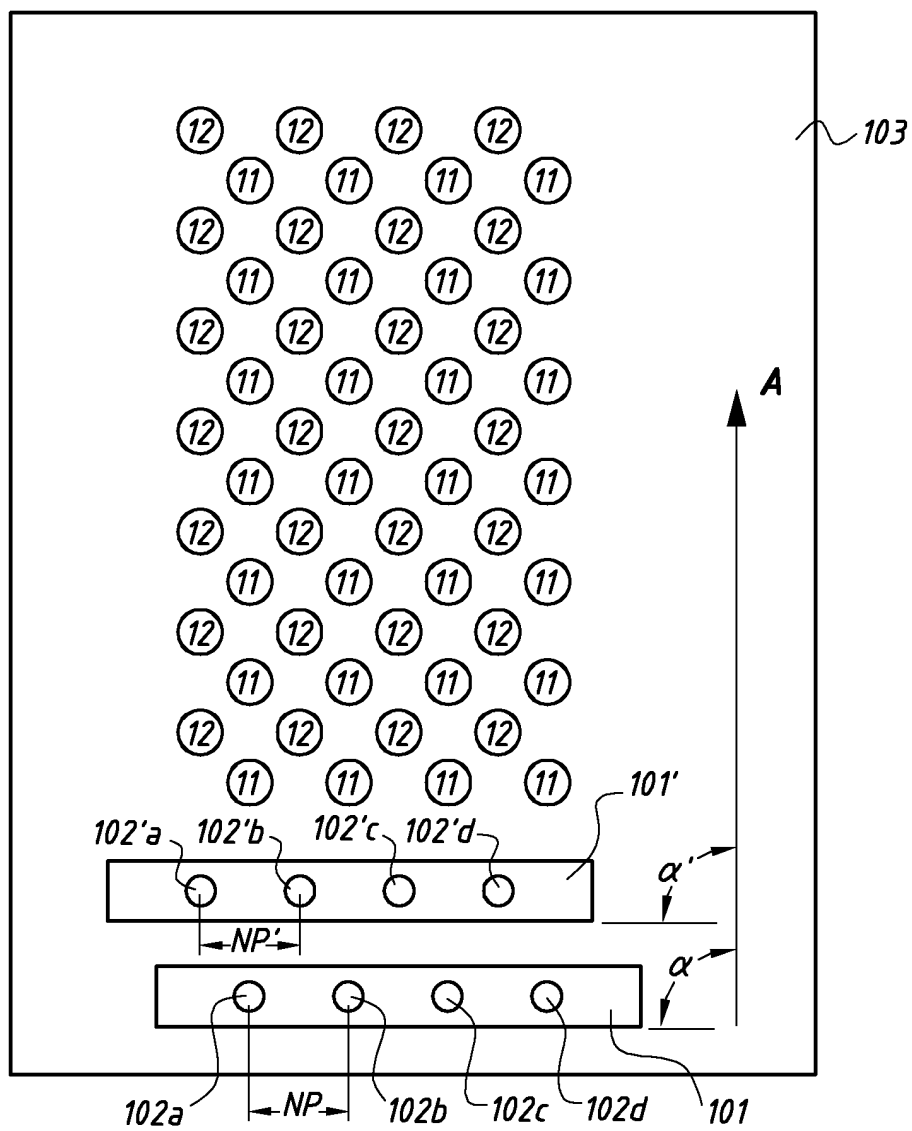


FIG. 5A

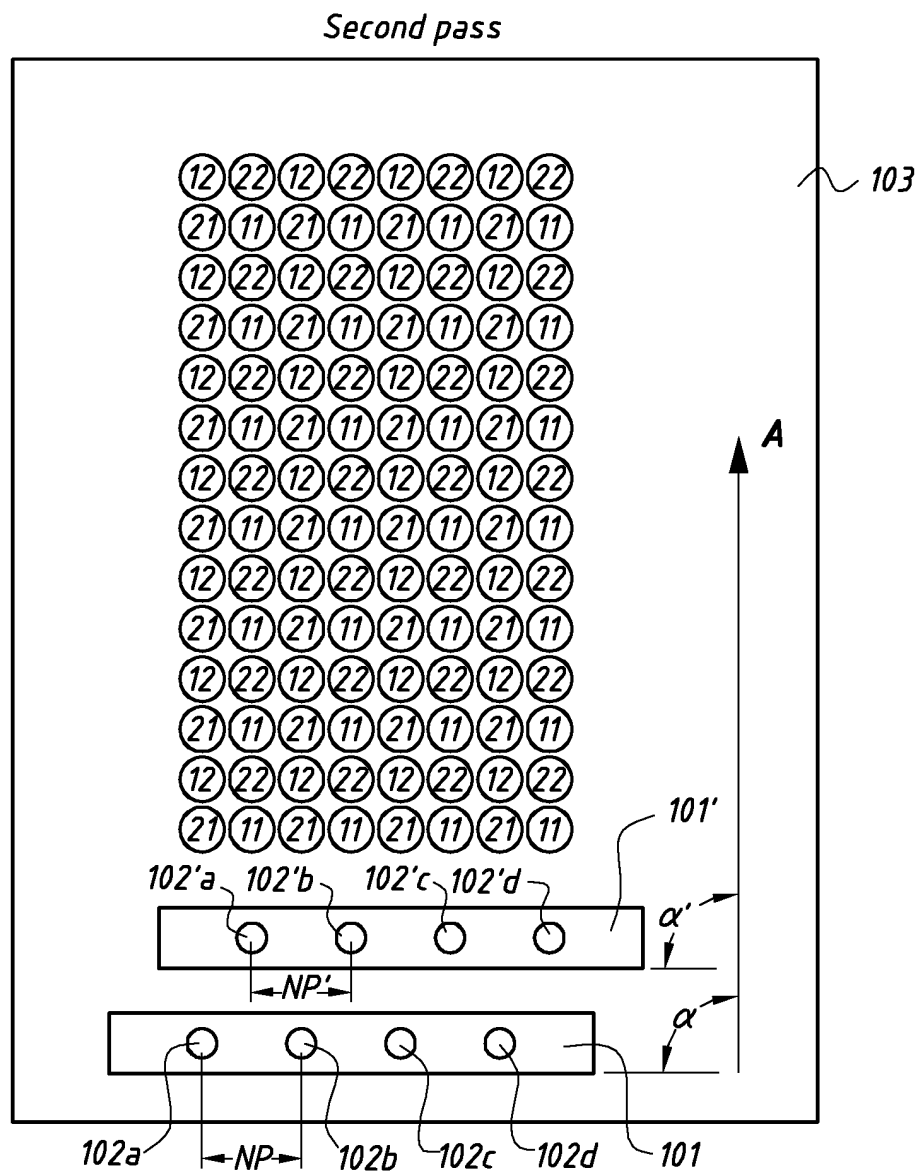


FIG. 5B



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 00 0701

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 5 872 580 A (HORIUCHI TAKAHIRO ET AL) 16 February 1999 (1999-02-16) * the whole document *	1-10	B41J2/51
A	EP 1 027 989 A (APRION DIGITAL LTD) 16 August 2000 (2000-08-16) * the whole document *	1-10	
A	EP 0 921 008 A (FRANCOTYP POSTALIA GMBH) 9 June 1999 (1999-06-09) * the whole document *	1-10	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			B41J
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 25 April 2002	Examiner Axters, M
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03 82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 00 0701

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

25-04-2002

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 5872580	A	16-02-1999	JP	3176272 B2	11-06-2001
			JP	9141860 A	03-06-1997
EP 1027989	A	16-08-2000	EP	1027989 A2	16-08-2000
			US	6345879 B1	12-02-2002
EP 0921008	A	09-06-1999	DE	19755874 C1	15-07-1999
			EP	0921008 A1	09-06-1999