



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
14.08.2002 Bulletin 2002/33

(51) Int Cl.7: **G07C 1/30**

(21) Application number: **01301212.5**

(22) Date of filing: **12.02.2001**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Ho, George**
Hong Kong (HK)

(74) Representative: **Godwin, Edgar James**
MARKS & CLERK,
57-60 Lincoln's Inn Fields
London WC2A 3LS (GB)

(71) Applicant: **Ho, George**
Hong Kong (HK)

(54) **Vehicle parking arrangements**

(57) A parking meter device that is devoted to a separate person or vehicle comprises a housing unit 10 that has an LED 11 that in use is clearly visible from outside the vehicle. The device includes a two-way radio circuit 12, a display 14 and a keyboard 15. The unit also includes a computer 19. In use, the user communicates, using the keyboard 15, with a remote central parking service provide via radio data network channels to demand a parking period. The parking service provider checks the authenticity of the demand and approves the parking request. During lawful, paid for, parking the LED 11 remains ON so that a patrolling parking attendant can easily monitor that parking approval has been given. The parking meter device is in effect a personal device and overcomes disadvantages and limitations inherent for usual side-of-the-road parking meter devices that are devoted to parking bays or zones rather than individuals.

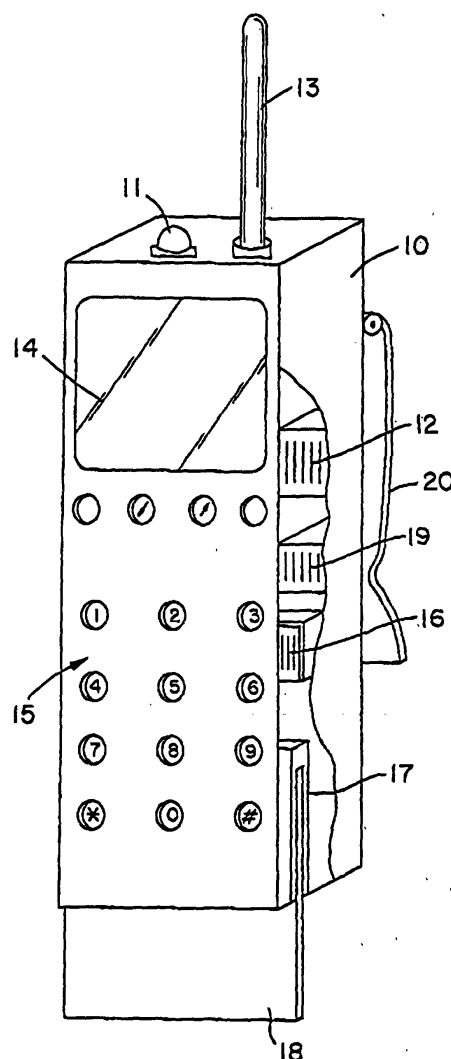


Figure 1

Description

[0001] The invention relates to vehicle parking arrangements.

[0002] At present for vehicle parking arrangements a stationary parking meter is provided for each parking bay, or zone, that must be charged with cash either before parking or at the end of a period of parking. The parking meters may in some instances be operated using a credit card or devoted pre-paid card. In all cases, each meter is committed to its own parking bay or zone, and being generally accessible, remains vulnerable to vandalism and robbery. Further inherent problems arise in adjusting or varying the parking tariff at each meter from time to time, as each meter must then be visited and adjusted. Maintenance crews and breakdown crews are also required to service and repair the parking meters as an on-going expense.

[0003] It is an object of the invention to overcome or at least reduce these problems.

[0004] According to the invention there is provided a vehicle parking meter arrangement having a device for separate devoted use by a vehicle user arranged to be located in the vehicle during use and visible from outside the vehicle, the device comprising a portable housing unit arranged to be supported inside the vehicle and including a visual indicator for portraying a positive condition of the device during use, a two-way radio circuit for a user for communicating with a parking service provider to alert the service provider of his desire to park in a parking bay and for the service provider to check payment arrangements of the user and approve vehicle parking for a time period, in which the approval is confirmed via the two-way radio circuit and the device initiated for that time period by signals generated by the two-way radio circuit to adopt the positive condition.

[0005] The two-way radio circuit may be incorporated in the device and include a manually responsive switch for use in alerting the service provider of the desire to park in the parking bay. The manually responsive switch means may be a keypad.

[0006] The device is preferably releasably attachable in the vehicle.

[0007] The unit may include a timer arranged to change the device from the positive condition after a predetermined time interval. The visual indicator may be arranged to portray another condition of the device after the termination of the predetermined time interval.

[0008] The device may be arranged to incorporate a Subscriber Identity Module (SIM card).

[0009] The device may have a port arranged to receive and hold a pre-paid tariff parking card.

[0010] The device may be arranged to respond to signals from a vehicle security alarm system and to transmit a warning signal when initiated by the vehicle security alarm system. The warning signal may be a radio signal.

[0011] The radio signal is transmitted to a telephone

network. The device may be arranged to communicate with a Global Positioning System (GPS).

[0012] The device may be arranged to receive information from the parking service provider identifying on a screen any unoccupied parking bays in locations adjacent to the vehicle.

[0013] The vehicle parking meter arrangement may include a voice actuated switch for alerting the service provider of the desire to park.

[0014] The two-way radio circuit may comprises a mobile telephone.

[0015] The two-way radio circuit may comprise a telephone hand set installed in the vehicle.

[0016] The two-way radio circuit may comprise a Global Navigation System installed in the vehicle.

[0017] Vehicle parking arrangements according to the invention will now be described by way of example with reference to the accompanying drawing in which:-

Figure 1 shows a partly cut-away isometric view of a housing unit of the device of a first arrangement; and

Figure 2 shows a schematic diagram of alternative arrangements.

[0018] Referring to the drawings, in Figure 1 a device comprises a housing unit 10 that is releasably attachable adjacent a windscreen of a vehicle. An LED 11 is mounted in a top of the unit 10 for visually indicating the condition of the device in a manner that is clearly visible from outside the vehicle. A two-way radio circuit 12 is incorporated inside the unit 10 and an aerial 13 mounted on top of the device.

[0019] A liquid crystal display 14 and a keyboard 15 are mounted at the front of the device 10, and a Subscriber Identity Module (SIM card) 16 releasably mounted inside the device 10. A port 17 in a base of the device is provided to slidably receive and hold a pre-paid tariff parking card 18. The unit 10 also houses a computer 19 that is programmed to carry out various functions as discussed below. A spring clip 20 mounted to a back of the device 10 is used to hold the device against a vehicle dashboard.

[0020] Generally stated, the described parking meter device departs in principle from the prior art by being related and separately devoted to a vehicle user (or vehicle) ; at present parking meters are devoted to parking bays or zones. The described meter device is used in practice in conjunction with a remote parking service provider who monitors, controls, calculates and collects payment centrally, using radio communications. The radio communications pass between a central parking service provider and any number of parking meter devices owned by or in the possession of various vehicle users. It will therefore be appreciated, as a direct consequence, that it is relatively easy to centrally adjust, according to time-of-day, changes in tariffs according to

type of user or overall, the payments required and determine lawfully allowed time periods. The technology to be used and the computer programming required is well-practised already for such adjustments and also available for use more generally in other applications. The technology and computer programming are especially well-known in mobile telephone applications, for example. Thus, the unit 10 may take the form of a suitably modified mobile telephone module that, in this case, is arranged to use communications with the parking service provider in a manner that in itself is well-understood by those skilled in the art. Various optional or additional features mentioned below are also within the normal technical capability of such forms of communications. Normal, or so-called "normal", arrangements of the use of SIM cards, insertable pre-paid tariff cards (that may be re-charged when required with further credit, using the communications), security checking and so forth are all well-understood in such other applications already. It is also known to apply Global Positioning System (GPS) information to vehicle mounted devices that operate as navigational aids or vehicle locating (or monitoring) devices in the event that the vehicle is driven away without proper authority for example. In short, the specifically described device in its simplest form uses well-known technology and enables vehicle parking to be carried out, supervised and paid for, in a much improved fashion as compared to present practice. In more sophisticated embodiments of the invention, the device can be significantly enhanced, when desired, by one or more of numerous additional features that each never-the-less rely on the proven and available technology without altering to any great extent the usefulness and general portability of the device in its primary role use for vehicle parking.

[0021] Returning to Figure 1, the device is used when parking a vehicle by the user selecting a suitable parking bay and using the keyboard 15 to communicate with the parking service provider. Normally, the user identifies himself (or is identified by the signals that his device transmits) and the parking bay or zone, and requests a parking period required. The communications between the user's device and the parking service provider will normally make use of local radio network data channels. The parking service provider checks the identity and payment arrangements (the user may have a pre-paid card 18 or have a current credit and billing arrangement) and whether the parking period is available and/or allowed. (In public parking places, the parking may be restricted according to time of day and a maximum parking period may be determined by local bye-laws, for example) A parking approval is communicated to the user's device and is displayed on the screen 14, and the LED 11 is turned ON. This has been referred to elsewhere as portraying a "positive condition of the device".

[0022] It will be appreciated that 'turned ON' could include providing an intermittent lighting up of the LED 11, that to say a flashing light during the positive condition

of the device. This is preferable, especially in the presence of bright sunlight, otherwise the LED 22 may appear to be turned ON even when it is not. In any event a flashing light is generally easier to check than a continuously illuminated light.

[0023] The keypad 15 may be simplified and comprise a single manually operable button or may be replaced by a simple touch pad. In such an arrangement, the button or pad is used when required to turn ON the device. In other words, it is necessary only to turn ON the device on arrival at a parking bay and the request and appropriate approval can then be communicated to and from the parking service provider. The single button or the pad thus provides the "manually responsive switch means". Such manually responsive switching means could also comprise, in effect, the plugging in of the device to a power supply socket, such as a cigarette lighter socket in the vehicle for example.

[0024] When the device is in use and mounted in the vehicle, the LED 11 is positioned so as to be clearly visible from outside the vehicle to enable a patrolling parking attendant to check the condition of the device from time to time to ensure that the vehicle is legitimately parked and that the relevant parking tariff has been paid. At the end of the approved parking period the LED 11 is turned OFF. Normally this is controlled by a timer circuit in the computer 19, but the LED 11 may be turned OFF (or switched to a different colour) by appropriate signals transmitted from the parking service provider at the termination of the approved parking period. The turning OFF of the LED 11 (or change in colour) conveniently indicates that the device is no longer in a "positive condition".

[0025] In some situations it may be necessary to visibly indicate that the device is being used in the actual parking bay or zone for which the approval has been obtained from the parking service provider. In that case, the screen 14 may be controlled to display a specific bay or zone (e.g. SF A 47). This is to indicate to the patrolling parking attendant in this case that the parking approval has been given for "San Francisco" - "Zone A" - and that "47" minutes remain of the parking period approved. The minutes can be counted down, as time passes, and the LED 11 will remain ON for the remaining period. (Of course, the LED 11 may be omitted in this case and the minute numeral in effect used to indicate the so-called "positive condition" instead of using the LED or similar if preferred.)

[0026] The device may also be programmed to send a signal to the user via the radio network channels to his mobile or land telephone to alert the user that the approved parking period is drawing to a close. This enables the user to return to the vehicle or, in some cases, to apply for an extension of the approved parking time.

[0027] As foreshadowed above, the described device can be programmed to respond to a vehicle security alarm system and arranged to provide audible or visible alarms if a vehicle door is opened or the vehicle tam-

pered with in such a manner that the vehicle alarm system is triggered. More helpfully, the device can be programmed to generate signals that are transmitted to the parking service provider, or to the user via a connection to his normal telephone, via the radio network channel, to indicate that an unauthorised entry has been made. The described device may also be equipped and coupled to communicate to a GPS facility so that navigation aid maps can be displayed on the screen 14. The maps can also be updated by the parking service provider to display nearby vacant parking bays to assist the vehicle user to more quickly find such bays and so reduce unnecessary travelling delays and general traffic congestion. The GPS facility can also be used to track a vehicle that has been lost or stolen based on signals transmitted from the described parking meter device in such circumstances.

[0028] In Figure 2, the generalised schematic circuit illustrates various alternative arrangements of the parking meter arrangement. The arrangements are operative according to the same principle as described above, namely that the user alerts the parking service of his desire to park, the service provider checks the payment arrangements and approves parking as appropriate, and a device is initiated to visually indicate that parking has been approved.

[0029] In the alternative arrangements, the two-way radio circuits are however provided in physically separate devices from the visual indicator device. This has two immediate principle advantages. Firstly, the visually indicator device can be quite a simple (cheap) device. Secondly, the visual indicator device can be 'robust', that is easily made less prone to damage from direct sunlight to which it is inherently exposed during normal use. Also, as the user may have available in the vehicle a separate suitable two-way communicating circuit such as a mobile telephone, a vehicle installed telephone handset, a vehicle navigation system and the like, the parking arrangements can be supplied at substantially less cost. Thus in the alternative arrangements, the two-way radio circuit may not necessarily be part of a vehicle "devoted" parking device. Additionally, when the radio circuits part of a normal a mobile telephone, the user may communicate with the service provider in a normal conversational manner.

[0030] In any event, the two-way radio circuits are arranged, when parking approval is given, to initiate a visual indicator device to adopt its positive condition as required. This initiation is preferably carried out by remote signalling using radio signals, infrared, ultrasonic and so forth, including Bluetooth capability if preferred.

[0031] It may be desirable in most cases to introduce various, otherwise known, security procedures to ensure that the communications between the two-way radio circuits and the visual indicator device cannot be carried out without the authorised approval of the service provider or by an unauthorised user. For example, a security code may be introduced and transferred to the vis-

ual indicator each time a parking period is approved. Such security code may form part of the display on the visual indicator device that can be observable from outside the vehicle and checked by a patrolling parking warden from time to time.

[0032] In Figure 2, a visual indicator device 21 has an LED 22 for indicating a positive condition of the device. The device is attachable to an inside of the vehicle such that the light 22 is visible from outside the vehicle. A screen 23, when present, is also visible for outside the car to display any desired data. Such data may include the vehicle license number, time, date and remaining period of parking for example, as well as a variable security number when required. Associated with the device is a two-way radio circuit 24 that may be incorporated in a mobile telephone, a vehicle installed handset, a vehicle navigational system. The radio circuit may be a vehicle 'devoted' radio circuit especially provided for the parking arrangement, in the same manner as possible in Figure 1 say, which in this case has a having manually operable keypad, or a voice responsive switch. The radio circuit is arranged to initiate the device 21, by generating a signal, to adopt the position condition and turn ON the light 22 as required. The initiating signal will normally provide data for display on the screen 23, as explained above. The two-way radio circuit 24 could be hard-wired to the device 21 but, more conveniently and more usually, the circuit 24 is arranged to provide radio, infra-red, or ultra-sonic signals for initiating the device 21.

Claims

1. A vehicle parking meter arrangement having a device for separate devoted use by a vehicle user arranged to be located in the vehicle during use and visible from outside the vehicle, the device comprising a portable housing unit arranged to be supported inside the vehicle and including a visual indicator for portraying a positive condition of the device during use, a two-way radio circuit for a user for communicating with a parking service provider to alert the service provider of his desire to park in a parking bay and for the service provider to check payment arrangements of the user and approve vehicle parking for a time period, in which the approval is confirmed via the two-way radio circuit and the device initiated for that time period by signals generated by the two-way radio circuit to adopt the positive condition.
2. A vehicle parking meter arrangement according to claim 1, in which the two-way radio circuit is incorporated in the device and includes a manually responsive switch for use in alerting the service provider of the desire to park in the parking bay.

3. A vehicle parking meter arrangement according to claim 2, in which the manually responsive switch means is a keypad.
4. A vehicle parking meter arrangement according any of claims 1 to 3, in which the device is releasably attachable in the vehicle. 5
5. A vehicle parking meter arrangement according to any of claims 1 to 4, in which the unit includes a timer arranged to change the device from the positive condition after a predetermined time interval. 10
6. A vehicle parking meter arrangement according to claim 5, in which the visual indicator is arranged to portray another condition of the device after the termination of the predetermined time interval. 15
7. A vehicle parking meter arrangement according to any of claims 1 to 6, in which the device is arranged to incorporate a Subscriber Identity Module (SIM card). 20
8. A vehicle parking meter arrangement according to any of claims 1 to 7, in which the device has a port arranged to receive and hold a pre-paid tariff parking card. 25
9. A vehicle parking meter arrangement according to any of claims 1 to 8, in which the device is arranged to respond to signals from a vehicle security alarm system and to transmit a warning signal when initiated by the vehicle security alarm system. 30
10. A vehicle parking meter arrangement according to claim 9, in which the warning signal is a radio signal.. 35
11. A vehicle parking meter arrangement according to claim 10, in which the radio signal is transmitted to a telephone network. 40
12. A vehicle parking meter arrangement according to claim 1, in which the device is arranged to communicate with a Global Positioning System (GPS). 45
13. A vehicle parking meter arrangement according to claim 12, in which the device is arranged to receive information from the parking service provider identifying on a screen any unoccupied parking bays in locations adjacent to the vehicle. 50
14. A vehicle parking meter arrangement according to claim 1, including a voice actuated switch for alerting the service provider of the desire to park. 55
15. A vehicle parking meter arrangement according to claim 1, in which the two-way radio circuit comprises a mobile telephone.
16. A vehicle parking meter arrangement according to claim 1, in which the two-way radio circuit comprises a telephone hand set installed in the vehicle.
17. A vehicle parking meter arrangement according to claim 1, in which the two-way radio circuit comprises a Global Navigation System installed in the vehicle.

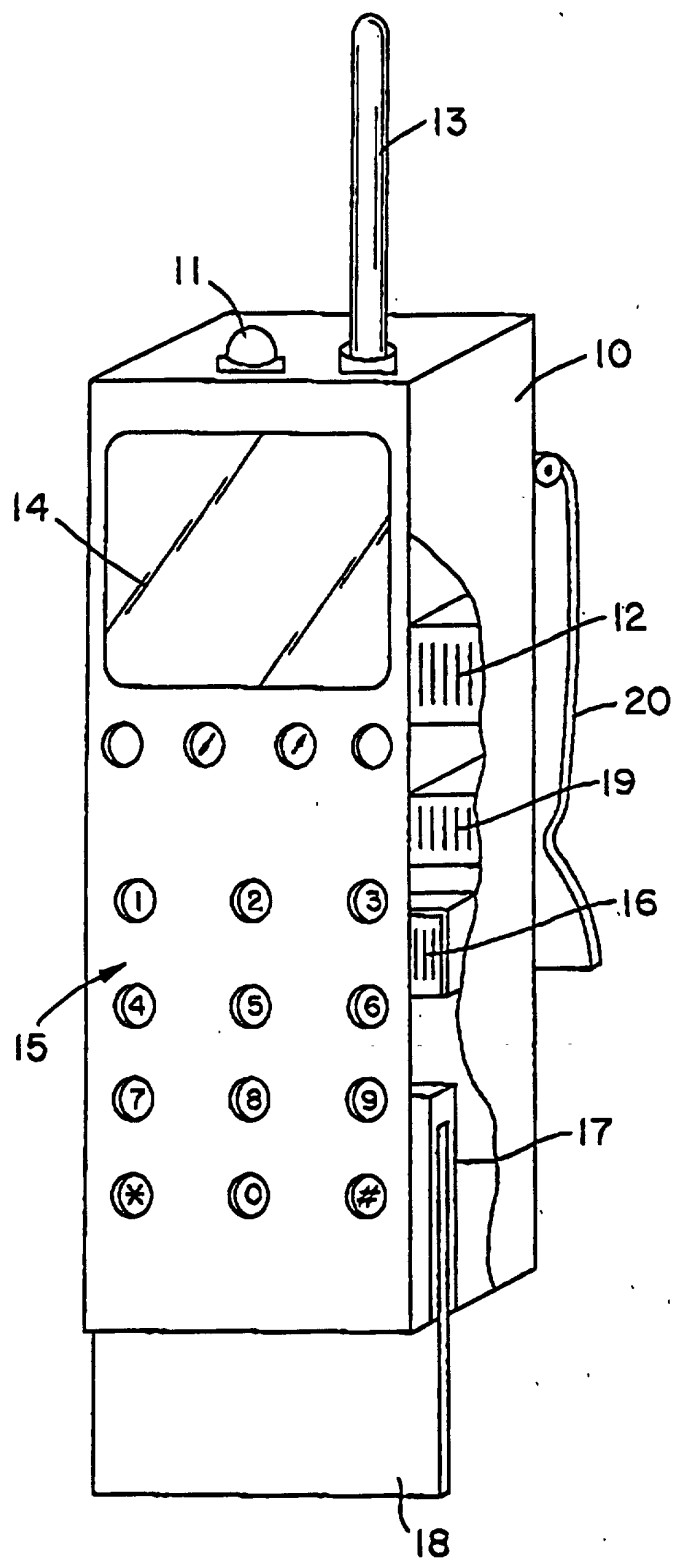


Figure 1


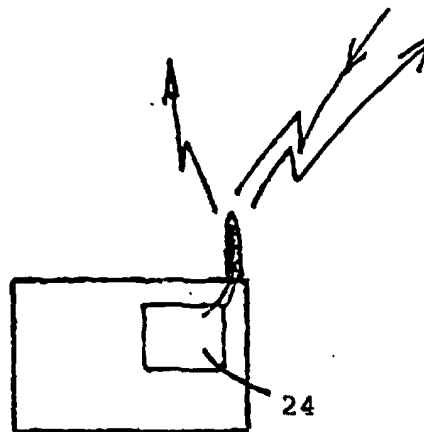


Figure 2

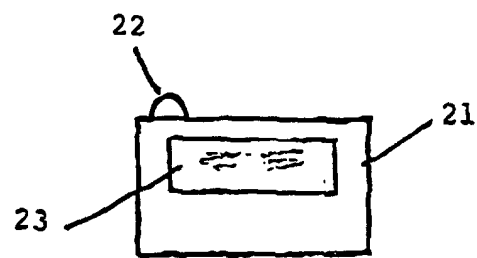

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 30 1212

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 952 557 A (LEVY NESSIM IGAL) 27 October 1999 (1999-10-27) * column 6, line 24-37 * * column 6, line 58 - column 7, line 5; claim 1 * * column 9, line 10-32 * * column 9, line 49-54 * * column 10, line 10-29 *	1-6, 8-10, 12-14,17	G07C1/30
Y	* column 11, line 30-41 *	7,11,15, 16	
Y	WO 96 11453 A (ILEN TERO ;PARKIT OY (FI)) 18 April 1996 (1996-04-18) * page 6, line 8; figure 2 * * page 3, line 17-33 *	7,11,15, 16	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			G07C
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 23 April 2001	Examiner Beauce, G
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 1212

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

23-04-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0952557 A	27-10-1999	NONE	
WO 9611453 A	18-04-1996	FI 944738 A	08-04-1996
		AU 3655095 A	02-05-1996

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82