

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 246 755 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

05.10.2005 Bulletin 2005/40

(21) Application number: **01903024.6**

(22) Date of filing: **11.01.2001**

(51) Int Cl.7: **B65D 1/00**

(86) International application number:
PCT/US2001/000858

(87) International publication number:
WO 2001/051361 (19.07.2001 Gazette 2001/29)

(54) **SLIDER FOR A RECLOSABLE FASTENER LYING IN A TWO DIMENSIONAL PLANE**

SCHIEBER FÜR WIEDERVERSCHLIESSBAREN VERSCHLUSS MIT ZWEIDIMENSIONALEM
VERLAUF

GLISSIERE D'APPLICATION D'EFFORTS D'OUVERTURE OU DE FERMETURE A UNE ATTACHE
SE TROUVANT DANS UN PLAN BIDIMENSIONNEL

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

(30) Priority: **11.01.2000 US 480909**

(43) Date of publication of application:
09.10.2002 Bulletin 2002/41

(73) Proprietor: **THE PROCTER & GAMBLE COMPANY**
Cincinnati, Ohio 45202 (US)

(72) Inventor: **HUPP, Matthew Todd**
Cincinnati, OH 45249 (US)

(74) Representative: **Veronese, Pancrazio et al**
Procter & Gamble Italia S.p.A.
Italian Research Center
Via Aterno 92/94
66020 Sambuceto di San Giovanni Teatino (IT)

(56) References cited:
WO-A-00/64772 **BE-A- 505 325**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD OF THE INVENTION

[0001] The invention relates to sliders applying opening or closing forces to a reclosable fasteners, particularly rigid, elongate reclosable fasteners lying in a plane defining mutually orthogonal X and Y directions.

BACKGROUND

[0002] Flexible storage bags for use in the containment and protection of various items, as well as the preservation of perishable materials such as food items, are well known in the art. Such bags typically comprise an elongate reclosable fastener such as an interlocking rib-type seal integrally formed with the bag, to seal contents disposed in the bag. Sliding closure mechanisms, which utilize a sliding plastic sleeve to bias interlocking ribs into and out of engagement, have become popular due to their comparative ease of operation and visual and tactile confirmation that the seal formed by the reclosable fastener has been successfully completed.

[0003] Rigid and semi-rigid containers are also well known in the art. Such containers have realized a fair degree of commercial success in providing a means for storing a wide variety of contents. These containers typically incorporate lids which are usually sealed to the container by a reclosable fastener comprising interlocking protruded and recessed elements such as bulbs and grooves. Additionally, U.S. Patent No. 3,784,055 issued January 8, 1974 to Anderson, and U.S. Patent No. 3,967,756 issued July 6, 1976 to Barish, both of which are incorporated herein by reference, disclose containers utilizing plug seals.

[0004] While such mechanical closures can be effective in preserving container contents, some consumers experience difficulty in fully completing the closure operation and confirming for themselves that a satisfactory closure has been achieved. This is particularly so when the physical change in position of the lid between interlocked and non-interlocked positions is comparatively small.

[0005] Traditional sliders used with reclosable fasteners on flexible storage bags assures the user that the fastener is opened or closed during use, however, such sliders typically embody sidewalls limiting their operation to unidirectional fasteners. An example of a traditional type slider is illustrated in U.S. patent No. 3,660,875 issued May 9, 1972 to Gutman. Belgian Patent No. 505,325 to Prouvost, illustrates the use of a flexible airtight zipper on a storage bag for holding fabric remnants. Since rigid and semi-rigid containers typically incorporate lids sealed by fasteners extending in directions having vector components extending in mutually orthogonal directions, the traditional sliders are unsuitable for opening or closing such fasteners. The zipper seal of Prouvost would require considerable flexibility in

the joined components to enable such a zipper to circumscribe a multidimensional rigid or semi-rigid reclosable container. The seal of Prouvost does not apply a sealing force in a Z direction while traversing a path in the X- Y plane.

[0006] Accordingly, it is desirable to provide a slider for opening or closing a reclosable fastener for sealing a lid to a storage container wherein the reclosable fastener lies in a two dimensional plane defining mutually orthogonal directions. Particularly, it is desirable to provide a slider that is slidably attachable to the reclosable fastener and capable of effectively opening or closing the fastener while pivoting around corners joining mutually orthogonal sections or curvilinear segments of the fastener. More particularly, it is desirable to provide a slider having the aforementioned attributes that can effectively open and close the reclosable fastener requiring minimal maneuvering by the consumer other than moving the slider along the fastener.

SUMMARY OF THE INVENTION

[0007] A slider opens or closes a rigid elongate reclosable fastener lying in an X-Y plane and sealable in a Z direction orthogonal thereto. The slider is slidably attachable to the fastener and imparts forces to the fastener in the Z direction to open or close the same as the slider moves along a travel path having vector components in the X and Y directions. The slider biases interlocking elements of the reclosable fastener operatively associated therewith into engagement with one another as the slider is moved in a first direction along the travel path and urges the interlocking elements apart when the slider is moved in a second direction along the travel path, opposite the first direction.

[0008] In one embodiment a wedge disposed on the slider biases the interlocking elements of the fastener into engagement as the slider is moved in the first direction and urges the elements apart as the slider is moved in the second direction. In an alternate embodiment, a wedge urges the interlocking elements apart as the slider moves in the second direction while separate portions of the slider have a spacing therebetween which is sufficiently small as to bias the elements of the fastener together as the slider moves in the first direction.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] While the specification concludes with claims particularly pointing out and distinctly claiming the present invention, it is believed that the present invention will be better understood from the following description in conjunction with the accompanying Drawing Figures, in which like reference numerals identify like elements, and wherein:

Figure 1 is perspective view of a storage container incorporating a slider for opening or closing a re-

closable fastener attaching the lid to the container. Figure 2a is a cross sectional view of interlocking elements of the elongate reclosable fastener sealing the lid to the flange of the container depicted in Figure 1.

Figure 2b is a cross sectional view of the elongate reclosable fastener depicted in Figure 2a showing the interlocking elements separated apart in an opened configuration.

Figure 3 is a top view of the storage container depicted in Figure 1 showing the travel path of the slider and a first direction of travel which closes the reclosable fastener.

Figure 4 is a top view of the storage container depicted in Figure 1 showing the travel path of the slider and a second direction of travel which opens the reclosable fastener.

Figure 5a is a perspective view of an embodiment of a slider according to the present invention.

Figure 5b is side view along the width of the slider depicted in Figure 5a showing the closing end of the slider.

Figure 5c is a side view along the length of the slider depicted in Figure 5a.

Figure 6a is a cross sectional view of the closing end of the slider depicted in Figures 5a-5c shown slidably attached to a reclosable fastener in the closing configuration.

Figure 6b is a cross sectional view of the opening end of the slider depicted in Figures 5a-5c shown slidably attached to a reclosable fastener in the opening configuration.

Figure 7a is a perspective view of an alternate embodiment of a slider according to the present invention.

Figure 7b is side view along the length of the slider depicted in Figure 7a.

Figure 8a is a perspective view of a modified configuration of the slider embodiment illustrated in Figures 7a-7b.

Figure 8b is a side view along the width of the slider depicted in Figure 8a showing the opening end of the slider.

Figure 8c is side view along the length of the slider depicted in Figure 8a.

Figure 9a is a cross sectional view of the closing end of the slider depicted in Figures 8a-8c shown slidably attached to a reclosable fastener in the closing configuration.

Figure 9b is a cross sectional view of the opening end of the slider depicted in Figure 8a-8c shown slidably attached to a reclosable fastener in the opening configuration.

DESCRIPTION

[0010] As used herein, the following terms have the following meanings:

[0011] X, Y, and Z are coordinates defining perpendicular directions intersecting one another at right angles at an origin.

[0012] Rigid means deficient or devoid of flexibility; appearing stiff and unyielding, remaining unaltered when typical in-use forces are applied.

[0013] A reclosable fastener is a fastener that is selectively openable, sealable, reopenable and resealable.

[0014] The present invention pertains to a slider suitable for opening or closing an elongate reclosable fastener. Although the slider of the present invention is applicable for opening all types of reclosable fasteners used for sealing flexible storage bags, tubs, or other storage containers, it is particularly suitable for opening or closing rigid, elongate reclosable fasteners lying in an X-Y plane requiring the slider to travel along a path having vector components in the X and Y directions. More particularly, the slider according to the present invention is suitable for opening or closing a rigid elongate reclosable fastener lying in an X-Y plane and sealable in a Z direction orthogonal thereto, whereby the slider imparts forces to the fastener in the Z direction to open or close the same as the slider moves along the travel path. An example of such a reclosable fastener is one sealing a lid 30 to the flange 20 of a storage container 10 as illustrated in Figure 1.

[0015] The container 10 according to the present invention may be relatively small, such that the container 10 may be stored in one's pocket or purse. Such a container 10 may be useful for storing pills, capsules, etc. Alternatively, the container 10 may be relatively large such that the container 10 is sized to fit a flat bed semi-truck. Such a container 10 may be useful for carrying construction materials, etc. One contemplated use for the container 10 is to store perishable items such as food.

[0016] In the embodiment depicted in Figure 1, the storage container 10 includes a container body 12 which may be unitarily formed from a piece of sheet material, a planar or domed shaped bottom side 14 defining an X-Y plane, an opening 16 shown opposite the bottom side 14, a flange 20 circumscribing the opening 16, and a lid 30 for covering the opening 16. Both the flange 20 and the lid 30 are illustrated as planar but may be shaped concave or convex relative to the bottom side 14.

[0017] Although the container body 12 illustrated has 4 sidewalls, the body may actually comprise three or more sidewalls. In addition, although the opening 16 in the container illustrated in Figure 1 is disposed opposite the bottom side 14, the invention is applicable openings 16 disposed on any side of the container.

[0018] The flange 20 may be either unitarily formed with the container body 12 or provided as a separate material element joined to the container body 12. When provided as a separate, preferably more rigid material element, it is preferred that the container body 12 ma-

terial be formed into at least a small peripheral flange 20 at its upper edge (defining the opening 16) with pleated corners so as to form a suitable junction point for joining the container body 12 to the flange 20. The lid 30 may be either unitarily formed with the container body 12 or at least hingedly attached to the flange 20 at a hinge line 25. The hinge line 25 may comprise a unitary living hinge or be provided as a line of weakness by scoring, perforations, or the like which may optionally permit the lid 30 to be separated from the container body 12. While a hinged embodiment is shown, embodiments without hinges are contemplated.

[0019] The reclosable fastener 40 may circumscribe or partially enclose the container opening 16. The reclosable fastener 40 may comprise any type of reusable mechanical seal known in the art. Suitable seals include friction fit or a compression fit fin seals, adhesive seals, cohesive seals, and selectively activatable adhesives as illustrated by commonly assigned U.S. Patent Numbers 5,662,758, issued Oct. 2, 1997 in the names of Hamilton, et al., 5,871,067, issued Feb. 16, 1999 in the names of Hamilton, et al., Application Serial No. 08/745,339, filed Nov. 8, 1996 in the name of McGuire, et al., and Application Serial No. 08/745,340, filed Nov. 8, 1996 in the name of Hamilton, et al., incorporated herein by reference. By reusable, it is meant that the lid 30 of the container 10 may be reversibly transformed between each of the open and closed positions at least two times and still functionally seal the container 10.

[0020] In the embodiment shown in Figure 1, the reclosable fastener 40 comprises mechanical interlocking elements 42, 44 which includes at least one protruded element 42 interlocking with at least one recessed element 44 to form a seal. The two interlocking elements 42, 44 circumscribe the container opening 16, occupying a marginal portion of the lid 30 and a marginal portion of the flange 20. The interlocking elements 42, 44 are preferably spaced a substantially constant distance inwardly from the peripheral edge of the lid 30 and flange 20 enabling a slider 100 having an adequate inward extent to be drawn along the peripheral edge without leaving gaps or unsealed portions.

[0021] As illustrated in Figures 2a and 2b, the protruded element 42 may have a bulbous shape and the recessed element 44 may be a groove 49 shaped complementary to the protruded element 42. The interlocking elements 42, 44 are disposed on mating portions of the flange 20 and lid 30. The protruded element 42 may be unitarily formed with the flange 20 extending upwardly from the top side 22 of the flange 20 while the recessed element 44 may be uniformly formed with the lid 30 having a bulbous non-interlocking surface 47 extending upward from the top side 32 of the lid 30 or vice versa. The recessed element 44 is open on the bottom side 34 of the lid 30 so as to receive the protruded element 42 therein while the protruded element 42 is open on the bottom side 24 of the flange 20.

[0022] The slider 100 depicted in Figure 1 has a gen-

erally C-shaped configuration with ends of the slider 100 straddling the peripheral edges of the flange 20 and lid 30 in overlying relation enabling portions of the slider 100 to interface with the interlocking elements 42, 44 of the reclosable fastener 40. One portion of the slider 100 which interfaces with interlocking elements 42, 44 has a spacing therebetween which is sufficiently small as to bias the elements into interlocking engagement when the slider 100 is translationally drawn in a first direction over a region of the periphery where the elements are separated. Other portions of the slider 100 urge the interlocked elements 42, 44 apart as the slider 100 moves in a second direction opposite the first direction, applying separating forces.

[0023] The reclosable fastener 40 may define a continuous travel path having vector components in the X and Y directions and extending from an opened end 50 to a closed end 52 for directing the motion of the slider 100 along the fastener 40. Alternatively, as illustrated in Figure 1, a track 46 may be disposed along side of the fastener defining the continuous travel path 48.

[0024] The travel path 48 may comprise a combination of rectilinear sectors running in mutually perpendicular directions, with one sector running substantially parallel to the X direction and an adjacent sector running substantially parallel to the Y direction. The sectors are joined via a transition region which may comprise an arc having a radius of curvature and a perimeter having points of tangency with vector components in the X and Y directions. The travel path 48 may also be entirely curvilinear having an oval shape or comprise a series of arcuate sectors forming a path having a wavy pattern such as a sinusoidal shape.

[0025] Figures 3 and 4 show top views of the storage container 10 depicted in Figure 1. The track 46 is congruent with the reclosable fastener 40 along all edges of the lid 30 and flange 20 except for the edge occupied by the hinge line 25. The track 46 runs from one side of the hinge line 25 comprising an opened end 50 of the fastener to the other side of the hinge line 25 comprising a closed end 52.

[0026] In the configuration shown in Figures 3 and 4, the track 46 defines a travel path 48 comprising two opposing arcs 54, 56 curved concave towards the center of the container joined by a predominantly straight, although slightly curved sector 58 opposite the hinge line 25. As the track 46 approaches the open end 50 of the fastener near the hinge line 25, the track 46 diverts away from the fastener in order to direct the slider 100 to a parking place 60 enabling the lid 30 to rotate about the hinge line 25 or be removed from the container without interfering with the slider 100.

[0027] As illustrated in Figures 2a and 2b, the track 46 can comprise a slot 70 in the top side of the lid 30 congruent with the recessed element 44 of the reclosable fastener 40. The slot 70 includes an inside edge 72 nearest the recessed element 44 and an outside edge 74 opposite the inside edge 72. The slot 70 in the top

side 32 of the lid 30 forms a bead 76 on the bottom side 34 of the lid 30 which interfaces with a complementary slot 80 in the top side 22 of the flange 20 congruent with the protruded element 42 of the reclosable fastener 40. The slot 80 in the top side 22 of the flange 20 protrudes through the flange 20 forming a bead 82 on the bottom side 24 of the flange 20. The bead 82 on the bottom side 24 of the flange 20 includes an inside edge 84 nearest to the opened end 41 of the protruded element 42 and an outside edge 86 opposite the inside edge 84.

[0028] The inside edge 84 of the bead 82 on the bottom side 24 of the flange 20 generally defines a first edge 90 of the track 46 for the slider embodiments described hereunder. In one slider embodiment, the outside edge 81 of the slot 80 in the top side 22 of the flange 20 forms the second edge 94 of the track 46 when such slider is disposed in the opening mode whereas the outside edge 74 of the slot 70 in the top side 32 of the lid 30 forms the second edge 92 of the track when such slider is disposed in the closing mode. In another embodiment, the outside edge 74 of the slot 70 in the top side 32 of the lid 30 defines second edge 92 of the track 46 when the slider is disposed in both the opening and the closing modes.

[0029] As illustrated in Figures 3 and 4, the slider 100 is slidably attachable to the track 46 and moveable along the travel path 48. The slider 100 has a length 102 running parallel to the travel path 48 and a width 104 running orthogonal thereto. As shown in Figures 5a, 5b, and 5c, the C-shaped body of the slider 100 comprises a base 110 having a first surface 112 with first and second elongate members 120, 130 extending therefrom in a side-by-side arrangement. The first and second elongate members 120, 130 each have proximal ends 122, 132 depending from the first surface 112 of the base 110, distal ends 124, 134 extended away from the first surface 112 and opposing internal surfaces 126, 136. The first elongate member 120 includes a pivot 140 depending from the internal surface 126 at the distal end 124 projecting towards the second elongate member 130. The second elongate member 130 includes a tracking member 160 depending from the internal surface 136 at the distal end 134 projecting towards the first elongate member 120.

[0030] The tracking member 160 may be aligned with the pivot 140 along the length 102 of the slider 100 and along the width 104 of the slider 100. Alternatively, the tracking member 160 may be offset from the pivot 140 along the length 102 of the slider and along the width 104 of the slider 100. Preferably, as shown in Figures 5a-5c, the tracking member 160 is offset from the pivot 140 along the width 104 of the slider 100 and aligned with the pivot 140 along the length 102 of the slider 100.

[0031] In configurations where the reclosable fastener defines the travel path 48, the first and second elongate members 120, 130 straddle the peripheral edges of the lid 30 and flange 20 while the pivot 140 and tracking member 160 interface with the interlocking elements

of the fastener 42, 44. Particularly, the pivot 140 may interface with the opened end 41 of the protruded element 42 on the bottom side 24 of the flange 20 and the tracking member 160 may interface with the non-interlocking surface 47 of the recessed element 44 on the top side 32 of the lid 30.

[0032] In the assembled configurations illustrated in Figures 6a and 6b, the first and second elongate members 120, 130 straddle the peripheral edges of the lid 30 and flange 20 as the pivot 140 and tracking member 160 interface with the slot 70 on the top side of the lid 30 and the bead on the bottom side 24 of the flange 20. Particularly, in the closing mode shown in Figures 6a, the tracking member 160 is disposed against the outside edge 74 of the slot 70 in the top side of the lid 30 while the pivot 140 butts against the inside edge 84 of the bead 82 on the bottom side 24 of the flange 20. In the opening mode illustrated in Figure 6b, the tracking member 160 is disposed against the outside edge 81 of the slot 80 in the top side 22 of the flange 20 while the pivot 140 rests against the inside edge 84 of the bead 82 on the bottom side 24 of the flange 20.

[0033] The pivot 140 enables the slider 100 to rotate about the distal end 124 of the first elongate member 120, particularly along curvilinear sectors and transition regions having vector components extending in the X and Y directions. For this reason, the pivot 140 comprises an oval, preferably cylindrical external surface 142 which interfaces with the track 46. In order for the slider 100 to properly rotate about the pivot 140 along curvilinear sectors or transition regions along the travel path 48, the pivot 140 is assembled on the concave side of the curvilinear sectors or transition regions while the tracking member 160 is assembled along the convex side. This enables the base 110 of the slider 100 to rotate relative to distal ends of the elongate members as the slider 100 moves along the curvilinear sectors of the travel path 48.

[0034] The tracking member 160 generally maintains the attachment of the slider 100 to the track 46 and guides the slider 100 along the travel path 48. However, the tracking member 160 may also serve as a pivot particularly where the travel path 48 takes on a wavy pattern such as a sinusoidal shape requiring both the base 110 and the distal ends of the elongate members to rotate relative to one another depending upon the slider 100 location along the travel path 48. The external surface 162 of the tracking member 160 is preferably convex in shape in order to minimize frictional contact with the track 46. However, the external surface 162 is oval and preferably, cylindrical if the tracking member 160 is also required to function as a pivot.

[0035] Although rotation of the slider 100 is desirable, particularly in transition regions along the travel path 48, it may be necessary to maintain proper orientation of the slider 100 relative to the reclosable fastener 40 to ensure that portions of slider 100 interfacing with the interlocking elements 42, 44, described hereunder, are prop-

erly oriented relative to the fastener. This may enable the slider 100 to operate more effectively in opening and closing the fastener. For instance, proper orientation of the slider 100 may include the length 102 of the slider 100 being substantially parallel to the travel path 48 while the width 104 is substantially orthogonal thereto. Such an orientation can be maintained by a rotation restraint 180 disposed on the slider 100 that interfaces with the reclosable fastener 40 or the track 46.

[0036] Although the rotation restraint 180 may comprise a number of different configurations to control the rotation of the slider 100, the rotation restraint 180 for the slider illustrated in Figures 5a-5c comprises a pin 182 disposed on the internal surface 126, at the distal end 124 of the first elongate member 120 projecting towards the second elongate member 130. As shown, the pin 182 is spaced apart from the pivot 140 along the length 102 of the slider 100 and in alignment with the pivot 140 along the width 104 of the slider 100. Like the pivot 140, the pin 182 interfaces with the travel path 48 by resting against the inside edge 84 of the bead 82 on the bottom side 24 of the flange 20.

[0037] The distance between the restraint and the pivot 140 is limited, depending upon the travel path 48, particularly on the radius of curvature of the transition regions along the travel path 48. The greater the radius of curvature the greater the allowable distance separating the pivot 140 and the rotation restraint 180. Likewise, the smaller the radius of curvature the smaller the allowable distance therebetween.

[0038] Like the pivot 140 and the tracking member 160, the external surface of the pin 182 is shaped to minimize frictional contact with the track 46. The external surface can have a convex shape in order to limit the interface to point contact.

[0039] As previously described, the primary function of the slider 100 is to bias the interlocking elements 42, 44 of the reclosable fastener 40 together as the slider 100 moves in a first direction 36 closing the fastener and to apply separating forces to the interlocking elements 42, 44 as the slider 100 moves in a second direction 38 opposite the first direction 36 opening the fastener. The slider generally includes features that provide these functional characteristics.

[0040] In the embodiment shown in Figures 5a-c, the slider 100 includes a wedge 200 disposed on the distal end 124 of the second elongate member 130, adjacent to, but opposite the tracking member 160. The wedge 200 is disposed away from the first surface 112 of the base 110 to interface with the interlocking elements 42, 44 of the reclosable fastener 40. The wedge 200 comprises an internal surface 202 and an external surface 204, an opening end 206 and a closing end 208. Spacing 210 between the internal surface 202 of the wedge 200 and the first elongate member 120 forms a channel 212 which converges along the length 102 of the slider 100 from a maximal distance at the opening end 206 of the wedge 200 to a minimal distance at the closing end

208 of the wedge 200.

[0041] As shown, the wedge 200 can be frustoconical having a concave internal surface 202 and a convex external surface 204. In order to minimize frictional contact with the interfacing components of the fastener 40, both the internal surface and the external surface of the wedge may comprise wavy contours extending from the opening end 206 to the closing end 208. For instance, the contour of the external surface 204 may be convex relative to the travel path 48 near the opening end 206 and concave relative to the travel path 48 near the closing end 208 while the contour of the internal surface 202 may be concave near the opening end 206 and convex near the closing end 208.

[0042] For the slider embodiment illustrated in Figures 5a-c, the wedge 200 provides the function of opening and closing the reclosable fastener 40. In the closing configuration illustrated in Figure 6a, the concave internal surface 202 of the wedge 200 partially encloses the bulbous non-interlocking surface 47 of the recessed element formed in the lid 30 while internal surface of the first elongate member 120 contacts the bottom side 24 of the flange 20 at the bead 82 protruding therethrough forming the track 46. As the slider 100 moves along the travel path 48 in the first direction 36 shown in Figure 3, the converging channel formed between the concave internal surface 202 of the wedge 200 and the internal surface 126 of the first elongate member 120 biases the interlocking elements 42, 44 together in a sealing arrangement.

[0043] Once the slider 100 travels the length of the travel path 48 in the first direction 36 closing the fastener, the slider 100 can be placed in the opening configuration by reversing direction and interposing the wedge 200 between the interlocking elements 42, 44. A flexible lip 43 extending from the recessed element 44 of the fastener 40 on the top side of the lid 30, at the closed end 52 of the travel path 48 may be provided to enable the wedge 200 to initiate separation of the two elements 40, 42.

[0044] In the opening configuration illustrated in Figure 6b, the wedge 200 is disposed between the interlocking elements 42, 44 so that the concave internal surface 202 of the wedge 200 partially encloses the interlocking surface 45 of the protruding element while the groove 49 of the recessed element encloses the frustoconical external surface 204 of the wedge 200. As the slider 100 moves in the second direction 38 illustrated in Figure 4, the frustoconical external surface 204 of the wedge 200 urges the interlocking elements 42, 44 apart to open the reclosable fastener 40.

[0045] In the embodiment previously described, the wedge 200 performs both the opening and closing operation forcing the user to either fully open or fully close the fastener 40 before changing to the opposing operation. By providing a slider having separate components designated for opening and closing the fastener, the user can switch from the opening mode to the closing

mode at any point along the travel path.

[0046] In an alternate embodiment shown in Figures 7a and 7b, the slider 300 comprises a third elongate member 340 having a proximal end 342 depending from the first surface 312 of the base 310, a distal end 344, and an internal surface 346. The third elongate member 340 is spaced apart from the first and second elongate members 320, 330 with the second elongate member 330 being interposed between the first and third elongate members 320, 340.

[0047] The first and third elongate members 320, 340 cooperate to perform the closing operation of the slider 300. The internal surface 346 of the third elongate member 340 interfaces with the non-interlocking bulbous surface 47 of the recessed element 44 while the internal surface 326 of the first elongate member 320 interfaces with the bead 82 forming the track on the bottom side 24 of the flange 20. The internal surface 326 of the first elongate member 320 is tapered so that the spacing 313 between the internal surface 326 of the first elongate member 320 and the internal surface 346 of the third elongate member 340 varies along the length 302 of the slider from a maximal distance at the opening end 306 to a minimal proximal distance at the closing end 308 forming a converging channel therebetween. The measure of the minimal proximal distance is designed to bias the interlocking elements 42, 44 of the reclosable fastener 40 into engagement with one another.

[0048] In order to minimize frictional contact between the slider 300 and the reclosable fastener 40, The third elongate member 340 may be modified as shown in Figures 8a-8c. The third elongate member 340 may be shorter than the first elongate member 320 and comprise a finger member 350 disposed at the distal end 344 of the third elongate member 340. The finger member 350 is positioned adjacent to the closing end 308 of the slider 300, projecting parallel to the width 304 thereof.

[0049] As further illustrated in Figure 9a, the finger member 350 comprises an internal surface 352 which interfaces with the top side 32 of the lid 30, particularly, the non-interlocking bulbous surface 47 of the recessed element 44. At the same time, the internal surface 326 of the first elongate member 320 interfaces with the bottom side 24 of the flange 20, particularly, the bead 82 forming the track 46 along side of the opened end 41 of the protruded element 42 of the reclosable fastener 40.

[0050] Since the closing operation occurs primarily at the closing end 308 of the slider, the shorter third elongate member 340 can minimize contact with the fastener while the finger member 350 cooperates with the first elongate member 320 to bias the interlocking elements 42, 44 of the fastener 40 into engagement with one another. In order to provide better conformity with the non-interlocking bulbous surface 47 of the recessed element 44, the internal surface 352 of the finger member 350 may be curved concave towards the first elongate member 320.

[0051] To perform the opening operation for the embodiments illustrated in Figures 7a-7b and 8a-8c, a wedge 360 is interposed between the first and third elongate members 320, 340. As shown, the wedge 360 may be disposed at the distal end 334 of the second elongate member 330. The wedge 360 is tapered such that the external surface 362 of the wedge 360, opposite the internal surface 346 of the third elongate member 340, is sloped towards the first elongate member 320 from a first end 366 adjacent the opening end 306 of the slider 300 to a second end 368 approaching the closing end 308 of the slider 300. The cross section of the wedge 360 decreases from the first end 366 to the second end 368.

[0052] In its assembled configuration illustrated in Figure 9b, the wedge 360 is interposed between the interlocking elements 42, 44 of the reclosable fastener 40 with the internal surface 364 of the wedge 360 partially enclosing the bulbous interlocking surface 41 of the protruded element 42 while the external surface 362 of the wedge 360 interfaces with the groove 49 of the recessed element 44. In order to provide better conformity with the two interlocking elements 42, 44 the internal surface 364 may be concave towards the first elongate member 320 while the external surface 362 may be frustoconical.

[0053] So that the wedge 360 performing the opening function does not interfere with the aforementioned features performing the closing operation and vice versa, the second end 368 of the wedge 360 is spaced apart from the closing end 308 of the slider. Preferably, the second end of the wedge is spaced a predetermined distance from a plane disposed at the closing end 308 of the slider 300 defined by the minimal proximal distance between the internal surface 326 of the first elongate member 320 and the internal surface 346 of the third elongate member or internal surface 352 of the finger member 350, depending on the embodiment.

[0054] The sliders according to the present invention are preferably injection molded from high density polyethylene. However, one skilled in the art would recognize that such sliders may be manufactured from any moldable or machinable material utilizing machining or molding operations known in the art.

[0055] While particular embodiments of the present invention have been illustrated and described, it would be obvious to those skilled in the art that various other changes and modifications can be made without departing from the spirit and scope of the invention. It is therefore intended to cover in the appended claims all such changes and modifications that are within the scope of this invention.

Claims

1. A slider (100) for opening and closing an elongate reclosable fastener (40) lying in an X-Y plane and sealable in a Z direction orthogonal thereto **charac-**

terized in that:

the slider (100) imparts forces to the fastener (40) in the Z direction to open and close the fastener (40) as the slider (100) moves along a travel path (48) having vector components in both the X and Y directions; and the fastener is rigid.

2. A slider (100) for opening or closing an elongate reclosable fastener (40) according to claim 1 wherein:

the fastener (40) has interlocking protruded and recessed elements (42), (44) and tracks (46) extending along the length thereof, defining a travel path (48) having vector components extending in each of the X and Y directions; the slider (100) is slidably attached to the tracks (46) and moveable along the travel path (48) in opposing first and second directions (36), (38); the slider (100) comprising:

a wedge (200) having an internal surface (202) and an external surface (204), a closing end (208) and an opening end (206), both the internal surface (202) and the external surface (204) are inclined in the first direction (36) from the closing end (208) to the opening end (206),

wherein the internal surface (202) presses the recessed element (44) into engagement with the protruded element (42) as the slider (100) moves in the first direction (36) during closing, and the external surface (204) separates the recessed element (44) from the protruded element (42) as the slider (100) moves in the second direction (38) during opening.

3. The slider (100) according to Claim 2 wherein the internal surface (202) of the wedge (200) partially encloses the recessed element (44) during closing.
4. The slider (100) according to either of Claims 2 or 3, wherein the internal surface (202) of the wedge (200) partially encloses the protruded element (42) during opening.
5. The slider (100) according to any of the previous claims, further comprising:

a base (110) having a first surface (112);
a first elongate member (120) having a proximal end (122) depending from the first surface (112) and a distal end (124);
a second elongate member (130) spaced apart from the first elongate member (120), the second elongate member (130) having a proximal

end (132) depending from the base (110) and a distal end (134);

wherein the wedge (200) is disposed at the distal end (134) of the second elongate member (130).

6. A slider (300) for opening or closing an elongate reclosable fastener (40) according to claim 1 wherein:

the fastener (40) has interlocking protruded and recessed elements (42), (44) and tracks (46) extending along the length thereof defining a travel path (48) having vector components extending in each of the X and Y directions; the slider (300) is slidably attachable to the tracks (46) and moveable along the travel path (48) in opposing first and second directions (36), (38); the slider (300) comprising:

a length (302) extending from an opening end (306) to a closing end (308) and a width (304);

a base (310) having a first surface (312);

a first elongate member (320) having an internal surface (326), a proximal end (322) depending from the first surface (312) of the base (310) and a distal end (324);

a second elongate member (330) spaced apart from the first elongate member (320), the second elongate member (330) having a proximal end (332) depending from the first surface (312) of the base (310) and a distal end (334);

a third elongate member (340) spaced apart from the first elongate member (320) interposing the second member (330) there between, the third elongate member (340) having an internal surface (346), a proximal end (342) depending from the first surface (312) of the base (310) and a distal end (344);

a wedge (360) depending from the second elongate member (330), the wedge (360) having an internal surface (364) and a sloping external surface (362) inclined in the closing direction (36) from the closing end (308) to the opening end (306); and

wherein the wedge (360) is interposed between interlocking surfaces of protruded and recessed elements (42), (44) of the reclosable fastener (40) while the internal surfaces of the first and third elongate members (320), (340) interface respectively with non-interlocking surfaces of the protruded element (42) and the recessed element (44) of such a reclosable fastener (40).

7. The slider (300) according to Claim 6, further comprising a finger member (350) disposed at the distal end (344) of the third elongate member (340) at the closing end (308) thereof projecting parallel to the width (304) of the slider (300). 5
8. The slider (300) according to Claim 7 wherein the finger member (350) comprises a concave internal surface (352) and a convex external surface. 10
9. The slider (300) according to Claim 8 wherein the concave internal surface (352) of the finger member (350) partially encloses a non-interlocking surface (47) of the recessed element (44) of the reclosable fastener (40). 15
10. The slider (300) according to Claim 6 wherein the internal surface (364) of the wedge (360) partially encloses the interlocking surface (41) of the protruded element (42) while the external surface (362) of the wedge (360) interfaces with the groove (49) of the recessed element (44) of the reclosable fastener (40). 20

Patentansprüche

1. Schieber (100) zum Öffnen und Schließen eines verlängerten wiederverschließbaren Verschlusses (40), der in einer X-Y-Ebene liegt und in einer Z-Richtung rechtwinklig dazu versiegelbar ist, **dadurch gekennzeichnet, dass:** 25

der Schieber (100) Kräfte auf den Verschluss (40) in der Z-Richtung überträgt, um den Verschluss (40) zu öffnen und zu schließen, wenn sich der Schieber (100) entlang einer Bahn (48) bewegt, die sowohl in der X- als auch in der Y-Richtung Vektorkomponenten aufweist; und 35

dass der Verschluss starr ist. 40

2. Schieber (100) zum Öffnen oder Schließen eines verlängerten wiederverschließbaren Verschlusses (40) nach Anspruch 1 worin: 45

der Verschluss (40) ineinander greifende vorstehende und vertiefte Elemente (42), (44) und Laufbahnen (46) aufweist, die sich entlang der Länge davon erstrecken und eine Bahn (48) mit Vektorkomponenten definieren, die sich in der X- und Y-Richtung erstrecken; 50

der Schieber (100) gleitbar an den Laufbahnen (46) und beweglich entlang der Bahn (48) in einer entgegengesetzten ersten und zweiten Richtung (36), (38) angebracht ist; 55

wobei der Schieber (100) umfasst:

einen Keil (200) mit einer inneren Oberfläche (202) und einer äußeren Oberfläche (204), ein schließendes Ende (208) und ein öffnendes Ende (206), wobei sowohl die innere Oberfläche (202) als auch die äußere Oberfläche (204) in der ersten Richtung (36) von dem schließenden Ende (208) zu dem öffnenden Ende (206) hin geneigt sind,

worin die innere Oberfläche (202) das vertiefte Element (44) in Eingriff bringt mit dem vorstehenden Element (42), wenn sich der Schieber (100) während des Schließens in der ersten Richtung (36) bewegt, und die externe Oberfläche (204) das vertiefte Element (44) von dem vorstehenden Element (42) trennt, wenn sich der Schieber (100) beim Öffnen in der zweiten Richtung (38) bewegt.

3. Schieber (100) nach Anspruch 2, worin die innere Oberfläche (202) des Keils (200) das vertiefte Element (44) während des Schließens teilweise umschließt.

4. Schieber (100) nach einem der Ansprüche 2 und 3, worin die innere Oberfläche (202) des Keils (200) das vorstehende Element (42) während des Öffnens teilweise umschließt.

5. Schieber (100) nach einem der vorstehenden Ansprüche, weiterhin umfassend:

eine Basis (110) mit einer ersten Oberfläche (112);

ein erstes verlängertes Element (120) mit einem nahen Ende (122), das von der ersten Oberfläche (112) abhängig ist, und einem distalen Ende (124);

ein zweites verlängertes Element (130) in Abstand von dem ersten verlängerten Element (120), wobei das zweite verlängerte Element (130) ein nahes Ende (132) aufweist, das von der Basis (110) abhängig ist, und ein distales Ende (134);

worin der Keil (200) an dem distalen Ende (134) des zweiten verlängerten Elements (130) angebracht ist.

6. Schieber (300) zum Öffnen oder Schließen eines verlängerten wiederverschließbaren Verschlusses (40) nach Anspruch 1, worin:

der Verschluss (40) ineinander greifende vorstehende und vertiefte Elemente (42), (44) und

Laufbahnen (46) aufweist, die sich entlang der Länge davon erstrecken und eine Bahn (48) mit Vektorkomponenten definieren, die sich in der X- und Y-Richtung erstrecken;

der Schieber (300) gleitbar an den Laufbahnen (46) und beweglich entlang der Bahn (48) in einer entgegengesetzten ersten und zweiten Richtung (36), (38) angebracht ist; wobei der Schieber (300) umfasst:

eine Länge (302), die sich von einem öffnenden Ende (306) zu einem schließenden Ende (308) erstreckt, und eine Breite (304);

eine Basis (310) mit einer ersten Oberfläche (312);

ein erstes verlängertes Element (320) mit einer inneren Oberfläche (326), einem nahen Ende (322), das von der ersten Oberfläche (312) der Basis (310) abhängig ist, und einem distalen Ende (324);

ein zweites verlängertes Element (330) in Abstand von dem ersten verlängerten Element (320), wobei das zweite verlängerte Element (330) ein nahes Ende (332) aufweist, das von der ersten Oberfläche (312) der Basis (310) abhängig ist, und ein distales Ende (334);

ein drittes verlängertes Element (340) in Abstand von dem ersten verlängerten Element (320), wobei das zweite Element (330) zwischen diesen zwischengeschaltet ist, wobei das dritte verlängerte Element (340) eine innere Oberfläche (346), ein nahes Ende (342), das von der ersten Oberfläche (312) der Basis (310) abhängig ist, und ein distales Ende (344) aufweist;

ein Keil (360), der von dem zweiten verlängerten Element (330) abhängig ist, wobei der Keil (360) eine innere Oberfläche (364) und eine abfallende äußere Oberfläche (362) aufweist, die in der Schließrichtung (36) von dem schließenden Ende (308) zu dem öffnenden Ende (306) hin geneigt ist; und

worin der Keil (360) zwischen den ineinander greifenden Oberflächen der vorstehenden und vertieften Elemente (42), (44) des wiederverschließbaren Verschlusses (40) zwischengeschaltet ist, während die inneren Oberflächen des ersten und dritten verlängerten Elements (320), (340) jeweils an die

nicht ineinander greifenden Oberflächen des vorstehenden Elements (42) und des vertieften Elements (44) des wiederverschließbaren Verschlusses (40) angrenzen.

7. Schieber (300) nach Anspruch 6, weiterhin umfassend ein Fingerelement (350), das an dem distalen Ende (344) des dritten verlängerten Elements (340) an dem schließenden Ende (308) davon angebracht ist und parallel zu der Breite (304) des Schiebers (300) hervorsteht.

8. Schieber (300) nach Anspruch 7, worin das Fingerelement (350) eine konkave innere Oberfläche (352) und eine konvexe äußere Oberfläche umfasst.

9. Schieber (300) nach Anspruch 8, worin die konkave innere Oberfläche (352) des Fingerelements (350) eine nicht ineinander greifende Oberfläche (47) des vertieften Elements (44) des wiederverschließbaren Verschlusses (40) teilweise umschließt.

10. Schieber (300) nach Anspruch 6, worin die innere Oberfläche (364) des Keils (360) die ineinander greifende Oberfläche (41) des vorstehenden Elements (42) teilweise umschließt, während die äußere Oberfläche (362) des Keils (360) an die Ausbuchtung (49) des vertieften Elements (44) des wiederverschließbaren Verschlusses (40) angrenzt.

Revendications

1. Glissière (100) pour ouvrir et fermer un fermoir allongé refermable (40) reposant dans un plan X-Y et scellable dans une direction Z orthogonale à celui-ci **caractérisé en ce que** :

la glissière (100) imprime des forces au fermoir (40) dans la direction Z pour ouvrir et fermer le fermoir (40) à mesure que la glissière (100) se déplace le long d'une voie de déplacement (48) ayant des composants vecteurs à la fois dans les directions X et Y ; et

le fermoir est rigide.

2. Glissière (100) pour ouvrir ou fermer un fermoir allongé refermable (40) selon la revendication 1 dans laquelle :

le fermoir (40) a des éléments à enclenchement réciproque ressortants et renfoncés (42), (44) et des pistes (46) s'étendant le long de la longueur de ceux-ci, en définissant une voie de déplacement (48) ayant des composants vecteurs s'étendant dans chacune des directions

X et Y ;

la glissière (100) est fixée d'une manière pouvant coulisser aux pistes (46) et est mobile le long de la voie de déplacement (48) dans les première et seconde directions s'opposant (36), (38) ;

la glissière (100) comprenant :

un biseau (200) ayant une surface interne (202) et une surface externe (204), une extrémité fermante (208) et une extrémité ouverte (206), tant la surface interne (202) que la surface externe (204) sont inclinées dans la première direction (36) à partir de l'extrémité fermante (208) vers l'extrémité ouverte (206),

dans laquelle la surface interne (202) presse l'élément renforcé (44) dans un engagement avec l'élément ressortant (42) à mesure que la glissière (100) se déplace dans la première direction (36) durant la fermeture, et la surface externe (204) sépare l'élément renforcé (44) de l'élément ressortant (42) à mesure que la glissière (100) se déplace dans la seconde direction (38) durant l'ouverture.

3. Glissière (100) selon la revendication 2 dans laquelle la surface interne (202) du biseau (200) enferme partiellement l'élément renforcé (44) durant la fermeture.

4. Glissière (100) selon la revendication 2 ou 3, dans laquelle la surface interne (202) du biseau (200) enferme partiellement l'élément ressortant (42) durant l'ouverture.

5. Glissière (100) selon l'une quelconque des revendications précédentes, comprenant en outre :

une base (110) ayant une première surface (112) ;

un premier membre allongé (120) ayant une extrémité proximale (122) dépendant de la première surface (112) et une extrémité distale (124) ;

un deuxième membre allongé (130) séparé du premier membre allongé (120), le deuxième membre allongé (130) ayant une extrémité proximale (132) dépendant de la base (110) et une extrémité distale (134) ;

dans laquelle le biseau (200) est disposé à l'extrémité distale (134) du deuxième membre allongé (130).

6. Glissière (300) pour ouvrir ou fermer un fermoir allongé refermable (40) selon la revendication 1 dans laquelle :

le fermoir (40) a des éléments à enclenchement réciproque ressortants et renforcés (42), (44) et des pistes (46) s'étendant le long de la longueur de ceux-ci, en définissant une voie de déplacement 48 ayant des composants vecteurs s'étendant dans chacune des directions X et Y ;

la glissière (300) est fixée d'une manière pouvant coulisser aux pistes (46) et est mobile le long de la voie de déplacement (48) dans les première et seconde directions s'opposant (36), (38) ;

la glissière (300) comprenant :

une longueur (302) s'étendant à partir d'une extrémité ouverte (306) vers une extrémité fermante (308) et une largeur (304) ;

une base (310) ayant une première surface (312) ;

un premier membre allongé (320) ayant une surface interne (326), une extrémité proximale (322) dépendant de la première surface (312) de la base (310) et une extrémité distale (324) ;

un deuxième membre allongé (330) séparé du premier membre allongé (320), le deuxième membre allongé (330) ayant une extrémité proximale (332) dépendant de la première surface (312) de la base (310) et une extrémité distale (334) ;

un troisième membre allongé (340) séparé du premier membre allongé (320) intercalant le deuxième membre (330) entre eux, le troisième membre allongé (340) ayant une surface interne (346), une extrémité proximale (342) dépendant de la première surface (312) de la base (310) et une extrémité distale (344) ;

un biseau (360) dépendant du deuxième membre allongé (330), le biseau (360) ayant une surface interne (364) et une surface externe en pente (362) inclinée dans la direction fermante (36) à partir de l'extrémité fermante (308) vers l'extrémité ouverte (306) ; et

dans laquelle le biseau (360) est intercalé entre des

surfaces à enclenchement réciproque des éléments ressortant et renfoncé (42), (44) du fermoir refermable (40) alors que les surfaces internes des premier et troisième membres allongés (320), (340) se joignent respectivement avec des surfaces sans enclenchement réciproque de l'élément ressortant (42) et l'élément renfoncé (44) d'un tel fermoir refermable (40). 5

7. Glissière (300) selon la revendication 6, comprenant en outre un membre pour doigt (350) disposé à l'extrémité distale (344) du troisième membre allongé (340) à l'extrémité fermante (308) de celui-ci se projetant parallèle à la largeur (304) de la glissière (300). 10 15

8. Glissière (300) selon la revendication 7 dans laquelle le membre pour doigt (350) comprend une surface interne concave (352) et une surface externe convexe. 20

9. Glissière (300) selon la revendication 8 dans laquelle la surface interne concave (352) du membre pour doigt (350) enferme partiellement une surface sans enclenchement réciproque (47) de l'élément renfoncé (44) du fermoir refermable (40). 25


10. Glissière (300) selon la revendication 6 dans laquelle la surface interne (364) du biseau (360) enferme partiellement la surface à enclenchement réciproque (41) de l'élément ressortant (42) alors que la surface externe (362) du biseau (360) se joint à la gorge (49) de l'élément renfoncé (44) du fermoir refermable (40). 30 35

40

45

50

55

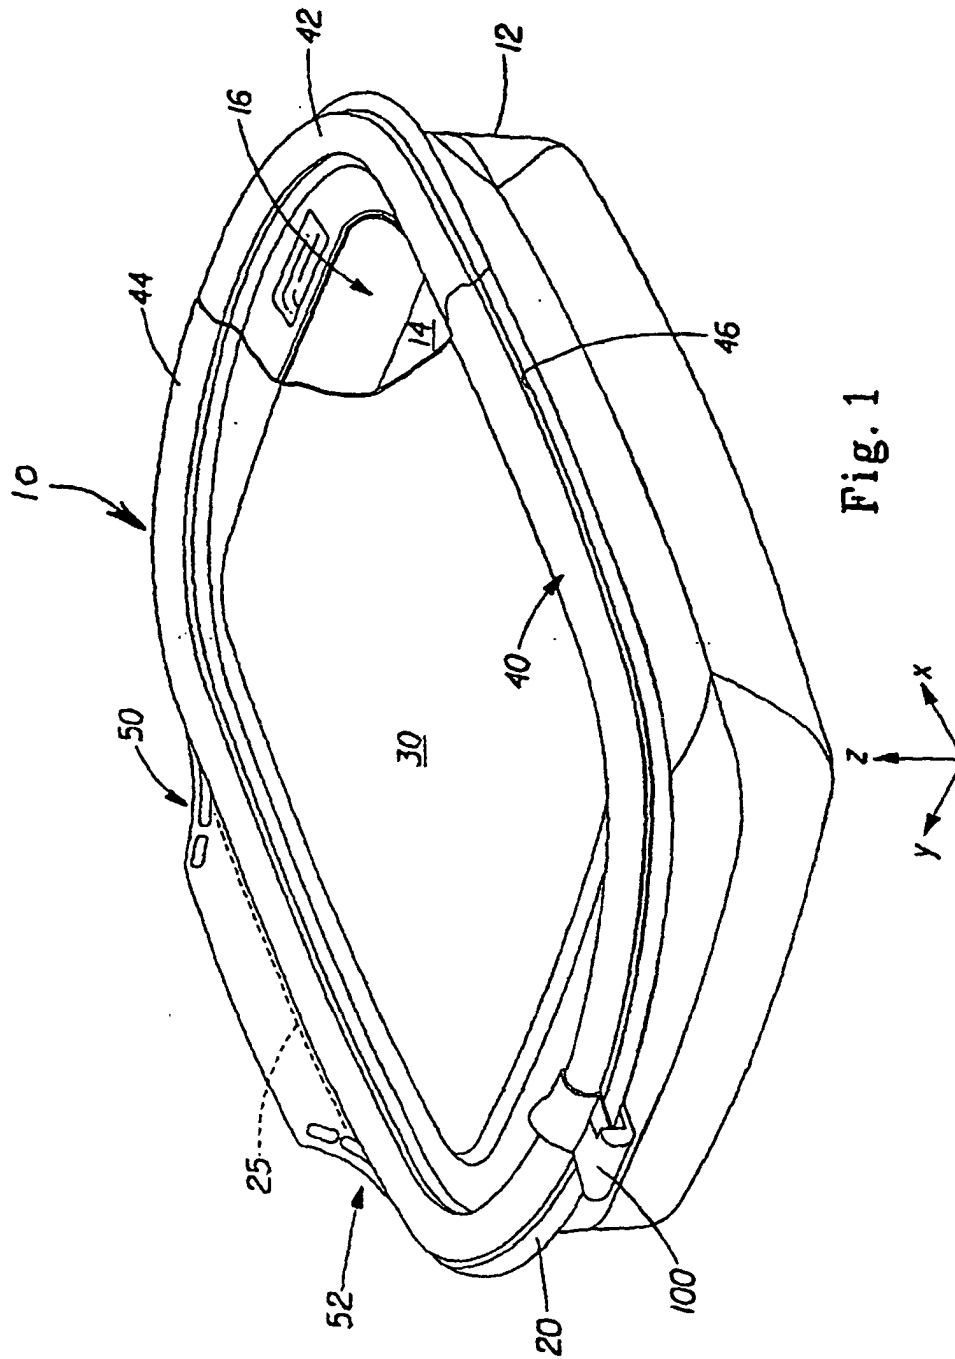

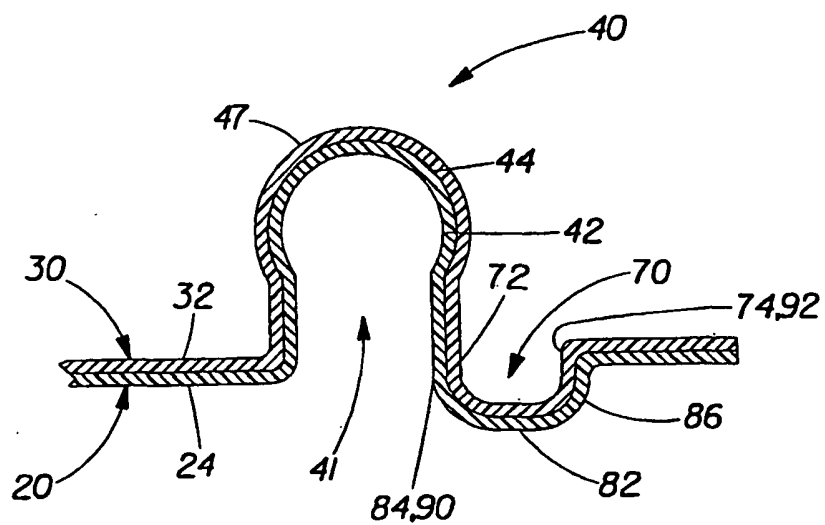


Fig. 2a

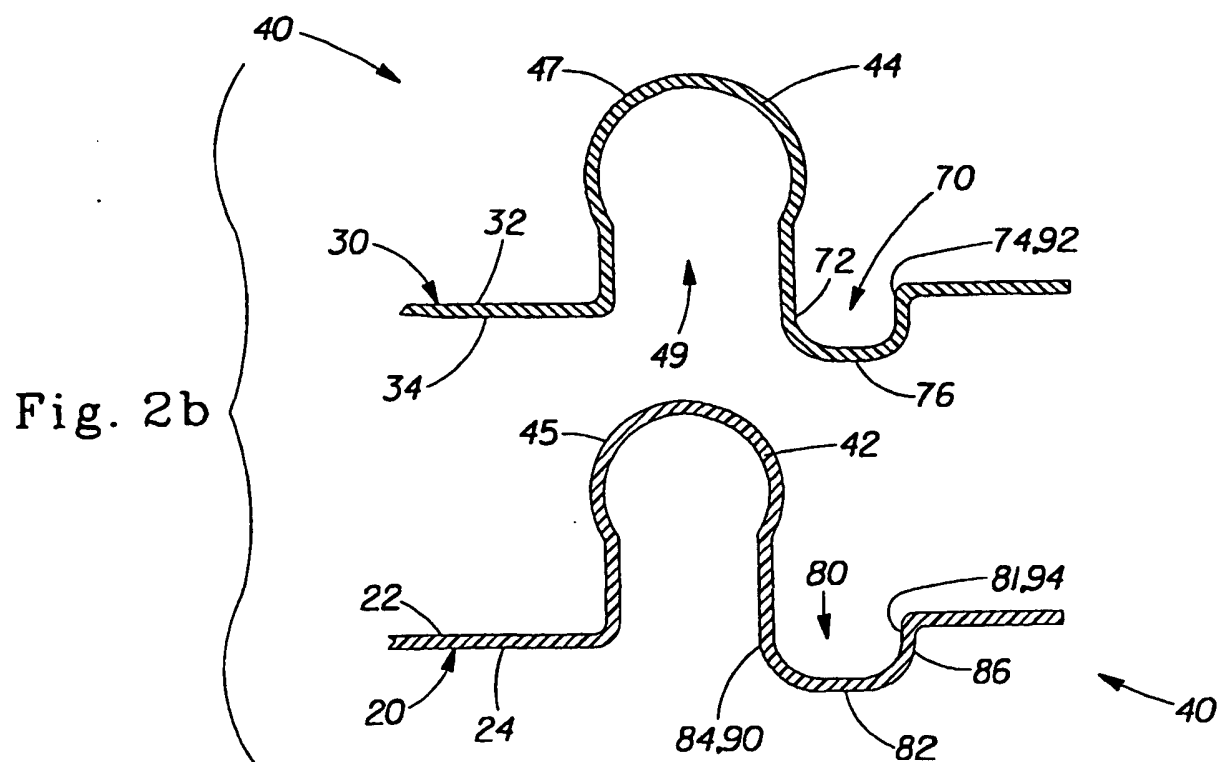


Fig. 2b

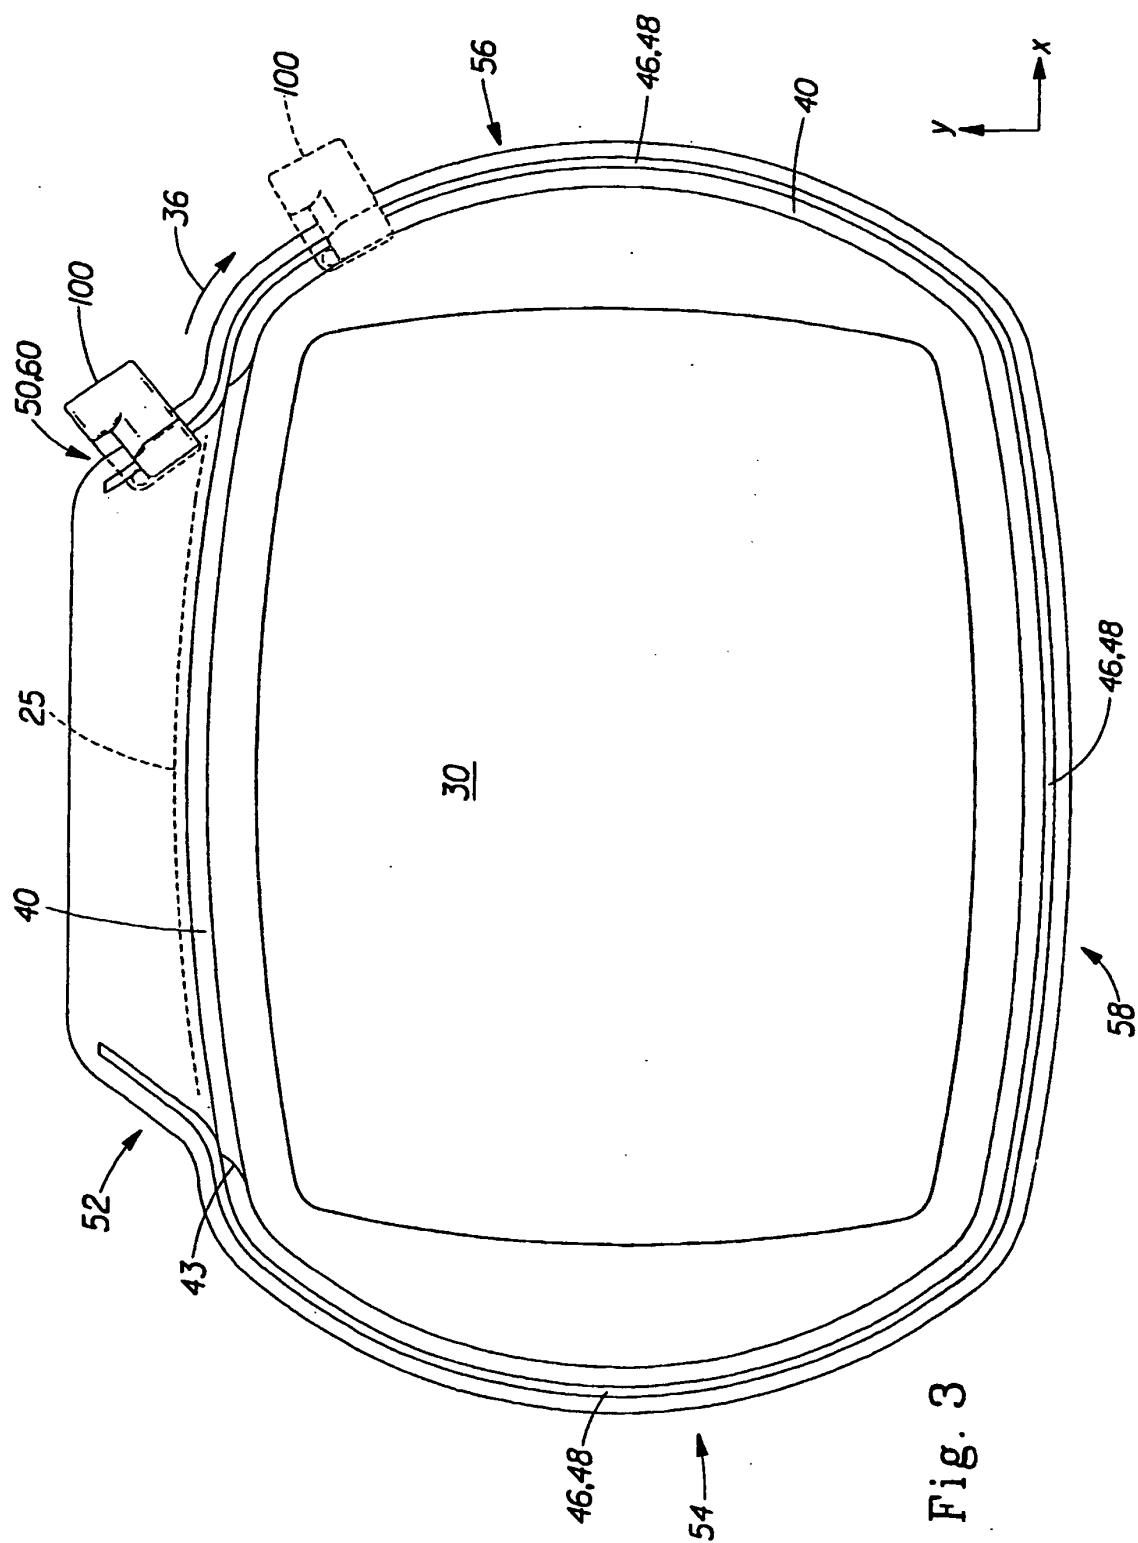
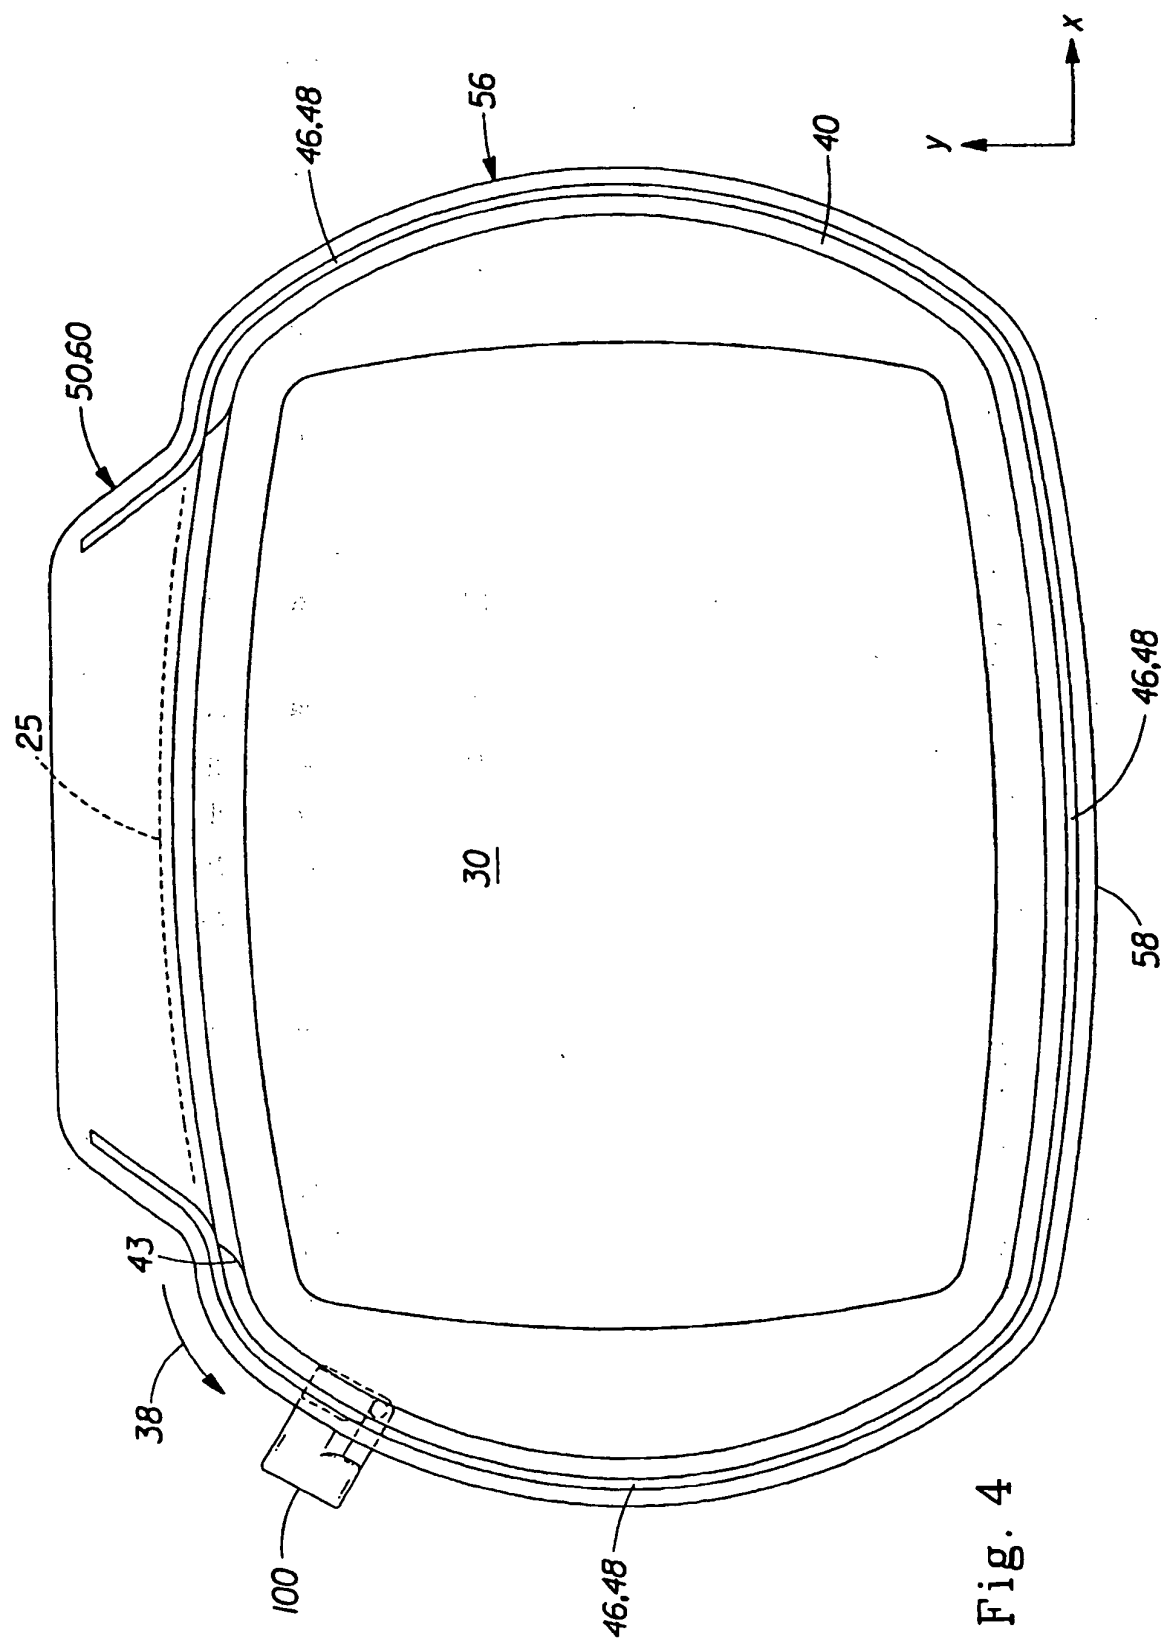
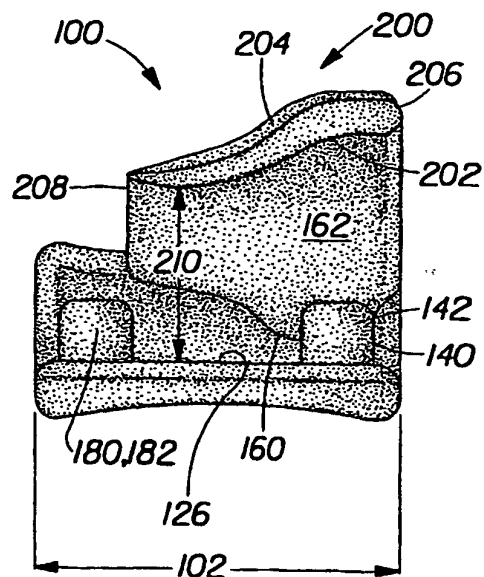
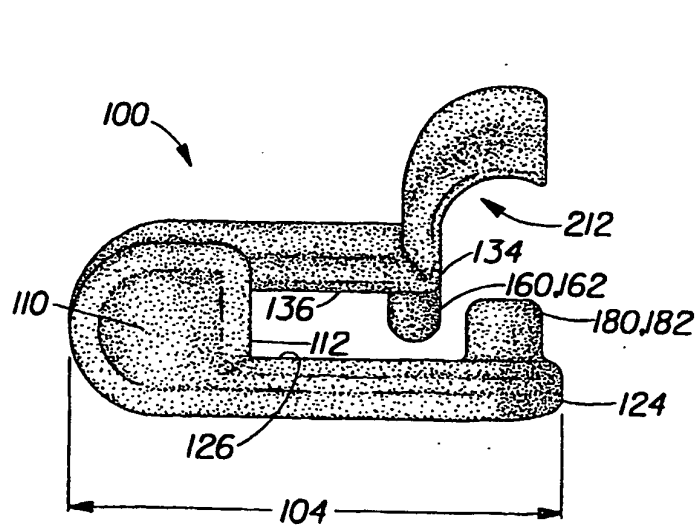
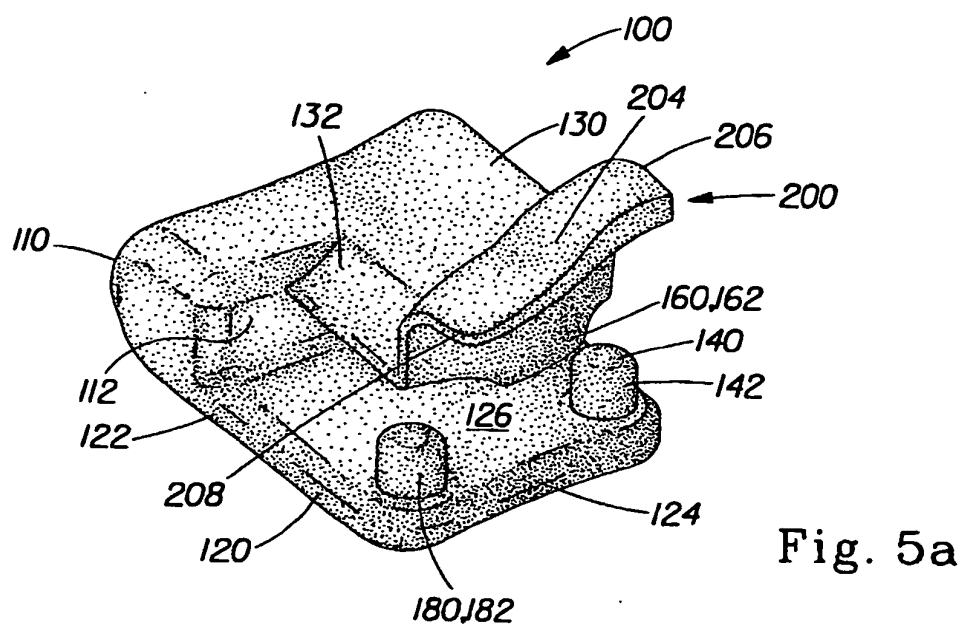


Fig. 3





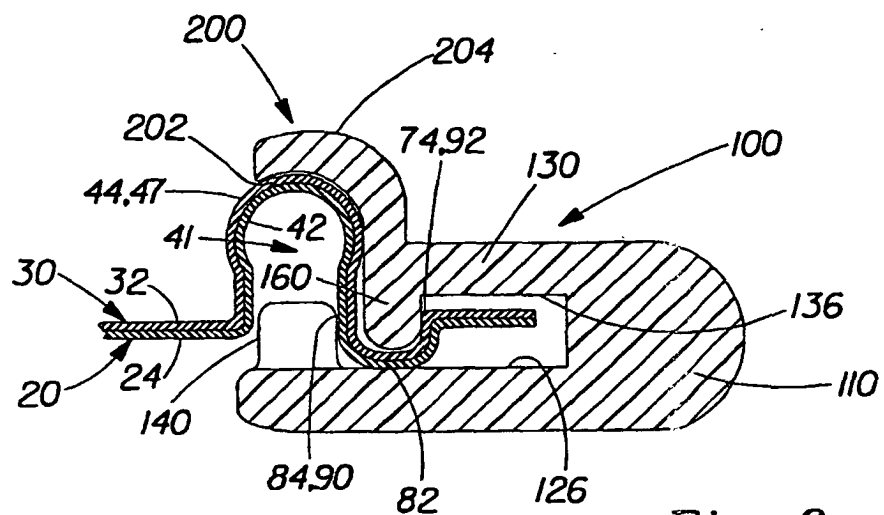
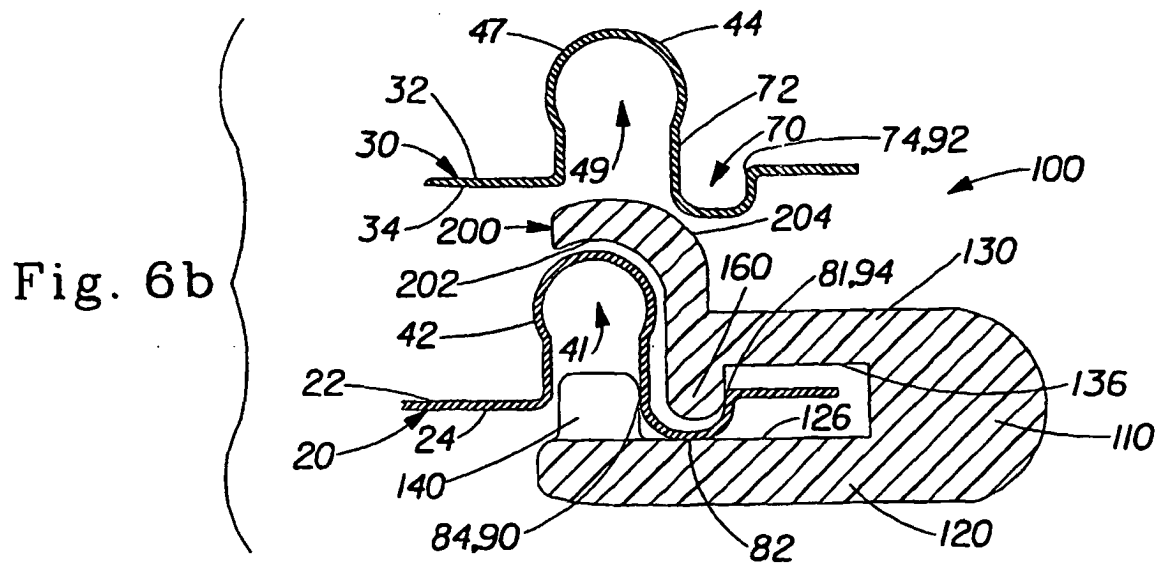


Fig. 6a



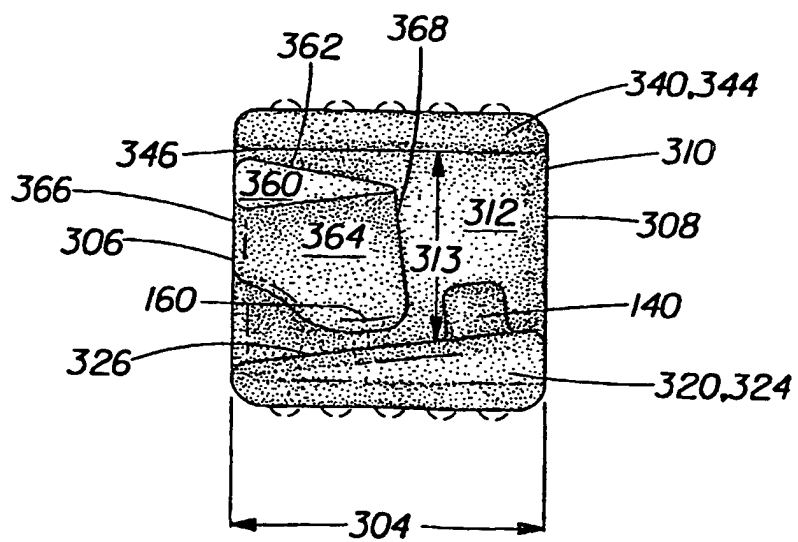
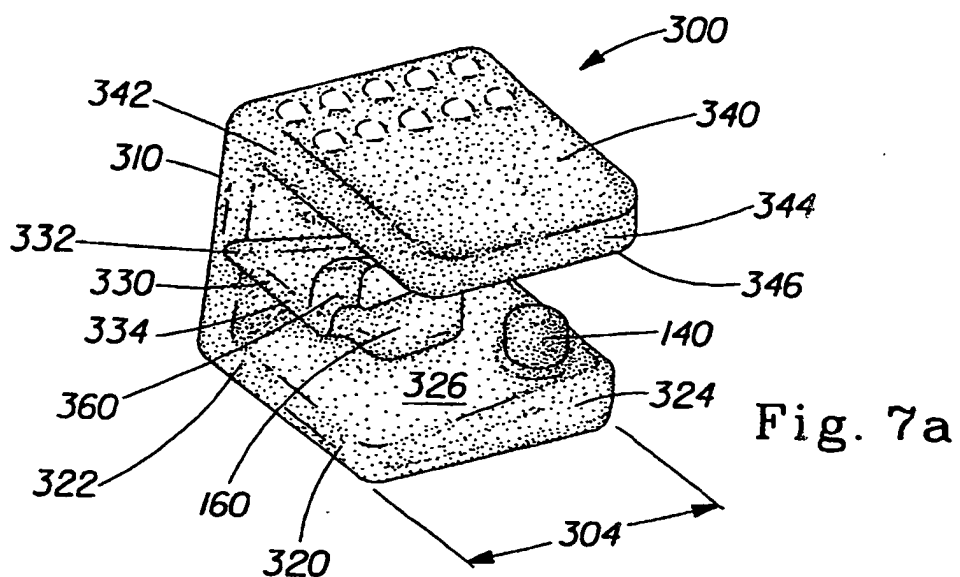
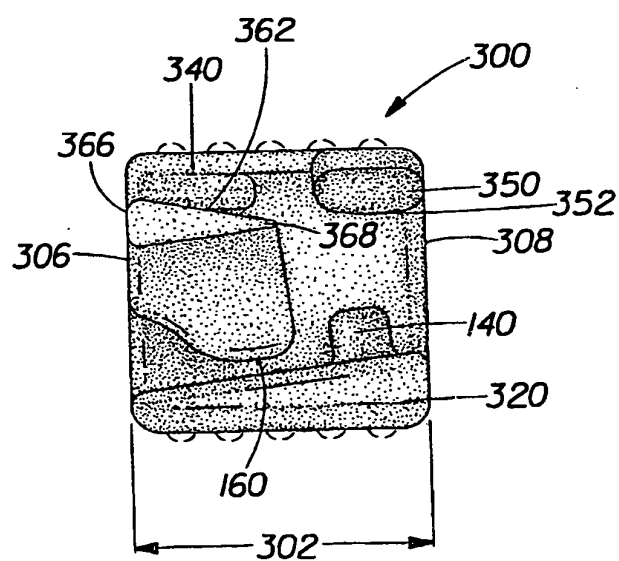
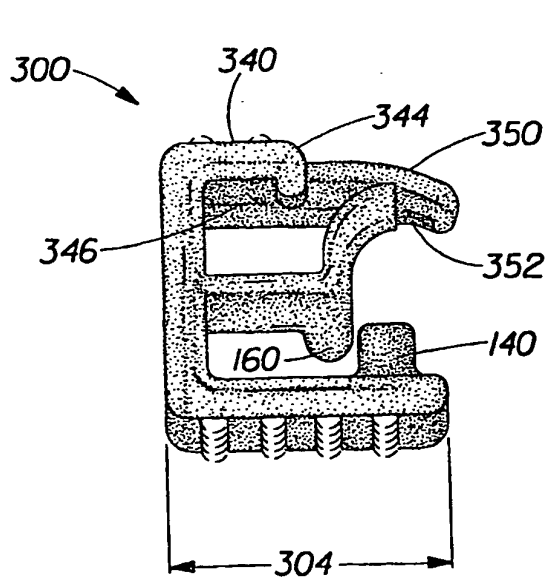
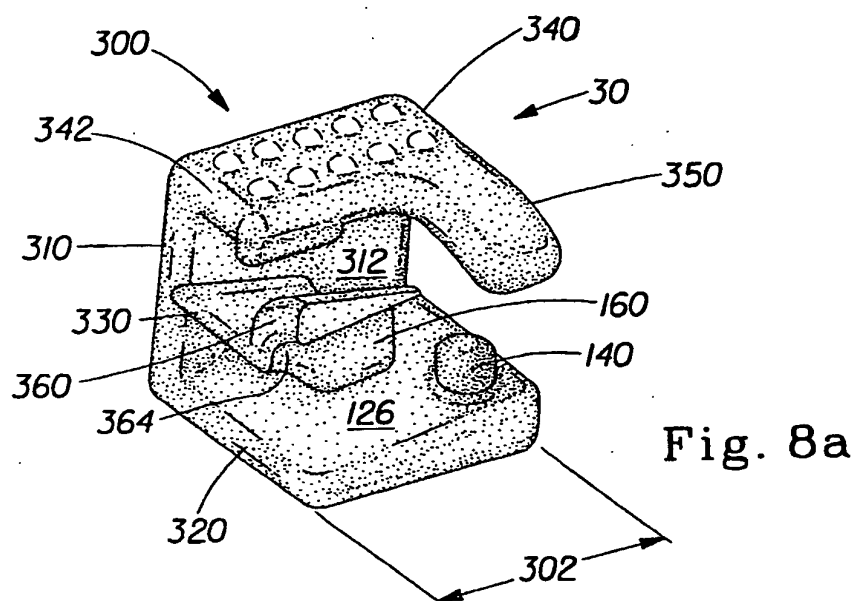


Fig. 7b



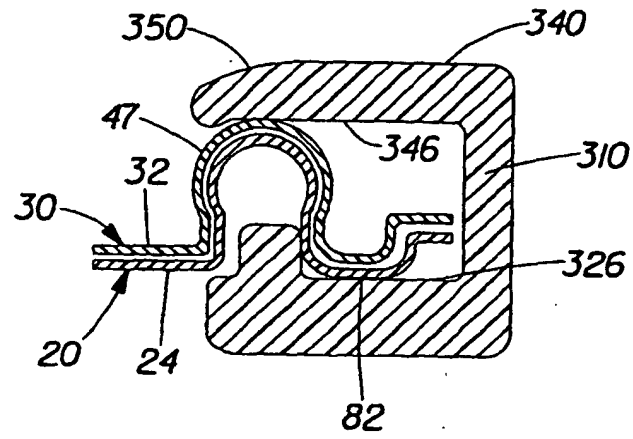


Fig. 9a

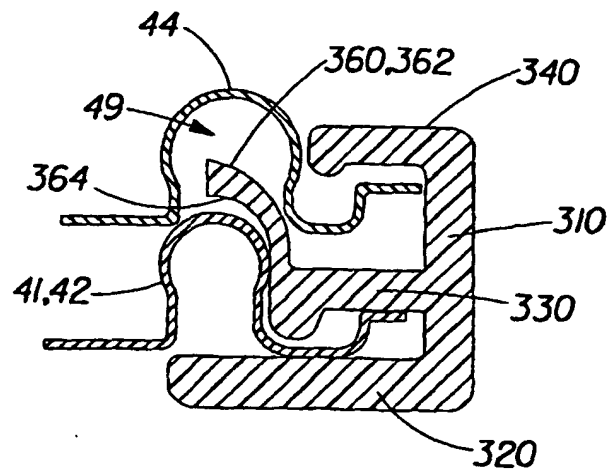


Fig. 9b