

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 258 591 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
28.07.2004 Bulletin 2004/31

(51) Int Cl.7: **E05F 15/12, E05F 15/10**

(21) Application number: **02291153.1**

(22) Date of filing: **07.05.2002**

(54) **Electric door operator**

Elektrischer Türantrieb

Dispositif électrique de commande de porte

(84) Designated Contracting States:
DE FR GB IT

(30) Priority: **07.05.2001 US 289219 P**

(43) Date of publication of application:
20.11.2002 Bulletin 2002/47

(73) Proprietor: **Westinghouse Air Brake
Technologies Corporation
Wilmerding, PA 15148 (US)**

(72) Inventor: **Pagowski, Stefan
Glen Ellyn, Illinois 60137 (US)**

(74) Representative: **Le Bras, Hervé et al
Cabinet Beau de Loménie,
158, rue de l'Université
75340 Paris Cedex 07 (FR)**

(56) References cited:
**US-A- 2 298 158 US-A- 4 333 269
US-A- 4 375 140 US-A- 4 452 292
US-A- 5 332 279**

EP 1 258 591 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Field of the Invention

[0001] This invention relates generally to power operators for multi-passenger mass transit vehicles, more particularly to an electrically driven rotary door operator for opening and closing dual leaf swing doors such as used in multiple passenger vehicles including airport utility transports, school, and small transit buses.

Background of the Invention

[0002] Prior to the use of power operated door openers, doors of mass transit vehicles were manually opened and closed, typically by the vehicle operator. The strain of actuating these door openings and closings often led to long term medical difficulties for the vehicle operators. The need for power operated door openers led to the development of largely pneumatically actuated operators since in most large vehicles, use of air brake systems provides a reliable and convenient source of operating air at controlled pressures. U.S. Patent Numbers 4,490,941 and 4,134,231 show examples of pneumatic powered door operators. However, these types of vehicles typically incorporate hydraulic brake systems. Therefore, no air supply is available, and hydraulic door drives are high in cost and involve excessive maintenance in order to prevent leaks and loss of brake system integrity. A growing need for a reliable low cost electric bus door operator now exists.

[0003] A power door operator for multi-passenger mass transit vehicles is disclosed in U.S. Patent Number 5,332,279. This type of prior art system incorporates an electrically driven gear motor operating drive arms rotating approximately 160° in order to open and close a dual panel swing door set. A gear motor drive shaft operating through a sleeve clutch operates individually adjustable length drive arms of a drive bar in order to effect approximately 90° rotation of each door from open to closed and closed to open. The operating door shafts located at the outer edges of each panel have door arms affixed thereto for connection to the above-mentioned reciprocating drive arms through door drive rods. Each door drive rod end is interfaced between its respective drive arm and door arm with a spherical rod end.

[0004] US patent 4,333,269 describes an automatic control and locking device used in automobiles which comprises a pinion driven by a means for driving it, which rotates a gear sector about a shaft member and thereby reciprocates a push bar used to open and close a hatchback.

[0005] The use of a pinion acting upon a gear wheel is also known for US patent 4,375,140 in relation with door openers.

[0006] In US patent 4,452,292, an automatic door opener is described in which a ring comprises inner gears and acting with a pinion provided in the inside of

that ring.

[0007] By acting onto a lever, the pinion can be removed from the contact position to the gear ring.

Summary of the Invention

[0008] The present invention is directed to an electric rotary door operator for controlling the opening and closing of a door pivotally mounted to a door frame of a multi-passenger mass transit vehicle. The electric door operator comprises a pinion and a means for rotating or driving this pinion in opposite directions through opening and closing cycles of the door. A gear sector is also provided which is mounted for rotation in an opposite direction from the pinion. The gear sector is engageable with the pinion and capable of being driven by the pinion such that it rotates in one of an opening and closing direction upon rotation of the pinion. A shaft member having a first and second end is provided. The first end of the shaft member is secured to the gear sector and the second end of the shaft member is engageable with one of a base plate and a wall portion of the vehicle. A push bar is suspended from the gear sector for one of opening and closing the door upon rotation of the gear sector in one of the opening and closing directions.

[0009] According to the invention, the rotary door operator further includes a handle for moving the pinion in one of a vertical and horizontal direction for disengagement of the pinion with the gear sector.

Objects of the invention

[0010] It is a primary object of the invention to provide an electric rotary door operator for opening and closing at least one door of a mass transit vehicle.

[0011] It is another object of the invention to design an operator which may be fully removed from the vehicle to facilitate maintenance and/or replacement thereof.

[0012] It is another object of the invention to provide an electric rotary door operator which requires minimal maintenance and is economically produced.

[0013] It is yet another object of the invention to produce an electric door operator which is capable of carrying a much higher force than in existing models without the necessity of mechanical force balancing via using two pushing bars acting in opposite directions.

[0014] It is still another object of the invention to provide an electric door operator which has a stiffer structure which is necessary for proper meshing between the driving pinion and the driven sector.

[0015] It is further object of the invention to provide an electric door operator which is slimmer than existing pneumatic door operators.

[0016] In addition to the objects and advantages listed above, various other objects and advantages of the latch door operator disclosed herein will become more readily apparent to persons skilled in the relevant art from a reading of the detailed description section of this

document.

Brief Description of the Drawings

[0017]

Figure 1 shows a perspective view of the electric door operator of the invention.

Figure 2 shows a cross-sectional side view of the electric door operator of the invention.

Figures 3-5 show the electric door operator system of the invention mounted on a door frame.

Figures 6-10 show the electric door operator system from several different angles showing the various components involved in the mechanism.

Figure 11 shows a top view of the gear sector.

Figure 12 shows an exploded partial side view of the connecting rod secured to the gear sector as shown in Figure 10.

Figure 13 shows a front view of the electric door operator of the invention.

Figures 14A-14C show the electric door operator of the invention mounted above a door of a vehicle in sequential stages of the door opening operation.

Detailed Description of the Invention

[0018] The following background information is provided to assist the reader to understand the environment in which the invention will typically be used. The terms used herein are not intended to be limited to any particular narrow interpretation unless specifically stated otherwise in this document.

[0019] Referring now to Figures 1-2, 13 and 14A-14C, there is shown the electric door operator, generally indicated as 10, for controlling the opening and closing of a door, 12 pivotally mounted to a door frame 14 of a multi-passenger mass transit vehicle. The inventive door operator comprises a pinion 16 and a means, such as a gear motor, 18 for rotating or driving this pinion 16 in opposite directions through opening and closing cycles of the door 12. A gear sector 20 is also provided which is mounted for rotation in an opposite direction from the pinion 16. The gear sector 20 is engageable with the pinion 16 and capable of being driven by the pinion 16 such that it rotates in one of an opening and closing direction upon rotation of the pinion 16. A shaft member 18 having a first 24 and second 26 end is provided. The first end 24 of the shaft member 22 is secured to the gear sector 20 and the second end 26 of the shaft member 22 is engageable with one of a base plate 28 and/or a wall portion 30 of the vehicle. The base plate 28 may be a separate plate member of which the shaft member 22 is engageable with and which is consequently secured to the wall 20 of the vehicle. Alternatively, the shaft member 22 may be engageable directly with the wall 30 of the vehicle. A push bar 32 is suspended from the gear sector 20 for one of opening and closing

ing the door 12 upon rotation of the gear sector 20 in one of the opening and closing directions.

[0020] The leverage of the mechanism and the ratio between the pinion 16 and gear sector 20 allows the use of maximum torque and maximum current within the gear motor 18 as a signal switching of the driving motor

[0021] In an emergency situation and/or in the case of electrical failure, the pinion 16 is capable of being disengaged from the gear sector 20 to enable manual opening of the door 12. Disengagement of the pinion can be achieved by means of a handle 34, as shown in Figure 13. The Figure shows this handle 34 being capable of moving the pinion in a vertical direction. However, the door operator may be modified so that the handle 34 is capable of moving the pinion in a horizontal direction to achieve disengagement of the pinion 16 from the gear motor 18.

[0022] A support plate 36 is mounted between the gear sector 20 and one of the base plate 28 and the wall portion 30 of the vehicle. Screws/nuts 37 are also provided along the perimeter of the support plate 36 for securing the support plate 36 to the base plate 28 and/or the vehicle wall 30. The support 36 is formed as an integral part, such as from one piece of a sheet metal, such that a flat portion 38 is close to the pinion 16 and another flat portion 40 supports the shaft member 22 such that under the gear sector 20 there is created a space having a predetermined size for the positioning of the push bar 32 therein.

[0023] The shaft member 22 is rigidly secured, as generally indicated by 35 in Figure 2, to the support plate 36. Any well known means can be used for securing the shaft member 22 to the support plate 36 such as welding, brazing, and the like.

[0024] A connecting means, such as a screw 42, is provided which extends through the shaft member 22 to threadedly engage one of the base plate 18 and/or wall portion of the vehicle 20. Consequently, the second end 26 of the shaft member 22 is threadedly engageable as shown at 43 with one of the base plate 28 and/or the wall portion 30 of the vehicle. This threaded engagement by the shaft member 22 enables complete removal of the door operator from the vehicle for maintenance and/or replacement. A nut 64 is provided at the bottom of the base 28, 30 for attachment to the screw 42 extending out there from.

[0025] This particular design wherein the shaft member 22 of the gear sector 20 is rigidly connected to the support plate 36 and is threadedly connected to the base plate 28 and/or vehicle wall 30 allows for bending action from the shaft member 22 to be transferred into two shearing forces within the base plate 28,30 and the support plate 36. This particular design also reinforces the support of the door opening and vice-versa, resulting in a much stiffer system which is capable of carrying high forces along the push bar 32 without high stresses/fatigue and strains in the support plate 36 or the base plate 28,30.

[0026] Figure 12 shows an exploded partial side view of the push bar 32 secured to the gear sector 20 as shown in Figure 10. The push bar 32 is secured to the gear sector 20 by means of a pin 48. Bearings and bushings 49 are also provided as needed. The push bar 32 has a first end 50 which is suspended from the gear sector 20 and a second end 52 which is connected to brackets 54 mounted on the door frame 14, see Figures 14A-14C. A connecting means 56 is secured to a second door 58 for one of opening and closing this second door upon movement of the push bar 32. This connection means 56 can comprise any well known means such as a rod, cable, and the like.

[0027] The push bar 32 is suspended from the gear sector 20 as close as possible in order to minimize bending action within the shaft member 22 supporting the gear sector 20.

[0028] Figure 11 shows a top view of the gear sector 20 wherein a stop member 44 is provided for halting the motion of the gear sector 20. This prevents movement of the push bar 32 over a "dead line". This stop means 44 cooperates with at least one limit switch 60, as shown in Figure 13, for transmitting a signal to the gear motor 18. A second limit switch 62 may also be provided to transmit a signal to the gear motor 18. The limit switches send signals to the gear motor 18 that the opening and/or closing operation of the door 12 is complete and that the direction of the motor should be changed so that the pinion 16 rotates in an opposite direction.

[0029] Figures 3-5 show the operator system 10 of the invention mounted on a door system. As illustrated in Figure 4, in order to make it possible to open the door 12 by pushing its panel, eccentric "e" has to be positive. If not, then the emergency release would be useless.

[0030] Figures 6-10 show the operator system from several different angles showing the various components involved in the mechanism. Figure 7 shows a spring 66, an actuator 68, and a nut handle 70 which cooperate with handle 34. A collar is also shown at 72.

[0031] With respect to the electrical aspects of the inventive operator 10, when the motor is started, the full voltage is switched on. This results in a high current occurring before the door starts moving. A thermal protection is provided to help the control system to distinguish between a high motor current at the start of the stroke of the door and a high motor current at the end of the stroke. During the start time, the spike time is on the range of a couple of milliseconds, at the end of the motion, the time is in the range of hundreds of milliseconds which causes a heating effect which is capable of energizing a bi-metal switch.

[0032] It is noted that the Figures show the door operator in connection with a pair of pivotally mounted swing doors. However, one having ordinary skill in the art would recognize that the door operator of the invention may be used to open a single plug door.

[0033] The invention has been described in such full, clear, concise and exact terms so as to enable any per-

son skilled in the art to which it pertains to make and use the same. It should be understood that variations, modifications, equivalents and substitutions for components of the specifically described embodiments of the invention may be made by those skilled in the art without departing from the spirit and scope of the invention as set forth in the appended claims. Persons who possess such skill will also recognize that the foregoing description is merely illustrative and not intended to limit any of the ensuing claims to any particular narrow interpretation.

Claims

1. An electric door operator (10) for controlling the opening and closing of a door (12) pivotally mounted to a door frame (14) of a multi-passenger mass transit vehicle, said electric door operator comprising:

- (a) a pinion (16)
- (b) a means (18) for rotating said pinion in opposite directions through opening and closing cycles of such door;
- (c) a gear sector (20) mounted for rotation in an opposite direction from said pinion, said gear sector being engageable with said pinion (16) and capable of rotating in one of an opening and closing direction upon rotation of said pinion (16);
- (d) a shaft member (22) having a first and second end, said first end of said shaft member (22) secured to said gear sector (20) and said second end of said shaft member being engageable with one of a base plate and a wall portion of such vehicle; and
- (e) a push bar (32) suspended from said gear sector for one of opening and closing a door upon rotation of said gear sector in one of said opening and closing directions, **characterized in that** said operator further includes a handle (34) for moving said pinion in one of a vertical and horizontal direction for disengagement of said pinion (16) with said gear sector.

2. An electric door operator as recited in claim 1 wherein said second end of said shaft member is threadedly engageable with one of said base plate (28) and such wall portion (30) of such vehicle.

3. An electric door operator as recited in any of the preceding claims further including a support plate (36) mounted between said gear sector and said one of said base plate (28) and such wall portion (30) of such vehicle.

4. An electric door operator as recited in claim 3

wherein said shaft member (22) is rigidly secured to said support plate.

5. An electric door operator as recited in claim 4 including a screw member (37) extending through said shaft member to threadedly engage one of said base plate and such wall portion of such vehicle. 5
6. An electric door operator as recited in claim 3 wherein a space having a predetermined size is provided between said gear sector (20) and said support plate (36). 10
7. An electric door operator as recited in claim 6 wherein said push bar (32) is positioned within said space. 15
8. An electric door operator as recited in any of the preceding claims further including a stop member (44) for limiting the rotation of said gear sector. 20
9. An electric door operator as recited in any of the preceding claims wherein said means for rotating said pinion comprises a gear motor (18). 25
10. An electric door operator as recited in claim 9 further including at least one limit switch (60) for transmitting a signal to said gear motor.
11. An electric door operator as recited in any of the preceding claims wherein said push bar (32) has a first end (50) which is suspended from said gear sector (20) and a second end (52) which is connected to brackets (54) mounted on such door frame (14). 30
12. An electric door operator as recited in claim 11 further including a connecting means (56) secured to a second door for one or opening and closing such second door upon movement of said push bar. 40
13. An electric door operator as recited in claim 12 wherein said connecting means (56) comprises one of a rod and a cable. 45

Patentansprüche

1. Elektrische Türbetätigungsverrichtung (10) zum Steuern des Öffnens und Schließens einer Tür (12), die schwenkbar an einem Türrahmen (14) eines Personenbeförderungsverkehrsmittels angebracht ist, wobei die elektrische Türbetätigungsverrichtung folgendes umfasst: 50
 - (a) ein Ritzel (16);
 - (b) ein Mittel (18) zum Drehen des Ritzels in entgegengesetzte Richtungen während Öff-

nungs- und Schließungszyklen der Tür;
 (c) einen Zahnkreis Sektor (20), der für die Drehung in einer entgegengesetzten Richtung relativ zum Ritzel angebracht ist, wobei der Zahnkreis Sektor in das Ritzel (16) eingreifen kann und sich bei Drehung des Ritzels (16) in eine Öffnungsrichtung oder in eine Schließrichtung drehen kann;
 (d) ein Wellenglied (22) mit einem ersten und einem zweiten Ende, wobei das erste Ende des Wellengliedes (22) an dem Zahnkreis Sektor (20) angebracht ist und das zweite Ende des Wellengliedes mit einer Grundplatte oder einem Wandabschnitt des Fahrzeuges in Eingriff gelangen kann; und
 (e) eine Schubstange (32), die an dem Zahnkreis Sektor angehängt ist und dem Öffnen oder Schließen einer Tür dient, sobald sich der Zahnkreis Sektor in die Öffnungsrichtung bzw. die Schließrichtung dreht,

dadurch gekennzeichnet,

dass die Betätigungsverrichtung des weiteren einen Griff (34) enthält, mit dem das Ritzel in eine vertikale oder eine horizontale Richtung bewegt werden kann, um das Ritzel (16) aus der Eingriffnahme mit dem Zahnkreis Sektor zu lösen.

2. Elektrische Türbetätigungsverrichtung nach Anspruch 1, wobei das zweite Ende des Wellengliedes in Gewindeeingriff mit der Grundplatte (28) oder dem Wandabschnitt (30) des Fahrzeuges gebracht werden kann.
3. Elektrische Türbetätigungsverrichtung nach einem der vorangehenden Ansprüche, die des weiteren eine Stützplatte (36) enthält, die zwischen dem Zahnkreis Sektor und der Grundplatte (28) oder dem Wandabschnitt (30) des Fahrzeuges angebracht ist.
4. Elektrische Türbetätigungsverrichtung nach Anspruch 3, wobei das Wellenglied (22) starr an der Stützplatte befestigt ist.
5. Elektrische Türbetätigungsverrichtung nach Anspruch 4, die ein Schraubenglied (37) enthält, das sich so durch das Wellenglied hindurch erstreckt, dass es die Grundplatte oder den Wandabschnitt des Fahrzeuges in Gewindeeingriff nimmt.
6. Elektrische Türbetätigungsverrichtung nach Anspruch 3, wobei ein Spalt von zuvor festgelegter Größe zwischen dem Zahnkreis Sektor (20) und der Stützplatte (36) angeordnet ist.
7. Elektrische Türbetätigungsverrichtung nach Anspruch 6, wobei die Schubstange (32) innerhalb

des Spalts angeordnet ist.

8. Elektrische Türbetätigungsverrichtung nach einem der vorangehenden Ansprüche, die des weiteren ein Anschlagglied (44) enthält, das dem Begrenzen der Drehbewegung des Zahnkreis-sektors dient. 5
9. Elektrische Türbetätigungsverrichtung nach einem der vorangehenden Ansprüche, wobei das Mittel zum Drehen des Ritzels einen Getriebemotor (18) umfasst. 10
10. Elektrische Türbetätigungsverrichtung nach Anspruch 9, die des weiteren wenigstens einen Begrenzungsschalter (60) enthält, der dem Übermitteln eines Signals an den Getriebemotor dient. 15
11. Elektrische Türbetätigungsverrichtung nach einem der vorangehenden Ansprüche, wobei die Schubstange (32) ein erstes Ende (50), das an dem Zahnkreis-sektor (20) angehängt ist, und ein zweites Ende (52), das an Schellen (54) befestigt ist, die an dem Türrahmen (14) angebracht sind, aufweist. 20
12. Elektrische Türbetätigungsverrichtung nach Anspruch 11, die des weiteren ein Verbindungsmittel (56) enthält, das an einer zweiten Tür befestigt ist, um diese zweite Tür bei Drehung der Schubstange zu öffnen bzw. zu schließen. 25
13. Elektrische Türbetätigungsverrichtung nach Anspruch 12, wobei das Verbindungsmittel (56) eine Stange oder ein Kabel umfasst. 30

Revendications

1. Actionneur électrique (10) de porte, servant à commander l'ouverture et la fermeture d'une porte (12) montée pivotante sur un bâti (14) de porte d'un véhicule destiné à transporter un groupe de plusieurs passagers, ledit actionneur électrique de porte comprenant : 40
 - (a) un pignon (16);
 - (b) un moyen (18) permettant de faire tourner ledit pignon dans des sens opposés lors de cycles d'ouverture et de fermeture de la porte ;
 - (c) un secteur denté (20) monté pour tourner dans un sens opposé à celui dudit pignon, ledit secteur denté pouvant venir en prise d'engagement mutuel avec ledit pignon (16) et étant en mesure de tourner, lors de la rotation dudit pignon (16), dans l'un des sens d'ouverture et de fermeture ; 50
 - (d) un élément axe (22) possédant une première et une deuxième extrémité, ladite première extrémité dudit élément axe (22) fixée audit 55

secteur denté (20) et ladite deuxième extrémité dudit élément axe pouvant venir en prise avec l'un des éléments que constituent une plaque de base et une partie paroi du véhicule ; et (e) une barre de poussée (32) suspendue audit secteur denté en vue d'effectuer l'une des actions que constituent l'ouverture et la fermeture d'une porte lors de la rotation dudit secteur denté dans l'un desdits sens d'ouverture et de fermeture,

caractérisé en ce que ledit actionneur comporte en outre une poignée (34) servant à déplacer ledit pignon dans la direction verticale ou dans la direction horizontale afin de désengager ledit pignon (16) d'avec ledit secteur denté.

2. Actionneur électrique de porte selon la revendication 1, où ladite deuxième extrémité dudit élément axe peut venir en prise par filetage avec l'un des éléments que constituent ladite plaque de base (28), et ladite partie paroi (30) du véhicule.
3. Actionneur électrique de porte selon l'une quelconque des revendications précédentes, comportant en outre une plaque de support (36) montée entre ledit secteur denté et l'élément susdit qui est choisi entre ladite plaque de base (28) et ladite partie paroi (30) du véhicule.
4. Actionneur électrique de porte selon la revendication 3, où ledit élément axe (22) est rigidement fixé à ladite plaque de support.
5. Actionneur électrique de porte selon la revendication 4, comportant un élément vis (37) s'étendant dans ledit élément axe afin de venir en prise, par filetage, avec l'un desdits éléments que constituent ladite plaque de base et ladite partie paroi du véhicule. 35
6. Actionneur électrique de porte selon la revendication 3, où un espace de taille prédéterminé est prévu entre ledit secteur denté (20) et ladite plaque de support (36). 45
7. Actionneur électrique de porte selon la revendication 6, où ladite barre de poussée (32) est positionnée à l'intérieur dudit espace.
8. Actionneur électrique de porte selon l'une quelconque des revendications précédentes comportant en outre un élément d'arrêt (44) servant à limiter la rotation dudit secteur denté.
9. Actionneur électrique de porte selon l'une quelconque des revendications précédentes, où ledit moyen servant à faire tourner ledit pignon com-

prend un moteur à engrenage (18).

10. Actionneur électrique de porte selon la revendication 9, comportant en outre au moins un commutateur à contact de fin de course (60) servant à transmettre un signal audit moteur à engrenage. 5
11. Actionneur électrique de porte selon l'une quelconque des revendications précédentes, où ladite barre de poussée (32) possède une première extrémité (50) qui est suspendue audit secteur denté (20) et une deuxième extrémité (52) qui est reliée à des pattes d'attache (54) montées sur le bâti de porte (14). 10 15
12. Actionneur électrique de porte selon la revendication 11, comportant en outre un moyen de liaison (56) fixé à une deuxième porte et servant à effectuer une des actions d'ouverture et de fermeture de cette deuxième porte lors du déplacement de ladite barre de poussée. 20
13. Actionneur électrique de porte selon la revendication 12, où ledit moyen de liaison (56) comprend une tige ou un câble. 25

30

35

40

45

50

55

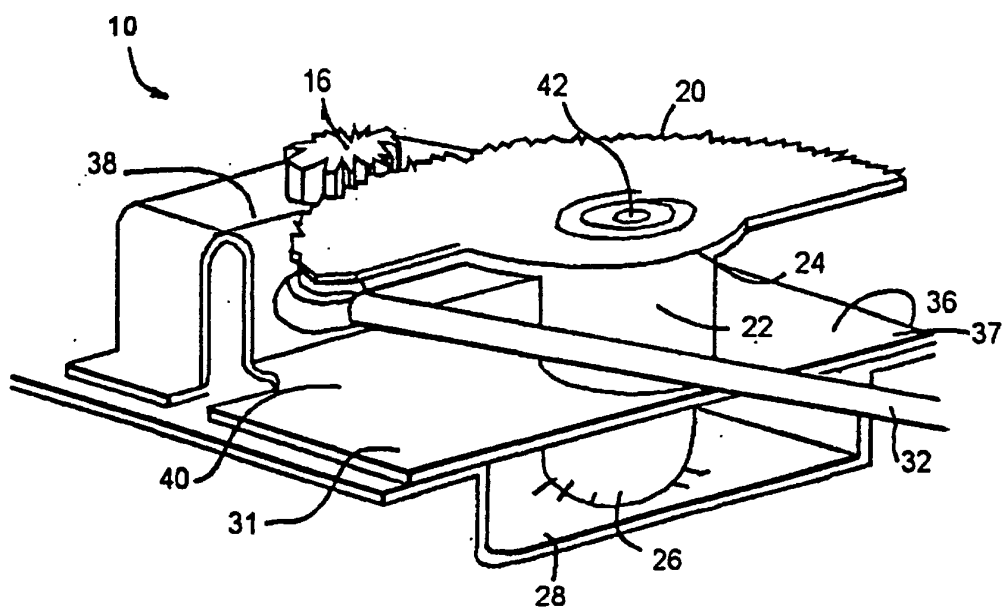


Fig. 1

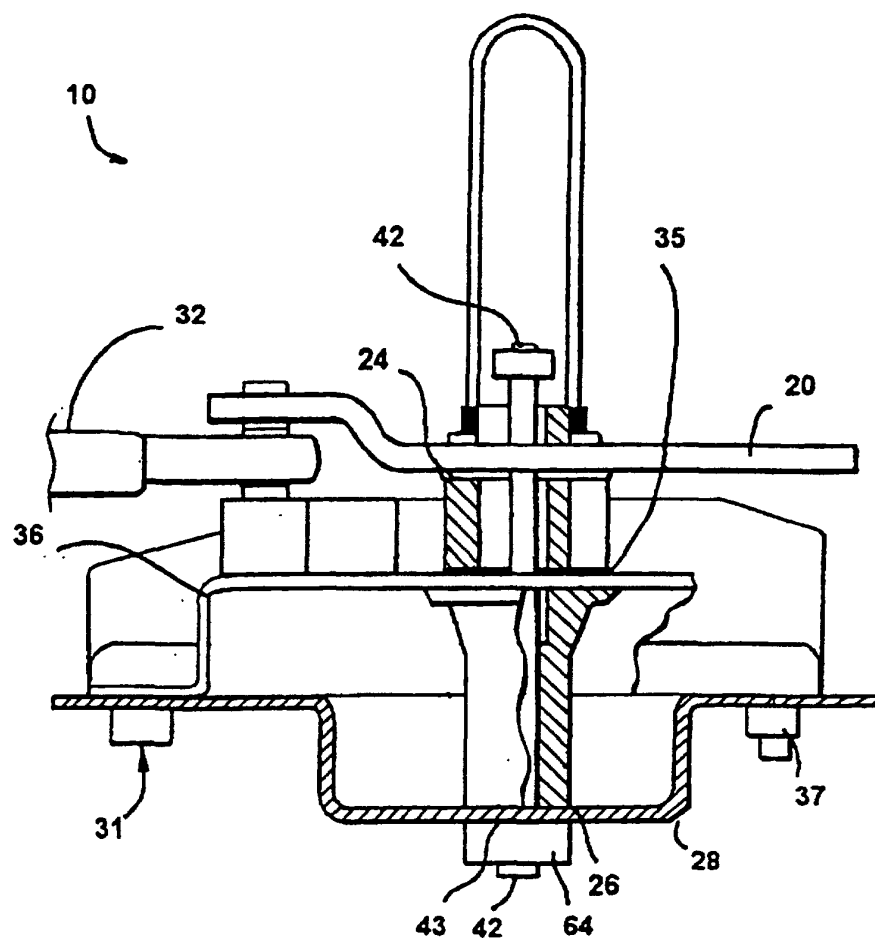


Fig. 2

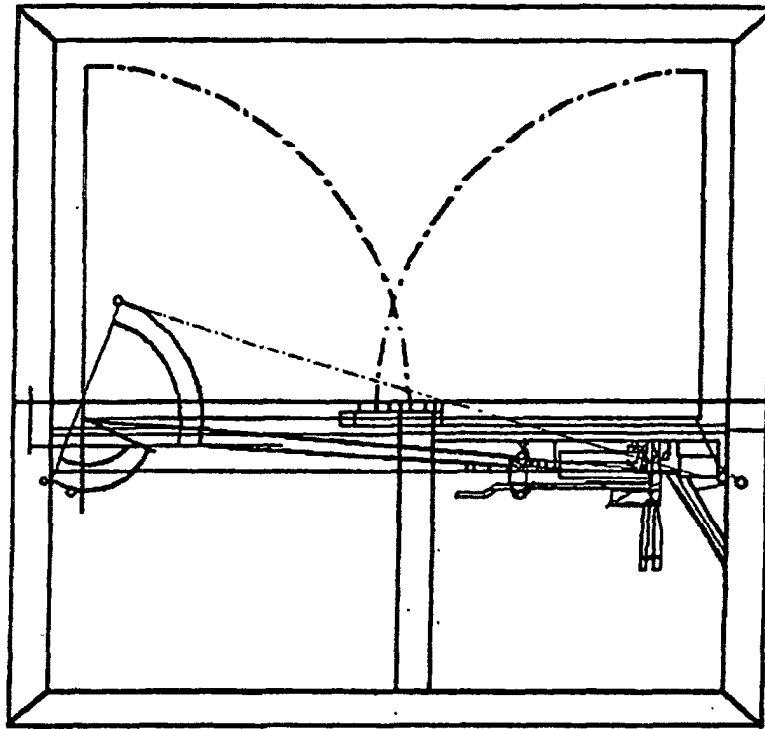


Fig. 3

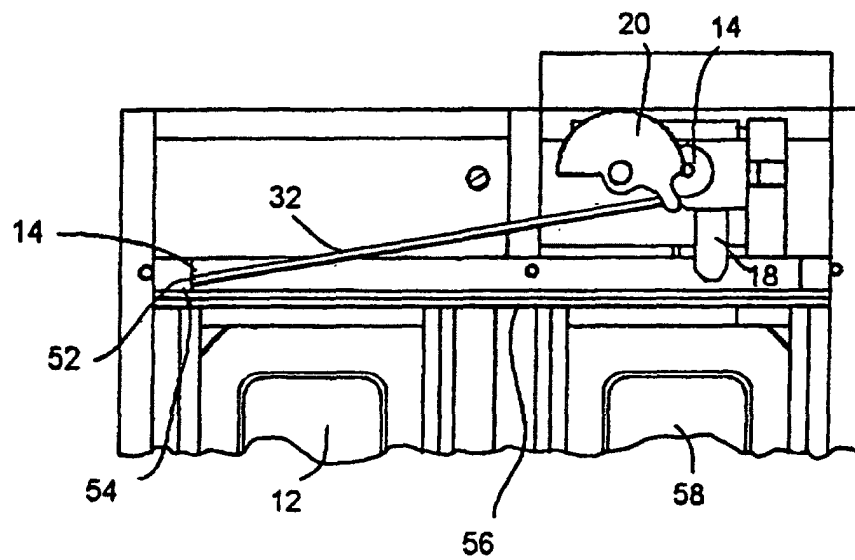


Fig. 4

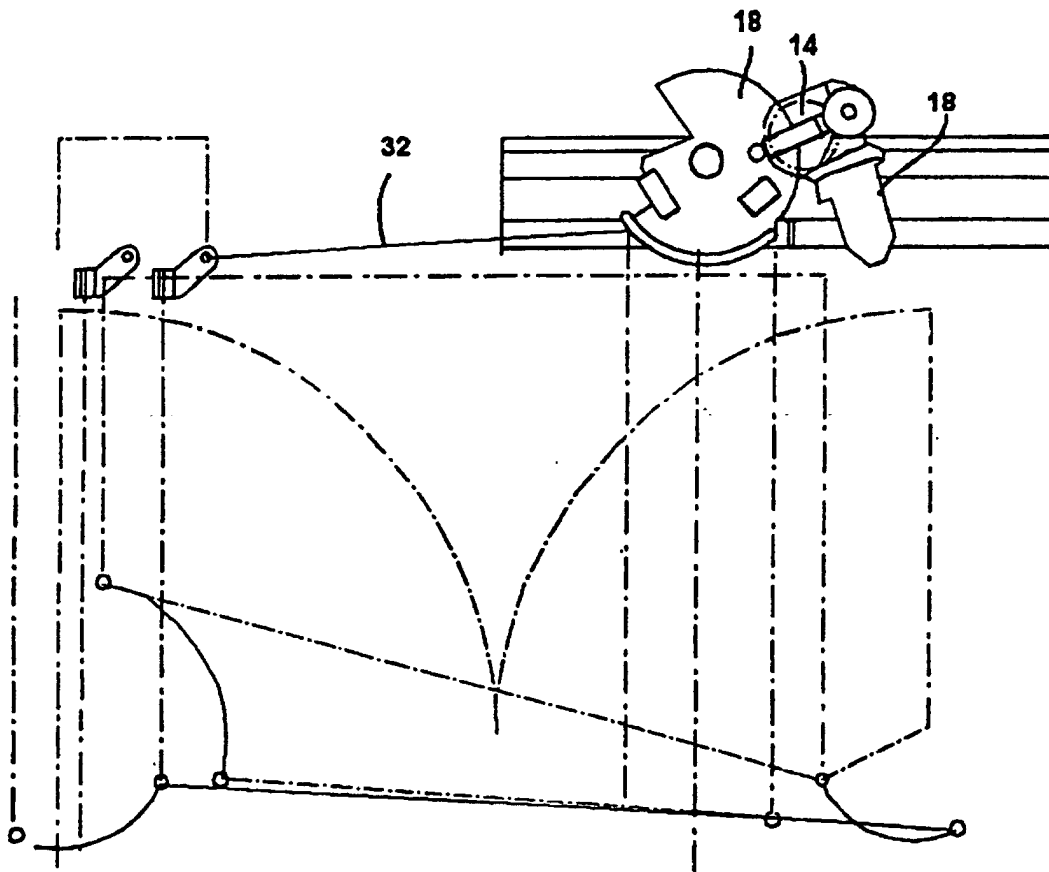


Fig. 5

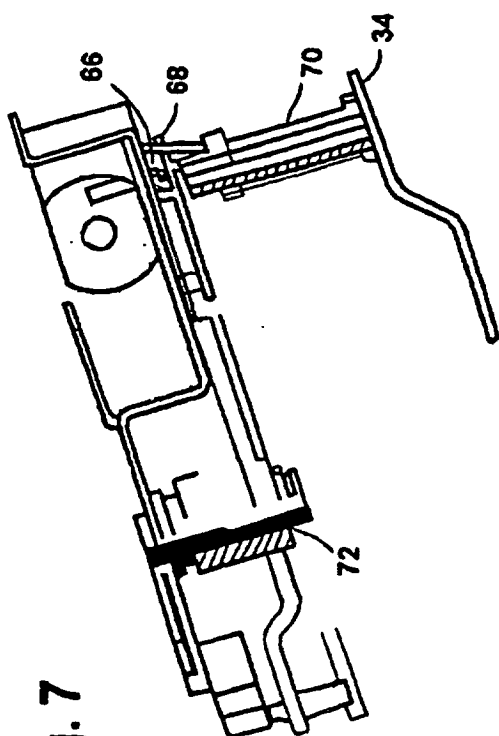


Fig. 7

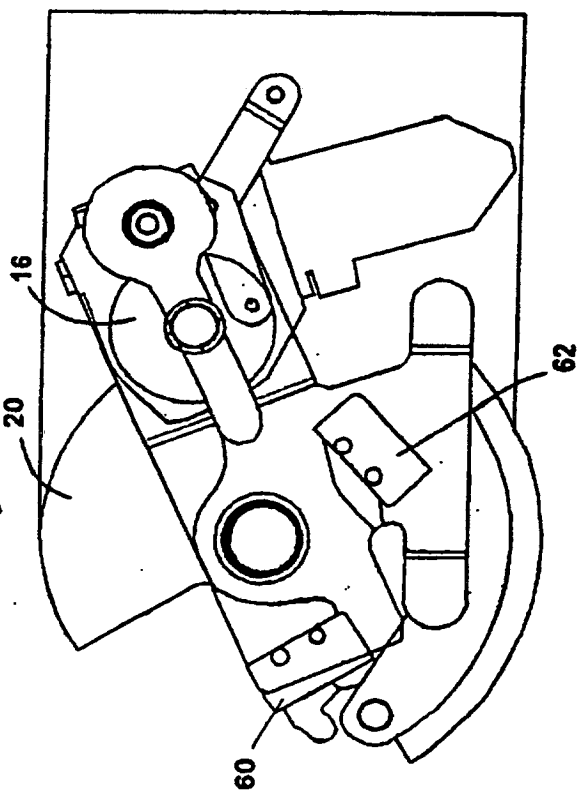


Fig. 6

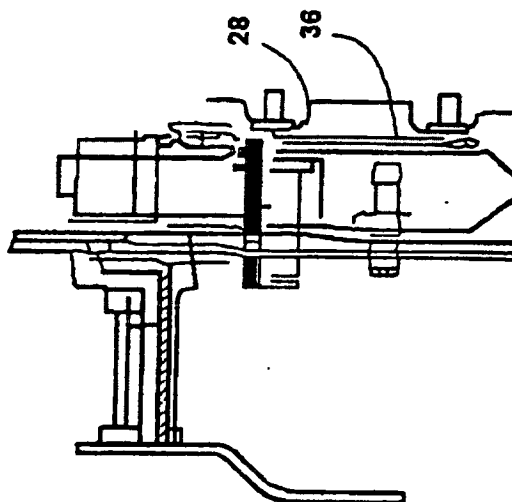


Fig. 8

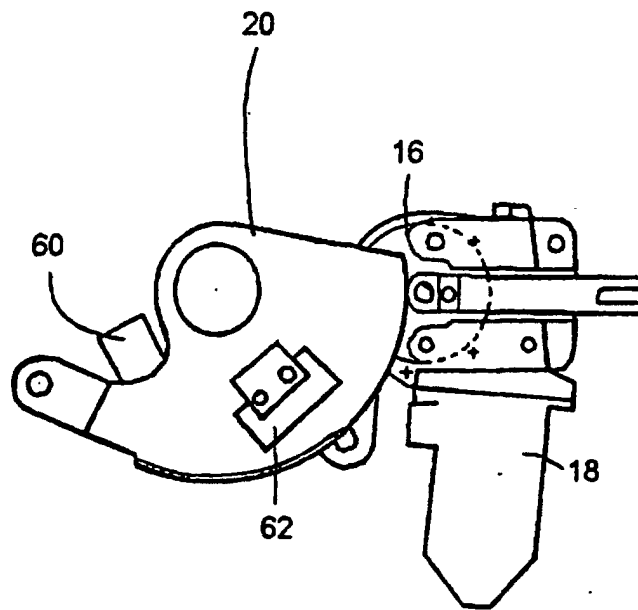


Fig. 9

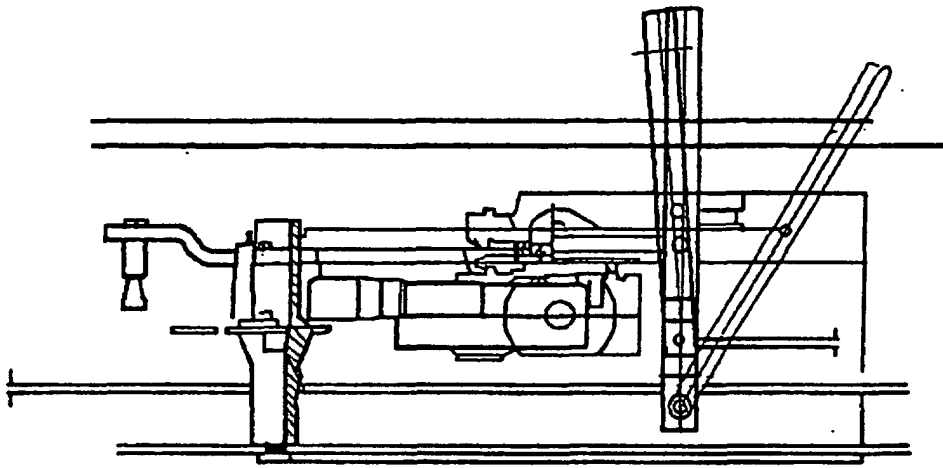


Fig. 10

Fig. 11

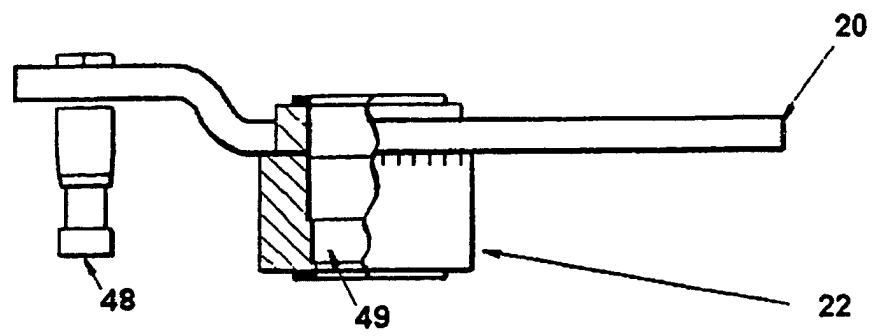
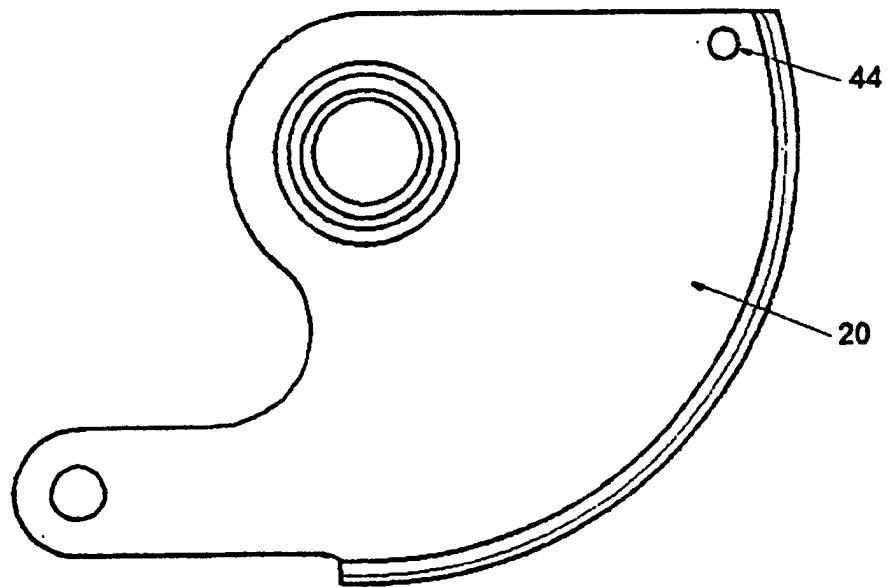


Fig. 12

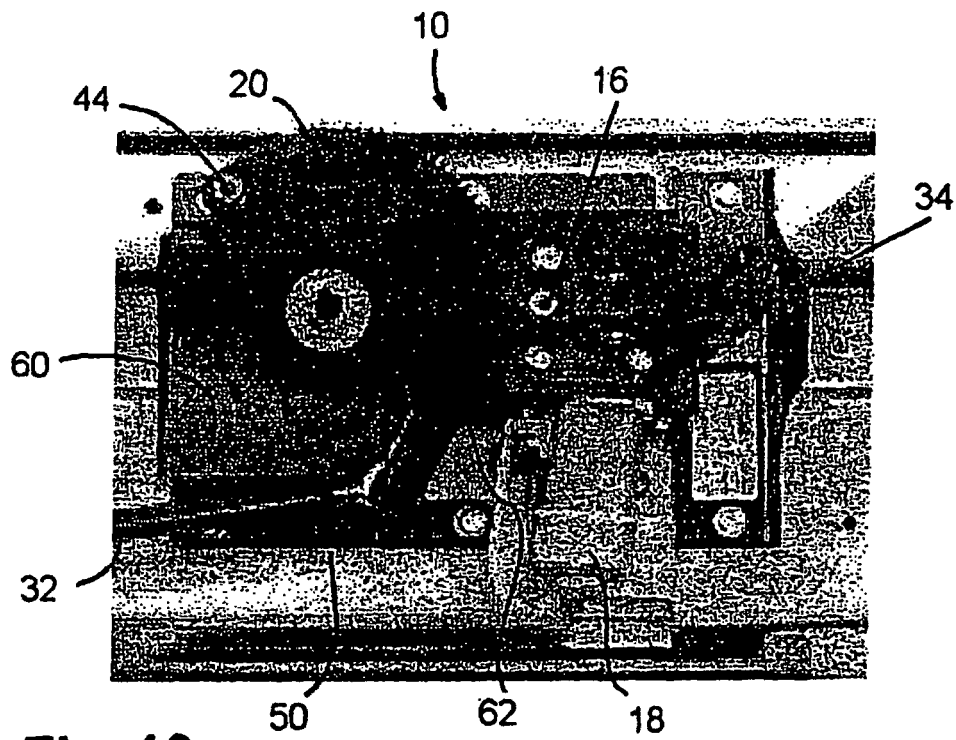


Fig. 13

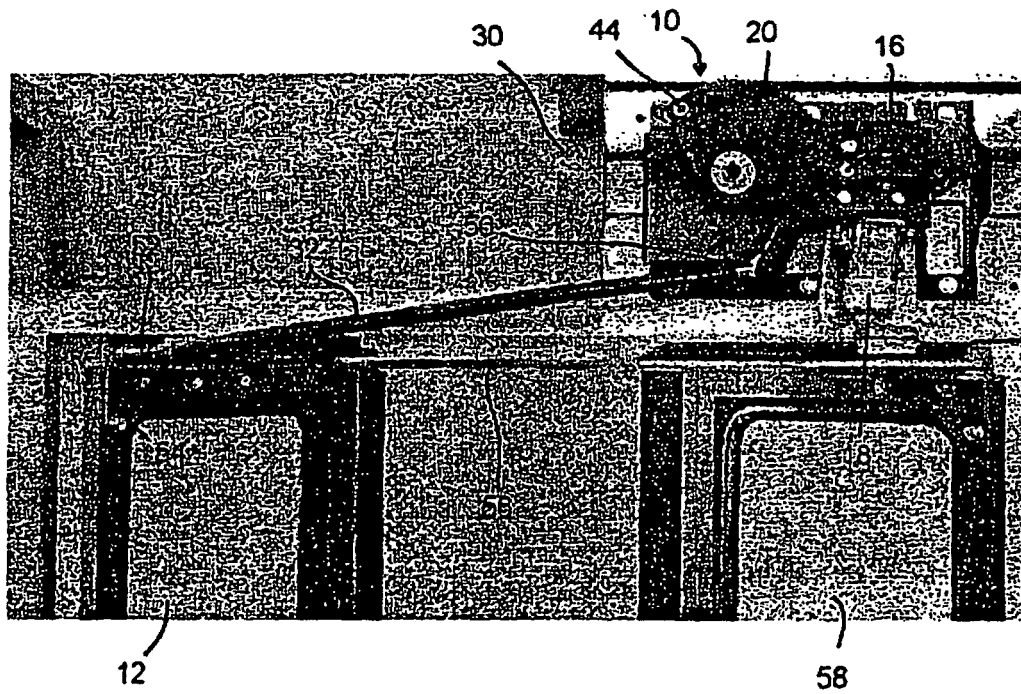


Fig. 14A

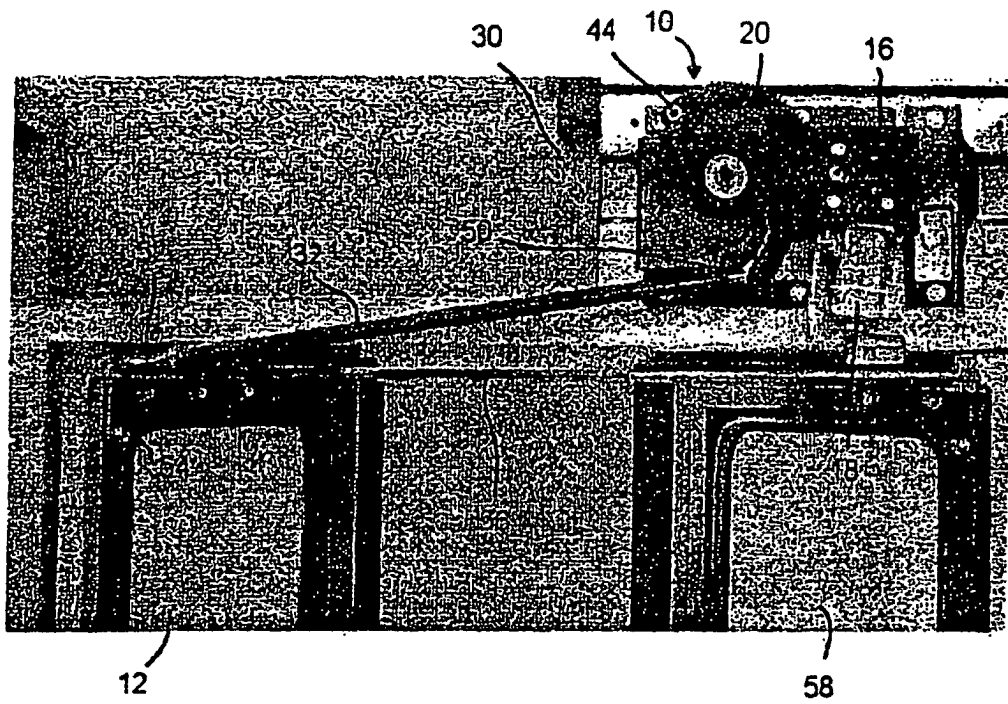


Fig. 14B

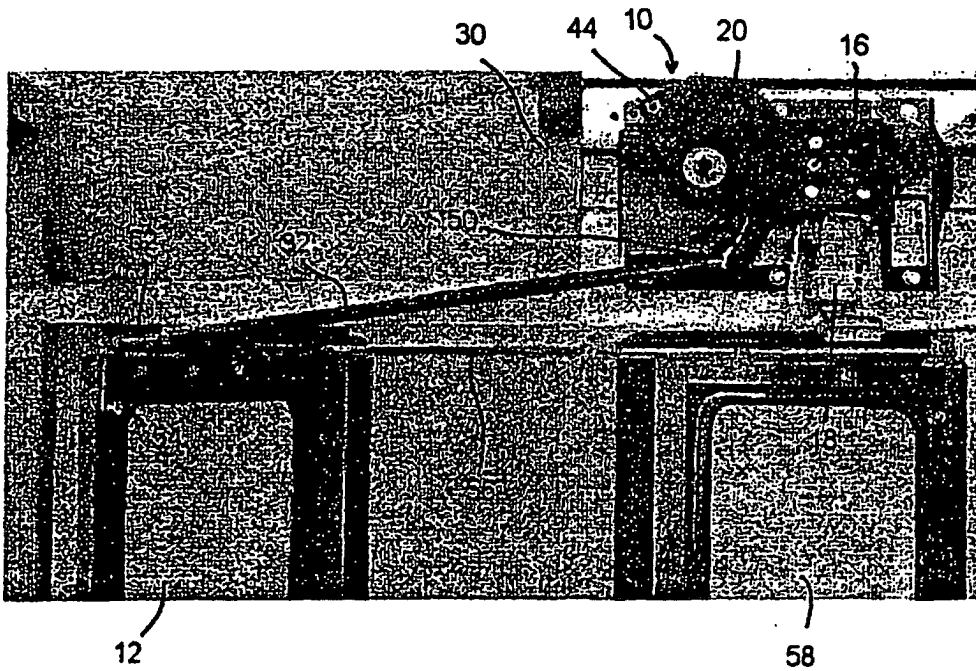


Fig. 14C