



(11) **EP 1 277 987 B9**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

(15) Correction information:
Corrected version no 1 (W1 B1)
Corrections, see
Drawings

(51) Int Cl.:
F16H 55/30 (2006.01) **F16G 13/04** (2006.01)

(48) Corrigendum issued on:
03.12.2008 Bulletin 2008/49

(45) Date of publication and mention
of the grant of the patent:
14.05.2008 Bulletin 2008/20

(21) Application number: **02254886.1**

(22) Date of filing: **11.07.2002**

(54) **Alternating guide power transmission chain**

Getriebekette mit alternierender Anordnung von Führungsgliedern

Chaîne pour transmission de puissance avec plaquettes de guidages alternées

(84) Designated Contracting States:
DE FR IT

• **Wigsten, Mark MacDonald**
Lansing, NY 14882 (US)

(30) Priority: **17.07.2001 US 907021**

(74) Representative: **Lerwill, John et al**
A.A. Thornton & Co.
235 High Holborn
London, WC1V 7LE (GB)

(43) Date of publication of application:
22.01.2003 Bulletin 2003/04

(73) Proprietor: **BorgWarner, Inc.**
Auburn Hills, MI 48326-2872 (US)

(56) References cited:
DE-A- 2 504 050 **DE-A- 19 721 944**
US-A- 2 223 314 **US-A- 5 397 280**

(72) Inventors:
• **Markley, George L.**
Montour Falls, NY 14865 (US)

EP 1 277 987 B9

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

[0001] A power transmission chain transmits power from a driving sprocket to one or more driven sprockets by forming an endless loop that wraps and engages the teeth of the sprockets. Rotation of the driving sprocket moves the chain thereby transmitting power through the chain to rotate the driven sprockets engaged by the chain. Power transmission chains are widely used in the automotive industry. In an engine timing application, a chain transmits power from at least one driving sprocket positioned on a crankshaft to at least one driven sprocket positioned on a camshaft. Other automotive applications of power transmission chains include transmitting power from a torque converter to a transmission and transmitting power in the transfer case of a four wheel drive vehicle. Power transmission chains are also widely used in industrial applications.

[0002] One type of power transmission chain is known as a "silent chain." A typical silent chain comprises an endless loop formed by a series of links that are adjacent to each other along the chain and that are rotatably joined to adjacent links. Each link extends a distance in a chain direction between locations at which it is rotatably joined to adjacent links and conventionally forms two teeth that are adjacent to each other along the chain direction of the link. The teeth of a link are formed to engage the teeth of a sprocket and extend in a front direction that is perpendicular to the chain direction. Links of a silent chain also conventionally form two apertures, one near each end of the link along the chain direction. The apertures extend through the link in a lateral direction that is perpendicular to the chain direction and perpendicular to the front direction of the link. The links of a silent chain are typically formed by a row of substantially identical flat links, each forming teeth and apertures as described, that are positioned laterally adjacent to each other to collectively form a link of the chain.

[0003] A silent chain is formed by positioning rows of flat links adjacent to each other and partially overlapping along the chain direction so that apertures at adjacent ends of links are aligned. Pivots, such as pins, extend through the aligned apertures to rotatably join adjacent links. Rows of links are joined in this manner to form an endless loop in which the front direction of the links, the direction that the teeth extend from the chain links, is directed toward the region within the endless loop. Links having teeth extending into the region within the loop are referred to as inverted tooth links. The surface of the chain, along which the teeth extend, is referred to as the front side of the chain. The surface of the chain opposite the front side, facing outwardly from the region within the endless loop, is the back side of the chain.

[0004] The inverted tooth links (sometimes referred to as driving links) transfer power between the chain and a sprocket along the chain direction. Each tooth of a link

defines an inside flank that faces generally along the chain direction toward the adjacent tooth of the link, and an outside flank that faces away from the inside flank of the tooth. The inside flanks of the teeth of an inverted tooth link meet at a crotch between the teeth. The teeth of a link may contact sprocket teeth along their inside flanks, along their outside flanks, or along both flanks. The contact between a link tooth flank and a sprocket tooth may transfer power or may be an incidental contact. Teeth of an inverted tooth link conventionally contact a sprocket on a flank of a sprocket tooth or at a root between adjacent sprocket teeth.

[0005] Inverted tooth links are positioned on a sprocket by contact with three sprocket teeth, one at each end of the link along the chain direction, and one between the teeth of the link. A row of links is positioned on a sprocket by contact of the teeth of the links comprising the row with sprocket teeth, by contact by outside flanks of teeth of the links of the adjacent rows, or by both. Contact with the sprocket at three locations along the chain direction limits motion of the row of links along the teeth of the sprocket.

[0006] Silent chains often include guide links. Guide links are conventionally flat plates that are positioned on the lateral outside edges of alternate rows of inverted tooth links. The guide links do not form teeth and are generally adjacent to the row of inverted tooth links. The guide links extend adjacent to the region between teeth of the inverted tooth links. The guide links on opposite lateral sides of a row are separated by approximately the lateral width of the sprocket teeth that extend between the teeth of the row of links. The guide links thereby act to position the chain laterally on a sprocket (i.e., maintain the chain on the center of the sprocket) but do not engage a sprocket between teeth of the sprocket. Guide links also increase the strength and stiffness of the chain.

[0007] Conventionally, the guide links on opposite lateral sides of a silent chain are aligned. Chains having guide links that are laterally aligned are generally stiffer and stronger at locations along the chain where guide links are located than at locations that do not have guide links. The chain must be designed to assure that the less strong locations without guide links are sufficiently strong. The cross-sections with guide links are stronger than the sections not having guide links and are therefore stronger than necessary. The cross sections with guide links have more material than is necessary, making the chain heavier than necessary.

[0008] A conventional silent chain drive is comprised of an endless loop silent chain that wraps at least two sprockets. Each sprocket is mounted to a shaft. Rotation of the shaft on which the driving sprocket is mounted transmits power from the driving sprocket through the chain to rotate a driven sprocket and the shaft to which the driven sprocket is mounted. Figure 1 illustrates such a basic arrangement. A chain 3 forms an endless loop and partially wraps driving sprocket 1 and driven sprocket 2 that are within the loop. A front side 4 of the chain 3 is

adjacent to the region within the endless loop formed by the chain 3. Teeth extend inwardly along the front side 4 to engage teeth of both the driving sprocket 1 and the driven sprocket 2. The back side 5 of the chain 3 is the side of the chain opposite the front side 4 and faces outwardly from the chain loop. Both the driving sprocket 1 and the driven sprocket 2 rotate in the same direction, shown counter-clockwise by Fig. 1.

[0009] Silent chains may also drive sprockets that engage the back side of the chain. Examples of devices that are driven by the back side of a silent chain (back-driven) include water pumps, injector pumps, and countershafts. Fig. 1 also shows a sprocket 6 that is back-driven by the chain 3. The driven sprocket 2 engages the teeth on the front side 4 of the chain 3 and rotates in the same direction as the driving sprocket 1, counter-clockwise in Fig. 1. Teeth of the back-driven sprocket 6 engage the back side 5 of the chain 3. The back-driven sprocket 6 rotates in the opposite direction of the driven sprocket 2.

[0010] Often, the back side of the links of a chain that engages and drives a sprocket is configured to engage a sprocket as a single tooth between two adjacent sprocket teeth. The teeth of sprockets engaged by the back side of such links are spaced apart by the length of the chain link. Consequently, these sprockets engage a chain link in fewer and farther separated locations than do front driven sprockets. This can result in a lower capacity for power transmission by back-driven sprockets. The lower power transmission capacity is acceptable in some applications because back-driven sprockets are frequently located in the slack region of the chain and/or are not required to transmit forces that are as large as can be transmitted by the front side of the silent chain.

[0011] Silent chain drives create noise at a variety of sources. One significant source of noise is the impact of sprocket teeth on chain teeth at the onset of engagement of the sprocket by the chain teeth. Among the factors that affect the level of the noise created by this impact are the velocity of impact between the chain and the sprocket and the mass of chain links contacting the sprocket. Noise created by engaging impact in silent chain drives is generally periodic with a frequency generally corresponding to the frequency of the chain teeth engaging sprocket teeth. This frequency is related to the number of teeth on the sprocket and the speed of the sprocket. The impacts can produce sound having objectionable pure sonic tones.

[0012] Chordal motion of a chain is another source of noise in power transmission chain drives, including silent chain drives, that is associated with engagement of a chain and sprocket. Chordal motion occurs as a chain link initially engages and begins to move with a sprocket. The sprocket can cause a movement of the span of free chain that is approaching the sprocket along the front to back direction of the chain. This vibratory movement, known as chordal fall, can also produce an objectionable pure sonic tone at the frequency of the chain mesh frequency or a multiple of it.

[0013] Figure 2 illustrates chordal fall. As described above, chains are comprised of a series of pivotally joined rigid links. Consequently, chains are not continuously flexible and do not wrap a sprocket as a circular arc. Rather, a chain wraps around a sprocket in a series of line segments, or chords. As a silent chain engages a sprocket, the individual link teeth contact the surfaces of a sprocket tooth and extend between adjacent teeth of the sprocket. This contact forces the links to rotate around pivot joints with respect to adjacent links. The chain thus bends at the pivot joints between adjacent links as it engages and wraps around a sprocket.

[0014] Figure 2 shows a chord C, which joins the pivot points A and B of a chain link at the position at which the point A engages a sprocket from a free chain run along a direction F. The chord C' joins the pivot points at positions A' and B' where the point A has moved with the sprocket half way to the point B location. As shown, by moving from the location A to the location A' the point A has moved a distance R in the direction T that is perpendicular to the direction F along the free span of the chain. The distance R is the chordal fall of the chain.

[0015] Because a chain repeatedly engages teeth, as described above, the change in position of the chain between repeated engagement of the sprocket causes chordal fall. The chordal fall is proportional to the length of C between pivots and inversely proportional to the radius of the circular path traveled by the points A and B around the center of a sprocket. The longer that the distance between points at which the chain pivots to engage the sprocket, the chain pitch, the greater chordal fall will be. The smaller the radius of the circular path traveled by the points A and B around the center of a sprocket, the greater the chordal fall will be. For example, a chain with a long pitch engaging a sprocket with relatively small diameter will experience a pronounced amount of chordal fall. In contrast, for an ideal toothless belt engaging a smooth pulley continuously, the length of chord C will be infinitely small, and consequently the belt will experience no chordal fall.

[0016] Back-drive chain and sprocket engagement can exacerbate the problem of chordal fall by permitting greater uncontrolled chordal fall movement of a chain on a sprocket than occurs for front drive engagement. A tooth of a front-driven sprocket extends between teeth of a link on the front side of the chain, and two adjacent sprocket teeth engage the link at its ends along the chain direction, one adjacent to each tooth outer flank of the inverted tooth link. A tooth of a back-driven sprocket can only engage the back side of the chain between links along the chain direction. Because the back driven sprocket engages the chain at fewer and more widely separated locations than the front driven sprocket, the chordal fall motion increases due to inability of the chain and sprocket contact to control the chordal fall motion.

[0017] One method for decreasing chordal fall motion at back-driven sprockets is to use chains formed by interleaved flat links, that is a flat link is laterally adjacent

to ends of two links that are aligned with and adjacent to each other along the chain direction. Sprocket teeth can extend into the back side of this chain at a distance that is only half the length of the link by alternately extending between links of laterally adjacent rows of teeth. The sprocket teeth must be in a series extending around the periphery of the sprocket and the teeth of adjacent series must be offset with respect to each other along the periphery of the sprocket. Figure 3 shows a back drive sprocket with offset series of teeth, i.e. the teeth are not laterally aligned. In this arrangement, sprocket teeth only extend into the back side of the chain between links. However, the distance along the chain direction at which the chain successively engages the back drive sprocket is about half the length of a chain link. Consequently, the back-driven sprocket engages chain at three locations along the chain direction for each row of links.

[0018] The three offset series of teeth on the sprocket, as shown in Fig. 3, however, increase the expense of manufacturing the sprocket. When back-driven sprockets are not required to transmit high loads, moreover, the additional expense of the offset series of sprocket teeth is not required to assure adequate power transmission. Therefore, it is desirable to provide a more cost-effective way of limiting chordal fall motion in low load applications.

[0019] Thus, a need remains for a power transmission chain having a more uniform stiffness along its length than has been known. Further, a need also exists for a power transmission chain that engages a sprocket at both the front and back sides while maintaining control of chordal fall motion without requiring expensive and difficult to manufacture sprockets to engage the backside of the chain.

BRIEF SUMMARY OF THE INVENTION

[0020] In accordance with the present invention, disadvantages of chains having laterally aligned guide links and disadvantages of chains engaging sprockets at both the front and back sides of the chain have been overcome. Provided in accordance with the invention is a power transmission chain having a front side for driving a front side drive sprocket and a backside for driving a backside drive sprocket; the chain comprising: a first series of links comprising a plurality rows of links positioned adjacent to each other and separated along a chain direction, the rows of the first series of links including: a guide link and a drive link, the guide link separated from the drive link in a first lateral direction that is perpendicular to the chain direction, and the guide link and the drive link being substantially the same length along the chain direction; a second series of links comprising a plurality rows of links positioned adjacent to each other and separated along a chain direction, the rows of the second series of links including a drive link; the drive links of the first and second series comprising two front side chain teeth extending from the drive link along the front side of the chain in a direction that is perpendicular to the chain

direction and also perpendicular to the first and second lateral directions, the two front side chain teeth being adjacent to each other along the chain direction, and the two front side chain teeth defining a region between the two front side chain teeth to accept a front side drive sprocket tooth, the guide links of the rows of the first series extending adjacent to the region between the two front side chain teeth of the drive links, the rows of the first series of links being separated along the chain direction by a distance that is less than a length along the chain direction of the links of the second series, the rows of the second series of links being separated along the chain direction by a distance that is less than a length along the chain direction of the links of the first series; the first series of links and the second series of links being interleaved along the chain direction so that a row of links of the second series is positioned between and extending adjacent to links of adjacent rows of the first series and a row of links of the first series is positioned between and extending adjacent to links of adjacent rows of the second series, the drive link of each interleaved row of the second series extending between the drive link and guide link of each row of the first series adjacent to the drive link of the row of the second series; each row of links of the first series being pivotally connected to each row of links of the second series interleaved with the row of links of the first series at locations near the ends of the links of the first series along the chain direction where the adjacent rows of the first series of links and the second series of links are interleaved; and each row of links of the second series being pivotally connected to each row of links of the first series interleaved with the row of the second series at locations near the ends of the links of the second series along the chain direction where the adjacent rows of the first series of links and second series of links are interleaved;

characterized in that:-

the rows of the second series of links each include a guide link separated from the drive link in a second lateral direction that is perpendicular to the chain direction and opposite the first lateral direction, the guide link and the drive link being substantially the same length along the chain direction; the drive link of each interleaved row of the first series extends between the drive link and guide link of each row of the second series adjacent to the drive link of the row of the first series; the guide links of the rows of the second series extending adjacent to the region between the two front side chain teeth of the drive links; separations along the chain direction between ends of drive links of adjacent rows of the first series of links are adjacent to the drive links of the second series of links and separations along the chain direction between ends of drive links of adjacent rows of the second series of links are adjacent to the drive links of the first series of links and the guide links of alternate rows along the chain direction are posi-

tioned on alternate lateral sides of the power transmission chain; and the drive links of the first and second series of links define a backside surface opposite the two front side chain teeth, the backside surface including two back side drive flanks facing at least in part along the chain direction, one backside drive flank being disposed at a first end of the drive link along the chain direction and another backside drive flank being disposed at a second end of the drive link opposite the first end along the chain direction.

[0021] With guide links that are offset from each other along the chain it is possible to create a more uniform stiffness along the chain than conventional chains having guide links that are laterally adjacent to each other.

[0022] The present invention also provides a multi-sprocket power transmission system having power transmission chain, the system comprising a backside drive sprocket having sprocket teeth extending radially outwardly from an outer surface of the backside drive sprocket, the sprocket teeth being arranged in a first series and a second series of sprocket teeth disposed around a circumference of the backside drive sprocket, with the first series of sprocket teeth and the second series of sprocket teeth being generally perpendicularly offset from each other; a power transmission chain having a first series of drive links and a second series of drive links, the first and second series of drive links are laterally adjacently interleaved and pivotally connected, each drive link of each series of drive links is positioned adjacent to two drive links of a laterally adjacent series of drive links, one drive link being disposed at each opposite end of the respective drive link along a chain direction thereof; the drive links define a front side of the power transmission chain and a backside of the power transmission chain, the front side of a drive link is located on a front side of the chain and comprises two front side chain teeth for meshing with a front side drive sprocket, the backside of a drive link is located on a backside of the chain and comprises backside flanks at opposite ends of the backside of the drive link along the chain direction, the backside of the drive link being configured to cooperate with a sprocket tooth of a series of sprocket teeth of the backside drive sprocket, characterized in that

the chain has a guide link laterally adjacent to and separated from each of the drive links, so that an interleaved and drive link is disposed between and adjacent to the guide link and drive link at each opposite end of the drive link along the chain direction; and each sprocket tooth of each series of sprocket teeth is separated from adjacent sprocket teeth of the same series to accept a drive link of the power transmission chain between adjacent sprocket teeth, the power transmission chain engaging the backside sprocket positioning the drive links of the first series of drive links between adjacent teeth of the first series of sprocket teeth and engaging surfaces of

adjacent teeth of the sprocket at the backside flanks at the opposite ends of the drive link, and positioning drive links of the second series of drive links between adjacent teeth the second series of sprocket teeth and engaging surfaces of adjacent teeth at the backside flanks at the opposite ends of the drive link.

[0023] In such a system having offset guide links provides control over chordal fall in such back driven applications.

[0024] A chain embodying to the present invention has a first series of links extending along the chain and a second series of links extending along the chain. The series of links form an endless loop. The direction along the link is the chain direction. The direction toward the region within the loop, is the front direction. The direction opposite the front direction, away from the region within the endless loop is the back direction. The direction perpendicular to the chain direction and perpendicular to the front and back directions is the lateral direction of the chain.

[0025] The first and second series of links are offset from each other along the chain direction so that a link of one series extends from one link of the other series to the next of the other series. Each series of links comprises rows of links that are positioned along the chain direction to form the series of links. Each row of links includes a guide link and one or more drive links. The guide link of each row is laterally separated from the drive links of the row by a distance that permits a drive link of the other series to be interleaved between the guide link and the drive links. The guide links of the first series are offset in a first lateral direction from the drive links of the first series. The guide links of the second series of links is offset in a second lateral direction from the drive links of the second series that is opposite the first lateral direction.

[0026] The rows of links of the first series are offset along the chain direction from the rows of links of the second series. A chain according to the present invention is formed by the rows of links of the first and second series being interleaved along the length of the chain. Drive links of each row of links of the first series are interleaved between guide links and drive links of two adjacent rows of links of the second series. Drive links of each row of links of the second series are interleaved between guide links and drive links of two adjacent rows of links of the first series. The interleaved rows are pivotally joined to each other.

[0027] According to the invention, a sprocket having teeth that extend radially outwardly at the periphery of the sprocket will support the backside of a chain according to the present invention at a desired radial location along the sprocket teeth. The sprocket teeth are arranged in series around the periphery of the sprocket, with teeth of adjacent series offset along the periphery. The sprocket teeth of each series are separated from adjacent teeth by a distance that is approximately the length of the drive links of the chain. The sprocket engages a chain accord-

ing to the present invention by positioning adjacent teeth of one series between adjacent drive links of one series of chain links, and positioning adjacent teeth of the other series of sprocket teeth between adjacent teeth of the other series of chain links. The sprocket teeth engage the drive links for driving contact at link surfaces at ends of the link along the chain direction. As is evident from the description of a power transmission chain according to the invention, the sprocket teeth of one series are offset along the periphery of the sprocket with respect to the sprocket teeth of the other series so that one series of sprocket teeth engage one series of chain links, and the other series of sprocket teeth engage the other series of chain links.

[0028] A preferred embodiment of the invention includes a sprocket having a first series of teeth and a second series of teeth. The teeth in each row are separated from adjacent teeth of the series a distance that is approximately the length of the drive links of a chain. The series of sprocket teeth are offset from each other in the lateral direction of the chain and along the periphery of the sprocket.

[0029] The drive links and guide links may have apertures near opposed ends in the chain direction that are configured to accept a pin so that the drive links and guide links can articulate about the pin.

[0030] Embodiments of the present invention provide drive links having two inverted teeth at the front side of the link and positioned adjacent to each other along the chain direction. The teeth are configured to be accepted by a conventional front drive sprocket. The back side of the drive link comprises flanks at opposed ends of the link along the chain direction that are configured so that the back side of the drive link is accepted between adjacent sprocket teeth of a back drive sprocket.

[0031] The objects and advantages of the present invention, as well as details of preferred embodiments thereof, will be more fully understood from the drawings and the following description.

BRIEF DESCRIPTION OF THE DRAWINGS

[0032]

Figure 1 is a side view of a power transmission chain engaging sprockets for front-drive and engaging a sprocket for back-drive.

Figure 2 is a side view illustration of chordal fall of a power transmission chain engaging a sprocket.

Figure 3 is an oblique view of a sprocket having three series of teeth staggered from adjacent series along the periphery of the sprocket.

Figure 4 is a side view of a section of a silent chain and a sprocket according to the present invention in back-drive engagement.

Figure 5 is an oblique view of the sprocket shown by Figure 4.

Figure 6 is an oblique view of a section of the power transmission chain shown by Figure 4.

Figure 7 is a plan view of a section of the power transmission chain shown by Figure 4.

Figure 8 is a side view of a drive link, guide link, and washer of the power transmission chain shown by Figure 4.

Figure 9 is a side section view of a section of the chain shown by Figure 4 in front side engagement with a sprocket.

Figure 10 is an oblique view of a section of a power transmission chain according to another embodiment of the present invention.

Figure 11 is a side view of a drive link of the power transmission chain shown by Figure 10.

DETAILED DESCRIPTION OF THE INVENTION

[0033] Figure 4 shows an embodiment of the present invention wherein a sprocket 10 engages a silent chain 20. The chain 20 has a front side 38 and a back side 40. As shown by Figs. 4 and 5, the sprocket 10 is generally cylindrical and has teeth 12 that extend radially outwardly from the periphery of the sprocket 10. The teeth 12 of the sprocket 10 engage the backside 40 of the chain 20. As compared to a sprocket that engages the front side of the chain 20, the sprocket 10 omits half of each tooth from alternate lateral sides to form teeth 12 that are half the width of teeth of a front side sprocket. The width of the teeth 12 provides clearance so that a link 24 can be positioned laterally adjacent to the teeth 12 as shown by Fig. 4.

[0034] Sprocket teeth 12 are spaced around the peripheral circumference of the sprocket 10 in two parallel series, a first series 14 and a second series 16. Each series 14 and 16 extends around the circumference of the sprocket 10. The first series 14 is offset from the second series 16 along an axial direction of the sprocket 10 that is perpendicular to the series 14 and 16. The teeth 12 of the series 14 are offset along the circumference of the sprocket 10 with respect to the teeth 12 of the series 16 so that each tooth 12 of the series 14 is positioned between adjacent teeth 12 of the series 16. Similarly, each tooth 12 of the series 16 is positioned along the circumference of the sprocket 10 between adjacent teeth 12 of the series 14. The sprocket 10 having two series of teeth 12 that are offset from each other along the circumference is less expensive to manufacture than a sprocket with more offset series, as the sprocket 10 may be cast in a two-piece mold and then be machined rela-

tively easily.

[0035] As best shown by Figs. 6 and 7, the chain 20 is formed by rows of drive links 24 and guide links 22. A first series 34 is formed by rows 36 of links 22 and 24. The rows 36 are positioned along a chain direction and are each separated from the preceding and following rows 36. Each row 36 has three side-by-side drive links 24 and a guide link 22 that is separated from the three drive links 24 in a first lateral direction that is perpendicular to the chain direction, and perpendicular to the front and back directions. A second series 44 is formed by rows 46 of links 22 and 24 that are positioned along the chain direction and are each separated from the preceding and following rows 46. Each row 46 has three side-by-side drive links 24 and a guide link 22 that is separated from the three drive links 24 in a second lateral direction that is opposite from the first lateral direction.

[0036] Series 34 and 44 form the chain 20 by interleaving the rows 36 and 46 along the chain direction. As shown by Figs. 6 and 7, each row 36 is separated from adjacent rows 36 along the chain direction by a distance that is less than the length of the links 24 and 22 along the chain direction. Similarly, each row 46 is separated from adjacent rows 46 by a distance that is less than the length of the links 24 and 22 along the chain direction. The guide links 22 of the rows 36 and 46 are separated from the drive links 24 of the row by a distance that allows the drive links 24 of an adjacent row to be positioned between the guide link 22 and the drive links 24.

[0037] Each row 36 is positioned between two adjacent rows 46 so that the drive links 24 of the adjacent rows 46 extend between the guide link 22 and the drive links 24 of the row 36, one adjacent row 46 at each end of the row 36 along the chain direction. The guide links 22 of the rows 46 extend adjacent to the drive links 24 of the row 36 at opposite ends along the chain direction of the row 36. Because the guide links 22 of the rows 46 are on the opposite lateral side of the chain 20 from the guide link 22 of the row 36, guide links 22 are on alternate lateral sides of the chain 20 for adjacent rows 36 and 46 along the chain 20. Because each row 36 and 46 has the same number of guide links 22 and drive links 24, a chain according to the present invention has a more uniform stiffness along its length than a chain having different numbers and types of links in each row.

[0038] As shown by Fig. 8, the drive links 24 of the chain 20 are generally flat plates. The drive links 24 define apertures 50 that are separated along the chain direction of the drive link 24. As is conventional for links of a silent chain, the apertures 50 are near the ends of the drive link 24 along the chain direction. As is also conventional for links of silent chains, the drive links 24 of the embodiment illustrated in Figs. 4 and 6 define two teeth 52 that are adjacent to each other along the chain direction and that extend in the front direction. Each tooth 52 defines an outer flank 57 that faces in part along the chain direction away from the adjacent tooth 52 at an end along the chain direction of the link 24. Each tooth 52 defines an

inner flank 54 that faces in part along the chain direction toward the adjacent tooth 52. The drive links 24 define a crotch 56 between inner flanks 54 of the teeth 52. The crotch 56 is located between the apertures 50. A back side of the drive link 24 comprises two back flanks 58, one each end of the link 24 along the chain direction. The back flanks 58 face in part along the chain direction and away from the drive link 24. A back surface 60 extends between the flanks 58.

[0039] The guide links 22 are flat plates that define two apertures 62 that are separated from each other along the chain direction of the guide link 22 by the same distance that the apertures 50 of the drive links 24 are separated. As is conventional, the guide links 22 form a front side edge 66 and a backside edge 64. The front side edge 66 and backside edge 64 are separated from the apertures 62 in the front direction and back direction respectively. As shown by Fig. 4, a guide link 22 that is laterally adjacent to a drive links 24, extends adjacent to the region between inner flanks 54 of a drive link 24. The guide links 22 extend in the back direction to position the backside edge 64 near the back surface 60 of the drive links 24.

[0040] As best shown by Figs. 6 and 7, the drive links 24 and guide links 22 are adjacent in the lateral direction so that the apertures 50 of the drive links 24 are aligned with the apertures 62 of the guide links 22. The rows 36 and 46 are interleaved so that the apertures of interleaved rows are aligned along the lateral direction. Pins 26 are positioned to extend through the aligned apertures 50 and 62 and beyond the guide links 22 at opposite lateral sides of the chain 20. Washers 28 are flat plates that define an aperture 68. A washer 28 is positioned on the section of the pin 26 extending laterally beyond the guide links 22.

[0041] The pins 26 may be secured near their ends to the washers 28, such as by a press fit. The apertures 50 of the drive links 24 and the apertures 62 of the guide links 22 may be sized so that the drive links 24 and guide links 22 articulate about the pin 26. Alternatively, a different form of pivot joint, such as a rocker joint, could be used to pivotally connect the rows 36 and 46 of the chain 20.

[0042] The chain 20 forms an endless loop having teeth 52 of the links 24 extend toward the region within the loop. The surface of the chain 20 that forms the interior of the loop is the front side 38 of the chain 20. The surface of the chain 20 that is opposite the front side of the chain and faces outwardly from the region within the endless loop, is the back side 40 of the chain 20.

[0043] As shown by Fig. 9, the teeth 52 along the front side 38 of the chain 20 will mesh with a sprocket 74 within the endless loop formed by chain 20 in a manner that is conventional for front drive silent chain and sprocket engagement. As the chain 20 wraps about the sprocket 74, the front-driven sprocket 74 positions a tooth 76 between the teeth 52 of every drive link 24 in the first series 34 and the second series 44. Thus, every drive link 24 en-

gages a tooth 76 of the sprocket 74 at each end along its chain direction and between teeth 52. The engagement of the sprocket 74 and front side 38 of the chain 20 is referred to as single tooth spacing.

[0044] Fig. 5 shows an oblique view of sprocket 10. The teeth 12 of each series 14 and 16, are spaced from adjacent teeth 12 of the series to accept the back side of a drive link 24 between adjacent teeth 12 and to engage the back flanks 58 of the drive link 24. The teeth 12 of the two series, 14 and 16, are offset from each other along the circumference of the sprocket 12 so that the teeth 12 of the series 14 extend between the drive links 24 of the series 34 and the teeth 12 of the series 16 extend between the drive links 24 of the series 44.

[0045] Figure 4 shows the back side 40 of the silent chain 20 engaging the teeth 12 of the sprocket 10. The sprocket teeth 12 of first series 14 and second series 16 are separated from adjacent teeth in the series by the length of the drive links 24 along a chain direction of the chain 20. The teeth 12 of the first series 14 and the second series 16 are not laterally aligned, but rather are offset along the sprocket such that the teeth 12 of the first series 14 extend between the drive links 24 of the first series 34 and the teeth 12 of the second series 16 extend between the drive links 24 of the second series 44 as the back side 40 of the chain 20 wraps around sprocket 10. The faces 18 of the sprocket teeth 12 are adjacent to the back flanks 58 of the drive links 24.

[0046] The sprocket teeth 12 extend into the back side 40 of the chain 20 at a distance that is only half the length of the drive links 24 by alternately extending between drive links 24 of the first series 34 and second series 44. Thus, the sprocket 10 engages the back side 40 of the chain 20 at single tooth spacing, and reduces the chordal fall motion associated with back-driven silent chain applications. Engagement of single tooth spacing also reduces the inefficiency and problems of wear of other components, such as chain guides, associated with the use of a shoulder in some applications.

[0047] While the previous discussion pertains to the use of a chain according to the present invention for back driving an inverted tooth silent chain, other embodiments of the present invention may be used in other applications involving front and back driving, or only front driving. More drive links may be included in each row of links. Rather than a single group of side-by-side links or shown by Figs. 6 and 7, a row could include additional groups of drive links that are separated from the group of drive links shown by Figs. 6 and 7 in a lateral direction away from the guide link. In that case, each interleaved series would include one or more groups of drive links that would be interleaved between groups of drive links of adjacent rows of links. Further, the front and back sides of the drive links may be substantially identical, or any other properly meshing configuration.

[0048] Figure 10 illustrates an alternate embodiment of the present invention featuring drive links 80 with substantially identical front and back sides. As shown in Fig.

11, the drive link 80 comprises a front surface 82 adjacent to two front flanks 84. Opposite the front surface 82 of the drive link 80 is a back surface 86. Adjacent to the back surface 86 at either end along the chain direction are back flanks 88. Drive link 90 also defines two apertures 90 that are sized to receive pivot members, such as pins. In the embodiment illustrated, the front and back sides of drive link 80 are symmetric about a line including the center points of the two apertures 90. Thus, a chain comprised of drive links 80 (which have substantially identical front and back sides) could be wrapped about similar sprockets, such as sprocket 10 of Fig. 5, for both front and back driving.

[0049] The drive link 80 does not have a crotch or cut-out typical of inverted teeth. Eliminating the cutout increases the strength and stiffness of the link and allows a reduction in mass for comparable load carrying capabilities. By using such a design with an offset tooth sprocket (such as shown in Fig. 5) and alternating guide links which facilitate a more uniformly stiff chain, an efficient chain is provided that does not experience the chordal fall associated with double tooth spacing.

[0050] While the invention has been described in connection with preferred embodiments, it will be understood that those embodiments are not the limit of the invention. Rather, the invention covers all alternatives, modifications, and equivalents within the spirit and scope of the invention as defined by the appended claims.

Claims

1. A power transmission chain having a front side (38) for driving a front side drive sprocket and a backside (40) for driving a backside drive sprocket; the chain comprising:

a first series (34) of links (24) comprising a plurality rows (36) of links positioned adjacent to each other and separated along a chain direction, the rows of the first series of links including:

a guide link (22) and a drive link (24), the guide link (22) separated from the drive link (24) in a first lateral direction that is perpendicular to the chain direction, and the guide link (22) and the drive link (24) being substantially the same length along the chain direction;

a second series (44) of links comprising a plurality rows (46) of links positioned adjacent to each other and separated along a chain direction, the rows (46) of the second series (44) of links including a drive link (24); the drive links (24) of the first and second series (34, 44) comprising two front side chain teeth (52) extending from the drive link (24) along the front side (38) of the chain

in a direction that is perpendicular to the chain direction and also perpendicular to the first and second lateral directions, the two front side chain teeth (52) being adjacent to each other along the chain direction, and the two front side chain teeth defining a region between the two front side chain teeth to accept a front side drive sprocket tooth,

the guide links (22) of the rows (36) of the first series (34) extending adjacent to the region between the two front side chain teeth (52) of the drive links (24),

the rows (36) of the first series (34) of links being separated along the chain direction by a distance that is less than a length along the chain direction of the links (24) of the second series (44),

the rows (46) of the second series (44) of links being separated along the chain direction by a distance that is less than a length along the chain direction of the links (22, 24) of the first series (34);

the first series (34) of links and the second series (44) of links being interleaved along the chain direction so that a row of links (46) of the second series is positioned between and extending adjacent to links of adjacent rows (36) of the first series and a row of links (36) of the first series (34) is positioned between and extending adjacent to links (24) of adjacent rows of the second series (44),

the drive link (24) of each interleaved row of the second series (44) extending between the drive link (24) and guide link (22) of each row of the first series (34) adjacent to the drive link (24) of the row (46) of the second series;

each row (36) of links of the first series (34) being pivotally connected to each row (46) of links of the second series (44) interleaved with the row (36) of links of the first series (34) at locations near the ends of the links (22, 24) of the first series (34) along the chain direction where the adjacent rows (36, 46) of the first series (34) of links and the second series (36) of links are interleaved; and

each row (46) of links of the second series (44) being pivotally connected to each row (36) of links of the first series (34) interleaved with the row (46) of the second series (44) at locations near the ends of the links (24) of the second series along the chain direction where the adjacent rows (36, 46) of the first series (34) of links and second series (44) of links are interleaved;

characterized in that:-

the rows (46) of the second series (44) of links each include a guide link (22) separated from the drive link in a second lateral direction that is perpendicular to the chain direction and opposite the first lateral direction, the guide link (24) and the drive link being substantially the same length along the chain direction;

the drive link (24) of each interleaved row (36) of the first series (34) extends between the drive link (24) and guide link of each row (46) of the second series (44) adjacent to the drive link (24) of the row (36) of the first series (34);

the guide links (22) of the rows (46) of the second series (44) extending adjacent to the region between the two front side chain teeth (52) of the drive links (24);

separations along the chain direction between ends of drive links (24) of adjacent rows (36) of the first series (34) of links are adjacent to the drive links (24) of the second series (44) of links and separations along the chain direction between ends of drive links (24) of adjacent rows (46) of the second series (44) of links are adjacent to the drive links (24) of the first series (34) of links and the guide links (22) of alternate rows (36, 46) along the chain direction are positioned on alternate lateral sides of the power transmission chain; and

the drive links (24) of the first and second series of links define a backside surface opposite the two front side chain teeth (52), the backside surface including two back side drive flanks (58) facing at least in part along the chain direction, one backside drive flank (58) being disposed at a first end of the drive link (24) along the chain direction and another backside drive flank (58) being disposed at a second end of the drive link (24) opposite the first end along the chain direction.

2. A power transmission chain according to claim 1, wherein the interleaved links (22, 24) of each row (36, 46) form apertures (50, 62) that are aligned in the lateral directions and the interleaved links are pivotally connected by pins (26) extending through the aligned apertures.
3. A power transmission chain according to claim 1 or 2, wherein the guide links (22) and the drive links (24) provide uniform stiffness along the chain.

4. A power transmission chain according to any one of claims 1 to 3, wherein the rows (36, 46) of links include a plurality of drive links (24).
5. A multi-sprocket power transmission system having power transmission chain, the system comprising a backside drive sprocket (10) having sprocket teeth (12) extending radially outwardly from an outer surface of the backside drive sprocket, the sprocket teeth (12) being arranged in a first series (14) and a second series (16) of sprocket teeth disposed around a circumference of the backside drive sprocket, with the first series of sprocket teeth and the second series of sprocket teeth being generally perpendicularly offset from each other;
a power transmission chain (20) having a first series (34) of drive links (24) and a second series of drive links (24), the first and second series of drive links (24) are laterally adjacently interleaved and pivotally connected, each drive link (24) of each series of drive links is positioned adjacent to two drive links of a laterally adjacent series of drive links, one drive link (24) being disposed at each opposite end of the respective drive link along a chain direction thereof; the drive links (24) define a front side (38) of the power transmission chain (40) and a backside (40) of the power transmission chain, the front side of a drive link is located on a front side of the chain and comprises two front side chain teeth (52) for meshing with a front side drive sprocket, the backside of a drive link (24) is located on a backside of the chain and comprises backside flanks (58) at opposite ends of the backside of the drive link along the chain direction, the backside of the drive link being configured to cooperate with a sprocket tooth (12) of a series of sprocket teeth of the backside drive sprocket, **characterized in that**
the chain (20) has a guide link (22) laterally adjacent to and separated from each of the drive links (24), so that an interleaved and drive link (24) is disposed between and adjacent to the guide link (22) and drive link (24) at each opposite end of the drive link (24) along the chain direction; and
each sprocket tooth (12) of each series (14, 16) of sprocket teeth is separated from adjacent sprocket teeth of the same series to accept a drive link (24) of the power transmission chain (20) between adjacent sprocket teeth,
the power transmission chain (20) engaging the backside sprocket (10) positioning the drive links (24) of the first series (34) of drive links (24) between adjacent teeth (12) of the first series (14) of sprocket teeth (12) and engaging surfaces of adjacent teeth (12) of the sprocket at the backside flanks (58) at the opposite ends of the drive link (24), and positioning drive links (24) of the second series (44) of drive links (24) between adjacent teeth (12) the second series (16) of sprocket teeth (12) and engaging surfaces of

adjacent teeth at the backside flanks (58) at the opposite ends of the drive link.

6. The power transmission system of claim 5, wherein the chain (20) further comprises pins (26) pivotally connecting interleaved drive links (24) and guide links (22).

10 Patentansprüche

1. Kraftübertragungskette mit einer Vorderseite (38) zum Antreiben eines vorderseitigen Antriebskettenrades und einer Rückseite (40) zum Antreiben eines rückseitigen Antriebskettenrades; wobei die Kette Folgendes aufweist:

eine erste Serie (34) von Kettengliedern (24), die mehrere Reihen (36) von Kettengliedern aufweist, die nebeneinander angeordnet sind und entlang einer Kettenrichtung voneinander getrennt sind, wobei die Reihen der ersten Serie von Kettengliedern Folgendes aufweisen:

ein Führungsglied (22) und ein Antriebsglied (24), wobei das Führungsglied (22) von dem Antriebsglied (24) in einer ersten seitlichen Richtung getrennt ist, die senkrecht zu der Kettenrichtung verläuft, und das Führungsglied (22) und das Antriebsglied (24) im Wesentlichen die gleiche Länge entlang der Kettenrichtung aufweisen;
eine zweite Serie (44) von Kettengliedern, die mehrere Reihen (46) von Kettengliedern aufweist, die nebeneinander angeordnet sind und entlang einer Kettenrichtung voneinander getrennt sind, wobei die Reihen (46) der zweiten Serie (44) von Kettengliedern ein Antriebsglied (24) enthalten;
wobei die Antriebsglieder (24) der ersten und der zweiten Serie (34, 44) zwei vorderseitige Kettenzähne (52) aufweisen, die sich von dem Antriebsglied (24) entlang der Vorderseite (38) der Kette in einer Richtung erstrecken, die senkrecht zu der Kettenrichtung und ebenfalls senkrecht zu der ersten und der zweiten seitlichen Richtung verläuft, wobei die zwei vorderseitigen Kettenzähne (52) entlang der Kettenrichtung nebeneinander angeordnet sind und die zwei vorderseitigen Kettenzähne eine Region zwischen den zwei vorderseitigen Kettenzähnen definieren, um einen Zahn eines vorderseitigen Antriebskettenrades aufzunehmen,
wobei sich die Führungsglieder (22) der Reihen (36) der ersten Serie (34) neben der Region zwischen den zwei vorderseitigen

Kettenzähnen (52) der Antriebsglieder (24) erstrecken,
wobei die Reihen (36) der ersten Serie (34) von Kettengliedern entlang der Kettenrichtung um eine Distanz voneinander getrennt sind, die geringer ist als eine Länge entlang der Kettenrichtung der Kettenglieder (24) der zweiten Serie (44),
wobei die Reihen (46) der zweiten Serie (44) von Kettengliedern entlang der Kettenrichtung um eine Distanz voneinander getrennt sind, die geringer ist als eine Länge entlang der Kettenrichtung der Kettenglieder (22, 24) der ersten Serie (34);
wobei die erste Serie (34) von Kettengliedern und die zweite Serie (44) von Kettengliedern entlang der Kettenrichtung so miteinander verschachtelt sind, dass eine Reihe von Kettengliedern (46) der zweiten Serie zwischen Kettengliedern benachbarter Reihen (36) der ersten Serie angeordnet ist und sich neben Kettengliedern benachbarter Reihen (36) der ersten Serie erstreckt und eine Reihe von Kettengliedern (36) der ersten Serie (34) zwischen Kettengliedern (24) benachbarter Reihen der zweiten Serie (44) angeordnet ist und sich neben Kettengliedern (24) benachbarter Reihen der zweiten Serie (44) erstreckt,
wobei sich das Antriebsglied (24) jeder verschachtelten Reihe der zweiten Serie (44) zwischen dem Antriebsglied (24) und dem Führungsglied (22) jeder Reihe der ersten Serie (34) neben dem Antriebsglied (24) der Reihe (46) der zweiten Serie erstreckt;
wobei jede Reihe (36) von Kettengliedern der ersten Serie (34) schwenkbar mit jeder Reihe (46) von Kettengliedern der zweiten Serie (44), die mit der Reihe (36) von Kettengliedern der ersten Serie (34) verschachtelt ist, an Stellen nahe den Enden der Kettenglieder (22, 24) der ersten Serie (34) entlang der Kettenrichtung, wo die benachbarten Reihen (36, 46) der ersten Serie (34) von Kettengliedern und der zweiten Serie (36) von Kettengliedern miteinander verschachtelt sind, verbunden ist; und
wobei jede Reihe (46) von Kettengliedern der zweiten Serie (44) schwenkbar mit jeder Reihe (36) von Kettengliedern der ersten Serie (34), die mit der Reihe (46) der zweiten Serie (44) verschachtelt ist, an Stellen nahe den Enden der Kettenglieder (24) der zweiten Serie entlang der Kettenrichtung, wo die benachbarten Reihen (36, 46) der ersten Serie (34) von Kettengliedern und der zweiten Serie (44) von Kettengliedern miteinander verschachtelt sind, verbunden

ist;

dadurch gekennzeichnet, dass:

die Reihen (46) der zweiten Serie (44) von Kettengliedern jeweils ein Führungsglied (22) enthalten, das von dem Antriebsglied in einer zweiten seitlichen Richtung getrennt ist, die senkrecht zu der Kettenrichtung verläuft und der ersten seitlichen Richtung entgegengesetzt ist, wobei das Führungsglied (24) und das Antriebsglied im Wesentlichen die gleiche Länge entlang der Kettenrichtung aufweisen;
sich das Antriebsglied (24) jeder verschachtelten Reihe (36) der ersten Serie (34) zwischen dem Antriebsglied (24) und dem Führungsglied jeder Reihe (46) der zweiten Serie (44) neben dem Antriebsglied (24) der Reihe (36) der ersten Serie (34) erstreckt;
sich die Führungsglieder (22) der Reihen (46) der zweiten Serie (44) neben der Region zwischen den zwei vorderseitigen Kettenzähnen (52) der Antriebsglieder (24) erstrecken;
Trennungen entlang der Kettenrichtung zwischen Enden von Antriebsgliedern (24) benachbarter Reihen (36) der ersten Serie (34) von Kettengliedern neben den Antriebsgliedern (24) der zweiten Serie (44) von Kettengliedern angeordnet sind und Trennungen entlang der Kettenrichtung zwischen Enden von Antriebsgliedern (24) benachbarter Reihen (46) der zweiten Serie (44) von Kettengliedern neben den Antriebsgliedern (24) der ersten Serie (34) von Kettengliedern angeordnet sind und die Führungsglieder (22) abwechselnder Reihen (36, 46) entlang der Kettenrichtung auf abwechselnden seitlichen Seiten der Kraftübertragungskette angeordnet sind; und
die Antriebsglieder (24) der ersten und der zweiten Serie von Kettengliedern eine Rückseite gegenüber den zwei vorderseitigen Kettenzähnen (52) definieren, wobei die Rückseite zwei rückseitige Antriebsflanken (58) enthält, die mindestens teilweise entlang der Kettenrichtung weisen, wobei eine rückseitige Antriebsflanke (58) an einem ersten Ende des Antriebsgliedes (24) entlang der Kettenrichtung angeordnet ist und eine andere rückseitige Antriebsflanke (58) an einem zweiten Ende des Antriebsgliedes (24), das dem ersten

Ende entgegengesetzt ist, entlang der Kettenrichtung angeordnet ist.

2. Kraftübertragungskette nach Anspruch 1, wobei die verschachtelten Kettenglieder (22, 24) jeder Reihe (36, 46) Öffnungen (50, 62) bilden, die in den seitlichen Richtungen aufeinander ausgerichtet sind, und die verschachtelten Kettenglieder durch Stifte (26), die sich durch die aufeinander ausgerichteten Öffnungen hindurch erstrecken, schwenkbar miteinander verbunden sind. 5
3. Kraftübertragungskette nach Anspruch 1 oder 2, wobei die Führungsglieder (22) und die Antriebsglieder (24) eine gleichbleibende Steifigkeit entlang der Kette bereitstellen. 10
4. Kraftübertragungskette nach einem der Ansprüche 1 bis 3, wobei die Reihen (36, 46) von Kettengliedern mehrere Antriebsglieder (24) enthalten. 15
5. Kraftübertragungssystem mit mehreren Kettenrädern und mit einer Kraftübertragungskette, wobei das System Folgendes aufweist: 20

ein rückseitiges Antriebskettenrad (10) mit Kettenradzähnen (12), die sich von einer Außenfläche des rückseitigen Antriebskettenrades radial nach außen erstrecken, wobei die Kettenradzähne (12) in einer ersten Serie (14) und einer zweiten Serie (16) von Kettenradzähnen angeordnet sind, die um einen Umfang des rückseitigen Antriebskettenrades herum angeordnet sind, wobei die erste Serie von Kettenradzähnen und die zweite Serie von Kettenradzähnen allgemein senkrecht voneinander versetzt sind; eine Kraftübertragungskette (20) mit einer ersten Serie (34) von Antriebsgliedern (24) und einer zweiten Serie von Antriebsgliedern (24), wobei die erste und die zweite Serie von Antriebsgliedern (24) seitlich nebeneinander verschachtelt sind und schwenkbar miteinander verbunden sind, wobei jedes Antriebsglied (24) jeder Serie von Antriebsgliedern neben zwei Antriebsgliedern einer seitlich benachbarten Serie von Antriebsgliedern angeordnet ist, wobei ein Antriebsglied (24) an jedem entgegengesetzten Ende des jeweiligen Antriebsgliedes entlang seiner Kettenrichtung angeordnet ist; wobei die Antriebsglieder (24) eine Vorderseite (38) der Kraftübertragungskette (40) und eine Rückseite (40) der Kraftübertragungskette definieren, wobei sich die Vorderseite eines Antriebsgliedes auf einer Vorderseite der Kette befindet und zwei vorderseitige Kettenzähne (52) aufweist, um sich mit einem vorderseitigen Antriebskettenrad zu verzahnen, wobei sich die Rückseite eines Antriebsgliedes (24) auf einer 25

Rückseite der Kette befindet und rückseitige Flanken (58) an entgegengesetzten Enden der Rückseite des Antriebsgliedes entlang der Kettenrichtung aufweist, wobei die Rückseite des Antriebsgliedes dafür konfiguriert ist, mit einem Kettenradzahn (12) einer Serie von Kettenradzähnen des rückseitigen Antriebskettenrades zusammenzuwirken,

dadurch gekennzeichnet, dass

die Kette (20) ein Führungsglied (22) aufweist, das seitlich neben jedem der Antriebsglieder (24) und von jedem der Antriebsglieder (24) getrennt angeordnet ist, dergestalt, dass ein verschachteltes und Antriebsglied (24) zwischen und neben dem Führungsglied (22) und Antriebsglied (24) an jedem entgegengesetzten Ende des Antriebsgliedes (24) entlang der Kettenrichtung angeordnet ist; und jeder Kettenradzahn (12) jeder Serie (14, 16) von Kettenradzähnen von benachbarten Kettenradzähnen derselben Serie getrennt ist, um ein Antriebsglied (24) der Kraftübertragungskette (20) zwischen benachbarten Kettenradzähnen aufzunehmen, wobei die Kraftübertragungskette (20) das rückseitige Kettenrad (10) in Eingriff nimmt und die Antriebsglieder (24) der ersten Serie (34) von Antriebsgliedern (24) zwischen benachbarten Zähnen (12) der ersten Serie (14) von Kettenradzähnen (12) positioniert und Flächen benachbarter Zähne (12) des Kettenrades an den rückseitigen Flanken (58) an den entgegengesetzten Enden des Antriebsgliedes (24) in Eingriff nimmt und Antriebsglieder (24) der zweiten Serie (44) von Antriebsgliedern (24) zwischen benachbarten Zähnen (12) der zweiten Serie (16) von Kettenradzähnen (12) positioniert und Flächen benachbarter Zähne an den rückseitigen Flanken (58) an den entgegengesetzten Enden des Antriebsgliedes in Eingriff nimmt. 30

6. Kraftübertragungssystem nach Anspruch 5, wobei die Kette (20) des Weiteren Stifte (26) aufweist, welche die verschachtelten Antriebsglieder (24) und Führungsglieder (22) schwenkbar miteinander verbinden. 35

Revendications

1. Chaîne de transmission de puissance présentant un devant (38) conçu pour entraîner un pignon d'entraînement de devant et un dos (40) conçu pour entraîner un pignon d'entraînement de dos, la chaîne comprenant : 40

une première série (34) de maillons (24) comprenant une pluralité de rangées (36) de 45

maillons occupant des positions adjacentes les unes aux autres et séparées dans une direction de la chaîne, les rangées de la première série de maillons comportant :

5 un maillon de guidage (22) et un maillon d'entraînement (24), le maillon de guidage (22) étant séparé du maillon d'entraînement (24) dans une première direction latérale perpendiculaire à la direction de la chaîne, et le maillon de guidage (22) et le maillon d'entraînement (24) présentant sensiblement la même longueur dans la direction de la chaîne ; 10

15 une deuxième série (44) de maillons comprenant une pluralité de rangées (46) de maillons occupant des positions adjacentes les unes aux autres et séparées dans une direction de la chaîne, les rangées (46) de la deuxième série (44) de maillons comportant un maillon d'entraînement (24) ; 20

25 les maillons d'entraînement (24) des première et deuxième séries (34, 44) comprenant deux dents de chaîne de devant (52) qui s'étendent du maillon d'entraînement (24) le long du devant (38) de la chaîne dans une direction perpendiculaire à la direction de la chaîne et aussi perpendiculaire aux première et deuxième directions latérales, les deux dents de chaîne de devant (52) étant adjacentes l'une à l'autre dans la direction de la chaîne, et les deux dents de chaîne de devant définissant entre elles une région destinée à recevoir une dent de pignon d'entraînement de devant, 30

35 les maillons de guidage (22) des rangées (36) de la première série (34) s'étendant en position adjacente à la région entre les deux dents de chaîne de devant (52) des maillons d'entraînement (24), 40

45 les rangées (36) de la première série (34) de maillons étant séparées dans la direction de la chaîne d'une distance inférieure à une longueur, dans la direction de la chaîne, des maillons (24) de la deuxième série (44), 50

55 les rangées (46) de la deuxième série (44) de maillons étant séparées dans la direction de la chaîne d'une distance inférieure à une longueur, dans la direction de la chaîne, des maillons (22, 24) de la première série (34) ; la première série (34) de maillons et la deuxième série (44) de maillons étant imbriquées dans la direction de la chaîne de façon à ce qu'une rangée de maillons (46) de la deuxième série soit positionnée entre, et s'étende en position adjacente à, des maillons de rangées adjacentes (36) de la première série, et à ce qu'une rangée de

maillons (36) de la première série (34) soit positionnée entre, et s'étende en position adjacente à, des maillons (24) de rangées adjacentes de la deuxième série (44), le maillon d'entraînement (24) de chaque rangée imbriquée de la deuxième série (44) s'étendant entre le maillon d'entraînement (24) et le maillon de guidage (22) de chaque rangée de la première série (34) adjacent au maillon d'entraînement (24) de la rangée (46) de la deuxième série ; chaque rangée (36) de maillons de la première série (34) étant articulée sur chaque rangée (46) de maillons de la deuxième série (44) imbriquée avec la rangée (36) de maillons de la première série (34) à des emplacements proches des extrémités des maillons (22, 24) de la première série (34) dans la direction de la chaîne où les rangées adjacentes (36, 46) de la première série (34) de maillons et de la deuxième série (36) de maillons sont imbriquées ; et chaque rangée (46) de maillons de la deuxième série (44) étant articulée sur chaque rangée (36) de maillons de la première série (34) imbriquée avec la rangée (46) de la deuxième série (44) à des emplacements proches des extrémités des maillons (24) de la deuxième série dans la direction de la chaîne où les rangées adjacentes (36, 46) de la première série (34) de maillons et de la deuxième série (44) de maillons sont imbriquées ;

caractérisée en ce que : -

les rangées (46) de la deuxième série (44) de maillons comportent chacune un maillon de guidage (22) séparé du maillon d'entraînement dans une deuxième direction latérale perpendiculaire à la direction de la chaîne et opposée à la première direction latérale, le maillon de guidage (24) et le maillon d'entraînement présentant sensiblement la même longueur dans la direction de la chaîne ; le maillon d'entraînement (24) de chaque rangée imbriquée (36) de la première série (34) s'étend entre le maillon d'entraînement (24) et le maillon de guidage de chaque rangée (46) de la deuxième série (44) adjacent au maillon d'entraînement (24) de la rangée (36) de la première série (34) ; les maillons de guidage (22) des rangées (46) de la deuxième série (44) s'étendent en position adjacente à la région entre les deux dents de chaîne

de devant (52) des maillons d'entraînement (24) ;

des séparations dans la direction de la chaîne entre des extrémités de maillons d'entraînement (24) de rangées adjacentes (36) de la première série (34) de maillons sont adjacentes aux maillons d'entraînement (24) de la deuxième série (44) de maillons, et des séparations dans la direction de la chaîne entre des extrémités de maillons d'entraînement (24) de rangées adjacentes (46) de la deuxième série (44) de maillons sont adjacentes aux maillons d'entraînement (24) de la première série (34) de maillons, et les maillons de guidage (22) de rangées alternées (36, 46) dans la direction de la chaîne sont positionnés sur des côtés latéraux alternés de la chaîne de transmission de puissance ; et les maillons d'entraînement (24) des première et deuxième séries de maillons définissent une surface de dos opposée aux deux dents de chaîne de devant (52), la surface de dos comportant deux flancs d'entraînement de dos (58) au moins partiellement en regard dans la direction de la chaîne, un flanc d'entraînement de dos (58) étant disposé à une première extrémité du maillon d'entraînement (24) dans la direction de la chaîne, et un autre flanc d'entraînement de dos (58) étant disposé à une deuxième extrémité du maillon d'entraînement (24) opposée à la première extrémité dans la direction de la chaîne.

2. Chaîne de transmission de puissance selon la revendication 1, les maillons imbriqués (22, 24) de chaque rangée (36, 46) formant des ouvertures (50, 62) alignées dans les directions latérales, et les maillons imbriqués étant articulés par des broches (26) s'étendant à travers les ouvertures alignées.

3. Chaîne de transmission de puissance selon la revendication 1 ou 2, les maillons de guidage (22) et les maillons d'entraînement (24) procurant une rigidité uniforme le long de la chaîne.

4. Chaîne de transmission de puissance selon l'une quelconque des revendications 1 à 3, les rangées (36, 46) de maillons comportant une pluralité de maillons d'entraînement (24).

5. Système de transmission de puissance à pignons multiples avec chaîne de transmission de puissance,

le système comprenant :

un pignon d'entraînement de dos (10) comportant des dents de pignon (12) s'étendant radialement vers l'extérieur depuis une surface extérieure du pignon d'entraînement de dos, les dents de pignon (12) étant agencées en une première série (14) et une deuxième série (16) de dents de pignon disposées sur une circonférence du pignon d'entraînement de dos, la première série de dents de pignon et la deuxième série de dents de pignon étant décalées généralement perpendiculairement l'une par rapport à l'autre ;

une chaîne de transmission de puissance (20) comportant une première série (34) de maillons d'entraînement (24) et une deuxième série de maillons d'entraînement (24), les première et deuxième séries de maillons d'entraînement (24) étant imbriquées de façon latéralement adjacente et articulées, chaque maillon d'entraînement (24) de chaque série de maillons d'entraînement occupant une position adjacente à deux maillons d'entraînement d'une série latéralement adjacente de maillons d'entraînement, un maillon d'entraînement (24) étant disposé à chaque extrémité opposée du maillon d'entraînement respectif dans une direction de la chaîne ;

les maillons d'entraînement (24) définissent un devant (38) de la chaîne de transmission de puissance (40) et un dos (40) de la chaîne de transmission de puissance, le devant d'un maillon d'entraînement étant situé sur un devant de la chaîne et comprenant deux dents de chaîne de devant (52) destinées à venir en prise avec un pignon d'entraînement de devant, le dos d'un maillon d'entraînement (24) étant situé sur un dos de la chaîne et comprenant des flancs de dos (58) à des extrémités opposées du dos du maillon d'entraînement dans la direction de la chaîne, le dos du maillon d'entraînement étant configuré pour coopérer avec une dent de pignon (12) d'une série de dents de pignon du pignon d'entraînement de dos,

caractérisé en ce que

la chaîne (20) comprend un maillon de guidage (22) latéralement adjacent à, et séparé de, chacun des maillons d'entraînement (24), de telle sorte qu'un maillon d'entraînement imbriqué (24) soit disposé de façon adjacente entre le maillon de guidage (22) et le maillon d'entraînement (24) à chaque extrémité opposée du maillon d'entraînement (24) dans la direction de la chaîne ; et

chaque dent de pignon (12) de chaque série (14, 16) de dents de pignon est séparée de dents de pignon adjacentes de la même série pour per-

mettre la réception d'un maillon d'entraînement (24) de la chaîne de transmission de puissance (20) entre des dents de pignon adjacentes, la chaîne de transmission de puissance (20) vient en prise avec le pignon de dos (10) en positionnant les maillons d'entraînement (24) de la première série (34) de maillons d'entraînement (24) entre des dents adjacentes (12) de la première série (14) de dents de pignon (12) et en venant en prise avec des surfaces de dents adjacentes (12) du pignon au niveau des flancs de dos (58) aux extrémités opposées du maillon d'entraînement (24), et en positionnant les maillons d'entraînement (24) de la deuxième série (44) de maillons d'entraînement (24) entre des dents adjacentes (12) de la deuxième série (16) de dents de pignon (12) et en venant en prise avec des surfaces de dents adjacentes au niveau des flancs de dos (58) aux extrémités opposées du maillon d'entraînement.

6. Système de transmission de puissance selon la revendication 5, la chaîne (20) comprenant en outre des broches (26) articulant des maillons d'entraînement (24) et des maillons de guidage (22) imbriqués.

30

35

40

45

50

55

Fig. 1

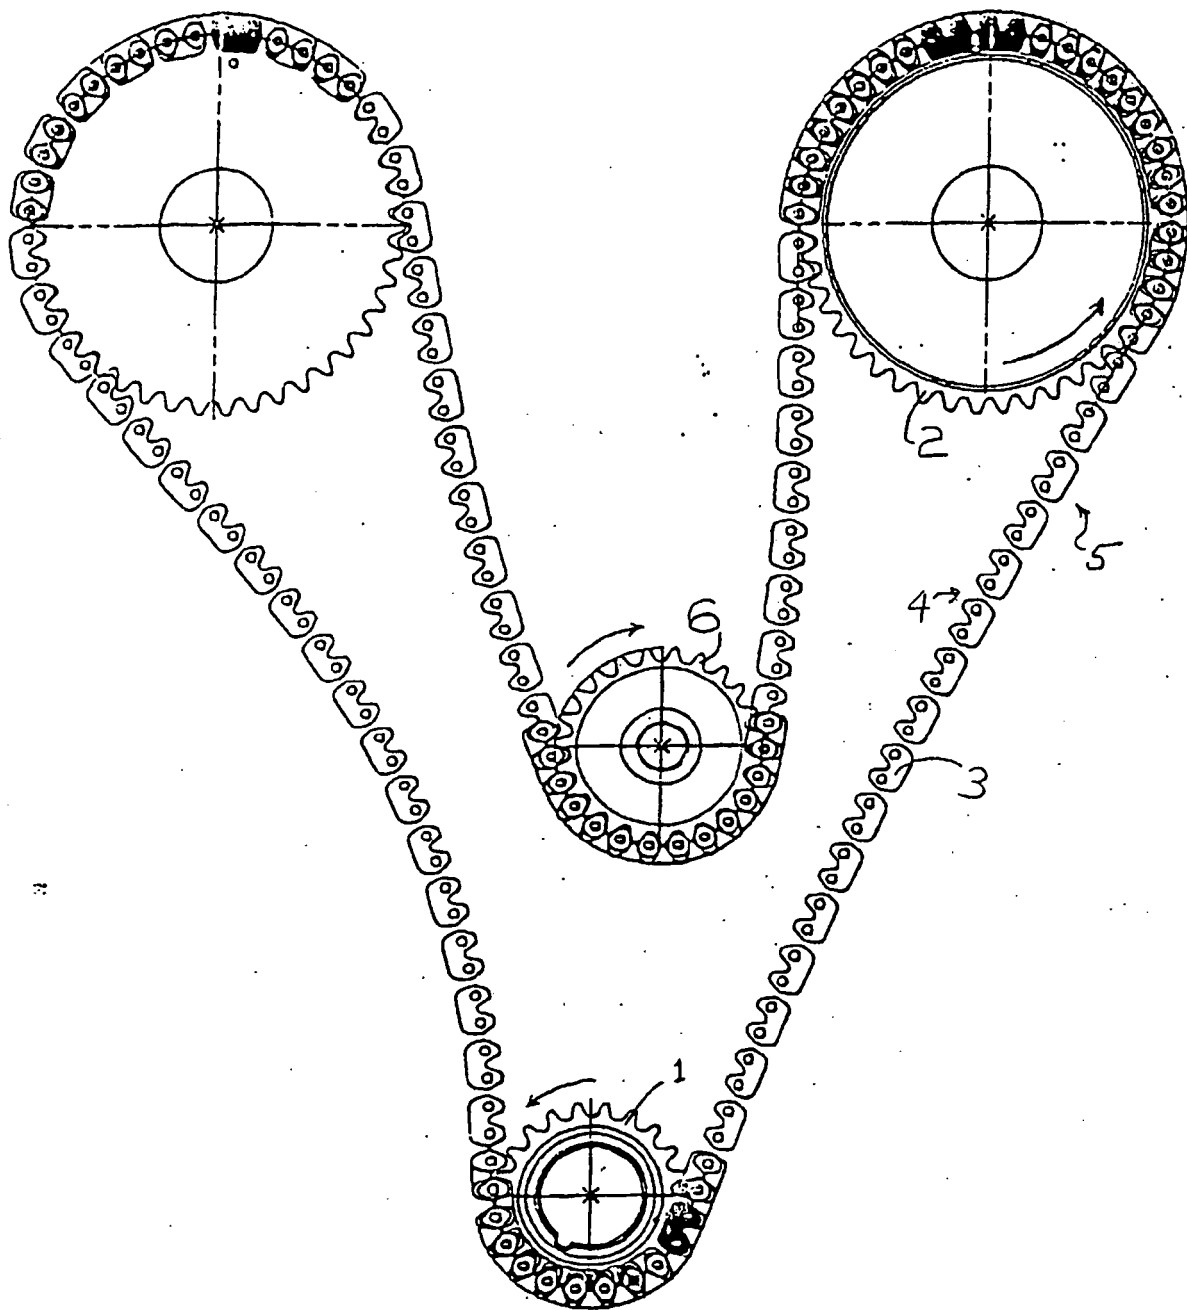


FIG.2

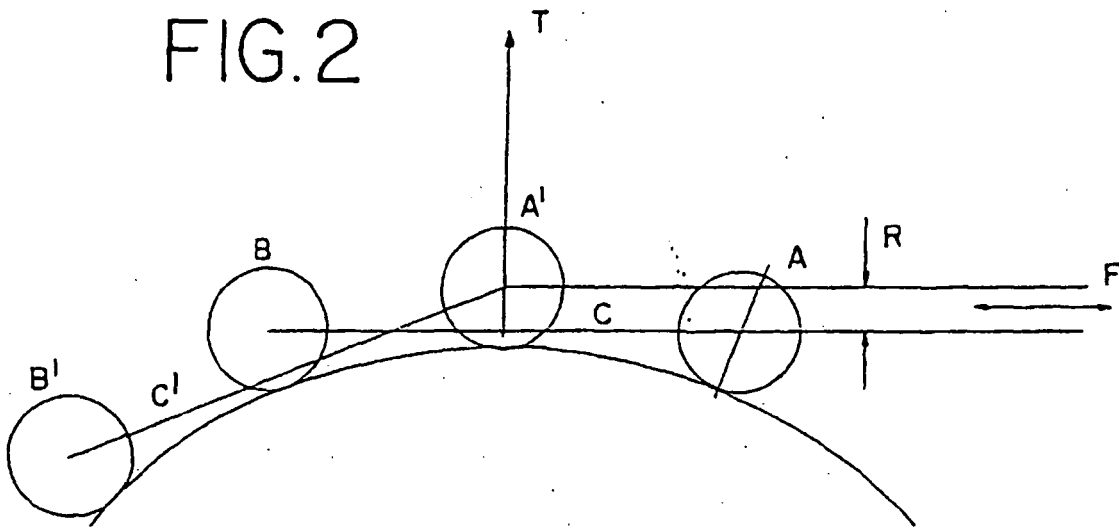
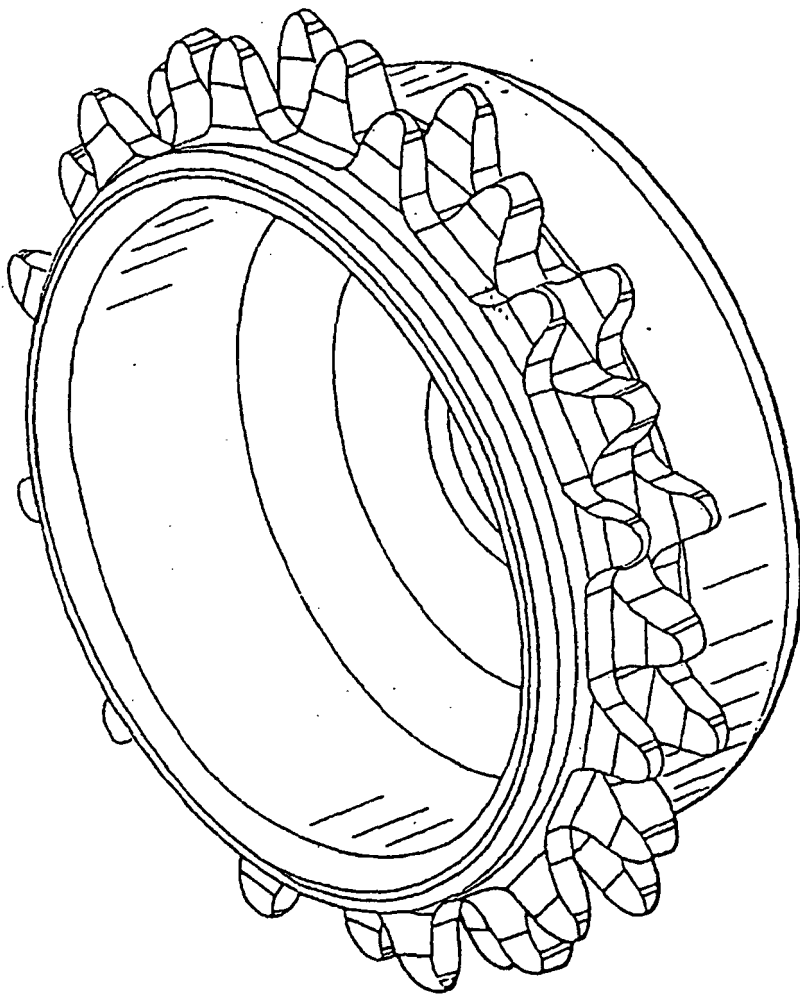


FIG. 3



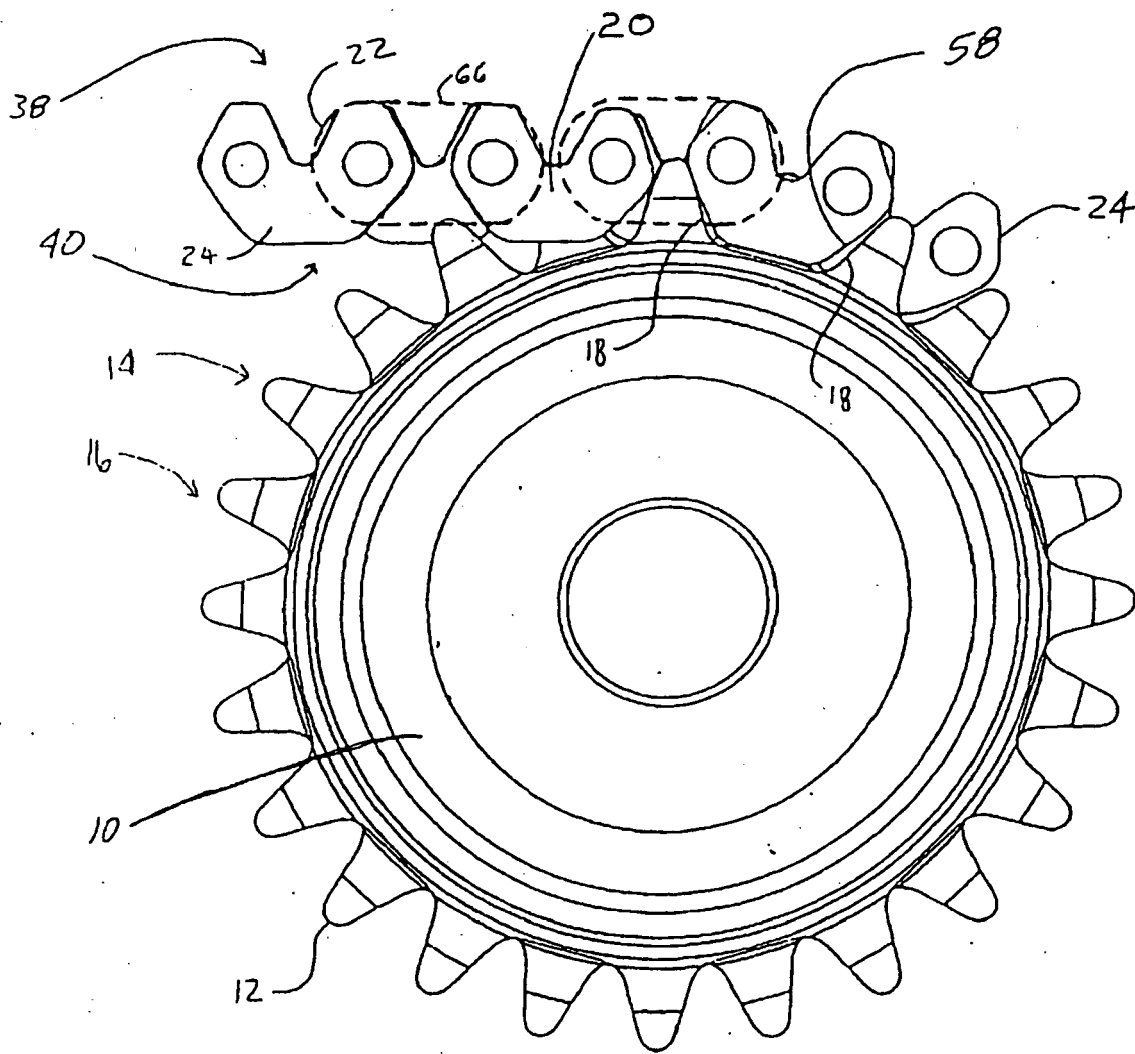
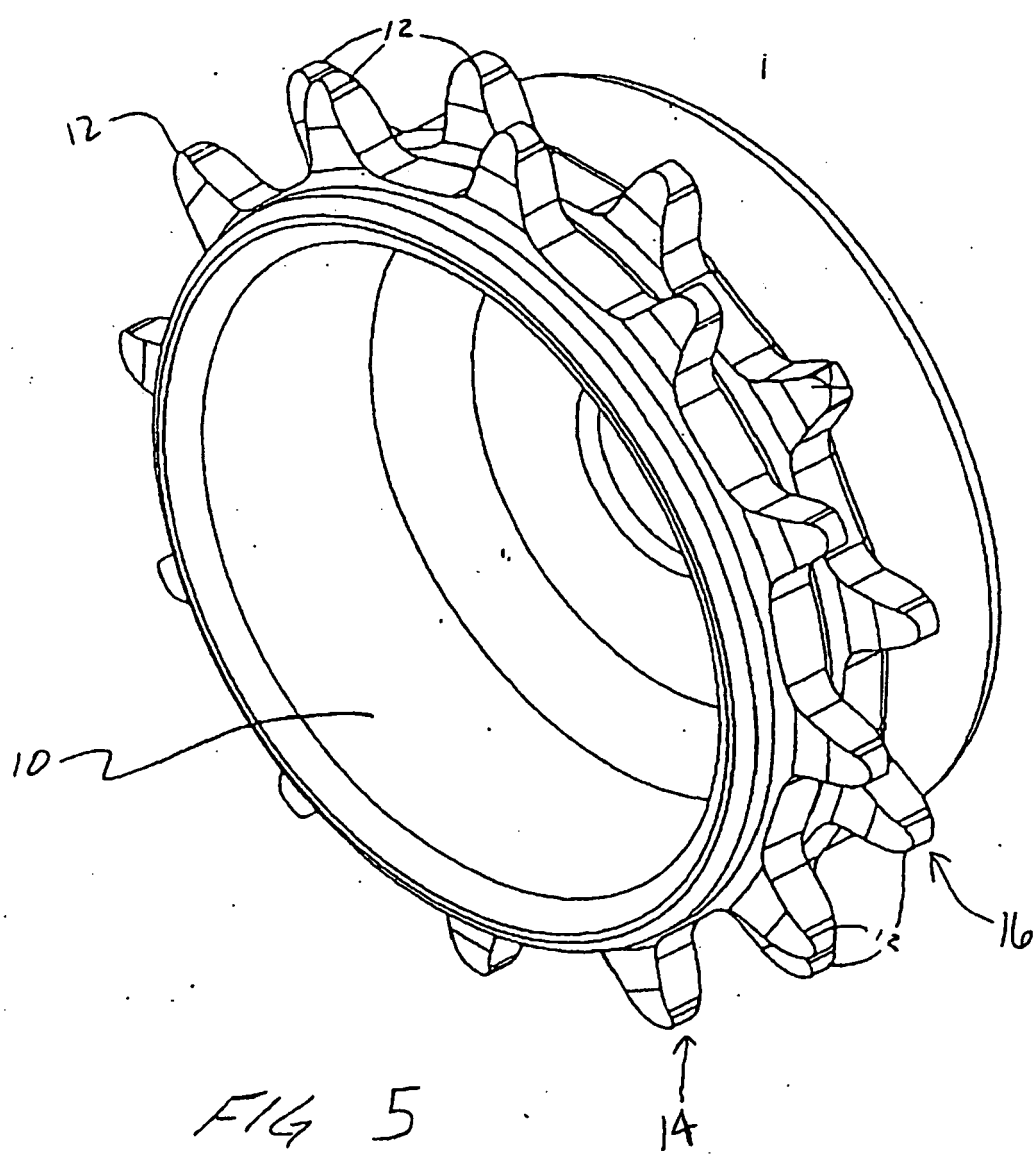


FIG 4



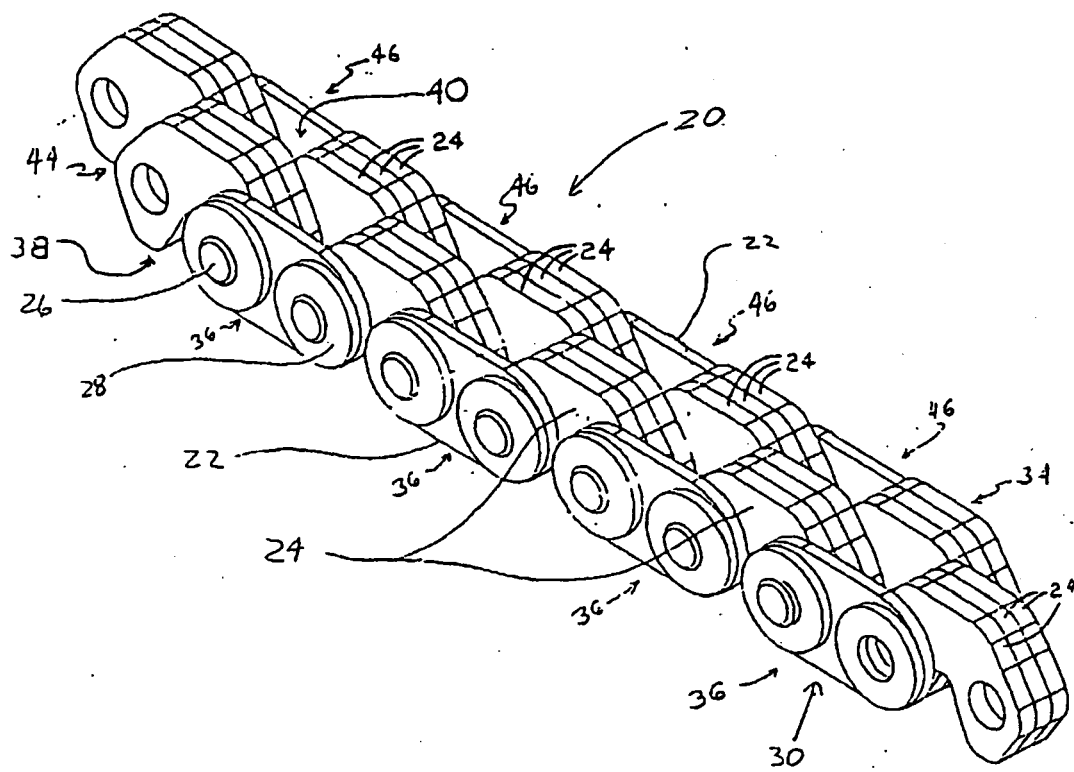


FIG 6

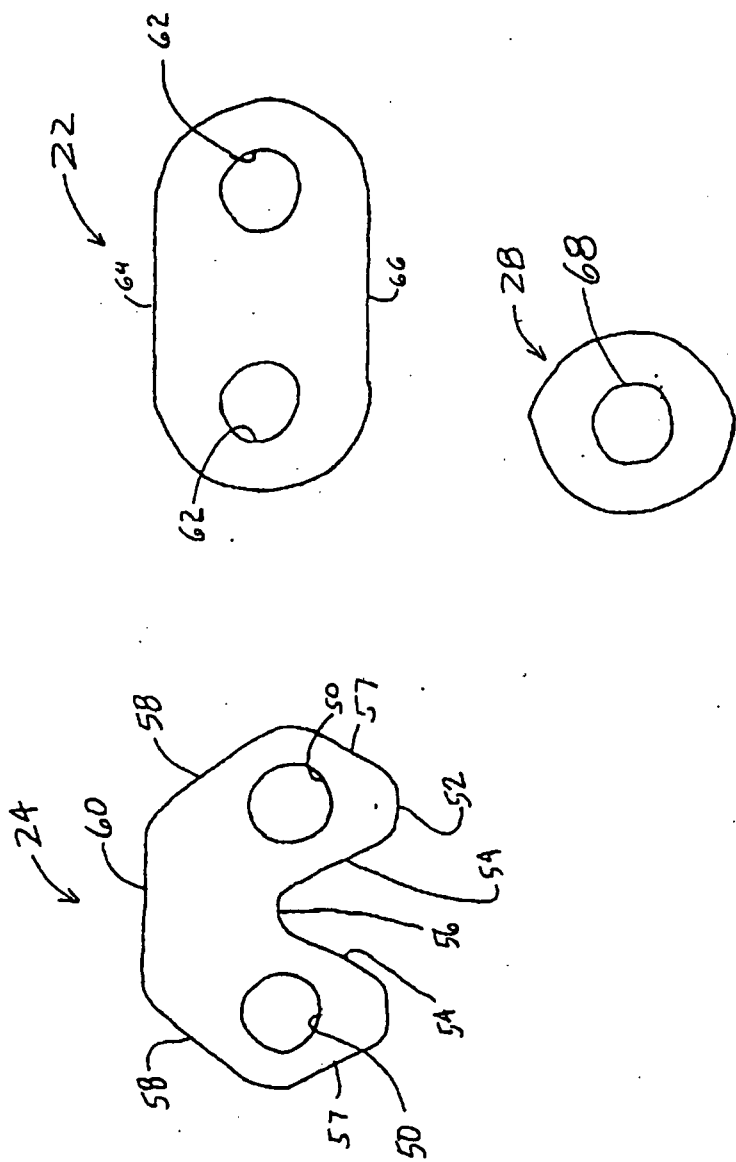


Fig. 8

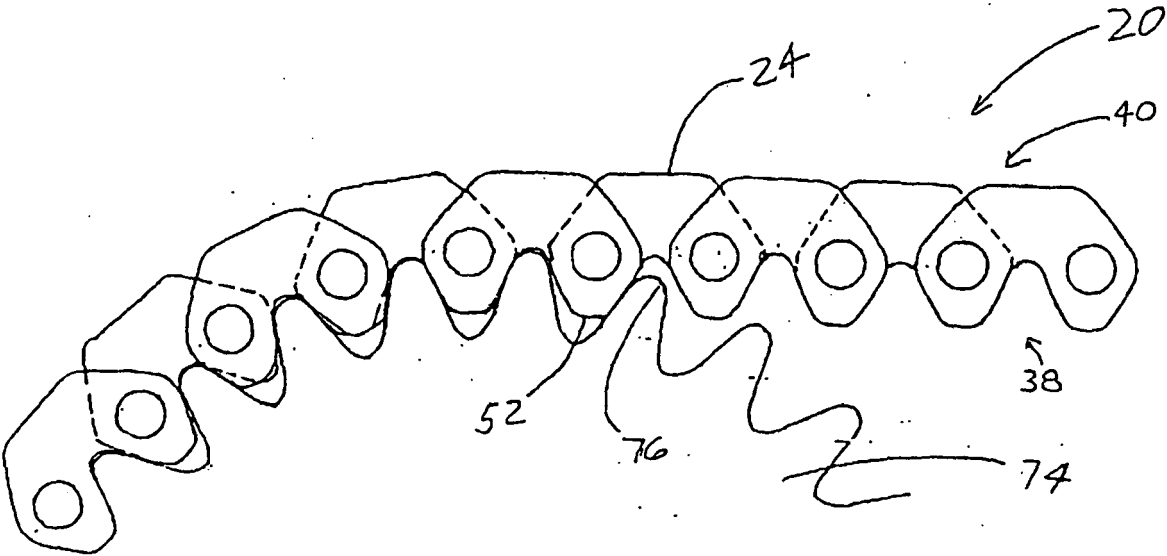


Fig. 9

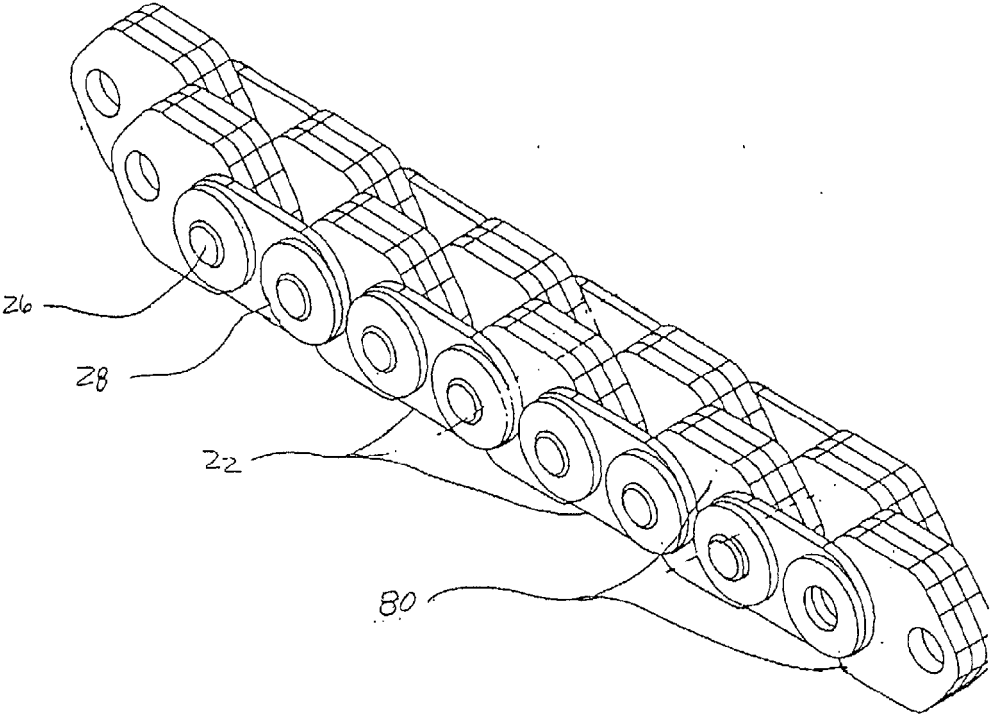


FIG 10

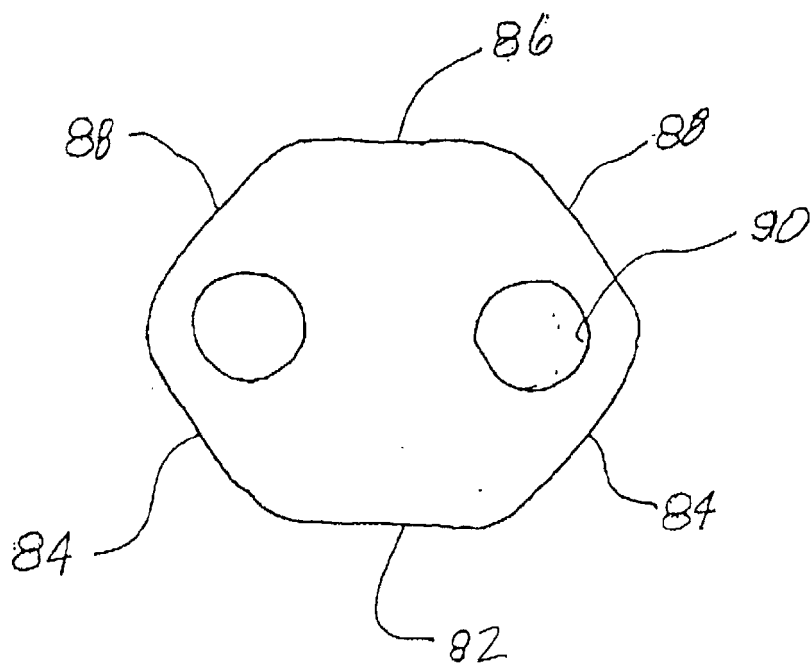


Fig. 11