



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 279 602 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**29.01.2003 Bulletin 2003/05**

(51) Int Cl.7: **B65B 53/06**

(21) Application number: **02077995.5**

(22) Date of filing: **23.07.2002**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
IE IT LI LU MC NL PT SE SK TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventor: **Butturini, Luciano**  
**I-20015 Parabiago (Milan) (IT)**

(74) Representative: **Martegani, Franco**  
**Patent Attorney,**  
**Via Carlo Alberto, 41**  
**20052 Monza (Milano) (IT)**


(30) Priority: **25.07.2001 IT MI20011597**

(71) Applicant: **ITALDIBIPACK S.p.A.**  
**20010 Pogliano Milanese (Milano) (IT)**

(54) **Method and machine for packaging products with heat-shrinking film**

(57) A procedure and a machine for packaging products in heat-shrinking film in which a plurality of products

are first enveloped in succession through sealing of the film around them, said film then being heat-shrunk with a single operation on all of said products.

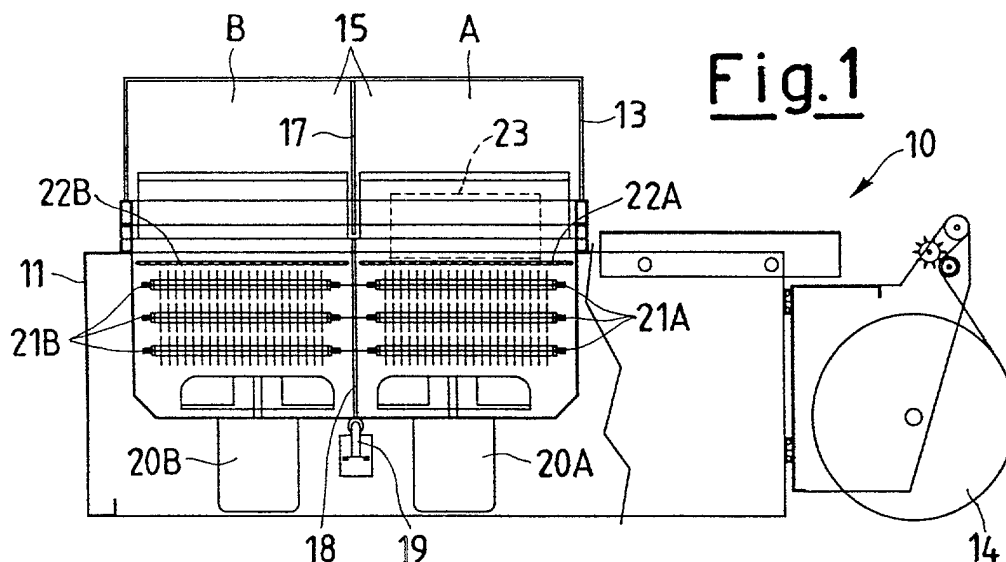

EP 1 279 602 A1

## Description

**[0001]** The present invention refers to a procedure for packaging small products with heat-shrinking film on an energy-saving packager.

**[0002]** Machines for packaging products with centre-folded heat-shrinking film have a dome hinged onto a structure to form a heat-shrinking chamber, equipped with a heat source and a fan for circulating the heated air. A cutting and sealing frame, equipped with a blade or sealing rods is applied integral with the edges of the dome.

**[0003]** The procedure foresees that an operator place the products to be packaged on a support surface inside the chamber between two flaps of a film folded upon itself in the longitudinal direction, known as "centre-folded film". The lowering of the dome determines the action of the blade or sealing rods on the film to form an encasement closed around the product. The subsequent activation of the heat source and of the fan determines the heat-shrinking of the film on the product. The packaging operations follow on for each product in the same way as that which is described.

**[0004]** Such machines, having to adapt to products of various sizes, must be of a suitable volume and have ventilation and heating capabilities which are suitable for large products and are therefore oversized in the case of the packaging of small products.

**[0005]** An energy-saving packaging machine foresees the realisation of a heat-shrinking chamber which can be divided through a mobile dividing wall, where each of the zones which are formed is arranged with a heat source and a fan for circulating air which are independent and can be selectively activated.

**[0006]** In the case of packaging small products, the heat-shrinking will take place in just one zone, defined by the dividing wall; in the case of treatment of large products, on the other hand, the entire volume of the dome shall be used with the simultaneous activation of both fans and both heat sources.

**[0007]** The main drawback of the conventional use of packaging machines with a dome consists of the high energy consumption, in the form of heat dispersion, which cannot be avoided each time the dome is opened.

**[0008]** Moreover, this use produces working conditions which are very dangerous for the operator, who, for each packaging product, is run over a great mass of hot air.

**[0009]** The general purpose of the present invention is that of overcoming the aforementioned drawbacks of the prior art in an extremely simple, cost-effective and particularly functional manner.

**[0010]** Another purpose is that of improving the heat-shrinking of film with low heat-absorption capability or with a greater thickness.

**[0011]** In view of the aforementioned purposes, according to the present invention, it has been thought of to realise a procedure for packaging with heat-shrinking

film, having the characteristics outlined in the attached claims.

**[0012]** The structural and functional characteristics of the present invention and its advantages compared to the prior art shall become even clearer from an examination of the following description, referring to the attached drawings, which show a procedure realised according to the innovative principles of the invention itself.

**[0013]** In the drawings:

- figure 1 is a side elevation section view which longitudinally shows a machine for packaging with heat-shrinking film which can be used in a possible non-exclusive embodiment of the present invention;
- figure 2 is a cross-section rotated by 90° with respect to the previous view of figure 1;
- figure 3 is plan view from above of the machine of figure 1;
- figures 4a-4c schematically show the steps of a packaging procedure, object of the present invention, carried out on the machine of figure 1, according to a first embodiment;
- figures 5a-5d schematically show the steps of a second embodiment of a packaging procedure;
- figures 6a-6d schematically show the steps of a third embodiment of a packaging procedure, object of the present invention;
- figures 7a-7e schematically show the steps of a fourth embodiment of a packaging procedure.

**[0014]** With reference to the drawings, with 10 an energy-saving machine for packaging products with heat-shrinking film is wholly indicated, comprising a structure 11 upon which a reel of heat-shrinking film 14 is fitted and upon which for example the procedure according to the invention is carried out.

**[0015]** The packaging machine 10 consists of a cover 13 or dome, equipped with cutting and sealing means, such as a blade or sealing rods, which fits onto a lower part 11, hinged at 16 along one of its sides, and defines a heat-shrinking chamber 15.

**[0016]** In the chamber a dividing wall is arranged, formed from an upper portion 17, integral with the dome 13, and a lower portion 18, inserted into the structure 11. Such portions of wall 17 and 18 can be both of the removable type or they can be generically mobile.

**[0017]** In this way the chamber 15 is divided into two separate zones A and B, which can be used independently, thanks to a sensor 19, which detects the presence or nonpresence of the wall 18.

**[0018]** Each zone A and B is equipped with a heat source, resistors 21A and 21B, and with a fan 20A and 20B for circulating the heated air, as well as with a support surface 22A and 22B, for example a gridded surface, for products to be packaged 23. Such a support surface 22A and 22B can be of the type which can be

adjusted in height, to allow the chamber 15 to also be divided in the vertical direction.

**[0019]** Moreover, in a different embodiment which is not shown in the figures, the support surface 22A and 22B of the machine 10 also has the function of transporting the products 23 into such a machine 10 and of discharging them out from it and is made up of a transportation device for example a conveyor belt or else rollers.

**[0020]** The procedure for packaging small products with heat-shrinking film 14 foresees the preparation of many products for every work cycle. By work cycle we mean all of the packaging operations carried out in succession on a number of products, which can be received simultaneously in the chamber 15 during heat-shrinking. In the subsequent descriptions of the procedure the products packaged in a work cycle shall be indicated with I, II, III, IV; those packaged in the subsequent cycles shall be indicated with I', II' and so on.

**[0021]** The number of products packaged for each work cycle is at least equal to two and the maximum depends upon the sizes of the products themselves, as well as upon the capacity of the chamber 15.

**[0022]** A first embodiment of the procedure, object of the present invention, is carried out with the dividing wall 18 in closed position to separate the chamber 15 into the two zones A and B. In zone A the sealing operations of products I and II are carried out in succession between the sealing rods (figures 4a-4c).

**[0023]** Each time the dome 13 is opened, the product I or II, enclosed by a closed encasement, is transferred into zone B (figures 4b and 4c). The work cycle ends with the heat-shrinking of all of the products present in zone B, through the activation of the fan 20B and of the heat source 21B (figure 4c). Possibly, as indicated in the figures, at the same time as the heat-shrinking, the sealing of the first product I' of the subsequent work cycle takes place in zone A.

**[0024]** A second embodiment of the procedure, object of the present invention and schematically shown in figures 5a-5d, is carried out with the dividing wall 18 in open position to define a single heat-shrinking chamber 15.

**[0025]** The sealing operations are carried out in succession upon products I, II, III, IV, which are then transferred into a different position of the support surface 22A and 22B (figures 5a-5c).

**[0026]** Once the capacity of the chamber 15 has been reached and the last product IV has been sealed, without opening the dome 13, the heat-shrinking of all of the products present in the chamber 15 takes place through the activation of the fans 20A and 20B, as well as of the heat sources 21A and 21B (figure 5d).

**[0027]** The embodiments described hereafter allow more than one heat-shrinking operation to be carried out for each product being treated, which is desirable in order to improve the heat-shrinking of film with low heat-absorption capability or with an increased thickness.

**[0028]** The third embodiment of the procedure foresees the operation of the machine 10 with the dividing wall 18 closed. In each work cycle in zone A the sealed products I and II of figures 6a and 6b accumulate, which are then transferred simultaneously into zone B (figure 6c). Then many heat-shrinking operations, up to a maximum equal to the number of products packaged in every work cycle, are carried out. Such heat-shrinking operations (figures 6c and 6d) coincide with the sealing operations in zone A of the products of the subsequent cycle I' and II' and therefore are interrupted by the opening of the dome 13.

**[0029]** Finally, in a final embodiment of the procedure the machine 10 functions with the dividing wall 18 closed and each sealing operation in zone A also corresponds to the actuation of the fan 20B and of the heat source 21B (figures 7c-7e). Figures 7a and 7b, on the other hand, represent a transitory start-up step of the machine 10. The products being treated I, II, I', II', I'' are transferred, for example through a non-shown automated transporter, into a series of contiguous successive positions and are discharged one at a time from zone B.

**[0030]** The operation of the chamber according to the described procedures can be programmed by the operator and is carried out step-by-step according to an automated sequence.

**[0031]** From that which is described above with reference to the figures is clear how a The procedure for packaging small products with heat-shrinking film on an energy-saving packager, according to the invention, is particularly useful and advantageous. Such a procedure, indeed, guarantees an increase in productivity, as well as a good shrinking of the film on the products with a substantial saving in energy.

**[0032]** The purpose mentioned in the preamble of the description is thus achieved.

## Claims

1. Procedure for packaging small products with heat-shrinking film on an energy-saving packager (10) consisting of a cover (13) or dome, equipped with cutting and sealing means, such as a blade or sealing rods, which fits onto a lower part (11), to define a chamber (15), where said chamber (15) foresees a dividing wall (17, 18) to define at least two separate zones (A, B), equipped with at least one heat source (21A, 21B) and with a fan (20A, 20B) for circulating the heated air and with a support surface (22A, 22B) for products to be packaged (23), **characterised in that** it foresees for every work cycle the packaging of a number of products (I, II, III, IV, I', II') at least equal to two and at most equal to the number of products which can simultaneously be received in said chamber (15, A, B), where said work cycle comprises:

- a number of sealing operations in said zone (A) equal to the number of products (I, II, III, IV) to be packaged;
  - at least one heat-shrinking operation of said products (I, II, III, IV) arranged in at least one of said zones (A, B) through the activation of said fans (20A, 20B) and of said heat sources (21A, 21B). 5
2. Procedure according to claim 1, **characterised in that** said at least one heat-shrinking operation is just one in number and is carried out in said zone (B) with said dividing wall (18) in closed position. 10
  3. Procedure according to claim 2, **characterised in that** at the same time as said heat-shrinking operation in said zone (B) the sealing in said zone (A) of a first product (I') of the next work cycle takes place. 15
  4. Procedure according to claim 1, **characterised in that** said at least one heat-shrinking operation is just one in number and is carried out in both of said zones (A and B) with said dividing wall (18) in open position. 20 25
  5. Procedure according to claim 1, **characterised in that** said at least one heat-shrinking operation are equal in number to the products to be packaged (I, II, III, IV) for each work cycle. 30
  6. Procedure according to claim 1, **characterised in that** said products to be packaged (I, II, III, IV) are transferred in an automated manner, said support surface (22A, 22B) consisting of a transporter. 35
  7. Machine for packaging products in heat-shrinking film when realised to carry out the procedure according to any one of claims 1-6. 40

45

50

55

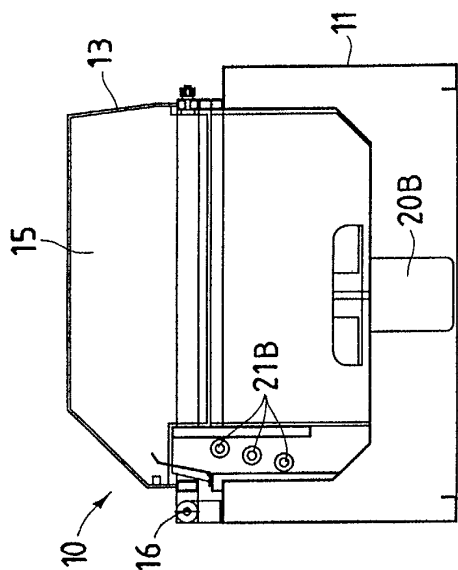


Fig. 2

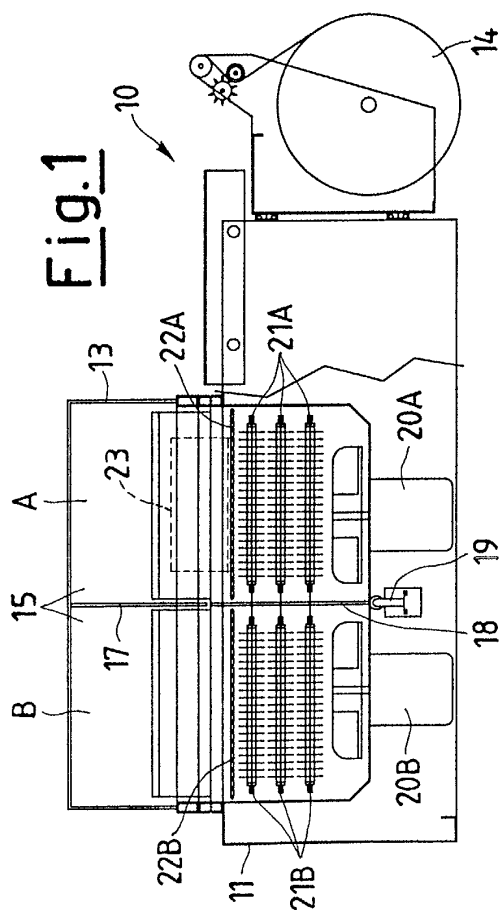


Fig. 1

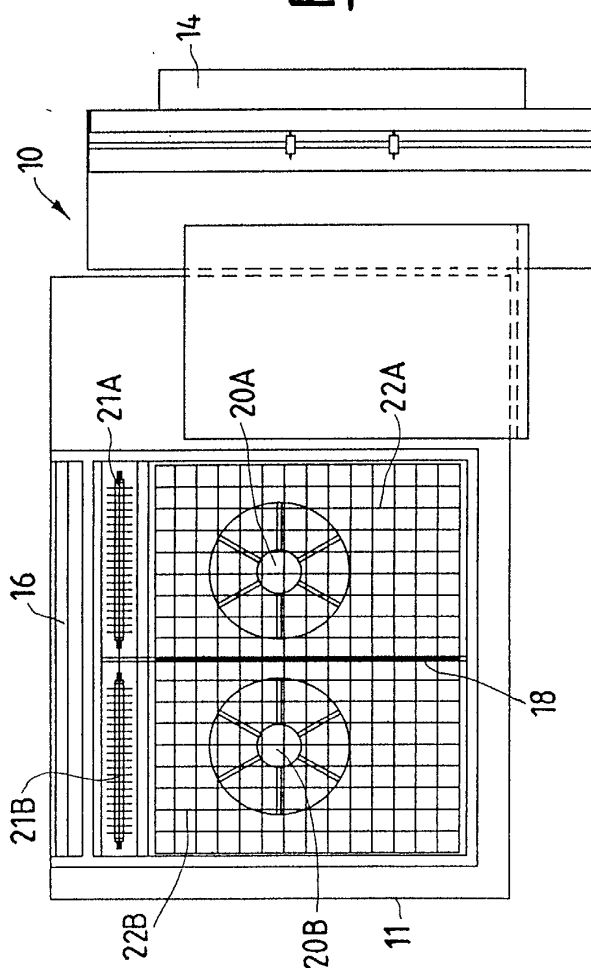


Fig. 3

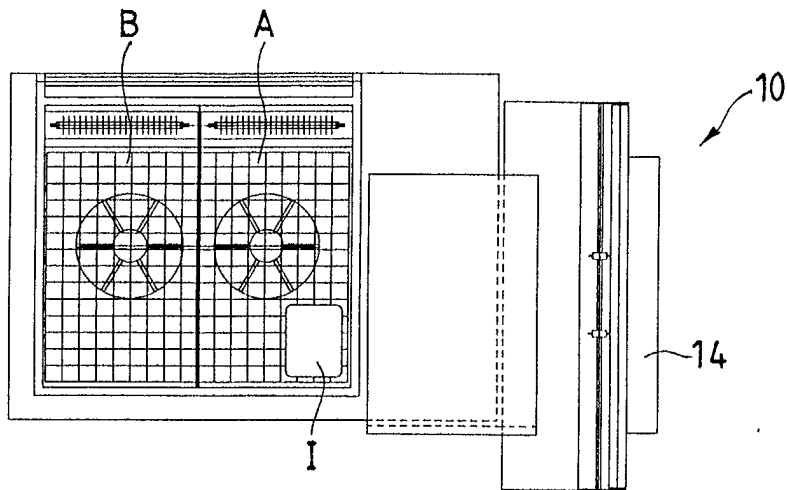


Fig.4a

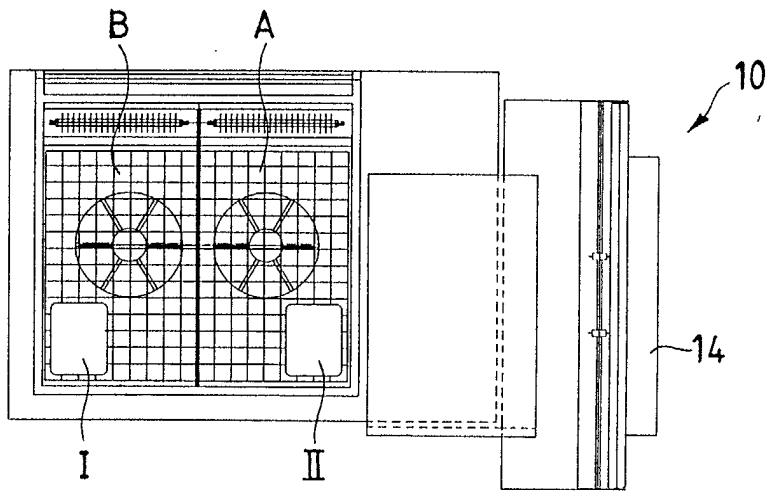


Fig.4b

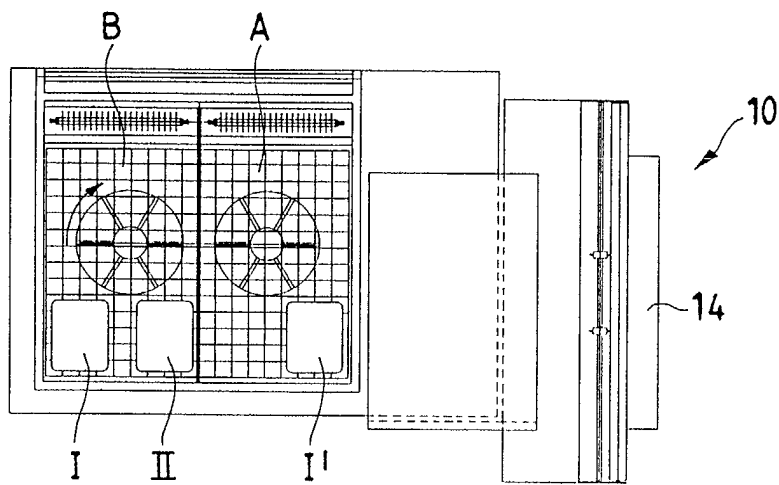


Fig.4c

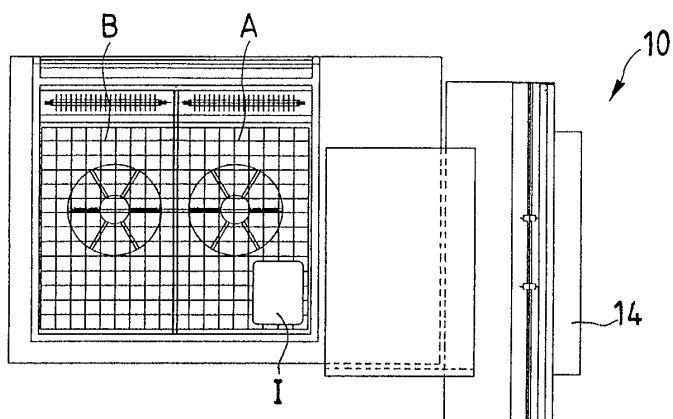


Fig. 5a

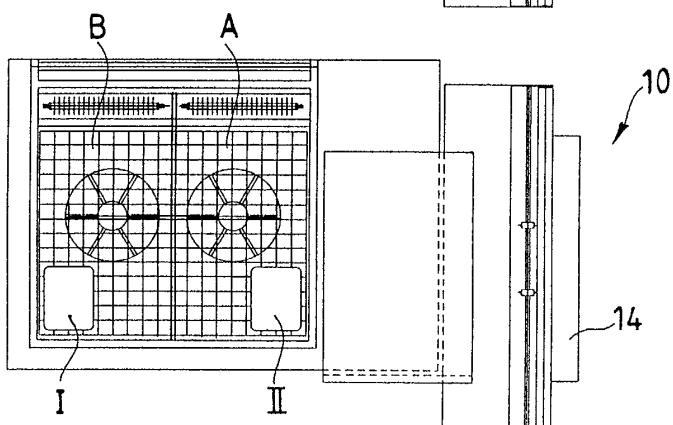


Fig. 5b

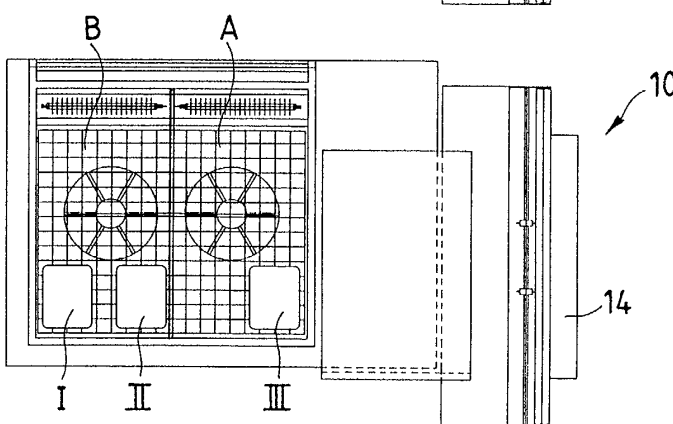


Fig. 5c

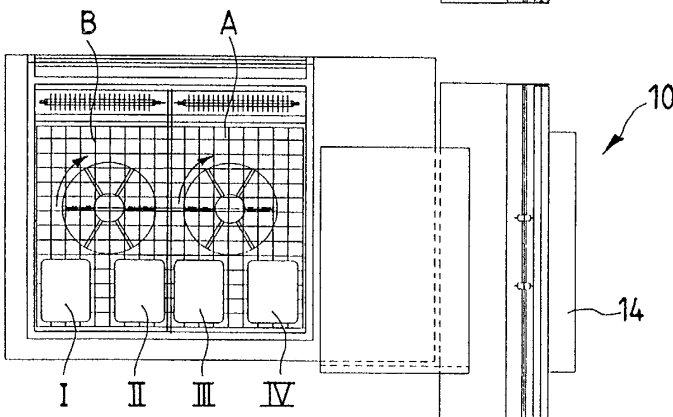


Fig. 5d

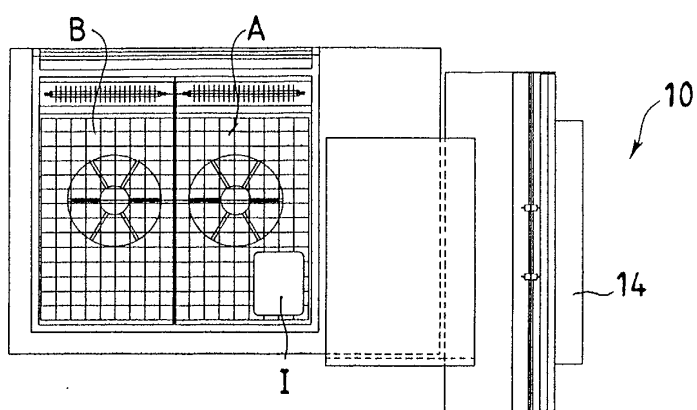


Fig. 6a

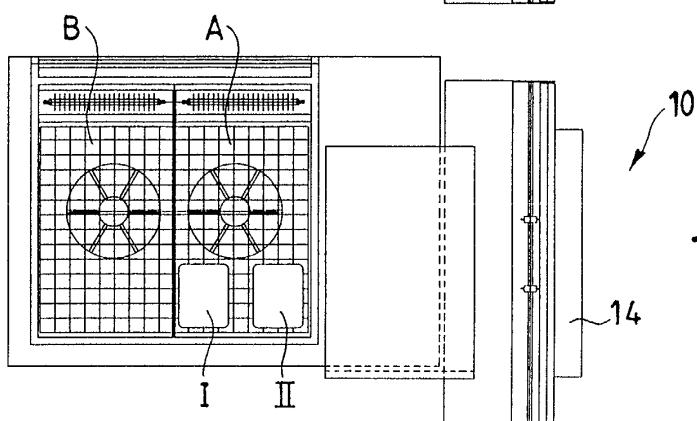


Fig. 6b

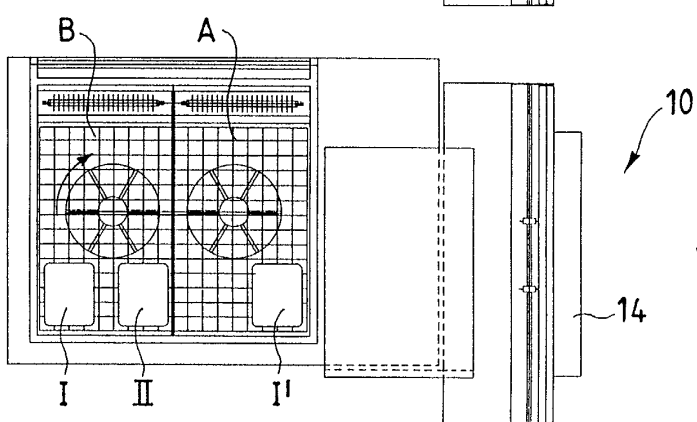


Fig. 6c

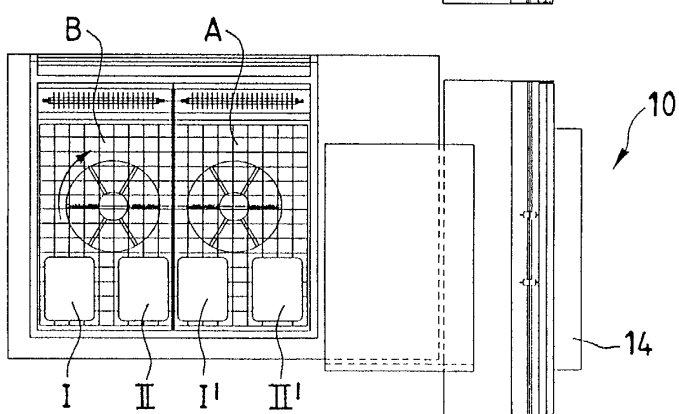


Fig. 6d



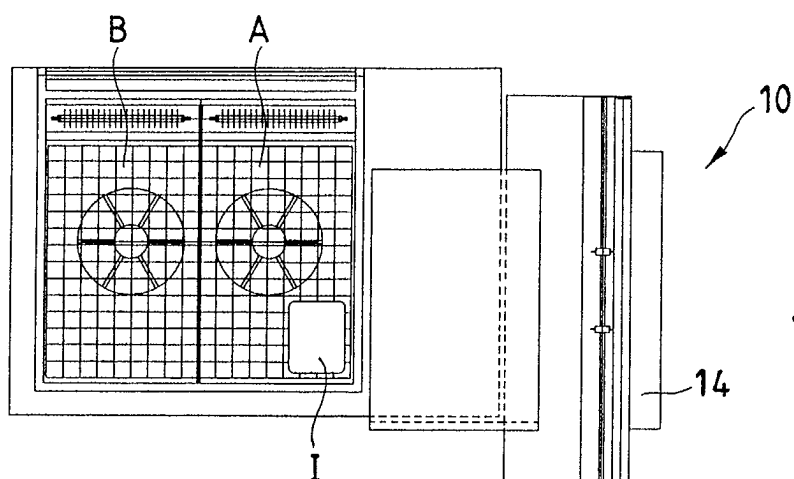


Fig.7a

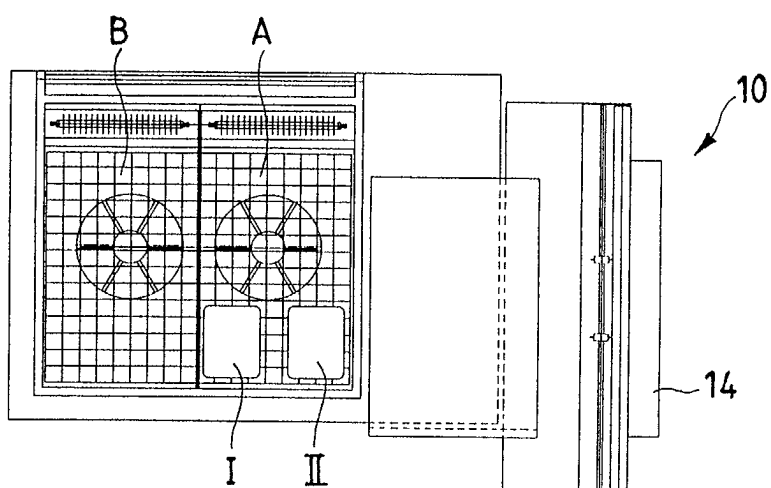


Fig.7b

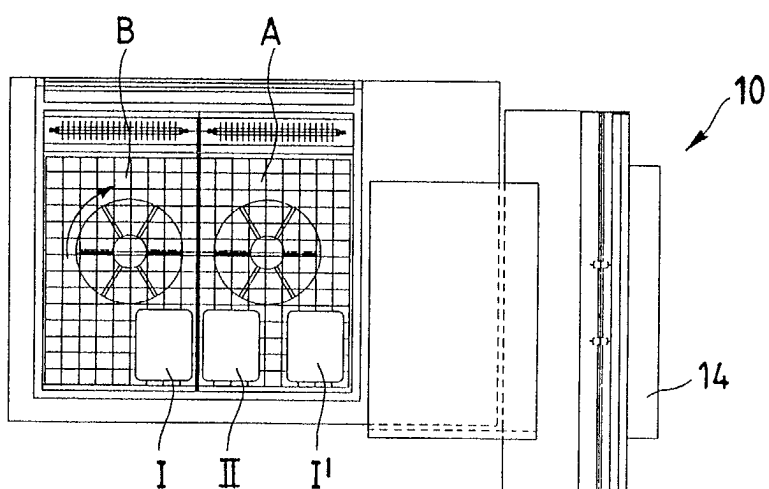


Fig.7c

Fig.7d


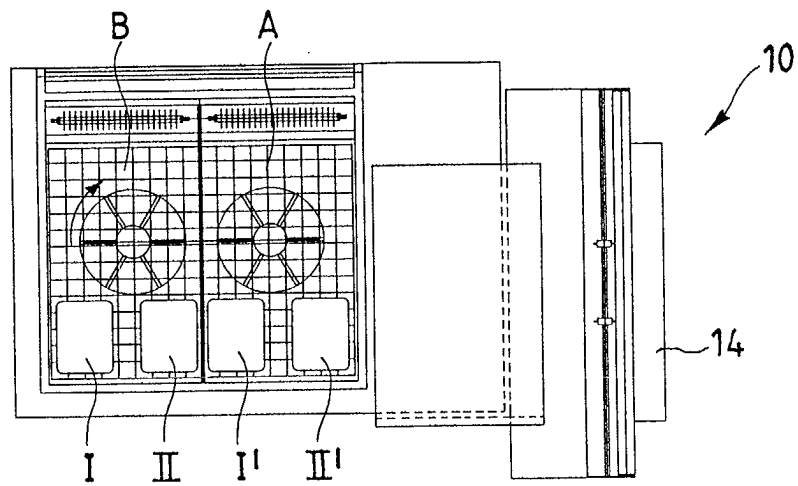


Fig.7e



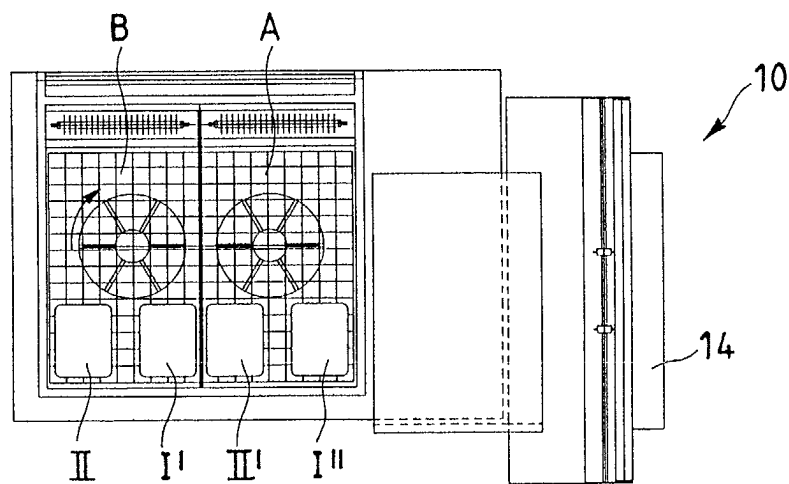

European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 02 07 7995

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	DE 19 17 264 A (SPORKENBACH GUSTAV ADOLF) 15 October 1970 (1970-10-15) * page 3, line 5 - page 4, line 35; figures *	1,7	B65B53/06
A	US 3 312 811 A (GARRETT SHANKLIN FRANK) 4 April 1967 (1967-04-04) * column 3, line 15 - column 6, line 52; figures *	1,6,7	
A	US 4 719 332 A (MARKUSON JR ARTHUR W) 12 January 1988 (1988-01-12) * column 7, line 31 - column 10, line 47; figures *	1,6,7	
A	DE 12 62 869 B (WELDOTRON CORP) 7 March 1968 (1968-03-07) * column 3, line 25 - column 5, line 44; figures *	1,6,7	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			B65B
Place of search		Date of completion of the search	Examiner
THE HAGUE		11 November 2002	Jagusiak, A
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03 82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 07 7995

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

11-11-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 1917264	A	15-10-1970	DE 1917264 A1	15-10-1970
US 3312811	A	04-04-1967	CH 437110 A	31-05-1967
			GB 1030950 A	25-05-1966
			NL 6500890 A	05-08-1965
US 4719332	A	12-01-1988	NONE	
DE 1262869	B	07-03-1968	NONE	