

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 279 610 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

21.07.2004 Bulletin 2004/30

(21) Application number: **01929657.3**

(22) Date of filing: **03.05.2001**

(51) Int Cl.7: **B65D 6/18**, B65D 5/20

(86) International application number:
PCT/ES2001/000169

(87) International publication number:
WO 2001/085555 (15.11.2001 Gazette 2001/46)

(54) **PACKING BOX**

VERPACKUNGSBEHÄLTER

BOITE D'EMBALLAGE

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

(30) Priority: **04.05.2000 ES 200001118**

(43) Date of publication of application:
29.01.2003 Bulletin 2003/05

(73) Proprietors:
• **Ripolles Romeu, Juan Luis**
43870 Amposta (ES)
• **Sannicolas Martinez, Miguel**
08940 Cornellà (ES)

(72) Inventors:
• **Ripolles Romeu, Juan Luis**
43870 Amposta (ES)

• **Sannicolas Martinez, Miguel**
08940 Cornellà (ES)

(74) Representative: **Duran Moya, Luis-Alfonso**
DURAN-CORRETJER
Còrsega, 329
(Paseo de Gracia/Diagonal)
08037 Barcelona (ES)

(56) References cited:

ES-T3- 2 092 011	ES-T3- 2 092 082
ES-U- 295 405	ES-U- 1 041 082
ES-U- 1 041 715	FR-A- 2 194 611
US-A- 3 623 651	US-A- 4 210 274
US-A- 5 697 500	

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 279 610 B1

Description

[0001] The present invention relates to packaging boxes provided with corner reinforcements which afford considerable advantages over those currently known in the field, possessing appreciable characteristics of novelty and inventive activity.

[0002] Document FR-A- 2 194 611, on which the preamble of claim 1 is based, discloses a packaging box comprising corner reinforcements slidable within corner flaps.

[0003] The packaging boxes with corner reinforcements to which the present invention relates are for general use, although a particular field of use is that of fruit, vegetables and the like, for the marketing of the said products.

[0004] The present invention applies to boxes produced by means of a thermoformed laminar element which, owing to its particular structure, can be assembled quickly and easily, so as to be very practical for storage and transportation because of its flatness in the opened-out condition, but which, on the other hand, can quickly form a firm and stable box for holding the desired products.

[0005] The present invention extends to the general configuration of the box and, in particular, to the specific configuration of the edges which have to overlap when the box is in the assembled condition, providing a simple and practical solution for the joining of the said edges.

[0006] The invention provides particular corner reinforcements of the boxes, which corner reinforcements are produced in the form of dihedral or tubular profiles, with or without internal fins for guiding lateral flaps of the various side walls of the box.

[0007] The present invention also extends to the configuration of means for the stacking of the box by means of injected flanges on the upper edges of the side walls of the box, with small projecting fins which can coincide with the openings in the lower side edges of the appropriate smaller side walls, enabling easy stacking to be achieved.

[0008] The present invention also extends to the particular configuration of the lower portions of the larger and smaller side walls of the box by the provision of ribs which are formed by deep drawing and which considerably reinforce the articulations of the side walls.

[0009] For a better understanding, some drawings showing the boxes of the present invention are appended by way of non-limiting example.

Figure 1 shows a plan view of a blank for a stackable box with corner reinforcements.

Figure 2 is a detail showing, in plan, the relative arrangement of two edges of side walls which are to overlap.

Figure 3 shows a detail in a cross-section taken in the section plane indicated.

Figures 4 and 5 are a plan view and an elevational

view of a particular profile of one of the side walls, respectively.

Figure 6 is a cross-section taken in the section plane shown in Figure 5.

Figure 7 is a perspective view.

Figures 8 and 9 are a side elevational view and a front elevational view of a flap of one of the side walls to be coupled with the flaps shown in Figures 4 to 7.

Figure 10 shows a detail, sectioned in the section plane indicated in Figure 8.

Figures 11 and 12 show the relative positions of two flaps of side walls, prior to their coupling and after their coupling.

Figure 13 is a perspective view of a box after its assembly.

Figures 14 to 17 show respective details, sectioned in the section planes indicated.

Figures 20 to 29 are respective perspective views of alternative embodiments of corner reinforcements according to the present invention.

[0010] As shown in the appended drawings, the present invention relates to the configuration of boxes, a blank for which is generally indicated 1 in the plan view of Figure 1. The blank is composed of a base panel 2, two panels 3 and 4 which correspond to the longer side walls, and a further two panels 5 and 6 corresponding to the shorter side walls.

[0011] According to one of the characteristics of the present invention, opposed lateral flaps of the side walls, which are to be joined together during the assembly of the box, have particular characteristics of shape which enable them to be coupled and retained very easily and effectively. Although the flaps corresponding to all of the side walls have been shown in the drawings, in the detailed explanation given below, reference will be made in particular to the flaps 7 and 8 of the side walls 6 and 4, respectively, which flaps are to overlap. The so-called edge portions, indicated 9 and 10, have as a characteristic the formation of recesses, such as 11 and 12, of complementary shape such that, when the said walls are turned up about the corresponding edges by which they are joined to the base 2, each edge portion is retained with a complementary edge portion. This can be seen in greater detail in Figures 4 to 7, corresponding to the flap 8, and in Figures 8 to 10, which correspond to the flap 7. In fact, as can be appreciated from these drawings, the recess 12 is intended to fit inside the recess 11 of the opposed flap, as shown in Figures 11 and 12 which show the assembly, in a manner such that, when the side walls are turned up, they are fastened together by the overlapping edge portions, simply by the pressing of some profiles into others. This considerably simplifies the assembly of the box.

[0012] As can be appreciated from Figures 3, 6 and 10, the flaps of the edges of the side walls will preferably have a dihedral structure with flat faces of different

lengths such as those indicated 13 and 14 in Figure 6 and 15 and 16 in Figure 10.

[0013] As indicated, the present invention provides a specific to the configuration of deep-drawn reinforcing elements in the vicinity of the lower edges of the side walls of the box. These deep-drawn elements in the form of longitudinal or curved ribs are shown, for example, in Figure 1, those corresponding to the longer side walls being indicated 17 and 17', and those corresponding to the shorter side walls 18 and 18'. They have a curved shape to permit the formation of openings in the edges of the smaller walls, such as the openings indicated 19 and 19' in the walls 5 and 6.

[0014] The present invention also extends to the formation of stacking flanges on the upper edges of the smaller sides; for example, the stacking profile, indicated 20 in Figure 13, has an arrangement complementary with that of the lower edge of the box itself to permit stacking.

[0015] The present invention also extends to the provision of a reinforcing rib 21 in the upper edge of each lateral handle opening, such as the opening 22 shown in Figure 15.

[0016] As shown in Figures 16 and 17, the base 2 is articulated to the side walls, for example, to the side wall 3, by means of a bending line 23; the above-described reinforcing rib 17, as well as an internal reinforcing rib 24 provided with openings 25, can be seen. In the corner regions, the profile 17 has a somewhat flattened structure, as shown in Figure 17.

[0017] The present invention also extends to the so-called corner reinforcements, which are constituted substantially by a dihedral structure 26, Figure 18, with flat faces 27 and 28 from which fins 29 and 30 extend inwardly in order to hold fast the edges 31 and 32 of the adjacent side walls, for example, those indicated 33 and 34. In the embodiment of Figure 18, the fins 29 and 30 terminate in inwardly-directed inner flanges 35 and 36.

[0018] In the embodiment shown in Figure 19, the corner reinforcement 37 has internal fins 38 and 39 which terminate internally in curved flanges 40 and 41.

[0019] The internal fins may also extend from the inner sides of the faces of the dihedral figure, as can be seen in Figures 20 and 21, in which the corner reinforcements have respective dihedrals 42 and 43 from the inner sides of which flat fins 44 and 45 extend perpendicular to the plane of symmetry of the dihedral. In the case of the corner reinforcement 43, the internal fins 46 and 47 have a structure similar to those of Figure 20 although, in this embodiment, no fitting of the inner sides of the edges of the side walls takes place.

[0020] As can be appreciated from Figure 22, the corner reinforcement may also be formed by means of a dihedral 48 from which respective fins 49 and 50 extend inwardly at an inclination in order to pinch the overlapping edges of the side walls.

[0021] Figure 23 shows a corner reinforcement constituted by a dihedral 51 which is extended by internal

fins 52 and 53 arranged substantially parallel to the faces of the dihedral 51.

[0022] Figures 24 to 26 show substantially circular or non-circular cylindrical corner-reinforcement embodiments; Figure 24 shows the cylindrical body of a corner reinforcement 54 which has an opening 55 along one of its inner generatrices so as to be able to coincide with the narrowest region of the overlapping edges of two side walls.

[0023] In Figure 25, the cylindrical corner reinforcement 56 has a structure similar to that of Figure 24, but has its internal fins 57 and 58 extending radially inwards.

[0024] Figure 26 shows the arrangement of a cylindrical corner reinforcement 59 with characteristics similar to those of Figure 24, clasping flat regions 60 and 61 of two side walls of a box.

[0025] Figures 27 to 29 show embodiments of corner reinforcements which are also dihedral but with the front corner rounded. Thus, for example, Figure 27 shows a substantially dihedral corner reinforcement 62 the corner 63 of which is rounded and which has curved inner flanges 64 and 65.

[0026] The configuration of the corner reinforcement of Figure 28 is similar to that of Figure 27, clasping the overlapping edges of the two side walls 66 and 67 which have regions partially enveloping inner loops formed by the curved fins 68 and 69.

[0027] Figure 29 shows a dihedral corner reinforcement 70 also with a rounded corner 71, with a structure similar to that of Figure 27 and 28, in which the side walls 72 and 73 of the box are fitted in the curved regions 74 and 75 partially enveloping the curved loops of the inner fins.

Claims

1. Packaging box of the type which comprises a single, thermoformed, laminar element (1) constituted by a central base element (2) and lateral extensions (3, 4, 5 and 6), which extensions can be turned up along their edges to constitute the side walls of the box, and are joined at their overlapping edges by detachable, slidable corner reinforcements, comprising flaps (7, 8) which overlap at the common edges of the side walls have, in each pair of opposed flaps, a device comprising opposed recesses and projections (11, 12) which can fit into one another in order to retain each pair of side walls (4, 6) which define two adjacent sides of the box, the box comprising further detachable slidable corner reinforcements (26, 37, 48, 51, 54, 56, 62, 70) **characterized in that** said detachable corner reinforcements are slidable over the flaps (7, 8).
2. Packaging box according to Claim 1, **characterized in that** the complementary recesses and projections (11, 12) are constituted by deep-drawn ele-

ments which have shapes such that they can be coupled with one another, and which are formed in the flaps (7, 8) that are joined together at each of the lateral corners of the box.

3. Packaging box according to Claim 1, **characterized in that** the shorter side walls have, in the vicinity of the lower edges, reinforcing ribs, which ribs (18, 18' extend around pairs of openings in the edge and are intended for stacking.

4. Packaging box according to Claim 1, **characterized in that** the side walls (5, 6) have ribs (21) formed by deep-drawing adjacent the upper edges of handle openings.

5. Packaging box according to Claim 1, **characterized in that** each of the shorter side walls (5, 6) has, in its upper edge, an outwardly directed deep-drawn element (20) which extends for most of the length of the wall and which has intermediate cut-outs for defining stacking fins.

6. Packaging box according to Claim 1, **characterized in that** the corner reinforcements (26) adopt a dihedral structure with inwardly-directed flanges (35, 36) extending from the edges of the faces of the dihedral defining a slot for the insertion of the overlapping flaps (31, 32) of each corner.

7. Packaging box according to Claim 6, **characterized in that** the fins (49, 50) extending from the edges of the faces of the dihedral adopt a structure which is inclined towards the interior of the dihedral.

8. Packaging box according to Claim 6, **characterized in that** the rear fins (52, 53) extending from the side edges of the faces of the dihedral (51) make up, together therewith, a prismatic profile having an opening in its inner corner for the penetration of the overlapping flaps in each of the lateral corners of the box.

9. Packaging box according to Claim 1, **characterized in that** the corner reinforcement is substantially cylindrical (54, 56) with a longitudinal slot (55) for receiving the edges of the side walls which overlap in a corner of the box.

Patentansprüche

1. Verpackungsbehälter in der Bauart, welche ein einzelnes, thermogeformtes Laminarelement (1) umfasst, das durch ein zentrales Basiselement (2) und seitliche Erweiterungen (3, 4, 5) gebildet ist, die entlang ihrer Kanten nach oben umgebogen werden können, um die Seitenwände des Behälters zu bil-

den, und an ihren überlappenden Kanten durch abnehmbare, schiebbare Eckverstärkungen aneinander gefügt sind, wobei er Klappen (7, 8), welche an den gemeinsamen Kanten der Seitenwände überlappen, mit einer Einrichtung in jedem Paar gegenüberliegender Klappen umfasst, welche gegenüberliegende Aussparungen und Vorsprünge (11, 12) umfasst, die ineinander eingesetzt werden können, um jedes Paar Seitenwände (4, 6) zu halten, welches zwei benachbarte Seiten des Behälters definiert, wobei der Behälter weitere abnehmbare, schiebbare Eckverstärkungen (26, 37, 48, 51, 54, 56, 59, 62, 70) umfasst, **dadurch gekennzeichnet, dass** die abnehmbaren Eckverstärkungen über die Klappen (7, 8) schiebbar sind.

2. Verpackungsbehälter nach Anspruch 1, **dadurch gekennzeichnet, dass** die komplementären Aussparungen und Vorsprünge (11, 12) durch tiefgezogene Elemente gebildet sind, welche solche Formen besitzen, dass sie miteinander gekoppelt werden können, und welche in den Klappen (7, 8) ausgebildet sind, die an jeder der seitlichen Ecken des Behälters aneinander gefügt sind.

3. Verpackungsbehälter nach Anspruch 1, **dadurch gekennzeichnet, dass** die kürzeren Seitenwänden in der Nähe der unteren Kanten Verstärkungsrippen (18, 18') besitzen, die sich um Öffnungspaare herum in den Kanten erstrecken und zum Stapeln bestimmt sind.

4. Verpackungsbehälter nach Anspruch 1, **dadurch gekennzeichnet, dass** die Seitenwände (5, 6) Rippen (21) besitzen, welche durch Tiefziehen neben den oberen Kanten von Gnföffnungen gebildet sind.

5. Verpackungsbehälter nach Anspruch 1, **dadurch gekennzeichnet, dass** jede der kürzeren Seitenwände (5, 6) in ihrer oberen Kante ein nach außen gerichtetes, tiefgezogenes Element (20) besitzt, welches sich über den größten Teil der Wandlänge erstreckt und welches Zwischenaussparungen besitzt, um Stapelrippen zu definieren.

6. Verpackungsbehälter nach Anspruch 1, **dadurch gekennzeichnet, dass** die Eckverstärkungen (26) eine V-förmige Struktur mit einwärts gerichteten Flanschen (35, 36) annehmen, welche sich von den Flächenrändern der V-Form erstrecken, die einen Schlitz zur Einführung der überlappenden Klappen (31, 32) jeder Ecke definiert.

7. Verpackungsbehälter nach Anspruch 6, **dadurch gekennzeichnet, dass** die Rippen (49, 50), welche sich von den Flächenrändern der V-Form erstrecken, eine Struktur annehmen, die in Richtung auf

die Innenseite der V-Form geneigt ist.

8. Verpackungsbehälter nach Anspruch 6, **dadurch gekennzeichnet, dass** die hinteren Rippen (52, 53), welche sich von den Seitenrändern der Flächen der V-Form (51) erstrecken, zusammen damit ein prismatisches Profil bilden, welches in seiner Innenecke eine Öffnung zum Durchdringen der überlappenden Klappen in jeder der seitlichen Ecken des Behälters besitzt.

9. Verpackungsbehälter nach Anspruch 1, **dadurch gekennzeichnet, dass** die Eckverstärkung im wesentlichen zylinderförmig (54, 56) mit einem Längsschlitz (55) zur Aufnahme der Kanten der Seitenwände ist, die in einer Ecke des Behälters überlappen.

Revendications

1. Boîte d'emballage du type comprenant un unique élément lamellaire thermoformé (1) composé d'un élément central de base (2) et de prolongements latéraux (3, 4, 5 et 6), lesquels prolongements peuvent être relevés le long de leurs bords pour constituer les parois latérales de la boîte, et sont reliés sur leurs bords en chevauchement, par des renforts d'angle amovibles et coulissants, comprenant des pattes (7, 8) se chevauchant sur les bords communs des parois latérales et présentant, dans chaque paire de pattes opposées, un dispositif comprenant des évidements et des protubérances (11, 12) opposés qui peuvent s'ajuster les uns dans les autres en vue de retenir chaque paire de parois latérales (4, 6) définissant deux côtés adjacents de la boîte, ladite boîte comportant en outre des renforts d'angle (26, 37, 48, 51, 54, 56, 59, 62, 70) amovibles et coulissants, **caractérisée par le fait que** lesdits renforts d'angle amovibles peuvent coulisser au-dessus des pattes (7, 8).

2. Boîte d'emballage selon la revendication 1, **caractérisée par le fait que** les évidements et protubérances complémentaires (11, 12) sont constitués par des éléments à emboutissage profond qui possèdent des configurations propres à autoriser leur accouplement mutuel, et qui sont ménagés dans les pattes (7, 8) reliées mutuellement sur chacun des coins latéraux de la boîte.

3. Boîte d'emballage selon la revendication 1, **caractérisée par le fait que** les parois latérales plus courtes présentent des nervures de renforcement à proximité des bords inférieurs, lesquelles nervures (18, 18') s'étendent autour de paires d'orifices pratiqués dans le bord, et sont destinées à l'empilement.

4. Boîte d'emballage selon la revendication 1, **caractérisée par le fait que** les parois latérales (5, 6) possèdent des nervures (21) pratiquées par emboutissage profond au voisinage direct des bords supérieurs d'orifices de manutention.

5. Boîte d'emballage selon la revendication 1, **caractérisée par le fait que** chacune des parois latérales plus courtes (5, 6) comporte, sur son bord supérieur, un élément (20) à emboutissage profond qui est dirigé vers l'extérieur, s'étend sur la majeure partie de la longueur de la paroi, et présente des découpes intermédiaires pour définir des membrures d'empilement.

6. Boîte d'emballage selon la revendication 1, **caractérisée par le fait que** les renforts d'angle (26) offrent une structure dièdre avec des ailes (35, 36) dirigées vers l'intérieur, s'étendant à partir des bords des faces du dièdre, définissant une fente en vue de l'insertion des pattes chevauchantes (31, 32) de chaque coin.

7. Boîte d'emballage selon la revendication 6, **caractérisée par le fait que** les membrures (49, 50), s'étendant à partir des bords des faces du dièdre, offrent une structure inclinée en direction de l'intérieur dudit dièdre.

8. Boîte d'emballage selon la revendication 6, **caractérisée par le fait que** les membrures postérieures (52, 53) s'étendant à partir des bords latéraux des faces du dièdre (51) décrivent, conjointement à ce dernier, un profil prismatique muni d'un orifice dans son coin intérieur, en vue de la pénétration des pattes chevauchantes dans chacun des coins latéraux de la boîte.

9. Boîte d'emballage selon la revendication 1, **caractérisée par le fait que** le renfort d'angle est sensiblement cylindrique (54, 56), avec une fente longitudinale (55) pour recevoir les bords des parois latérales qui se chevauchent dans un coin de la boîte.

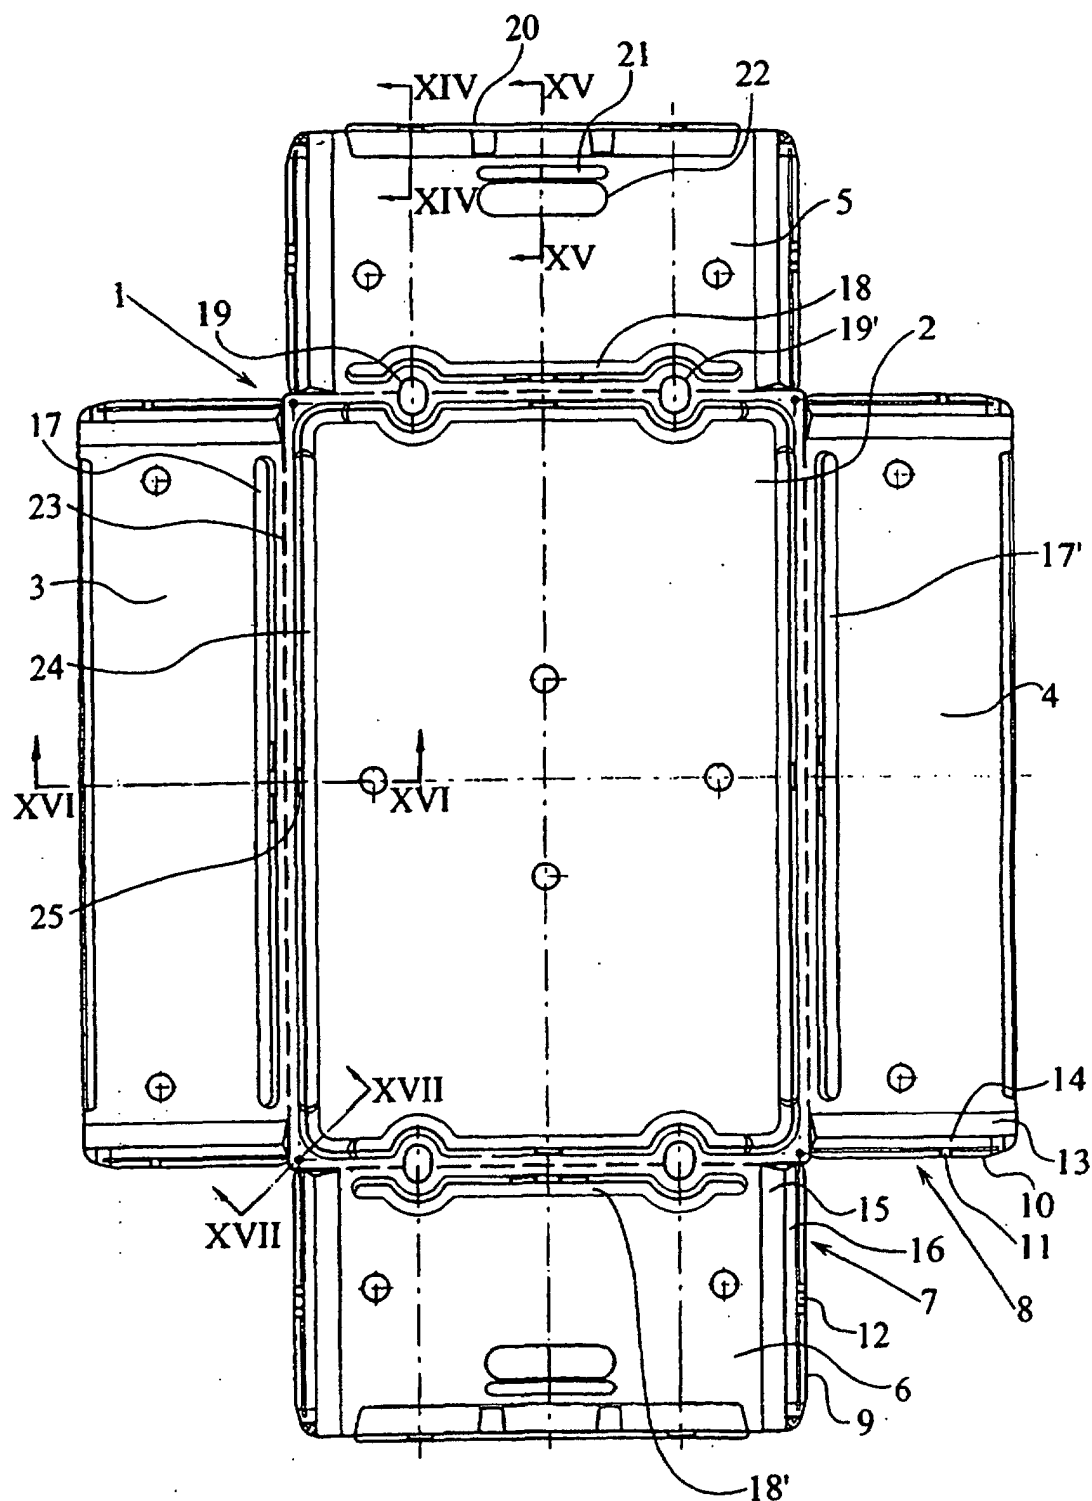

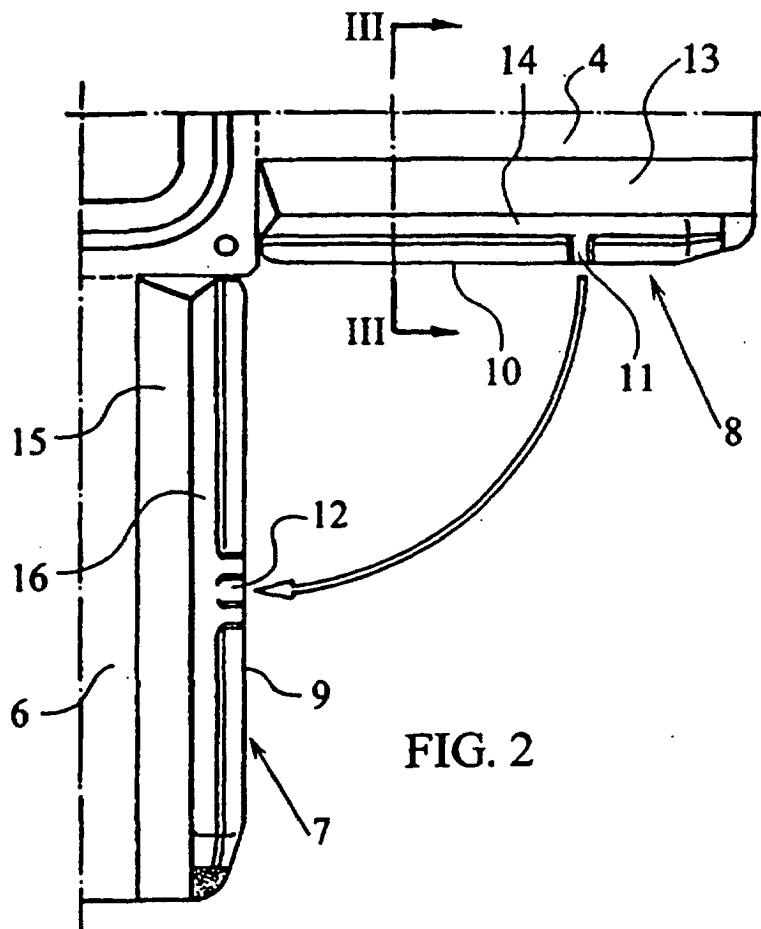


FIG. 1



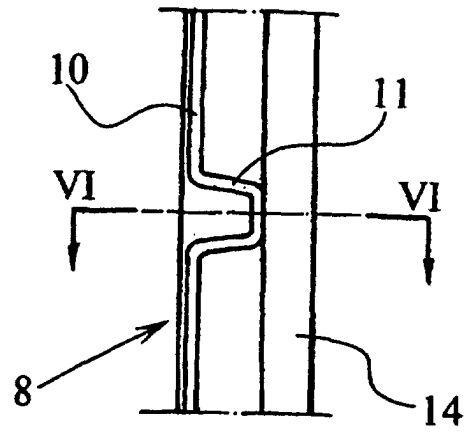


FIG. 5

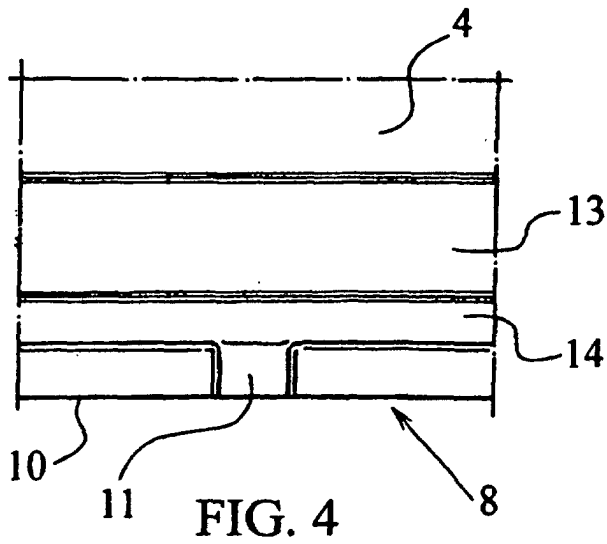


FIG. 4

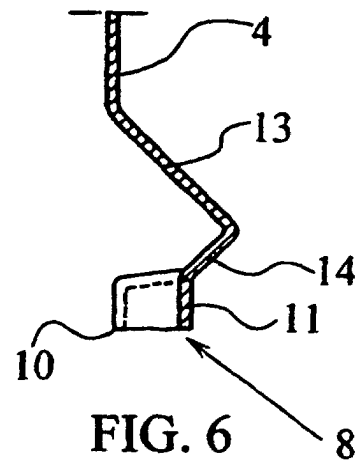


FIG. 6

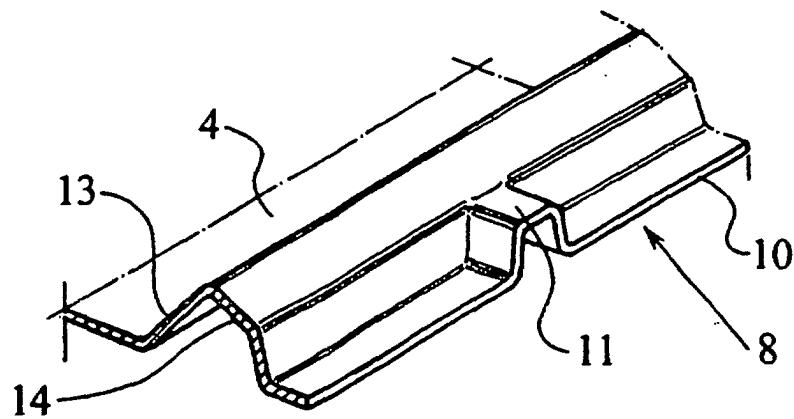


FIG. 7

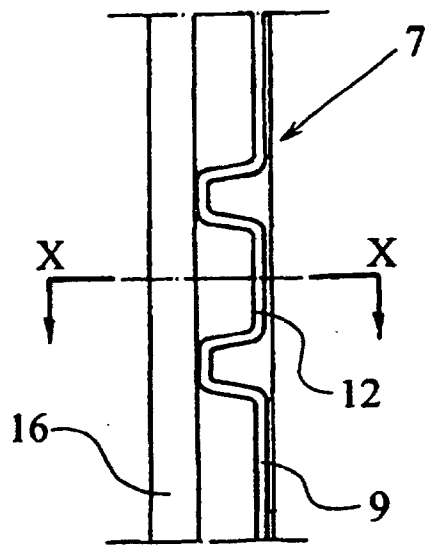


FIG. 8

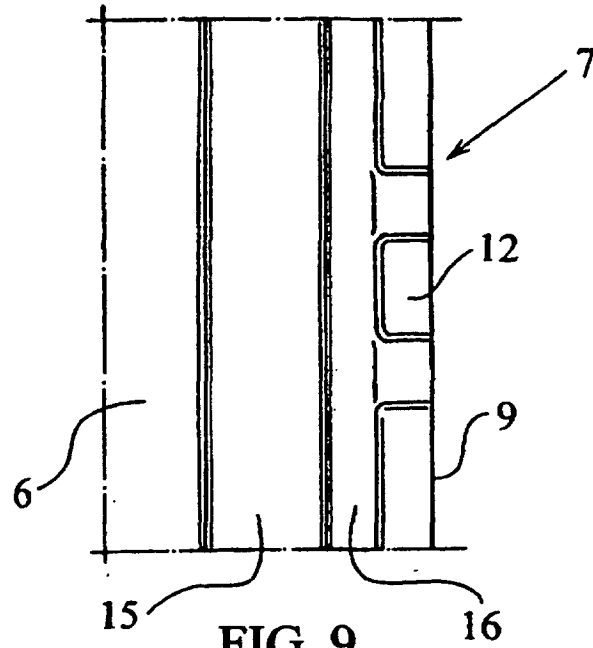


FIG. 9

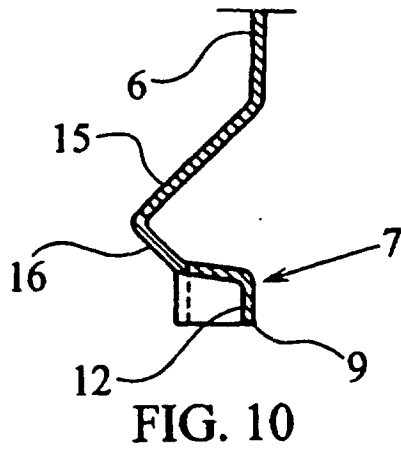


FIG. 10

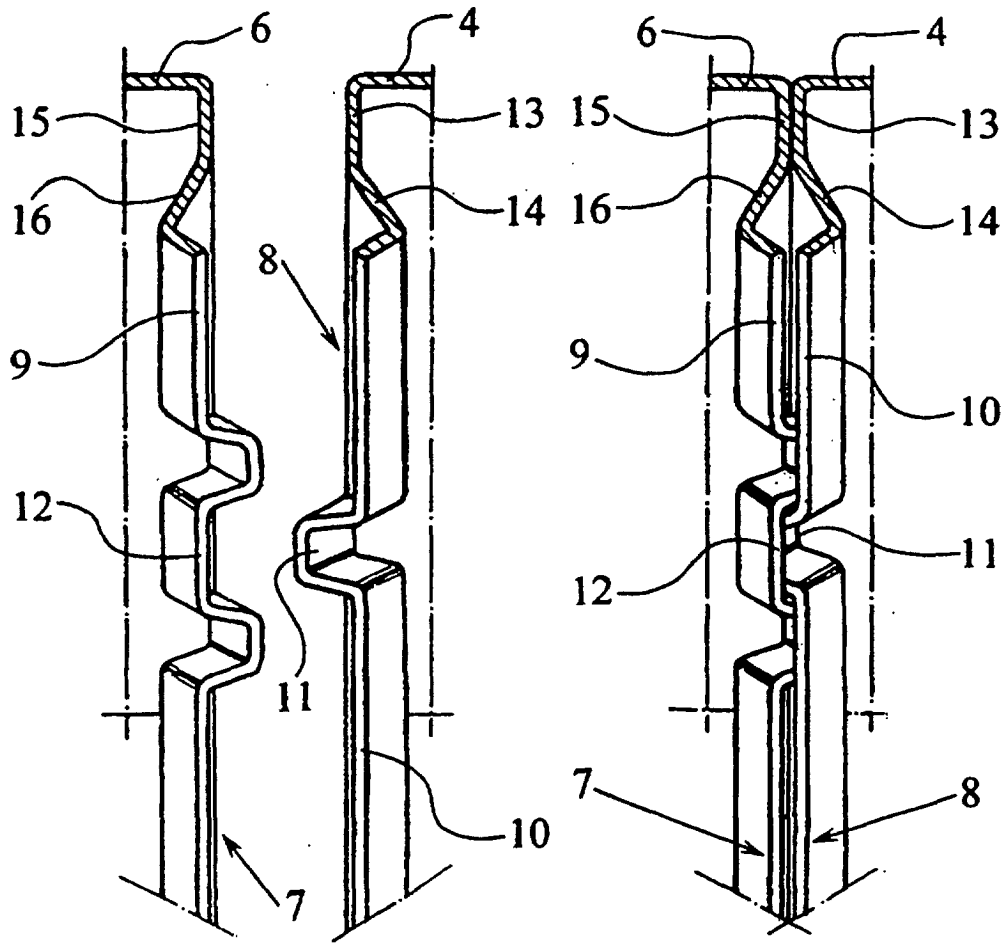
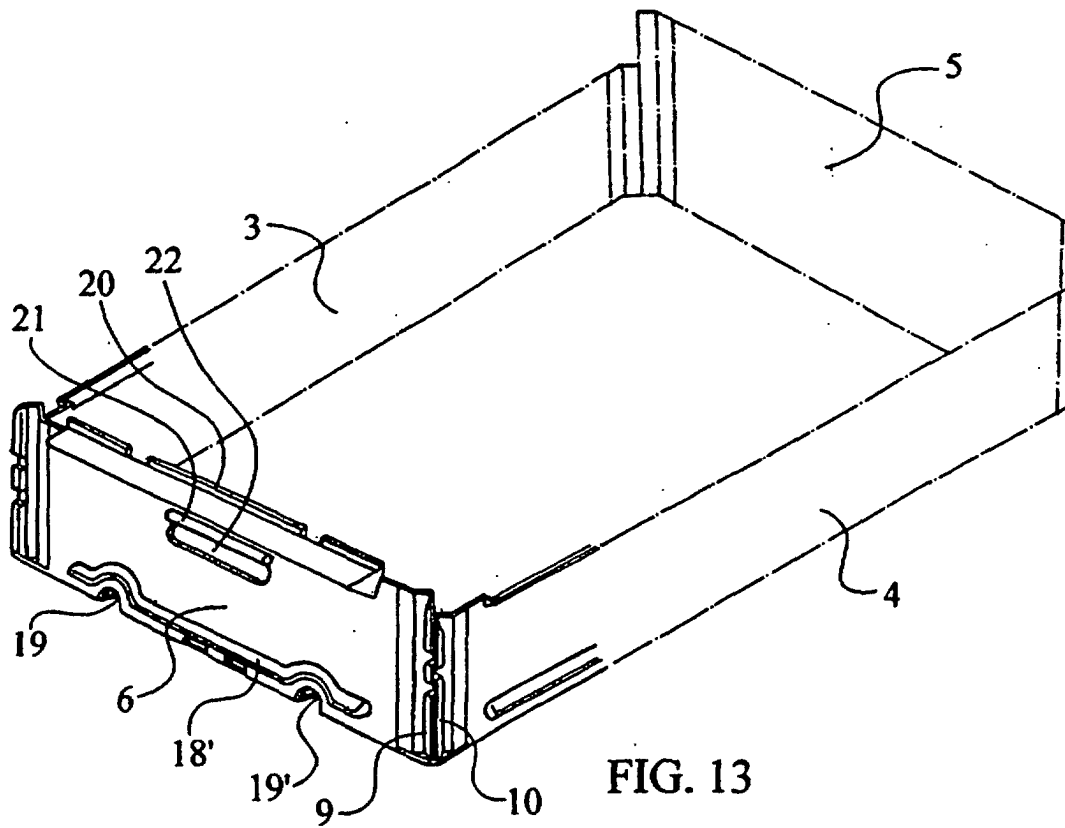


FIG. 11

FIG. 12






FIG. 14

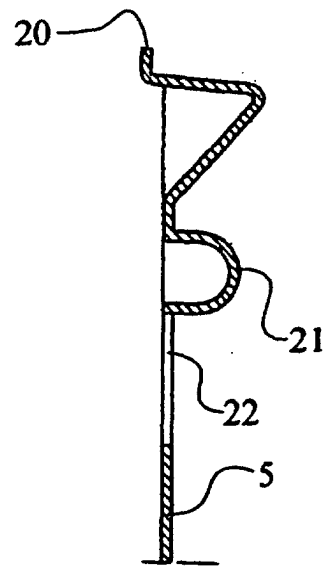


FIG. 15

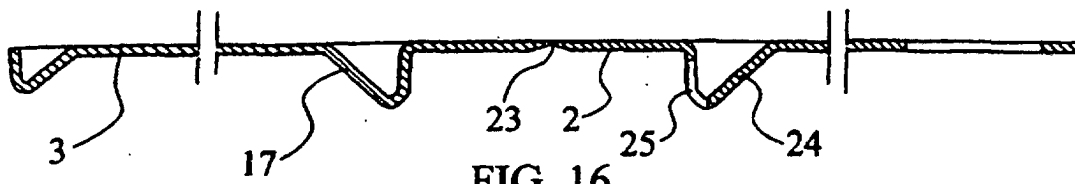


FIG. 16




FIG. 17

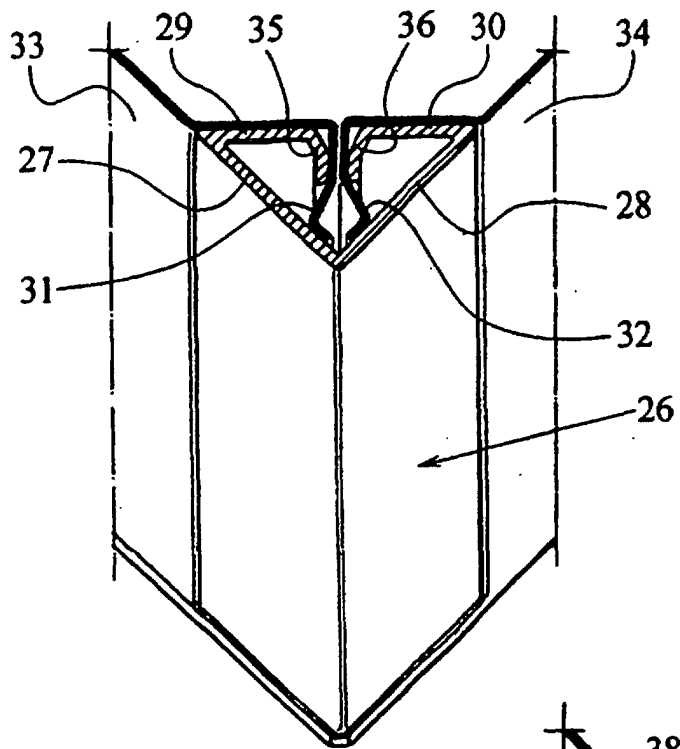


FIG. 18

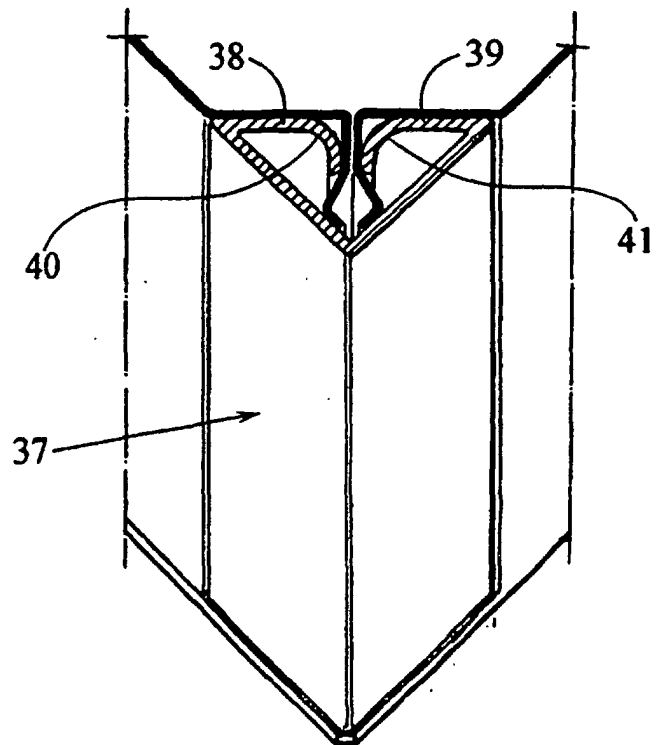


FIG. 19

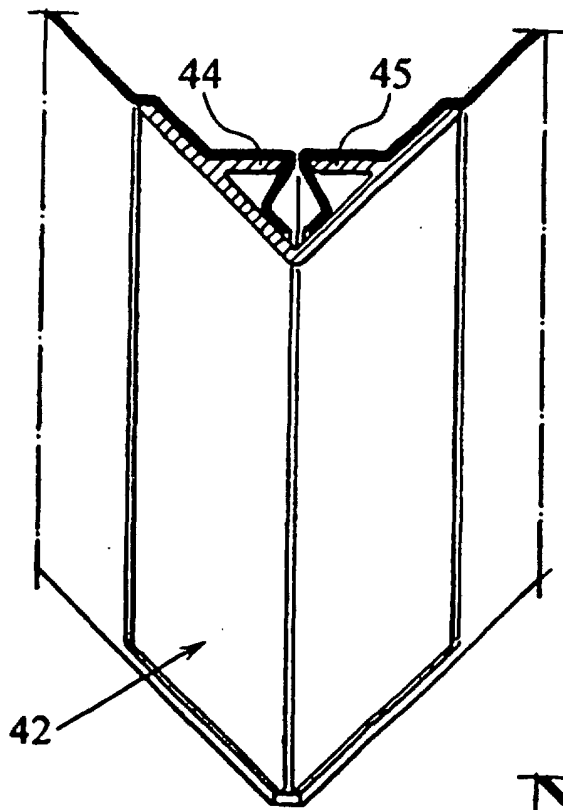


FIG. 20

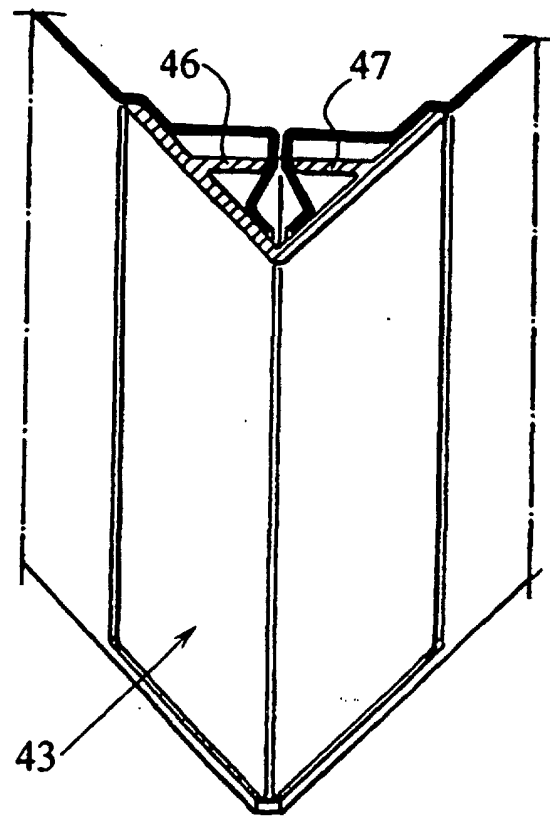


FIG. 21

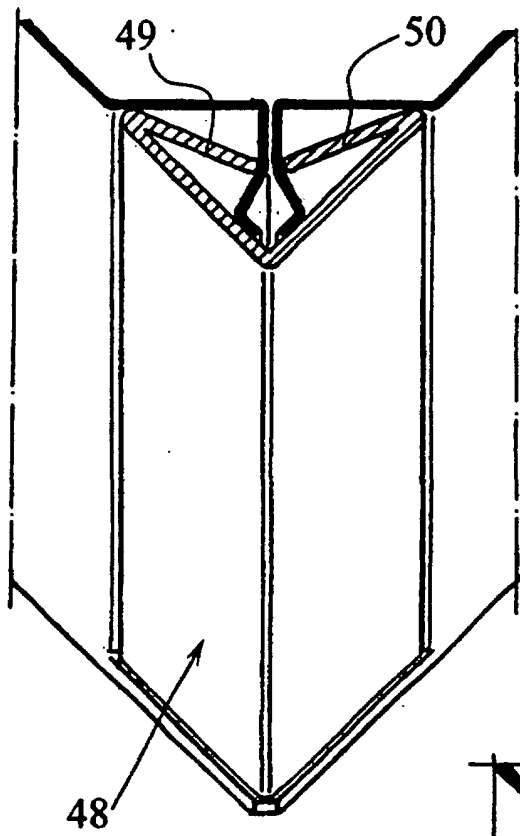


FIG. 22

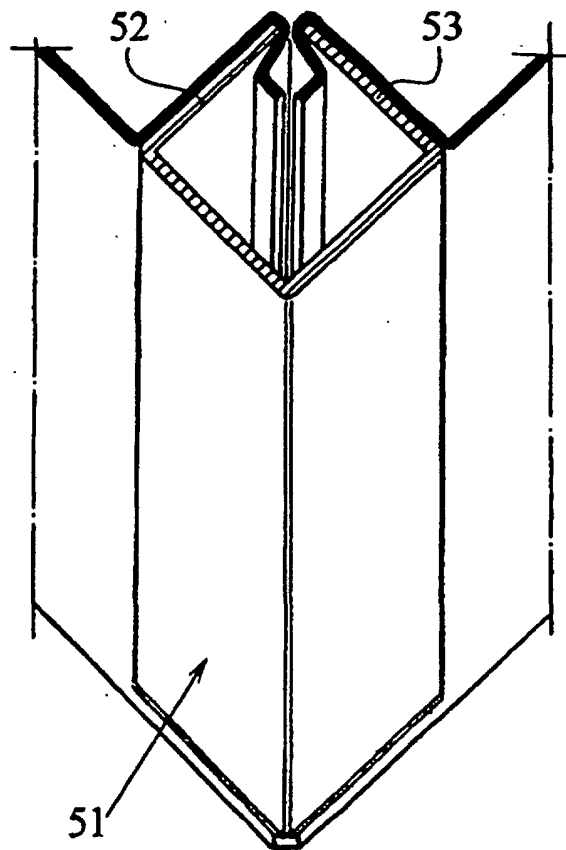


FIG. 23

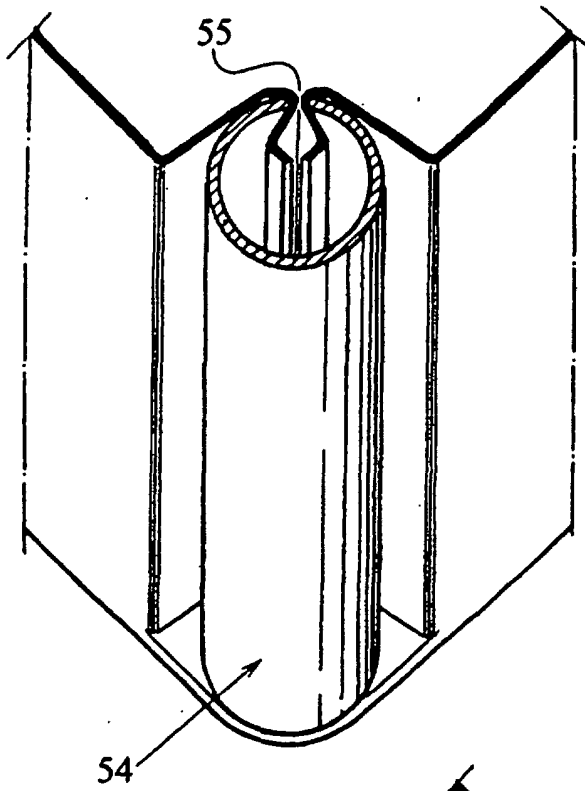


FIG. 24

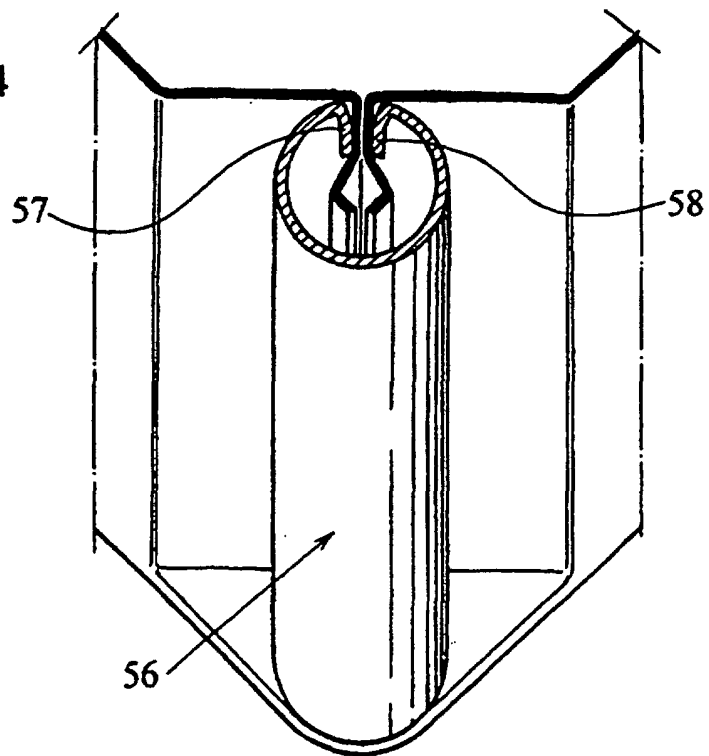


FIG. 25

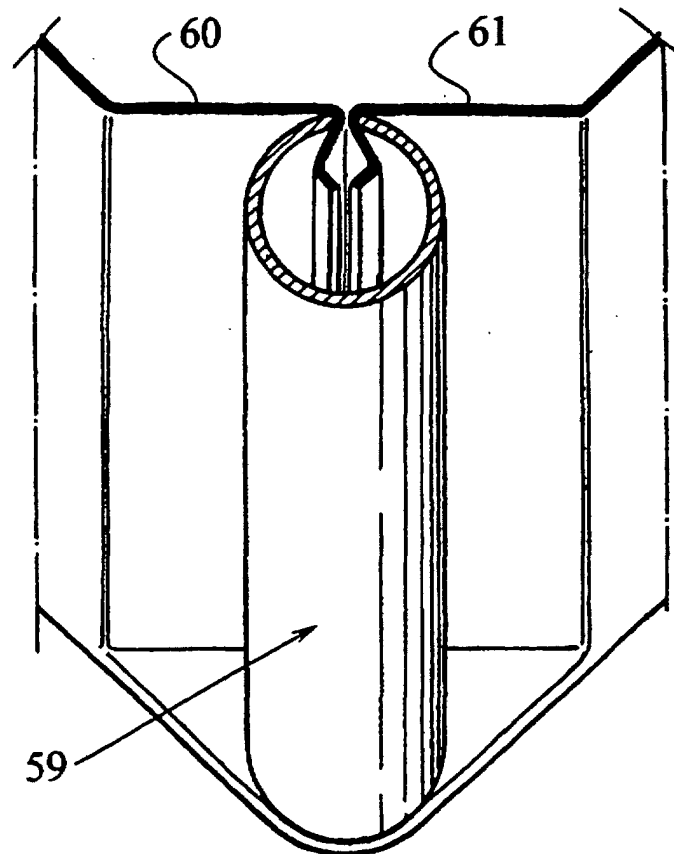


FIG. 26

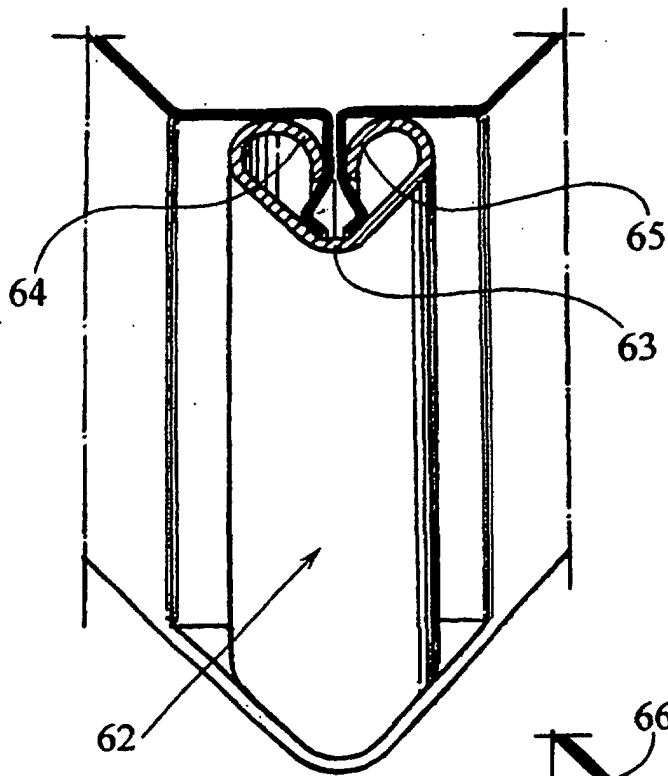


FIG. 27

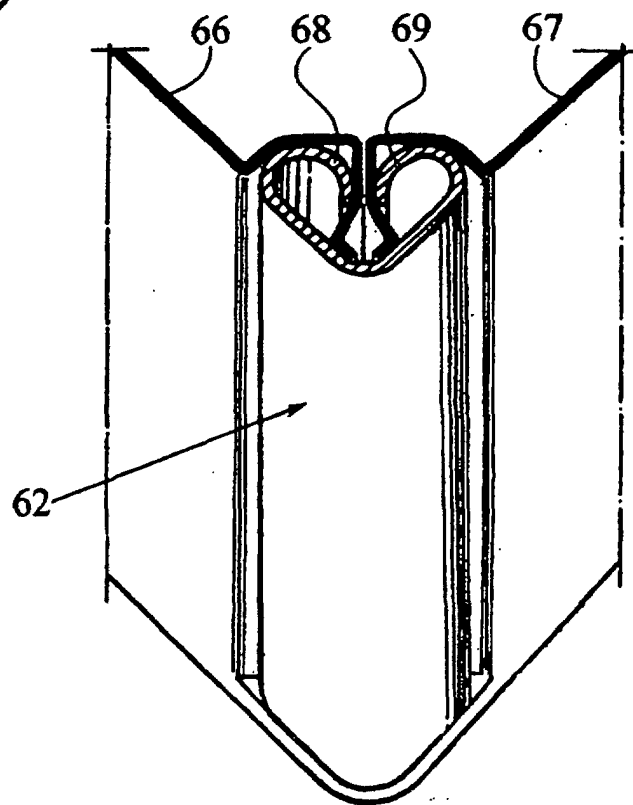


FIG. 28

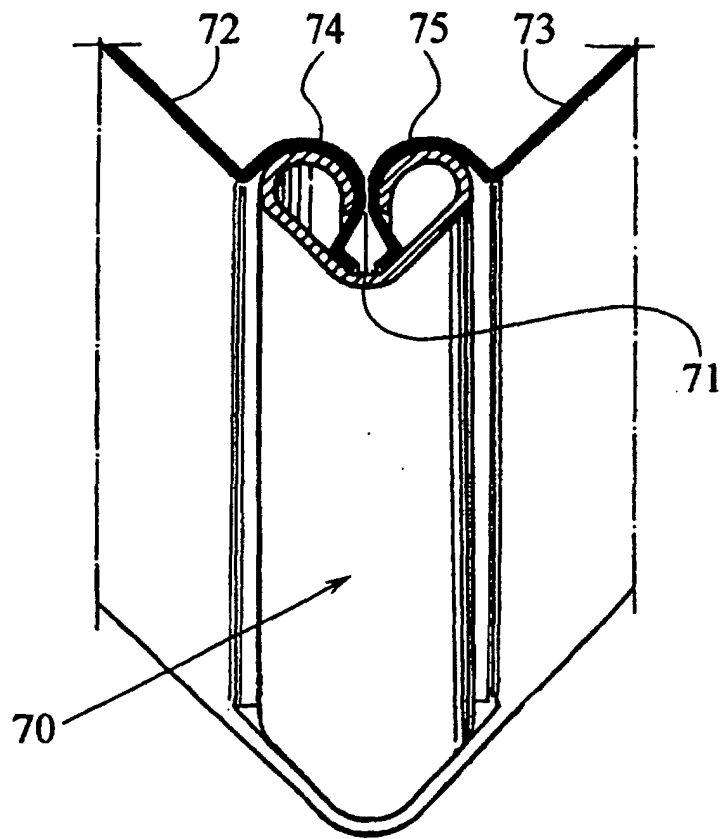


FIG. 29