



(11) **EP 1 279 795 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
14.05.2008 Bulletin 2008/20

(51) Int Cl.:
E21B 43/12 (2006.01)

(21) Application number: **02079411.1**

(22) Date of filing: **15.08.1997**

(54) **Variable orifice gas lift valve for high flow rates with detachable power source and method of using**

Lufthebeventil mit variabler Öffnung für hohen Durchsatz, ausgerüstet mit einer auswechselbaren Energiequelle sowie Anwendungsverfahren

Soupape de gas lift à orifice variable pour débits élevés munie d'une source d'énergie amovible et procédé d'utilisation

(84) Designated Contracting States:
FR GB

(30) Priority: **15.08.1996 US 23965 P**

(43) Date of publication of application:
29.01.2003 Bulletin 2003/05

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
97936508.7 / 0 918 918

(73) Proprietor: **SCHLUMBERGER TECHNOLOGY
CORPORATION**
Sugar Land, TX 77478 (US)

(72) Inventor: **Pringle, Ronald E.**
Houston,
Texas 77072 (US)

(74) Representative: **Bailey, Richard Alan**
Marks & Clerk
27 Imperial Square
Cheltenham, GL50 1RQ (GB)

(56) References cited:
GB-A- 2 289 296 **US-A- 4 239 082**
US-A- 5 176 164 **US-A- 5 535 767**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 279 795 B1

Description

RELATED APPLICATIONS

[0001] This application claims the benefit of U. S. Provisional Application No. 60/023,965, filed August 15, 1996.

BACKGROUND OF THE INVENTION

1. Field Of The Invention

[0002] The present invention relates to subsurface well completion equipment and, more particularly, to an apparatus for lifting hydrocarbons from subterranean formations with gas at high production rates. Additionally, embodiments of independent and detachable actuators are disclosed.

2. Description Of The Related Art

[0003] Artificial lift systems, long known by those skilled in the art of oil well production, are used to assist in the extraction of fluids from subterranean geological formations. The most ideal well for a company concerned with the production of oil, is one that flows naturally and without assistance. Often wells drilled in new fields have this advantage. In this ideal case, the pressure of the producing formation is greater than the hydrostatic pressure of the fluid in the wellbore, allowing the well to flow without artificial lift. However, as an oil bearing formation matures, and some significant percentage of the product is recovered, a reduction in the formation pressure occurs. With this reduction in formation pressure, the hydrocarbon issuance therefrom is likewise reduced to a point where the well no longer flows without assistance, despite the presence of significant volumes of valuable product still in place in the oil bearing stratum. In wells where this type of production decrease occurs, or if the formation pressure is low from the outset, artificial lift is commonly employed to enhance the recovery of oil from the formation. This disclosure is primarily concerned with one type of artificial lift called "Gas Lift."

[0004] Gas lift has long been known to those skilled in the art, as shown in U.S. Patent No. 2,137,441 filed in November 1938. Other patents of some historic significance are U.S. Patent Nos. 2,672,827, 2,679,827, 2,679,903, and 2,824,525, all commonly assigned hereto. Other, more recent developments in this field include U.S. Patent Nos. 4,239,082, 4,360,064 of common assignment, as well as 4,295,796, 4,625,941, and 5,176,164. While these patents all contributed to furthering the art of gas lift valves in wells, recent trends in drilling and completion techniques expose and highlight long felt limitations with this matured technology.

[0005] The economic climate in the oil industry of the 1990's demands that oil producing companies produce more oil, that is now exponentially more difficult to exploit,

in less time, and without increasing prices to the consumer. One successful technique that is currently being employed is deviated and horizontal drilling, which more efficiently drains hydrocarbon bearing formations. This increase in production makes it necessary to use much larger production tubing sizes. For example, in years past 60,325 mm (2-3/8 inch) production tubing was most common. Today, tubing sizes of offshore wells range from 114,3-177,8 mm (4-1/2 to 7 inches). While much more oil can be produced from tubing this large, conventional gas lift techniques have reached or exceeded their operational limit as a result.

[0006] In order for oil to be produced utilizing gas lift, a precise volume and velocity of the gas flowing upward through the tubing must be maintained. Gas injected into the hydrostatic column of fluid decreases the column's total density and pressure gradient, allowing the well to flow. As the tubing size increases, the volume of gas required to maintain the well in a flowing condition increases as the square of the increase in tubing diameter. If the volume of the gas lifting the oil is not maintained, the produced oil falls back down the tubing, and the well suffers a condition commonly known as "loading up." If the volume of gas is too great, the cost of compression and recovery of the lift gas becomes a significant percentage of the production cost. As a result, the size of a gas injection orifice in the gas lift valve is of crucial importance to the stable operation of the well. Prior art gas lift valves employ fixed diameter orifices in a range up to 19,05 mm (3/4 inch), which may be inadequate for optimal production in large diameter tubing. This size limitation is geometrically limited by the gas lift valve's requisite small size, and the position of its operating mechanism, which prevents a full bore through the valve for maximum flow.

[0007] Because well conditions and gas lift requirements change over time, those skilled in the art of well operations are also constantly aware of the compromise of well efficiency that must be balanced versus the cost of intervention to install the most optimal gas lift valves therein as well conditions change over time. Well intervention is expensive, most especially on prolific offshore or subsea wells, so a valve that can be utilized over the entire life of the well, and whose orifice size and subsequent flow rate can be adjusted to changing downhole conditions, is a long felt and unresolved need in the oil industry. There is also a need for a novel gas lift valve that has a gas injection orifice that is large enough to inject a volume of gas adequate to lift oil in large diameter production tubing. There is also a need for differing and novel operating mechanisms for gas lift valves that will not impede the flow of injection gas therethrough.

SUMMARY OF THE INVENTION

[0008] The present invention has been contemplated to overcome the foregoing deficiencies and meet the above described needs. In one aspect, the present in-

vention is a gas lift valve for use in a subterranean well, comprising: a valve body with a longitudinal bore there-through for sealable insertion in a mandrel; a variable orifice valve in the body for controlling fluid flow into the body; and, an actuating means connected to the variable orifice valve. Another feature of this aspect of the present invention is that the actuating means may be electro-hydraulically operated, and may further include: a hydraulic pump located in a downhole housing; an electric motor connected to and driving the hydraulic pump upon receipt of a signal from a control panel; hydraulic circuitry connected to and responding to the action of the pump; and, a moveable hydraulic piston responding to the hydraulic circuitry and operatively connected to the variable orifice valve, controlling movement thereof. Another feature of this aspect of the present invention is that the actuating means may further include a position sensor to report relative location of the moveable hydraulic piston to the control panel. Another feature of this aspect of the present invention is that the actuating means may be selectively installed and retrievably detached from the gas lift valve.

[0009] Another feature of this aspect of the present invention is that the actuating means may further include at least one pressure transducer communicating with the hydraulic circuitry, and transmitting collected data to the control panel. Another feature of this aspect of the present invention is that the actuating means may further include a mechanical position holder. Another feature of this aspect of the present invention is that the actuating means may be selectively installed and retrievably detached from the gas lift valve.

[0010] Another feature of this aspect of the present invention is that the actuating means may be hydraulically operated, and may further include: a hydraulic actuating piston located in a downhole housing and operatively connected to the variable orifice valve; a spring, biasing the variable orifice valve in a full closed position; and, at least one control line connected to the hydraulic actuating piston and extending to a hydraulic pressure source. Another feature of this aspect of the present invention is that the actuating means may further include a position sensor to report relative location of the moveable hydraulic piston to a control panel. Another feature of this aspect of the present invention is that the actuating means may further include at least one pressure transducer communicating with the hydraulic actuating piston, and transmitting collected data to a control panel. Another feature of this aspect of the present invention is that the actuating means may be selectively installed and retrievably detached from the gas lift valve.

[0011] Another feature of this aspect of the present invention is that the actuating means may be electro-hydraulic, and may further include: at least one electrically piloted hydraulic solenoid valve located in a downhole housing; at least one hydraulic control line connected to the solenoid valve and extending to a hydraulic pressure source; hydraulic circuitry connected to and re-

sponding to the action of the solenoid valve; and, a moveable hydraulic piston responding to the hydraulic circuitry and operatively connected to the variable orifice valve, controlling movement thereof. Another feature of this aspect of the present invention is that the actuating means may further include a position sensor to report relative location of the moveable hydraulic piston to a control panel. Another feature of this aspect of the present invention is that the actuating means may further include at least one pressure transducer communicating with the hydraulic circuitry, and transmitting collected data to a control panel. Another feature of this aspect of the present invention is that the actuating means may be selectively installed and retrievably detached from the gas lift valve.

[0012] Another feature of this aspect of the present invention is that the actuating means may be pneumo-hydraulically actuated, and may further include: a moveable hydraulic piston having a first and second end, operatively connected to the variable orifice valve, controlling movement thereof; at least one hydraulic control line connected to a hydraulic pressure source and communicating with the first end of the hydraulic piston; and, a gas chamber connected to and communicating with the second end of the hydraulic piston. Another feature of this aspect of the present invention is that the gas lift valve may be retrievably locatable within a side pocket mandrel by wireline and coiled tubing intervention tools. Another feature of this aspect of the present invention is that the gas lift valve may be selectively installed and retrievably detached from the actuating means. Another feature of this aspect of the present invention is that the actuating means may be selectively installed and retrievably detached from the gas lift valve.

[0013] In another aspect, the present invention may be a method of using a gas lift valve in a subterranean well, comprising: installing a first mandrel and a second mandrel in a well production string that are in operational communication; retrievably installing a variable orifice gas lift valve in a first mandrel; installing a controllable actuating means in a second mandrel; and, controlling the variable orifice gas lift valve by surface manipulation of a control panel that communicates with the actuating means. Another feature of this aspect of the present invention is that the method of installing the variable orifice gas lift valve and the actuating means may be by wireline intervention. Another feature of this aspect of the present invention is that the method of installing the variable orifice gas lift valve and the actuating means may be by coiled tubing intervention.

[0014] In another aspect, the present invention may be a gas lift valve for variably introducing injection gas into a subterranean well, comprising: a valve body with a longitudinal bore therethrough for sealable insertion in a mandrel; a variable orifice valve in the body for controlling flow of injection gas into the body; and, a moveable hydraulic piston connected to the variable orifice valve and in communication with a source of pressurized fluid; whereby the amount of injection gas introduced into the

well through the variable orifice valve is controlled by varying the amount of pressurized fluid being applied to the moveable hydraulic piston. Another feature of this aspect of the present invention is that the source of pressurized fluid may be external to the gas lift valve and may be transmitted to the gas lift valve through a control line connected between the gas lift valve and the external source of pressurized fluid. Another feature of this aspect of the present invention is that the external source of pressurized fluid may be located at the earth's surface. Another feature of this aspect of the present invention is that the source of pressurized fluid may be an on-board hydraulic system including: a hydraulic pump located in a downhole housing and in fluid communication with a fluid reservoir; an electric motor connected to and driving the hydraulic pump upon receipt of a signal from a control panel; and, hydraulic circuitry in fluid communication with the hydraulic pump and the hydraulic piston. Another feature of this aspect of the present invention is that the gas lift valve may further include an electrical conduit connecting the control panel to the gas lift valve for providing a signal to the electric motor. Another feature of this aspect of the present invention is that the hydraulic system may further include a solenoid valve located in the downhole housing and connected to the electrical conduit, the solenoid valve directing the pressurized fluid from the hydraulic system through the hydraulic circuitry to the hydraulic piston. Another feature of this aspect of the present invention is that the gas lift valve may further include at least one pressure transducer in fluid communication with the hydraulic circuitry and connected to the electrical conduit for providing a pressure reading to the control panel. Another feature of this aspect of the present invention is that the gas lift valve may further include an upstream pressure transducer connected to the electrical conduit and a downstream pressure transducer connected to the electrical conduit, the upstream and downstream pressure transducers being located within the gas lift valve to measure a pressure drop across the variable orifice valve, the pressure drop measurement being reported to the control panel through the electrical conduit. Another feature of this aspect of the present invention is that the gas lift valve may further include a position sensor to report relative location of the moveable hydraulic piston to the control panel. Another feature of this aspect of the present invention is that the gas lift valve may further include a mechanical position holder to mechanically assure that the variable orifice valve remains in its desired position if conditions in the hydraulic system change during use. Another feature of this aspect of the present invention is that the variable orifice valve may be stopped at intermediate positions between a full open and a full closed position to adjust the flow of injection gas therethrough, the variable orifice valve being held in the intermediate positions by the position holder. Another feature of this aspect of the present invention is that the hydraulic system may further include a movable volume compensator piston for displacing a volume of

fluid that is utilized as the hydraulic system operates. Another feature of this aspect of the present invention is that the variable orifice valve may further include a carbide stem and seat. Another feature of this aspect of the present invention is that the mandrel may be provided with at least one injection gas port through which injection gas flows when the variable orifice valve is open. Another feature of this aspect of the present invention is that the gas lift valve may further include an upper and lower one-way check valve located on opposite sides of the variable orifice valve to prevent any fluid flow from the well into the gas lift valve. Another feature of this aspect of the present invention is that the gas lift valve may further include latch means for adapting the variable orifice valve to be remotely deployed and retrieved. Another feature of this aspect of the present invention is that the variable orifice valve may be remotely deployed and retrieved by utilization of coiled tubing. Another feature of this aspect of the present invention is that the variable orifice valve may be remotely deployed and retrieved by utilization of wireline. Another feature of this aspect of the present invention is that the gas lift valve may further include a valve connection collet.

[0015] In another aspect, the present invention may be a gas lift valve for variably introducing injection gas into a subterranean well, comprising: a valve body with a longitudinal bore therethrough for sealable insertion in a mandrel; a hydraulic control line connected to the gas lift valve for providing a supply of pressurized fluid thereto; a variable orifice valve in the body for controlling flow of injection gas into the body; a spring biasing the variable orifice valve in a full closed position; a moveable hydraulic piston connected to the variable orifice valve; and, an actuating piston located in a downhole housing, connected to the moveable hydraulic piston and in communication with the control line; whereby the amount of injection gas introduced into the well through the variable orifice valve is controlled by varying the amount of pressurized fluid being applied to the actuating piston. Another feature of this aspect of the present invention is that the control line may be connected to a source of pressurized fluid located at the earth's surface. Another feature of this aspect of the present invention is that the gas lift valve may further include a mechanical position holder to mechanically assure that the variable orifice valve remains in its desired position if conditions in the gas lift valve change during use. Another feature of this aspect of the present invention is that the variable orifice valve may be stopped at intermediate positions between a full open and a full closed position to adjust the flow of injection gas therethrough, the variable orifice valve being held in the intermediate positions by the position holder. Another feature of this aspect of the present invention is that the variable orifice valve may further include a carbide stem and seat. Another feature of this aspect of the present invention is that the mandrel may be provided with at least one injection gas port through which injection gas flows when the variable orifice valve is open. Another

feature of this aspect of the present invention is that the gas lift valve may further include an upper and lower one-way check valve located on opposite sides of the variable orifice valve to prevent any fluid flow from the well into the gas lift valve. Another feature of this aspect of the present invention is that the gas lift valve may further include latch means for adapting the variable orifice valve to be remotely deployed and retrieved. Another feature of this aspect of the present invention is that the variable orifice valve may be remotely deployed and retrieved by utilization of coiled tubing. Another feature of this aspect of the present invention is that the variable orifice valve may be remotely deployed and retrieved by utilization of wireline. Another feature of this aspect of the present invention is that the gas lift valve may further include a valve connection collet.

[0016] In another aspect, the present invention may be a gas lift valve for variably introducing injection gas into a subterranean well, comprising: a valve body with a longitudinal bore therethrough for sealable insertion in a mandrel; a valve-open and a valve-closed hydraulic control line connected to the gas lift valve for providing dual supplies of pressurized fluid thereto; a variable orifice valve in the body for controlling flow of injection gas into the body; and, a moveable hydraulic piston connected to the variable orifice valve and in fluid communication with the valve-open and valve-closed hydraulic control lines; whereby the variable orifice valve is opened by applying pressure to the hydraulic piston through the valve-open control line and bleeding off pressure from the valve-closed control line; the variable orifice valve is closed by applying pressure to the hydraulic piston through the valve-closed control line and bleeding off pressure from the valve-open control line; and, the amount of injection gas introduced into the well through the variable orifice valve is controlled by varying the amount of pressurized fluid being applied to and bled off from the hydraulic piston through the control lines. Another feature of this aspect of the present invention is that the control lines may be connected to a source of pressurized fluid located at the earth's surface. Another feature of this aspect of the present invention is that the gas lift valve may further include a mechanical position holder to mechanically assure that the variable orifice valve remains in its desired position if conditions in the gas lift valve change during use. Another feature of this aspect of the present invention is that the variable orifice valve may be stopped at intermediate positions between a full open and a full closed position to adjust the flow of injection gas therethrough, the variable orifice valve being held in the intermediate positions by the position holder. Another feature of this aspect of the present invention is that the variable orifice valve may further include a carbide stem and seat. Another feature of this aspect of the present invention is that the mandrel may be provided with at least one injection gas port through which injection gas flows when the variable orifice valve is open. Another feature of this aspect of the present invention is that the

gas lift valve may further include an upper and lower one-way check valve located on opposite sides of the variable orifice valve to prevent any fluid flow from the well into the gas lift valve. Another feature of this aspect of the present invention is that the gas lift valve may further include latch means for adapting the variable orifice valve to be remotely deployed and retrieved. Another feature of this aspect of the present invention is that the variable orifice valve may be remotely deployed and retrieved by utilization of coiled tubing. Another feature of this aspect of the present invention is that the variable orifice valve may be remotely deployed and retrieved by utilization of wireline. Another feature of this aspect of the present invention is that the gas lift valve may further including a valve connection collet. Another feature of this aspect of the present invention is that the gas lift valve may further include a fluid displacement port for use during the bleeding off of pressurized fluid from the hydraulic piston. Another feature of this aspect of the present invention is that the gas lift valve may further include a valve-open and a valve-closed conduit for routing pressurized fluid from the valve-open and valve-closed control lines to the hydraulic piston.

[0017] Another feature of this aspect of the present invention is that the gas lift valve may further include an electrical conduit connecting a control panel at the earth's surface to the gas lift valve for communicating collected data to the control panel. Another feature of this aspect of the present invention is that the gas lift valve may further include a valve-open pressure transducer and to a valve-closed pressure transducer, the valve-open pressure transducer being connected to the electrical conduit and in fluid communication with the valve-open conduit, the valve-closed pressure transducer being connected to the electrical conduit and in fluid communication with the valve-closed conduit, the pressure transducers providing pressure readings to the control panel via the electrical conduit. Another feature of this aspect of the present invention is that the gas lift valve may further include an upstream pressure transducer connected to the electrical conduit and a downstream pressure transducer connected to the electrical conduit, the upstream and downstream pressure transducers being located within the gas lift valve to measure a pressure drop across the variable orifice valve, the pressure drop measurement being reported to the control panel through the electrical conduit.

[0018] In another aspect, the present invention may be a gas lift valve for variably introducing injection gas into a subterranean well, comprising: a valve body with a longitudinal bore therethrough for sealable insertion in a mandrel; a hydraulic control line connected to the gas lift valve for providing a supply of pressurized fluid thereto; a variable orifice valve in the body for controlling flow of injection gas into the body; a nitrogen coil chamber providing a pressurized nitrogen charge through a pneumatic conduit for biasing the variable orifice valve in a full closed position; and, a moveable hydraulic piston connected to the variable orifice valve and in fluid com-

munication with the hydraulic control line and the pneumatic conduit; whereby the variable orifice valve is opened by applying hydraulic pressure to the hydraulic piston through the hydraulic control line to overcome the pneumatic pressure in the pneumatic conduit; the variable orifice valve is closed by bleeding off pressure from the hydraulic control line to enable the pneumatic pressure in the nitrogen coil chamber to closed the variable orifice valve; and, the amount of injection gas introduced into the well through the variable orifice valve is controlled by varying the amount of hydraulic fluid being bled off from the hydraulic piston through the hydraulic control line. Another feature of this aspect of the present invention is that the hydraulic control line may be connected to a source of pressurized fluid located at the earth's surface. Another feature of this aspect of the present invention is that the gas lift valve may further include a mechanical position holder to mechanically assure that the variable orifice valve remains in its desired position if conditions in the gas lift valve change during use. Another feature of this aspect of the present invention is that the variable orifice valve may be stopped at intermediate positions between a full open and a full closed position to adjust the flow of injection gas therethrough, the variable orifice valve being held in the intermediate positions by the position holder. Another feature of this aspect of the present invention is that the variable orifice valve may further include a carbide stem and seat. Another feature of this aspect of the present invention is that the mandrel may be provided with at least one injection gas port through which injection gas flows when the variable orifice valve is open. Another feature of this aspect of the present invention is that the gas lift valve may further include an upper and lower one-way check valve located on opposite sides of the variable orifice valve to prevent any fluid flow from the well into the gas lift valve. Another feature of this aspect of the present invention is that the gas lift valve may further include latch means for adapting the variable orifice valve to be remotely deployed and retrieved. Another feature of this aspect of the present invention is that the variable orifice valve may be remotely deployed and retrieved by utilization of coiled tubing. Another feature of this aspect of the present invention is that the variable orifice valve may be remotely deployed and retrieved by utilization of wireline. Another feature of this aspect of the present invention is that the gas lift valve may further include a valve connection collet.

[0019] In another aspect, the present invention may be a gas lift valve for variably introducing injection gas into a subterranean well, comprising: a first mandrel connected to a second mandrel, the first and second mandrel being installed in a well production string; a valve means having a variable orifice for controlling flow of injection gas into the well, the valve means being installed in the first mandrel; an actuating means for controlling the valve means, the actuating means being installed in the second mandrel, in communication with and controllable from a control panel, and connected to the valve means by a

first and second hydraulic control line. Another feature of this aspect of the present invention is that the valve means and the actuating means may be remotely deployed within and retrieved from their respective mandrels. Another feature of this aspect of the present invention is that the valve means and actuating means may be remotely deployed and retrieved by utilization of coiled tubing. Another feature of this aspect of the present invention is that the valve means and actuating means may be remotely deployed and retrieved by utilization of wireline.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020]

Figures **1A-1C** are elevation views which together illustrate an electro-hydraulically operated embodiment of the apparatus of the present invention having an on-board hydraulic system and connected to an electrical conduit running from the earth's surface; the power unit is shown rotated ninety degrees for clarity.

Figures **2A-2C** are elevation views which together illustrate a hydraulically operated embodiment of the apparatus of the present invention connected to a single hydraulic control line running from the earth's surface; the power unit is shown rotated ninety degrees for clarity.

Figures **3A-3C** are elevation views which together illustrate another hydraulically operated embodiment of the apparatus of the present invention connected to dual hydraulic control lines running from the earth's surface; the power unit is shown rotated ninety degrees for clarity.

Figures **4A-4C** are elevation views which together illustrate another hydraulically operated embodiment of the apparatus of the present invention connected to dual hydraulic control lines running from the earth's surface; the power unit is shown rotated ninety degrees for clarity.

Figures **5A-5C** are elevation views which together illustrate a pneumatic-hydraulically operated embodiment of the apparatus of the present invention connected to a single hydraulic control line running from the earth's surface; the power unit is shown rotated ninety degrees for clarity.

Figure **6** is a cross-sectional view taken along line **6-6** of Figure **1B**.

Figure **7** is a cross-sectional view taken along line **7-7** of Figure **1B**.

Figure **8** is a cross-sectional view taken along line **8-8** of Figure **2B**.

Figure **9** is a cross-sectional view taken along line **9-9** of Figure **2B**.

Figure **10** is a cross-sectional view taken along line **10-10** of Figure **3B**.

Figure **11** is a cross-sectional view taken along line

11-11 of Figure 3B.

Figure 12 is a cross-sectional view taken along line 12-12 of Figure 4B.

Figure 13 is a cross-sectional view taken along line 13-13 of Figure 4B.

Figure 14 is a cross-sectional view taken along line 14-14 of Figure 5B.

Figure 15 is a cross-sectional view taken along line 15-15 of Figure 5B.

Figure 16 is a schematic representation of another embodiment of the present invention with a retrievable actuator positioned in an upper mandrel and a retrievable variable orifice gas lift valve positioned in a lowermost mandrel.

Figure 17 is a cross-sectional view taken along line 17-17 of Figure 16.

Figure 18 is a cross-sectional view taken along line 18-18 of Figure 16.

[0021] While the invention will be described in connection with the preferred embodiments, it will be understood that it is not intended to limit the invention to those embodiments. On the contrary, it is intended to cover all alternatives, modifications, and equivalents as may be included within the scope of the invention as defined by the appended claims.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0022] In the description that follows, like parts are marked through the specification and drawings with the same reference numerals, respectively. The figures are not necessarily drawn to scale, and in some instances, have been exaggerated or simplified to clarify certain features of the invention. One skilled in the art will appreciate many differing applications of the described apparatus.

[0023] For the purposes of this discussion, the terms "upper" and "lower," "up hole" and "downhole," and "upwardly" and "downwardly" are relative terms to indicate position and direction of movement in easily recognized terms. Usually, these terms are relative to a line drawn from an upmost position at the surface to a point at the center of the earth, and would be appropriate for use in relatively straight, vertical wellbores. However, when the wellbore is highly deviated, such as from about 60 degrees from vertical, or horizontal, these terms do not make sense and therefore should not be taken as limitations. These terms are only used for ease of understanding as an indication of what the position or movement would be if taken within a vertical wellbore.

[0024] Figures 1A-1C together show a semidiagrammatic cross section of a gas lift valve 8 shown in the closed position, used in a subterranean well (not shown), illustrating: a valve body 10 with a longitudinal bore 12 for sealable insertion in a side pocket mandrel 14, a variable orifice valve 16 in the body 10 which alternately permits, prohibits, or throttles fluid flow (represented by

item 18 — see Figure 7) into said body through injection gas ports 13 in the mandrel 14, and an actuating means, shown generally by numeral 20 which is electro-hydraulically operated using a hydraulic pump 22 located in a downhole housing 24, an electric motor 26 connected to and driving the hydraulic pump 22 upon receipt of a signal through an electrical conduit 23 connected to a control panel (not shown) located at the earth's surface. Also shown is a moveable temperature/volume compensator piston 15 for displacing a volume of fluid that is utilized as the actuating means 20 operates and for compensating for pressure changes caused by temperature fluctuations. A solenoid valve 28 controls the movement of pressurized fluid pumped from a control fluid reservoir 25 through a pump suction port 21 and in a hydraulic circuitry 30, and the direction of the fluid flowing there-through, which is connected to and responding to the action of the pump 22. A moveable hydraulic piston 32 responding to the pressure signal from the hydraulic circuitry 30 opens and controls the movement of the variable orifice valve 16. The actuator has a position sensor 34 which reports the relative location of the moveable hydraulic piston 32 to the control panel (not shown), and a position holder 33 which is configured to mechanically assure that the actuating means 20 remains in the desired position by the operator if conditions in the hydraulic system change slightly in use. Also shown is a pressure transducer 35 communicating with the hydraulic circuitry 30, and transmitting collected data to the control panel (not shown) via the electrical conduit 23. As shown in Figure 1C, a downstream pressure transducer 19 may be provided to cooperate with the pressure transducer 35 for measuring and reporting to the control panel any pressure drop across the variable orifice valve 16. It will be obvious to one skilled in the art that the electric motor 26 and downhole pump 22 have been used to eliminate the cost of running a control line from a surface pressure source. This representation should not be taken as a limitation. Obviously, a control line could be run from the surface to replace the electric motor 26 and downhole pump 22, and would be controlled in the same manner without altering the scope of this invention. When it is operationally desirable to open the variable orifice valve 16, an electric signal from the surface activates the electric motor 26 and the hydraulic pump 22, which routes pressure to the solenoid valve 28. The solenoid valve 28 also responding to stimulus from the control panel, shifts to a position to route hydraulic pressure to the moveable hydraulic piston 32 that opens the variable orifice valve 16. The variable orifice valve 16 may be stopped at intermediate positions between open and closed to adjust the flow of lift or injection gas 31 therethrough, and is held in place by the position holder 33. To close the valve, the solenoid valve 28 merely has to be moved to the opposite position rerouting hydraulic fluid to the opposite side of the moveable hydraulic piston 32, which then translates back to the closed position.

[0025] As shown in Figure 1B, the variable orifice valve

16 may include a carbide stem and seat 17. The gas lift valve 8 may also be provided with one-way check valves 29 to prevent any fluid flow from the well conduit into the gas lift valve 8. The gas lift valve 8 may also be provided with a latch 27 so the valve may be remotely installed and/or retrieved by well known wireline or coiled tubing intervention methods. As shown in Figure 6, this embodiment of the present invention may also be provided with a valve connection collet 11, the structure and operation of which are well known to those of ordinary skill in the art.

[0026] Figures 2A-2C together depict a semidiagrammatic cross section of a gas lift valve 8 shown in the closed position, used in a subterranean well (not shown), illustrating: a valve body 10 with a longitudinal bore 12 for sealable insertion in a side pocket mandrel 14, a variable orifice valve 16 in the body 10 which alternately permits, prohibits, or throttles fluid flow (represented by item 18 — see Figure 9) into said body through injection gas ports 13 in the mandrel 14, and an actuating means shown generally by numeral 36 that is hydraulically operated. Further illustrated is: a hydraulic actuating piston 38 located in a downhole housing 40 and operatively connected to a moveable piston 42, which is operatively connected to the variable orifice valve 16. A spring 44, biases said variable orifice valve 16 in either the full open or full closed position, and a control line 46 communicates with the hydraulic actuating piston 38 and extends to a hydraulic pressure source (not shown). When it is operationally desirable to open the variable orifice valve 16, hydraulic pressure is applied from the hydraulic pressure source (not shown), which communicates down the hydraulic control line 46 to the hydraulic actuating piston 38, which moves the moveable piston 42, which opens the variable orifice valve 16. The variable orifice valve 16 may be stopped at intermediate positions between open and closed to adjust the flow of lift or injection gas 31 therethrough, and is held in place by a position holder 33 which is configured to mechanically assure that the actuating means 36 remains in the position where set by the operator if conditions in the hydraulic system change slightly in use. The valve is closed by releasing the pressure on the control line 46, allowing the spring 44 to translate the moveable piston 42, and the variable orifice valve 16 back to the closed position.

[0027] As shown in Figure 2B, the variable orifice valve 16 may include a carbide stem and seat 17. The gas lift valve 8 may also be provided with one-way check valves 29 to prevent any fluid flow from the well conduit into the gas lift valve 8. The gas lift valve 8 may also be provided with a latch 27 so the valve may be remotely installed and/or retrieved by well known wireline or coiled tubing intervention methods. As shown in Figure 8, this embodiment of the present invention may also be provided with a valve connection collet 11, the structure and operation of which are well known to those of ordinary skill in the art.

[0028] Figures 3A-3C together disclose another embodiment of a semidiagrammatic cross section of a gas lift valve 8 shown in the closed position, used in a sub-

terranean well (not shown), illustrating: a valve body 10 with a longitudinal bore 12 for sealable insertion in a side pocket mandrel 14, a variable orifice valve 16 in the body 10 which alternately permits, prohibits, or throttles fluid flow (represented by item 18 — see Figure 11) into said body through injection gas ports 13 in the mandrel 14, and an actuating means shown generally by numeral 48 that is hydraulically operated. Further illustrated: hydraulic conduits 50 and 51 that route pressurized hydraulic fluid directly to a moveable piston 32, which is operatively connected to the variable orifice valve 16. Two control lines 46 extend to a hydraulic pressure source (not shown). The moveable hydraulic piston 32 responding to the pressure signal from the "valve open" hydraulic conduit 50 which opens and controls the movement of the variable orifice valve 16 while the "valve closed" hydraulic conduit 51 is bled off. The variable orifice valve 16 may be stopped at intermediate positions between open and closed to adjust the flow of lift or injection gas 31 therethrough, and is held in place by a position holder 33 which is configured to mechanically assure that the actuating means 48 remains in the position where set by the operator if conditions in the hydraulic system change slightly in use. Closure of the variable orifice valve 16 is accomplished by sending a pressure signal down the "valve closed" hydraulic conduit 51, and simultaneously bleeding pressure from the "valve open" hydraulic conduit 50.

[0029] A fluid displacement control port 49 may also be provided for use during the bleeding off of the conduits 50 and 51, in a manner well known to those of ordinary skill in the art. As shown in Figure 3B, the variable orifice valve 16 may include a carbide stem and seat 17. The gas lift valve 8 may also be provided with one-way check valves 29 to prevent any fluid flow from the well conduit into the gas lift valve 8. The gas lift valve 8 may also be provided with a latch 27 so the valve may be remotely installed and/or retrieved by well known wireline or coiled tubing intervention methods. As shown in Figure 10, this embodiment of the present invention may also be provided with a valve connection collet 11, the structure and operation of which are well known to those of ordinary skill in the art.

[0030] Figures 4A-4C together depict a semidiagrammatic cross section of a gas lift valve 8 shown in the closed position, used in a subterranean well (not shown), illustrating: a valve body 10 with a longitudinal bore 12 for sealable insertion in a side pocket mandrel 14, a variable orifice valve 16 in the body 10 which alternately permits, prohibits, or throttles fluid flow (represented by item 18 — see Figure 13) into said body through injection gas ports 13 in the mandrel 14, and an actuating means shown generally by numeral 48 that is hydraulically operated. Further illustrated: hydraulic conduits 50 and 51 that route pressurized hydraulic fluid directly to a moveable piston 32, which is operatively connected to the variable orifice valve 16, and two control lines 46 extending to a hydraulic pressure source (not shown). The movable

hydraulic piston 32 responding to the pressure signal from the "valve open" hydraulic conduit 50 which opens and controls the movement of the variable orifice valve 16 while the "valve closed" hydraulic conduit 51 is bled off. The variable orifice valve 16 may be stopped at intermediate positions between open and closed to adjust the flow of lift or injection gas 31 therethrough, and is held in place by a position holder 33 which is configured to mechanically assure that the actuating means 20 remains in the position where set by the operator if conditions in the hydraulic system change slightly in use. Closure of the variable orifice valve 16 is accomplished by sending a pressure signal down the "valve closed" hydraulic conduit 51, and simultaneously bleeding pressure from the "valve open" hydraulic conduit 50. The actuator has a position sensor 34 which reports the relative location of the moveable hydraulic piston 32 to the control panel (not shown) via an electrical conduit 23. Also shown are pressure transducers 35 communicating with the hydraulic conduits 50 and 51 through hydraulic pressure sensor chambers (e.g., conduit 51 communicates with chamber 9), and transmitting collected data to the control panel (not shown) via the electrical conduit 23.

[0031] As shown in Figure 4C, a downstream pressure transducer 19 may be provided to cooperate with the pressure transducer 35 for measuring and reporting to the control panel any pressure drop across the variable orifice valve 16. As shown in Figure 4B, a fluid displacement control port 49 may also be provided for use during the bleeding off of the conduits 50 and 51, in a manner well known to those of ordinary skill in the art. As also shown in Figure 4B, the variable orifice valve 16 may include a carbide stem and seat 17. The gas lift valve 8 may also be provided with one-way check valves 29 to prevent any fluid flow from the well conduit into the gas lift valve 8. The gas lift valve 8 may also be provided with a latch 27 so the valve may be remotely installed and/or retrieved by well known wireline or coiled tubing intervention methods. As shown in Figure 12, this embodiment of the present invention may also be provided with a valve connection collet 11, the structure and operation of which are well known to those of ordinary skill in the art.

[0032] Figures 5A-5C together depict a semidiagrammatic cross section of a gas lift valve 8 shown in the closed position, used in a subterranean well (not shown), illustrating: a valve body 10 with a longitudinal bore 12 for sealable insertion in a side pocket mandrel 14, a variable orifice valve 16 in the body 10 which alternately permits, prohibits, or throttles fluid flow (represented by item 18—see Figure 15) into said body through injection gas ports 13 in the mandrel 14, and an actuating means shown generally by numeral 52 that is hydraulically operated. Further illustrated: a hydraulic conduit 54 that routes pressurized hydraulic fluid directly to a moveable piston 32, which is operatively connected to the variable orifice valve 16. Hydraulic pressure is opposed by a pressurized nitrogen charge inside of a nitrogen coil chamber 56, the pressure of which is routed through a pneumatic

conduit 58, which acts on an opposite end of the moveable hydraulic piston 32, biasing the variable orifice valve 16 in the closed position. The nitrogen coil chamber 56 is charged with nitrogen through a nitrogen charging port 57. When it is operationally desirable to open the variable orifice valve 16, hydraulic pressure is added to the control line 54, which overcomes pneumatic pressure in the pneumatic conduit 58 and nitrogen coil chamber 56, and translates the moveable piston 32 upward to open the variable orifice valve 16. As before, the variable orifice valve 16 may be stopped at intermediate positions between open and closed to adjust the flow of lift or injection gas 31 therethrough, and is held in place by a position holder 33 which is configured to mechanically assure that the actuating means 52 remains in the position where set by the operator if conditions in the hydraulic system change slightly in use. Closing the variable orifice valve 16 is accomplished by bleeding off the pressure from the control line 54, which causes the pneumatic pressure in the nitrogen coil chamber 56 to close the valve because it is higher than the hydraulic pressure in the hydraulic conduit 54. An annulus port 53 may also be provided through the wall of the mandrel 14 through which pressure may be discharged to the annulus during operation.

[0033] As shown in Figure 5B, the variable orifice valve 16 may include a carbide stem and seat 17. The gas lift valve 8 may also be provided with one-way check valves 29 to prevent any fluid flow from the well conduit into the gas lift valve 8. The gas lift valve 8 may also be provided with a latch 27 so the valve may be remotely installed and/or retrieved by well known wireline or coiled tubing intervention methods. As shown in Figure 14, this embodiment of the present invention may also be provided with a valve connection collet 11, the structure and operation of which are well known to those of ordinary skill in the art.

[0034] Figure 16 is a schematic representation of one preferred embodiment of the present invention. Disclosed are uppermost and lowermost side pocket mandrels 60 and 61 sealably connected by a well coupling 62. A coiled tubing or wireline retrievable actuator 64 is positioned in the uppermost mandrel 60, and a variable orifice gas lift valve 66 is positioned in the lowermost mandrel 61, and are operatively connected by hydraulic control lines 68. In previous figures, the variable orifice valve 16 and the actuating mechanisms described in Figures 1-5 are shown located in the same mandrel, making retrieval of both mechanisms difficult, if not impossible. In this embodiment, the variable orifice gas lift valve 66, and the electro-hydraulic wireline or coiled tubing retrievable actuator 64 of the present invention are located, installed and retrieved separately, but are operatively connected one to another by hydraulic control lines 68. This allows retrieval of each mechanism separately, using either wireline or coiled tubing intervention methods which are well known in the art. As shown in Figure 18, which is a cross-sectional view taken along line 18-18 of Figure 16, an operating piston 72 is disposed adjacent

the variable orifice valve 66 in the lowermost mandrel 61. In every other aspect, however, the mechanisms operate as heretofore described.

[0035] It should be noted that the preferred embodiments described herein employ a well known valve mechanism generically known as a poppet valve to those skilled in the art of valve mechanics. It can, however, be appreciated that several well known valve mechanisms may obviously be employed and still be within the scope of the present invention. Rotating balls or plugs, butterfly valves, rising stem gates, and flappers are several other generic valve mechanisms which may obviously be employed to accomplish the same function in the same manner.

[0036] Whereas the present invention has been described in particular relation to the drawings attached hereto, it should be understood that other and further modifications, apart from those shown or suggested herein, may be made within the scope of the present invention. Accordingly, the invention is therefore to be limited only by the scope of the appended claims.

Claims

1. A gas lift valve for variably introducing injection gas into a subterranean well, comprising:

a valve body (10) with a longitudinal bore there-through for sealable insertion in a mandrel;
a variable orifice valve (16) in the body for controlling flow of injection gas into the body; and
a moveable hydraulic piston (32, 42) connected to and offset from the variable orifice valve and in communication with a source (25) of pressurized fluid;
whereby the amount of injection gas introduced into the well through the variable orifice valve is controlled by varying the amount of pressurized fluid being applied to the moveable hydraulic piston.

2. A gas lift valve according to Claim 1, wherein the source of pressurized fluid is external to the gas lift valve and is transmitted to the gas lift valve through a control line (46) connected between the gas lift valve and the external source of pressurized fluid.

3. A gas lift valve according to Claim 2, wherein the external source of pressurized fluid is located at the earth's surface.

4. A gas lift valve according to Claim 1, wherein the source of pressurized fluid is an on-board hydraulic system including:

a hydraulic pump (22) located in a downhole housing and in fluid communication with a fluid

reservoir (25);

an electric motor (26) connected to and driving the hydraulic pump upon receipt of a signal from a control panel; and

hydraulic circuitry (30) in fluid communication with the hydraulic pump and the hydraulic piston.

5. A gas lift valve according to Claim 4, further including an electrical conduit (26) connecting the control panel to the gas lift valve for providing a signal to the electric motor.

6. A gas lift valve according to Claim 5, the hydraulic system further including a solenoid valve (28) located in the downhole housing and connected to the electrical conduit (26), the solenoid valve directing the pressurized fluid from the hydraulic system through the hydraulic circuitry to the hydraulic piston.

7. A gas lift valve according to Claim 5, further including at least one pressure transducer (35) in fluid communication with the hydraulic circuitry and connected to the electrical conduit for providing a pressure reading to the control panel.

8. A gas lift valve according to Claim 5, further including an upstream pressure transducer connected to the electrical conduit and a downstream pressure transducer (19) connected to the electrical conduit, the upstream and downstream pressure transducers being located within the gas lift valve to measure a pressure drop across the variable lift valve, the pressure drop measurement being reported to the control panel through the electrical conduit.

9. A gas lift valve according to Claim 4, further including a position sensor (34) to report relative location of the moveable hydraulic piston to the control panel.

10. A gas lift valve according to Claim 4, further including a mechanical position holder (33) to mechanically assure that the variable orifice valve remains in its desired position if conditions in the hydraulic system change during use.

11. A gas lift valve according to Claim 10, wherein the variable orifice valve may be stopped at intermediate positions between a full open and a full closed position to adjust the flow of injection gas therethrough, the variable orifice valve being held in the intermediate positions by the position holder (33).

12. A gas lift valve according to Claim 4, wherein the hydraulic system further includes a movable volume compensator piston (15) for displacing a volume of fluid that is utilized as the hydraulic system operates.

13. A gas lift valve according to Claim 1, wherein the

variable orifice valve further includes a carbide stem and seat (17).

14. A gas lift valve according to Claim 1, wherein the mandrel is provided with at least one injection gas port (13) through which injection gas flows when the variable orifice valve is open. 5
15. A gas lift valve according to Claim 1, further including an upper and lower one-way check valve (29) located on opposite sides of the variable orifice valve to prevent any fluid flow from the well into the gas lift valve. 10
16. A gas lift valve according to Claim 1, further including latch means (27) for adapting the variable orifice valve to be remotely deployed and retrieved. 15
17. A gas lift valve according to Claim 16, wherein the variable orifice valve is remotely deployed and retrieved by utilization of coiled tubing. 20
18. A gas lift valve according to Claim 16, wherein the variable orifice valve is remotely deployed and retrieved by utilization of wireline. 25
19. A gas lift valve according to Claim 1, further including a valve connection collet (11). 30

Patentansprüche

1. Gasliftventil für das regelbare Einführen von Einspritzgas in ein unterirdisches Bohrloch, das aufweist:
 einen Ventilkörper (10) mit einer Längsbohrung dort hindurch für das abdichtbare Einsetzen in ein Mantelrohr,
 ein regelbares Expansionsventil (16) im Körper für das Steuern des Stromes des Einspritzgases in den Körper; und
 einen beweglichen hydraulischen Kolben (32, 42), der mit dem regelbaren Expansionsventil verbunden und davon versetzt und in Verbindung mit einer Quelle (25) von unter Druck stehendem Fluid ist;
 wobei die Menge des in das Bohrloch durch das regelbare Expansionsventil eingeführten Einspritzgases durch Verändern der Menge des unter Druck stehenden Fluids gesteuert wird, das beim beweglichen hydraulischen Kolben zur Anwendung gebracht wird. 40 45 50
2. Gasliftventil nach Anspruch 1, bei dem die Quelle des unter Druck stehenden Fluids extern zum Gasliftventil ist und zum Gasliftventil mittels einer Steuerleitung (46) übertragen wird, die zwischen dem 55

Gasliftventil und der externen Quelle des unter Druck stehenden Fluids geschaltet ist.

3. Gasliftventil nach Anspruch 2, bei dem die äußere Quelle des unter Druck stehenden Fluids auf der Erdoberfläche angeordnet ist.
4. Gasliftventil nach Anspruch 1, bei dem die Quelle des unter Druck stehenden Fluids ein integriertes Hydrauliksystem ist, das einschließt:
 eine Hydraulikpumpe (22), die in einem Abwärtsbohrlochgehäuse und in Fluidverbindung mit einem Fluidbehälter (25) angeordnet ist;
 einen Elektromotor (26), der mit der Hydraulikpumpe verbunden ist und die bei Empfang eines Signals von einem Schaltpult aus antreibt; und
 einen Hydraulikkreis (30) in Fluidverbindung mit der Hydraulikpumpe und dem hydraulischen Kolben.
5. Gasliftventil nach Anspruch 4, das außerdem eine elektrische Leitung (26) umfasse die das Schaltpult mit dem Gasliftventil für das Liefern eines Signals zum Elektromotor verbindet.
6. Gasliftventil nach Anspruch 5, wobei das Hydrauliksystem außerdem ein Magnetventil (28) umfasst, das im Abwärtsbohrlochgehäuse angeordnet und mit der elektrischen Leitung (26) verbunden ist, wobei das Magnetventil das unter Druck stehende Fluid vom Hydrauliksystem durch den Hydraulikkreis zum hydraulischen Kolben lenkt. 30
7. Gasliftventil nach Anspruch 5, das außerdem mindestens einen Druckwandler (35) in Fluidverbindung mit dem Hydraulikkreis umfasst und mit der elektrischen Leitung für das Liefern einer Druckablesung am Schaltpult verbunden ist. 35
8. Gasliftventil nach Anspruch 5, das außerdem einen stromaufwärts angeordneten Druckwandler, der mit der elektrischen Leitung verbunden ist, und einen stromabwärts angeordneten Druckwandler (19) umfasst, der mit der elektrischen Leitung verbunden ist, wobei der stromaufwärts und der stromabwärts angeordnete Druckwandler innerhalb des Gasliftventils angeordnet sind, um einen Druckabfall über das regelbare Liftventil zu messen, wobei über die Druckabfallmessung am Schaltpult mittels der elektrischen Leitung berichtet wird. 40 45 50
9. Gasliftventil nach Anspruch 4, das außerdem einen Positionssensor (34) umfasst, um die relative Position des beweglichen hydraulischen Kolbens am Schaltpult mitzuteilen.
10. Gasliftventil nach Anspruch 4, das außerdem einen

mechanischen Positionshalter (33) umfasst, um mechanisch zu sichern, dass das regelbare Expansionsventil in seiner gewünschten Position bleibt, wenn sich die Bedingungen im Hydrauliksystem während der Benutzung verändern.

11. Gasliftventil nach Anspruch 10, bei dem das regelbare Expansionsventil in Zwischenpositionen zwischen einer vollständig offenen und einer vollständig geschlossenen Position gestoppt werden kann, um den Fluss des Einspritzgases dort hindurch zu regulieren, wobei das regelbare Expansionsventil in den Zwischenpositionen mittels des Positionshalters (33) gehalten wird. 10
12. Gasliftventil nach Anspruch 4, bei dem das Hydrauliksystem außerdem einen beweglichen Volumen- ausgleichskolben (15) für das Verdrängen eines Fluidvolumens umfasst, das genutzt wird, während das Hydrauliksystem arbeitet. 20
13. Gasliftventil nach Anspruch 1, bei dem das regelbare Expansionsventil einen Hartmetallschaft und -sitz (17) umfasst. 25
14. Gasliftventil nach Anspruch 1, bei dem das Mantelrohr mit mindestens einer Einspritzgasöffnung (13) versehen ist, durch die Einspritzgas strömt, wenn das regelbare Expansionsventil offen ist. 30
15. Gasliftventil nach Anspruch 1, das außerdem ein oberes und ein unteres Einwegrückschlagventil (29) umfasst, die auf entgegengesetzten Seiten des regelbaren Expansionsventils angeordnet sind, um jeglichen Fluidstrom vom Bohrloch in das Gasliftventil zu verhindern. 35
16. Gasliftventil nach Anspruch 1, das außerdem ein Einklinkmittel (27) für das Anpassen des regelbaren Expansionsventils umfasst, damit es fernbetätigt ausgelöst und zurückgezogen wird. 40
17. Gasliftventil nach Anspruch 16, bei dem das regelbare Expansionsventil durch Nutzung einer flexiblen Rohrwerdel fernbetätigt ausgelöst und zurückgezogen wird. 45
18. Gasliftventil nach Anspruch 16, bei dem das regelbare Expansionsventil durch Nutzung eines Drahtseiles fernbetätigt ausgelöst und zurückgezogen wird. 50
19. Gasliftventil nach Anspruch 1, das außerdem eine Ventilanschlussklemmhülse (11) umfasst. 55

Revendications

1. Soupape de gas-lift (extraction par éjection de gaz) destinée à l'introduction variable d'un gaz d'injection dans un puits souterrain, comprenant: 5

un corps de soupape (10) pourvu d'un alésage longitudinal le traversant et destiné à être inséré de manière hermétique dans un mandrin;
une soupape à orifice variable (16) dans le corps pour commander l'écoulement d'un gaz d'injection dans le corps; a
un piston hydraulique mobile (32, 42) relié à la soupape à orifice variable et décalé par rapport à celle-ci et en communication avec une source (25) de fluide sous pression;
la quantité de gaz d'injection introduite dans le puits à travers la soupape à orifice variable étant commandée en faisant varier la quantité de fluide sous pression appliquée au piston hydraulique mobile.
2. Soupape de gas-lift selon la revendication 1, dans laquelle la source de fluide sous pression est extérieure à la soupape de gas-lift et est transmise à la soupape de gas-lift par le biais d'une ligne de commande (46) branchée entre la soupape de gas-lift et la source extérieure de fluide sous pression. 25
3. Soupape de gas-lift selon la revendication 2, dans laquelle la source extérieure de fluide sous pression est située à la surface de la terre. 30
4. Soupape de gas-lift selon la revendication 1, dans laquelle la source de fluide sous pression est un système hydraulique embarqué incluant: 35

une pompe hydraulique (22) située dans un logement de fond de trou et en communication fluide avec un réservoir de fluide (25);
un moteur électrique (26) relié à la pompe hydraulique et entraînant celle-ci à la réception d'un signal provenant d'un panneau de commande ; et
un réseau de circuits hydrauliques (30) en communication fluide avec la pompe hydraulique et le piston hydraulique.
5. Soupape de gas-lift selon la revendication 4, incluant, en outre, un conduit électrique (26) pour connecter le panneau de commande à la soupape de gas-lift pour fournir un signal au moteur électrique. 50
6. Soupape de gas-lift selon la revendication 5, le système hydraulique incluant, en outre, une électrovanne (28) située dans le logement de fond de trou et reliée au conduit électrique (26), l'électrovanne dirigeant le fluide sous pression du système hydraulique 55

vers le piston hydraulique à travers le réseau de circuits hydrauliques.

7. Soupape de gas-lift selon la revendication 5, incluant, en outre, au moins un transducteur de pression (35) en communication fluide avec le réseau de circuits hydrauliques et relié au conduit électrique pour fournir une lecture de pression au panneau de commande. 5
8. Soupape de gas-lift selon la revendication 5, incluant, en outre, un transducteur de pression en amont relié au conduit électrique et un transducteur de pression en aval (19) relié au conduit électrique, les transducteurs de pression en amont et en aval étant situés à l'intérieur de la soupape d'extraction de gaz pour mesurer une chute de pression à travers la soupape à levée variable, la mesure de chute de pression étant rapportée au panneau de commande par le biais du conduit électrique. 10 15 20
9. Soupape de gas-lift selon la revendication 4, incluant, en outre, un capteur de position (34) pour informer le panneau de commande d'une position relative du piston hydraulique mobile. 25
10. Soupape de gas-lift selon la revendication 4, incluant, en outre, un organe de maintien de position mécanique (33) pour s'assurer de façon mécanique que la soupape à orifice variable demeure dans sa position souhaitée si les conditions dans le système hydraulique changent pendant l'utilisation. 30
11. Soupape de gas-lift selon la revendication 10, dans laquelle la soupape à orifice variable peut être Stop- pée en des positions intermédiaires entre une posi- tion d'ouverture totale et de fermeture totale pour régler l'écoulement de gaz d'injection à travers la soupape, la soupape à orifice variable étant mainte- nue dans les positions intermédiaires par l'organe de maintien de position (33). 35 40
12. Soupape de gas-lift selon la revendication 4, dans laquelle le système hydraulique inclut, en outre, un piston de compensation de volume mobile (15) pour déplacer un volume de fluide utilisé lorsque le sys- tème hydraulique fonctionne. 45
13. Soupape de gas-lift selon la revendication 1, dans laquelle la soupape orifice variable inclut, en outre, une tige et un siège (17) on carbure. 50
14. Soupape de gas-lift selon la revendication 1, dans laquelle le mandrin est pourvu d'au moins un orifice de gaz d'injection (13) à travers lequel un gaz d'in- jection s'écoule lorsque la soupape à orifice variable est ouverte. 55

15. Soupape de gas-lift selon la revendication 1, in- cluant, en outre, un clapet anti-retour unidirectionnel supérieur et inférieur (29) situé sur les côtés opposés de la soupape à orifice variable pour empêcher tout écoulement de fluide du puits dans la soupape de gas-lift.
16. Soupape de gas-lift selon la revendication 1, in- cluant, en outre, un moyen de verrouillage (27) pour adapter la soupape à orifice variable de manière à ce qu'elle soit déployée et récupérée à distance.
17. Soupape de gas-lift selon la revendication 16, dans laquelle la soupape à orifice variable est déployée et récupérée à distance au moyen d'un tubage en spirale.
18. Soupape de gas-lift selon la revendication 16, dans laquelle la soupape à orifice variable est déployée et récupérée à distance au moyen d'un câble métal- lique.
19. Soupape de gas-lift selon la revendication 1, in- cluant, en outre, une douille de raccord de soupape (11).

Fig. 1A

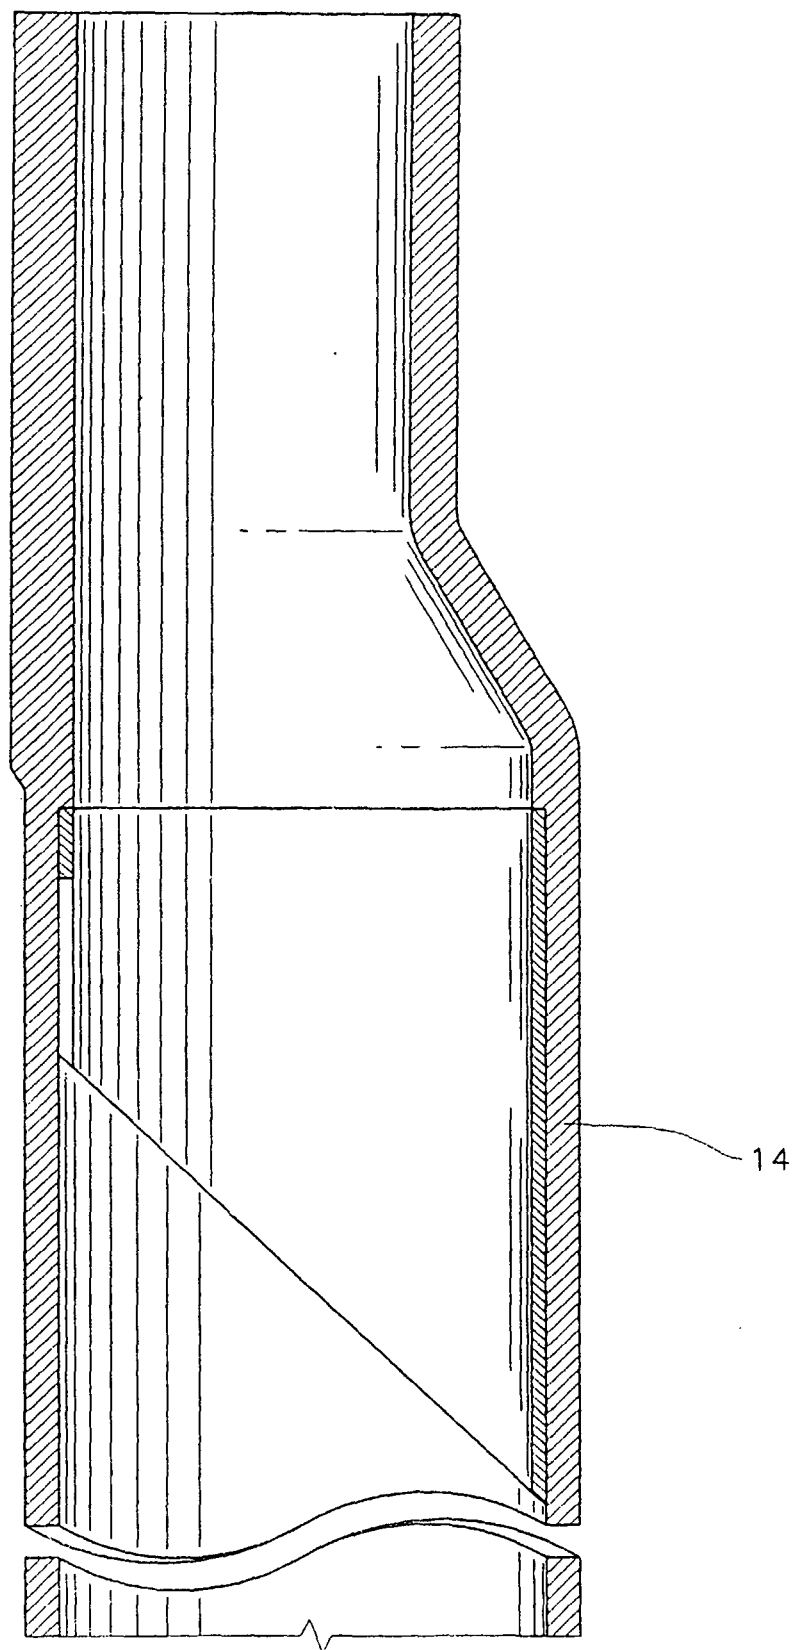


Fig. 1B

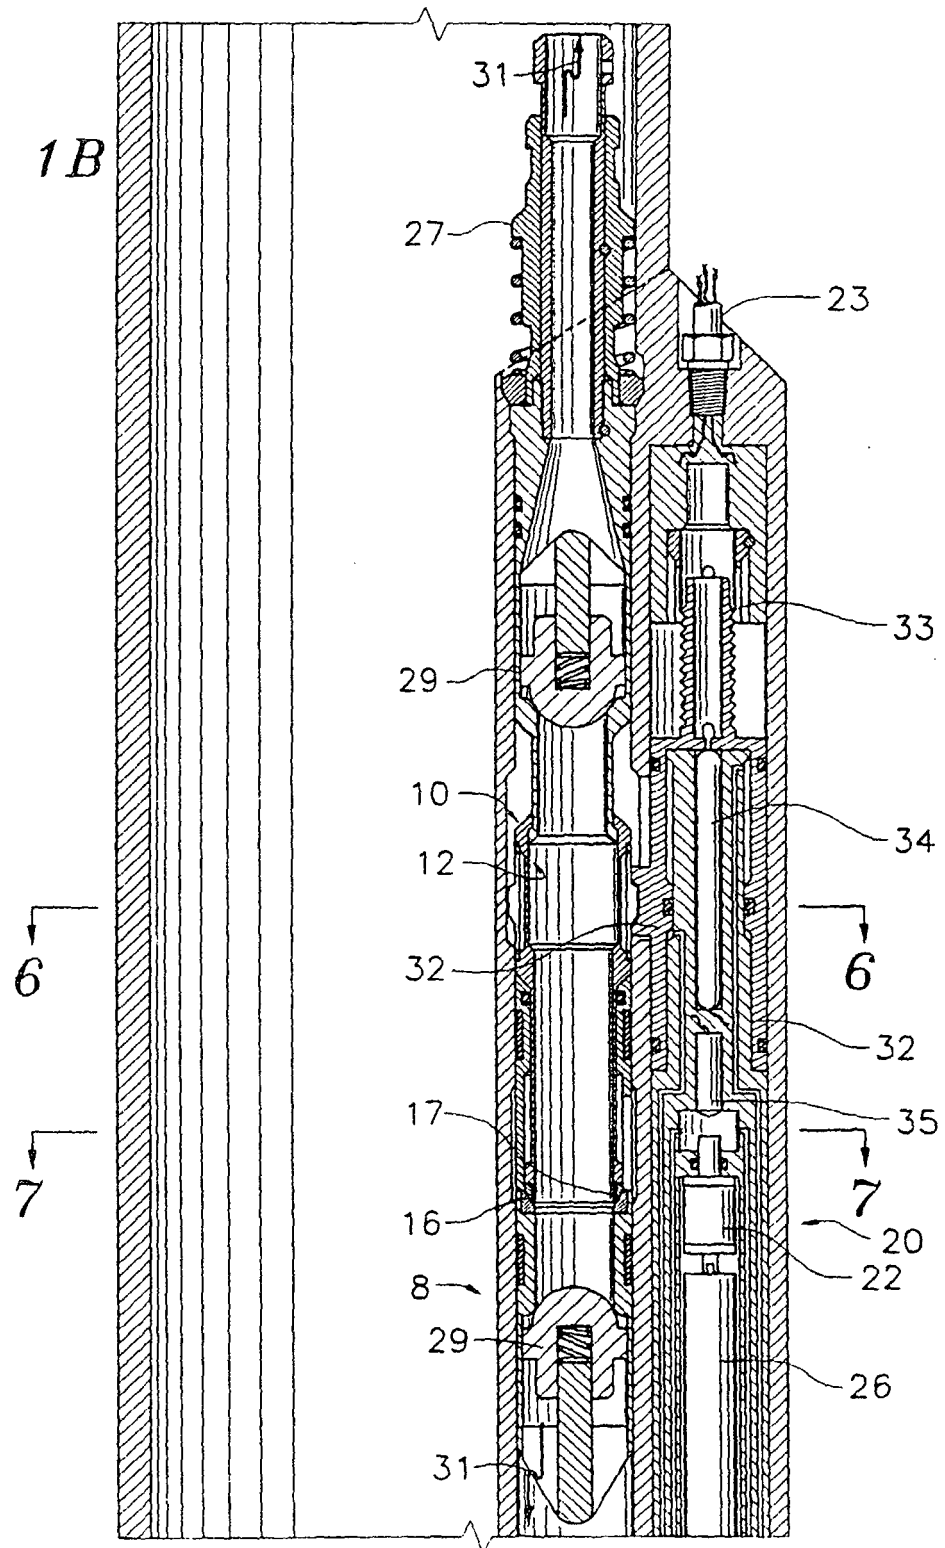


Fig. 1C

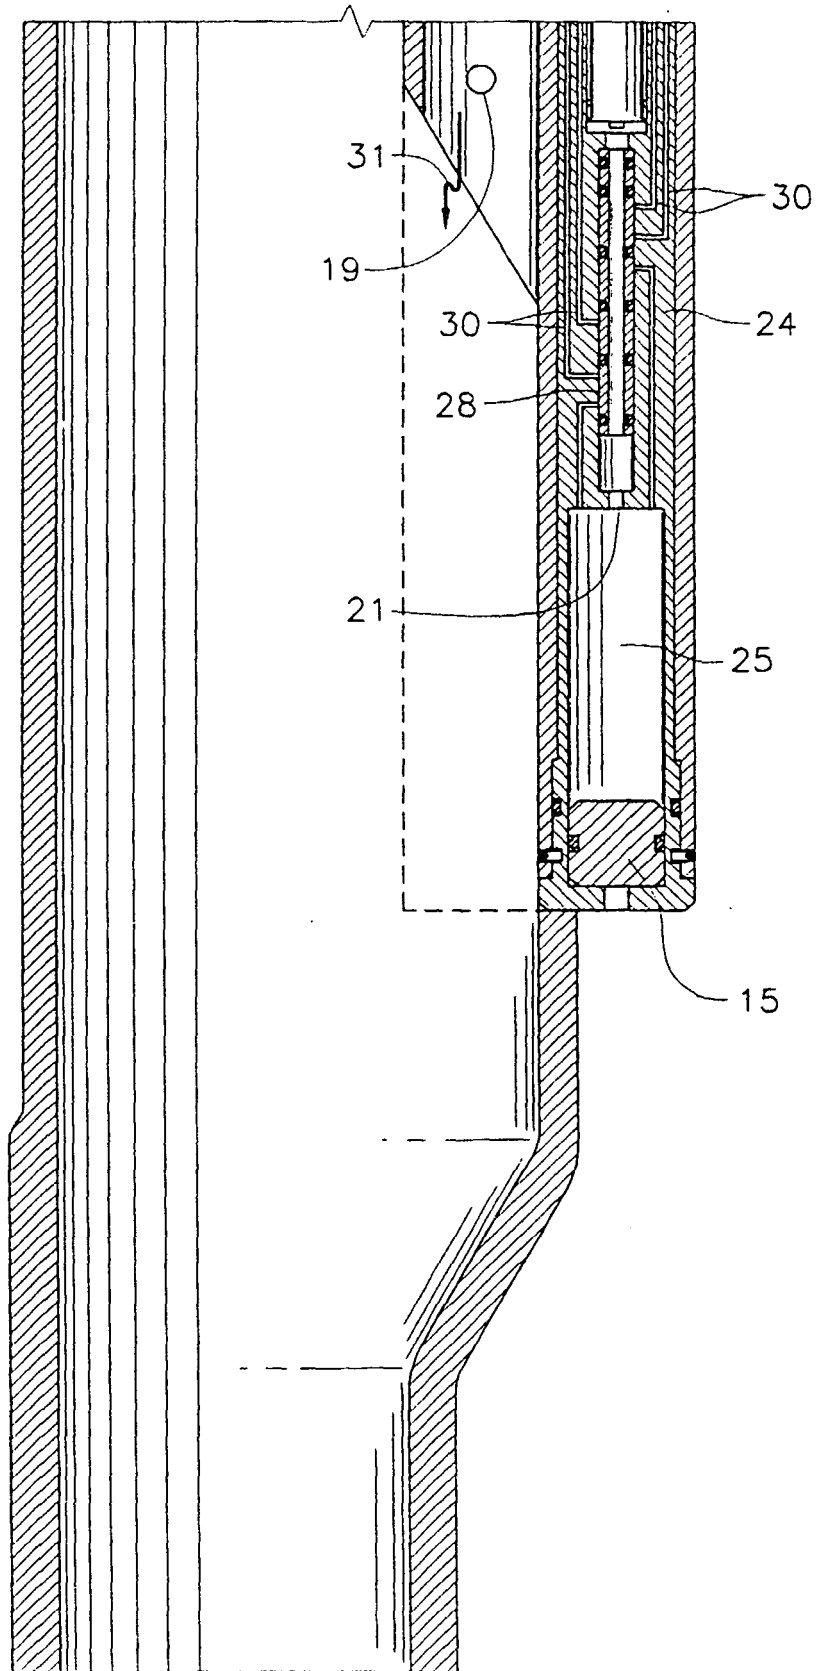


Fig. 2A

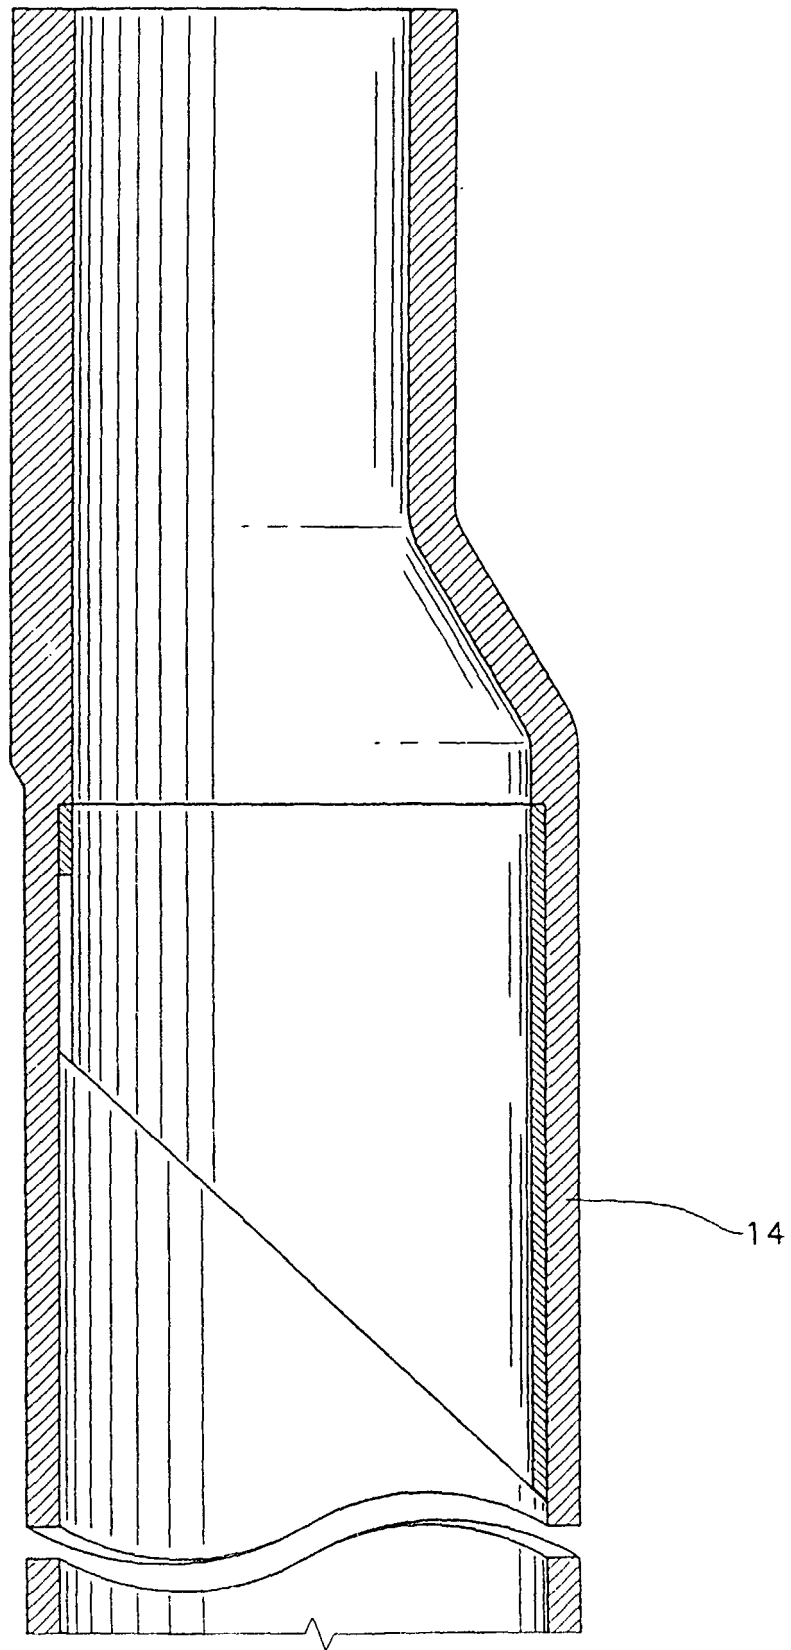


Fig. 2B

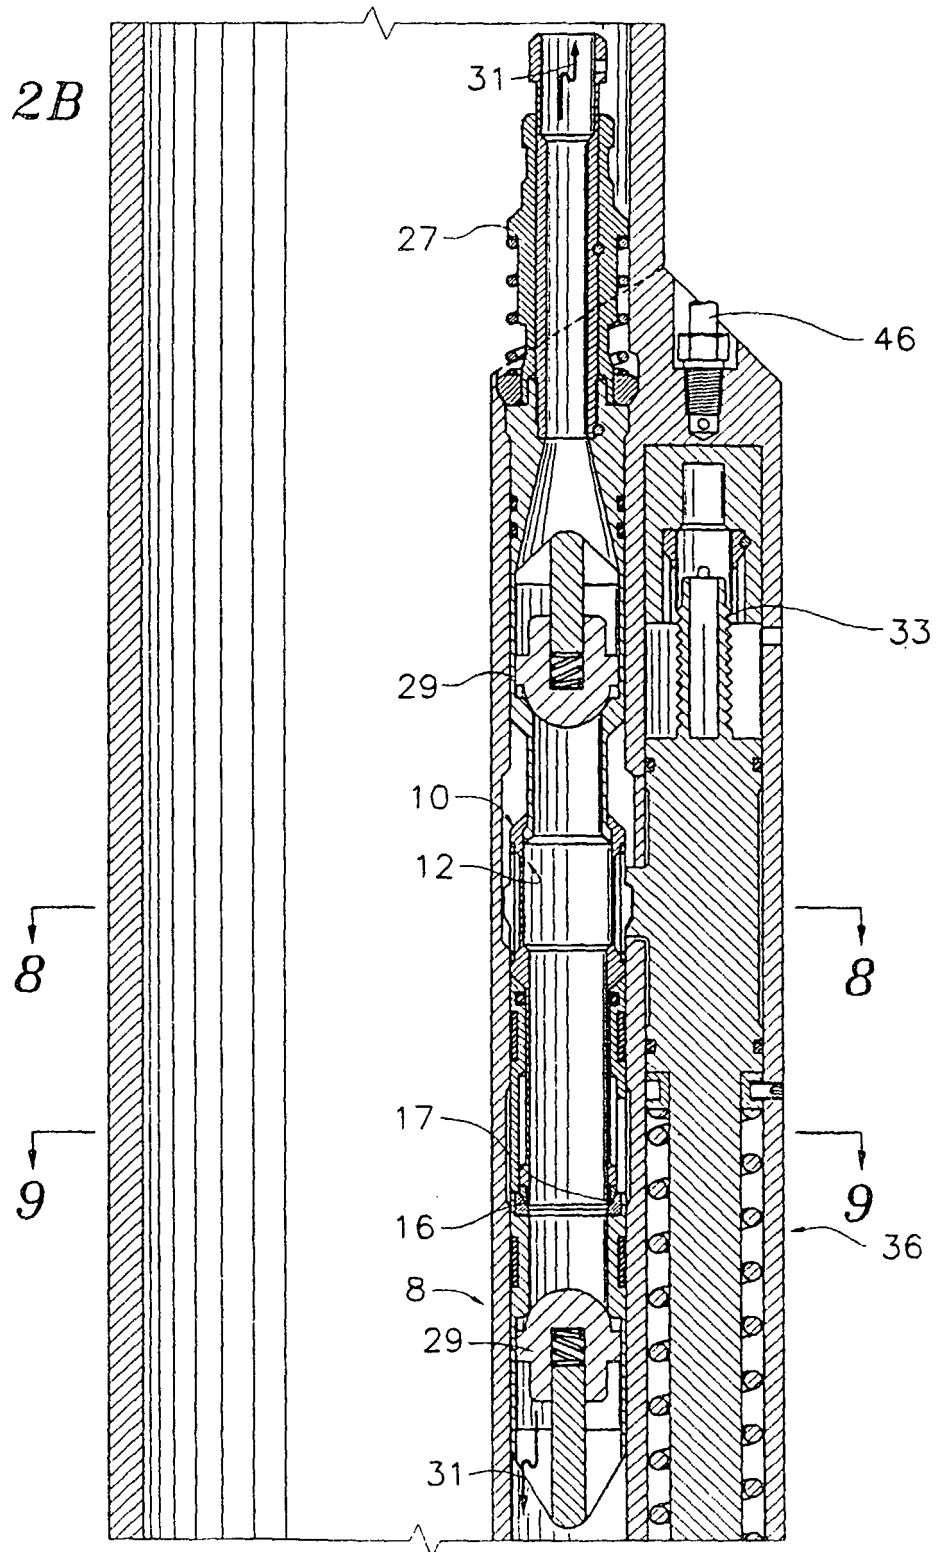


Fig. 2C

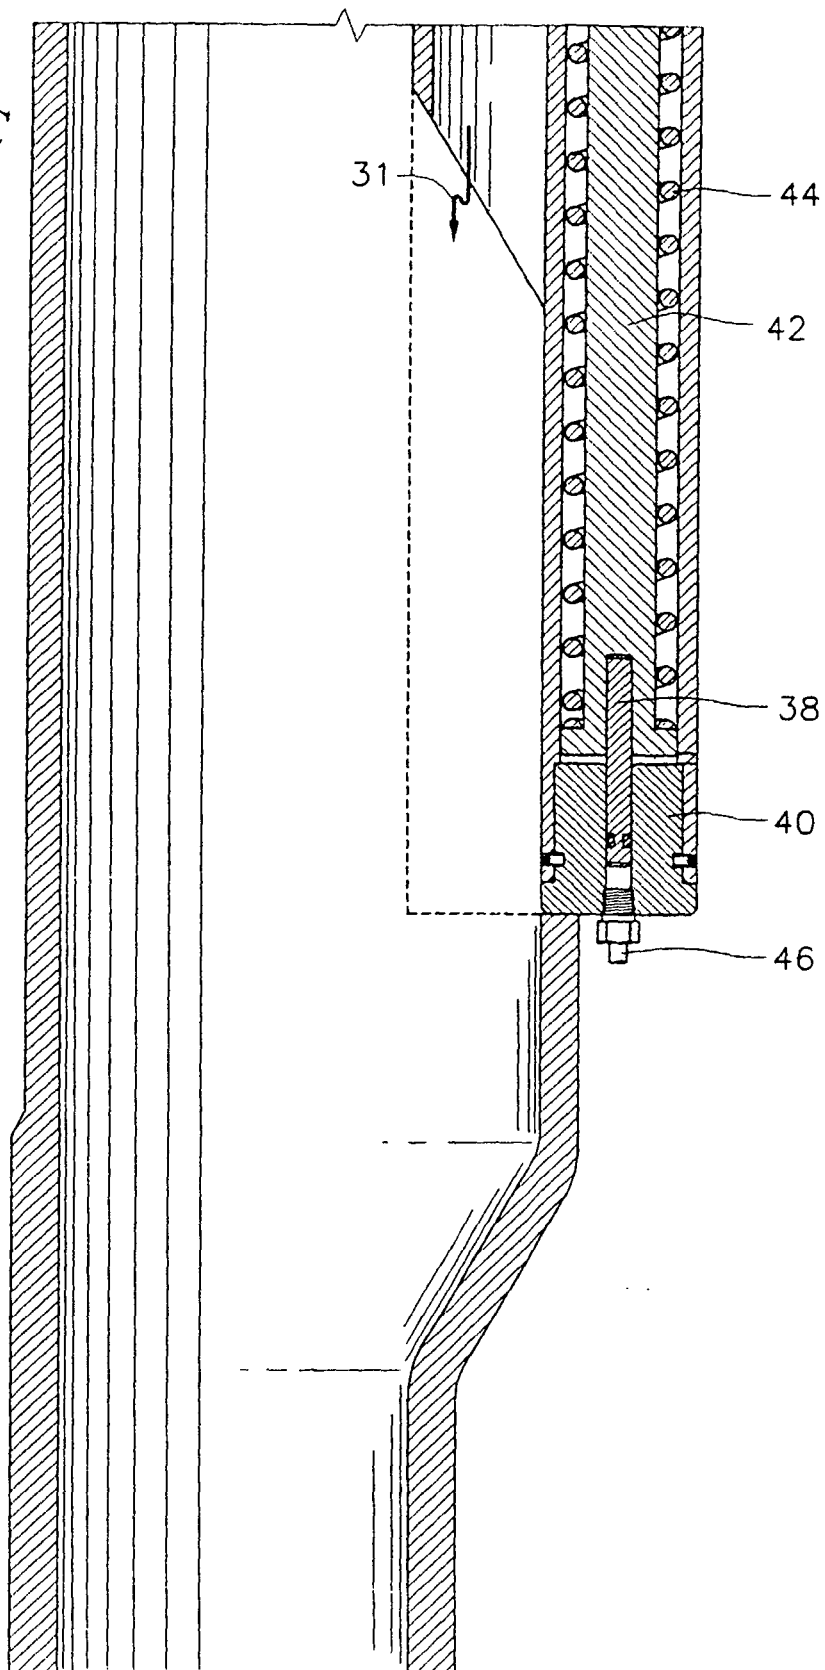


Fig. 3A

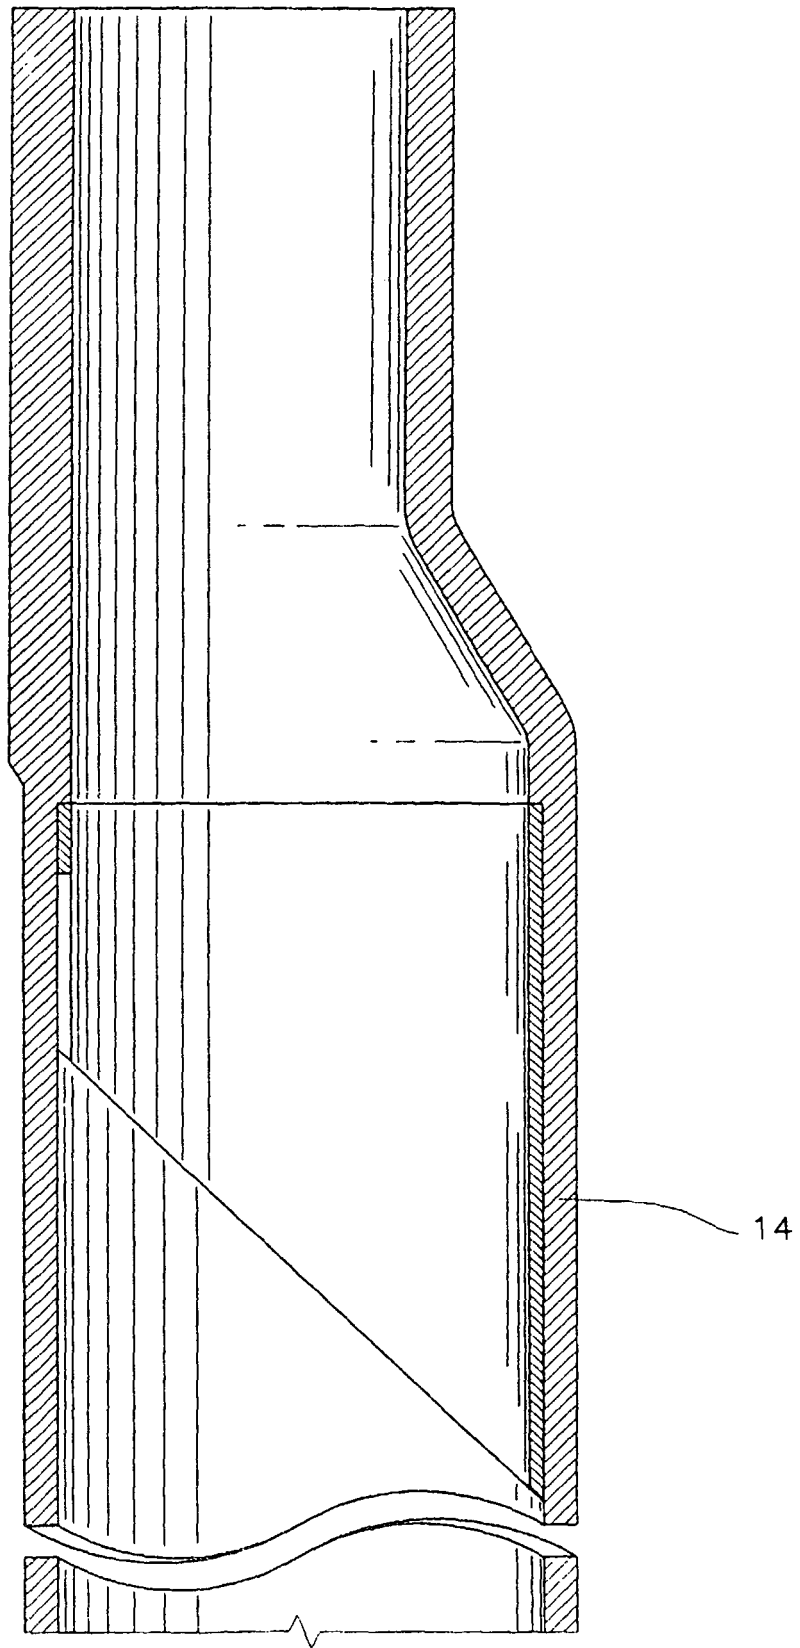


Fig. 3B

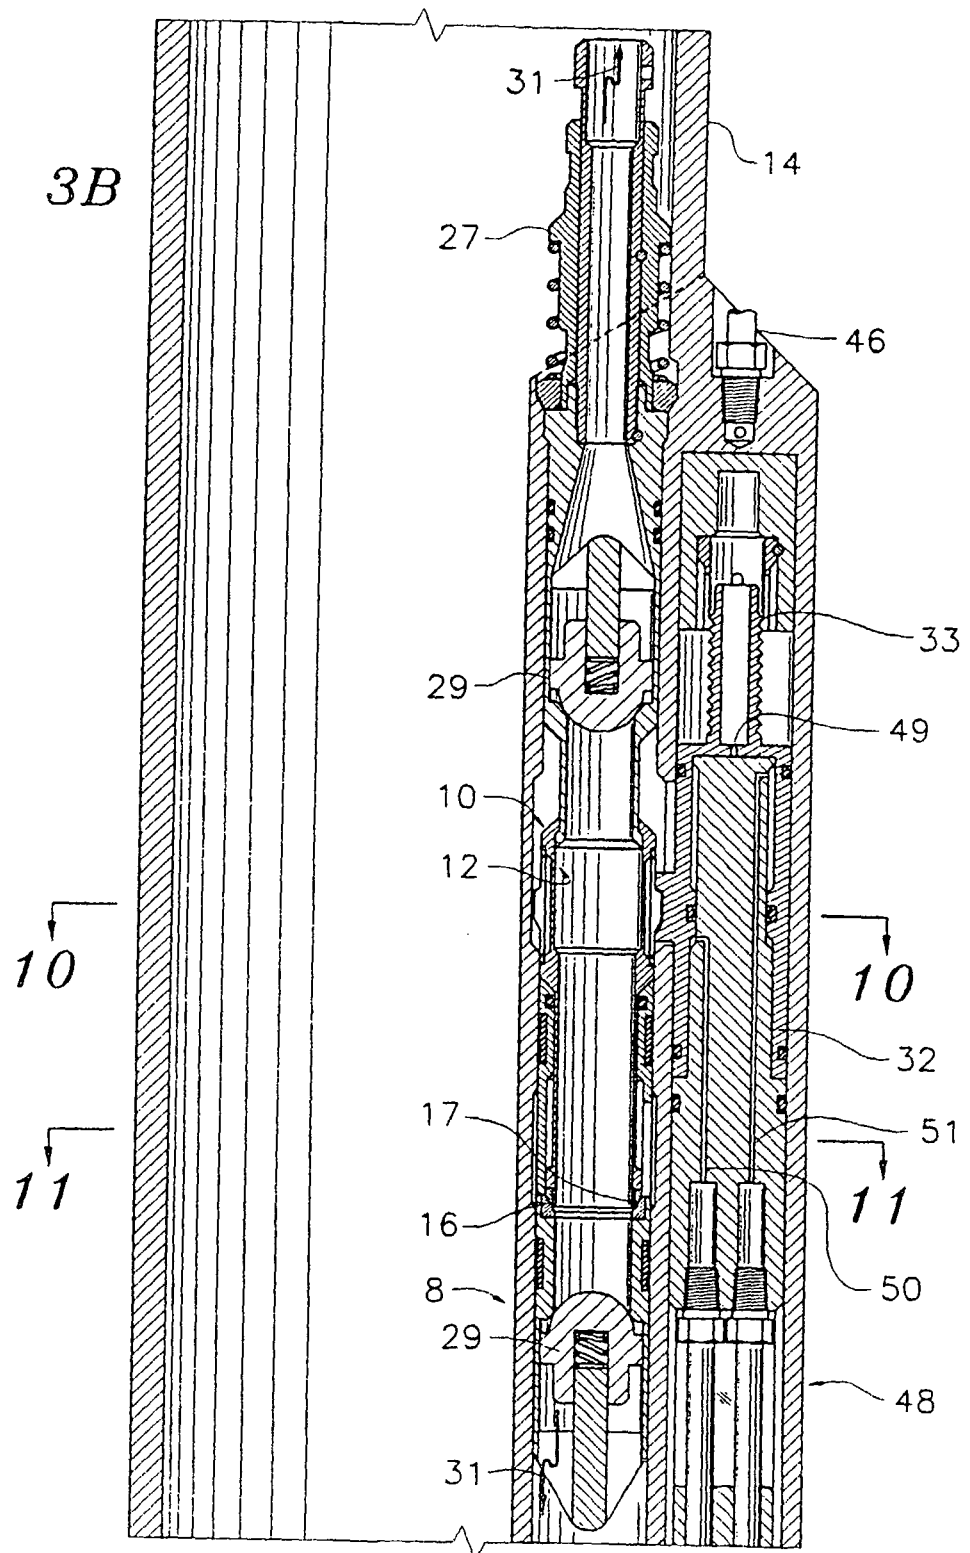


Fig. 3C

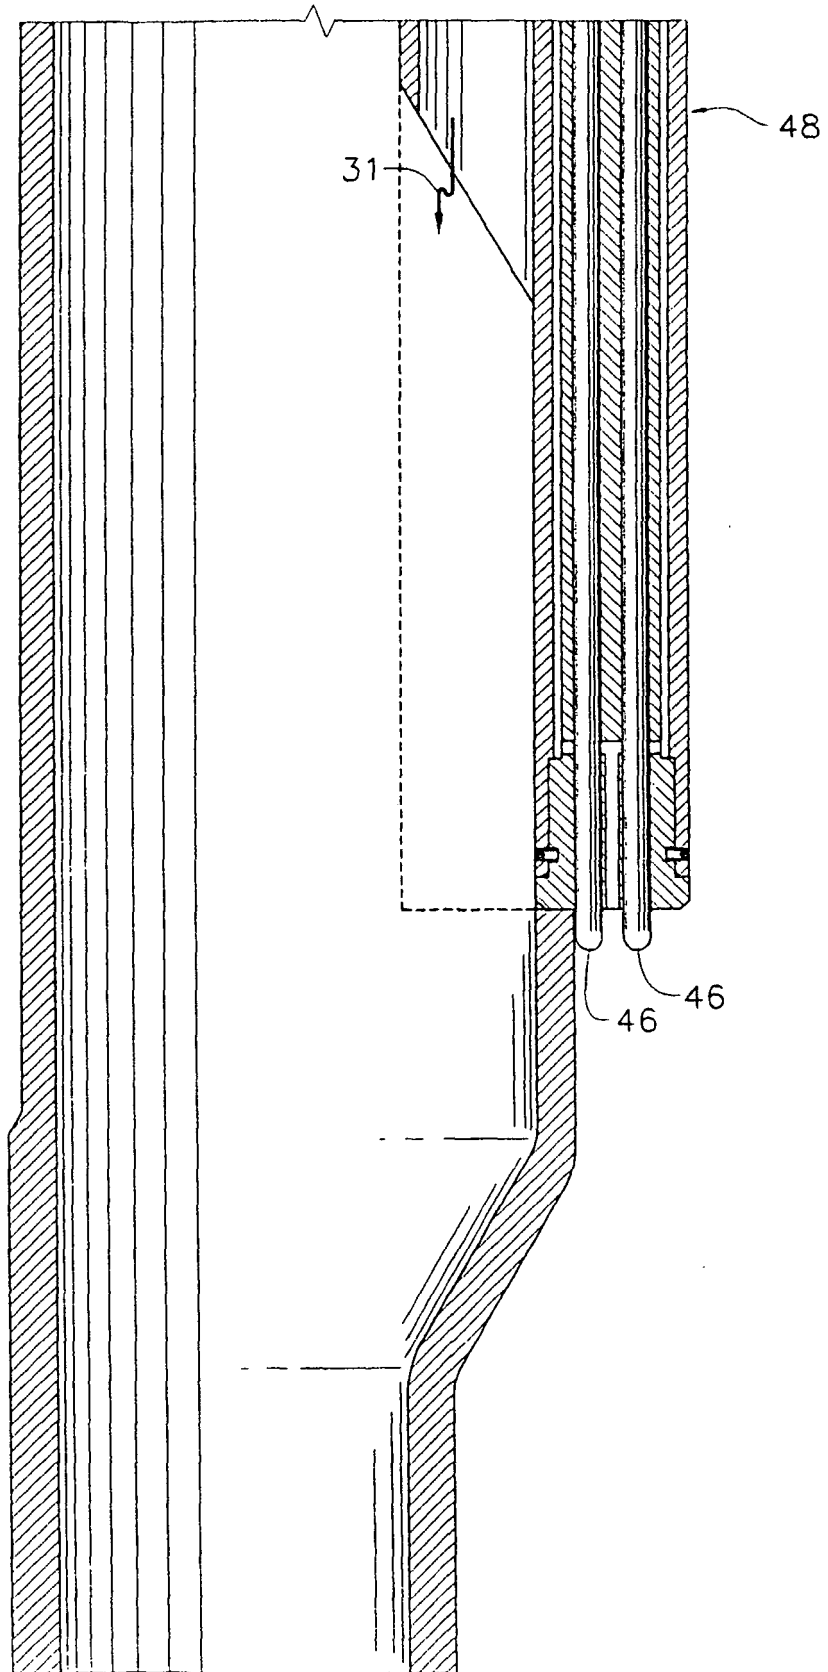


Fig. 4A

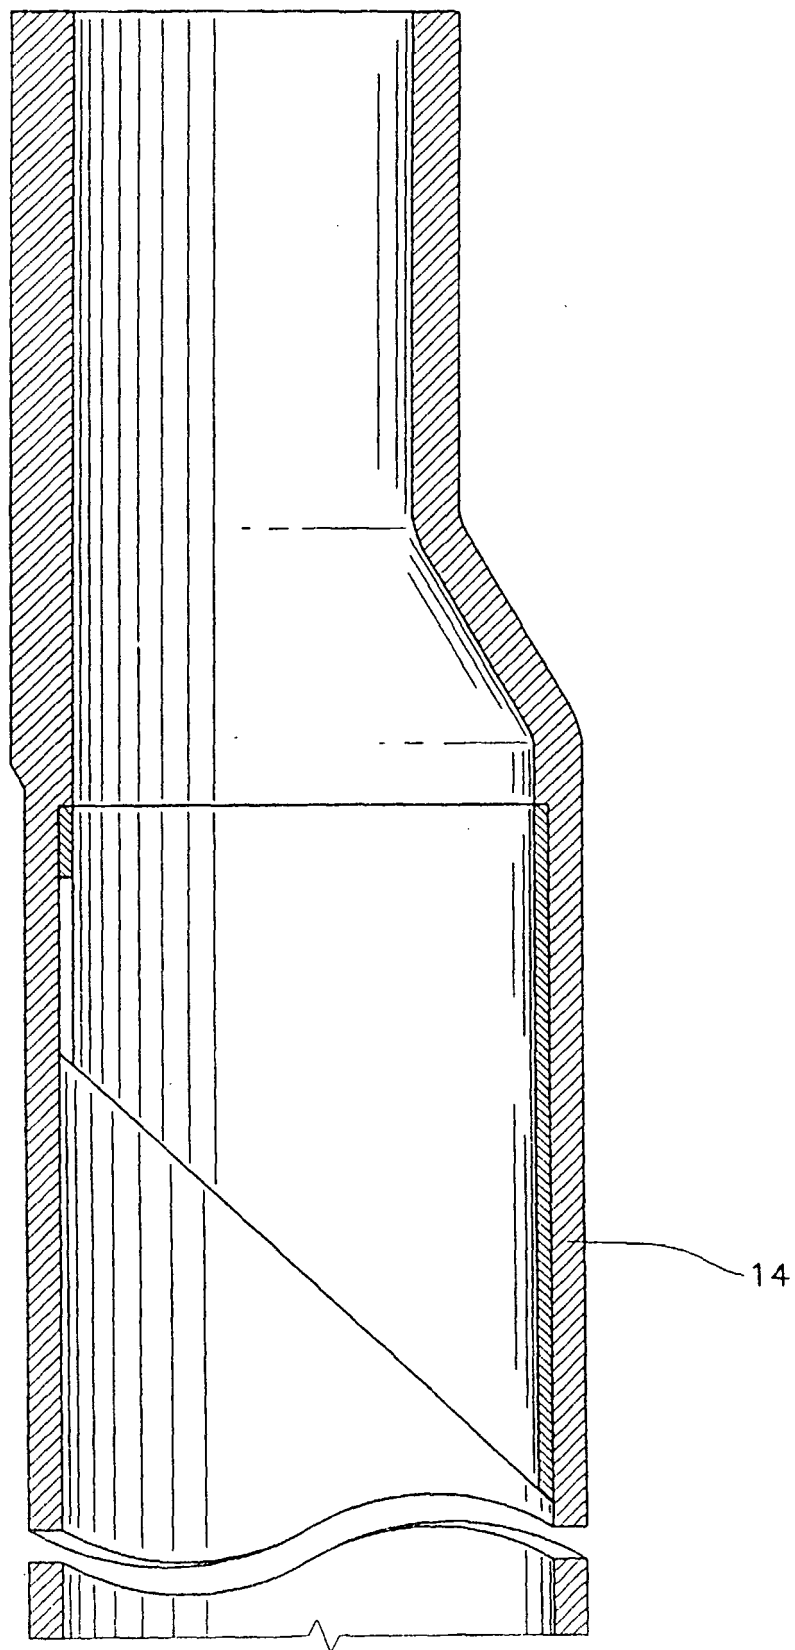


Fig. 4B

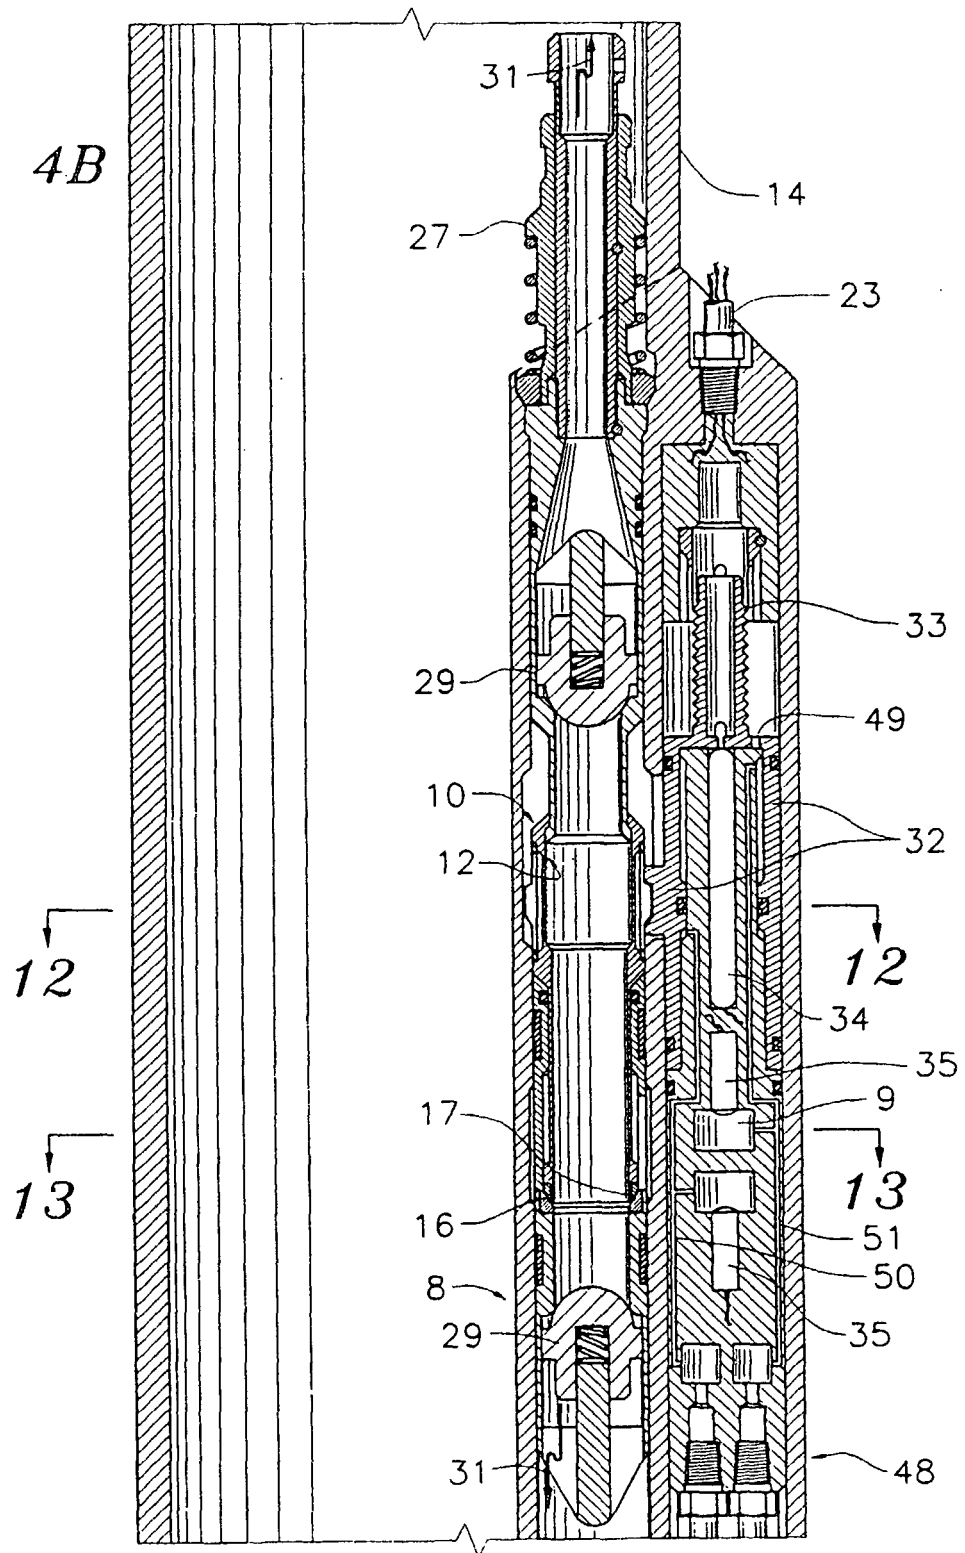


Fig. 4C

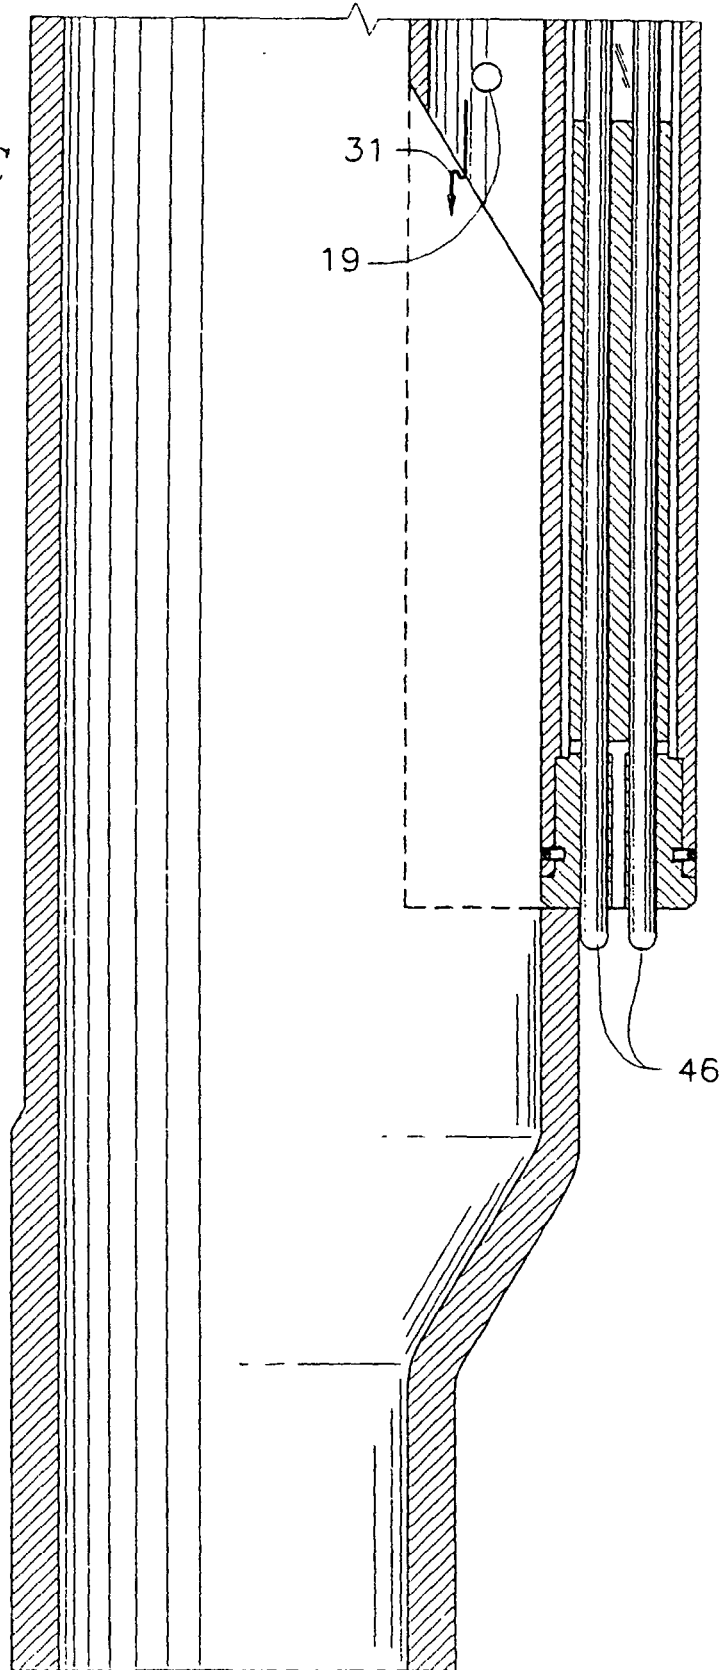


Fig. 5A

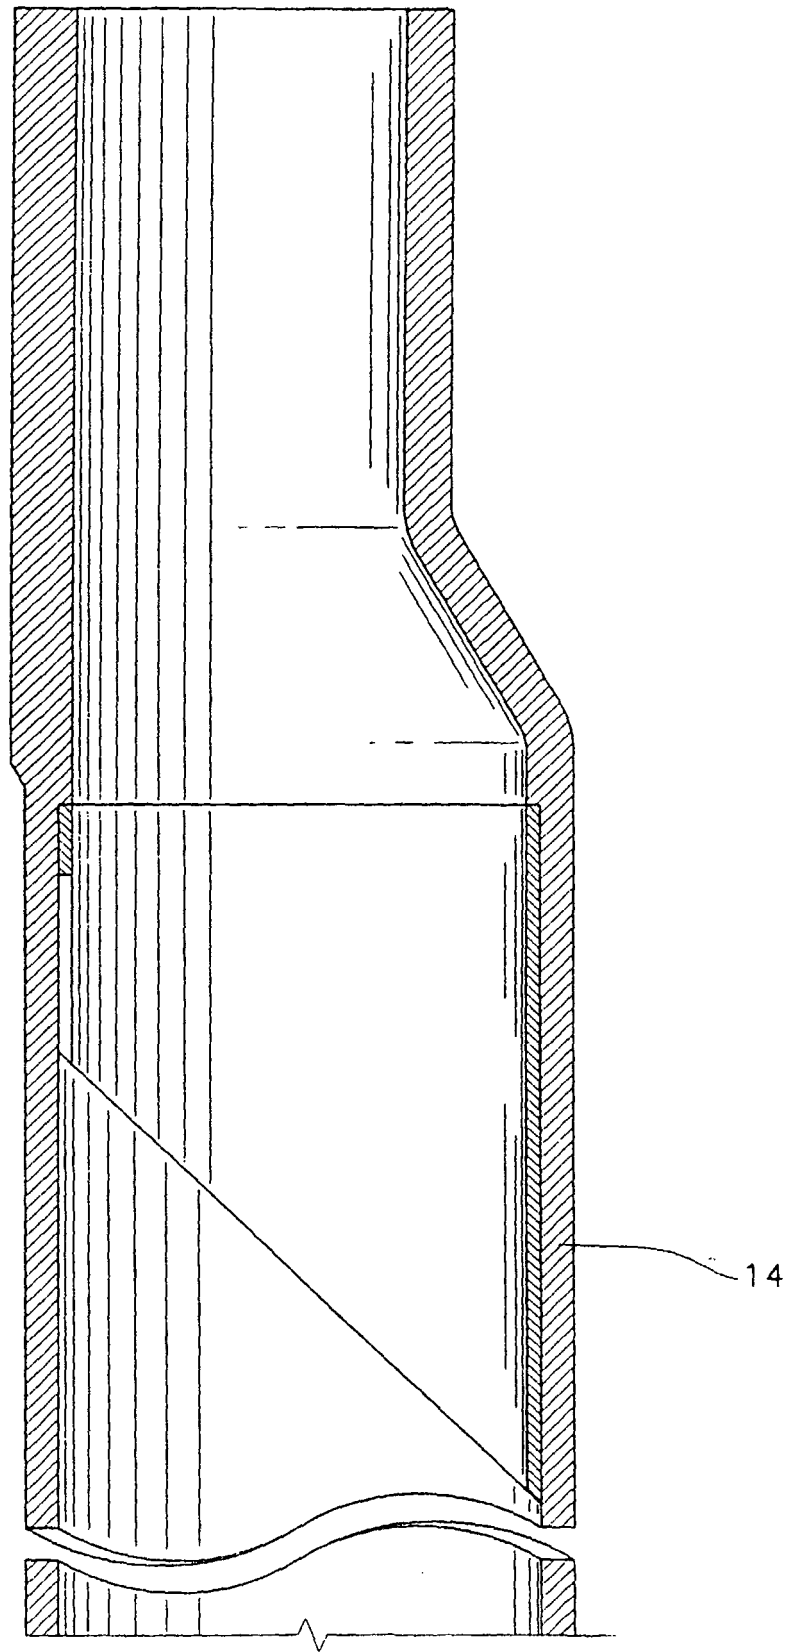


Fig. 5B

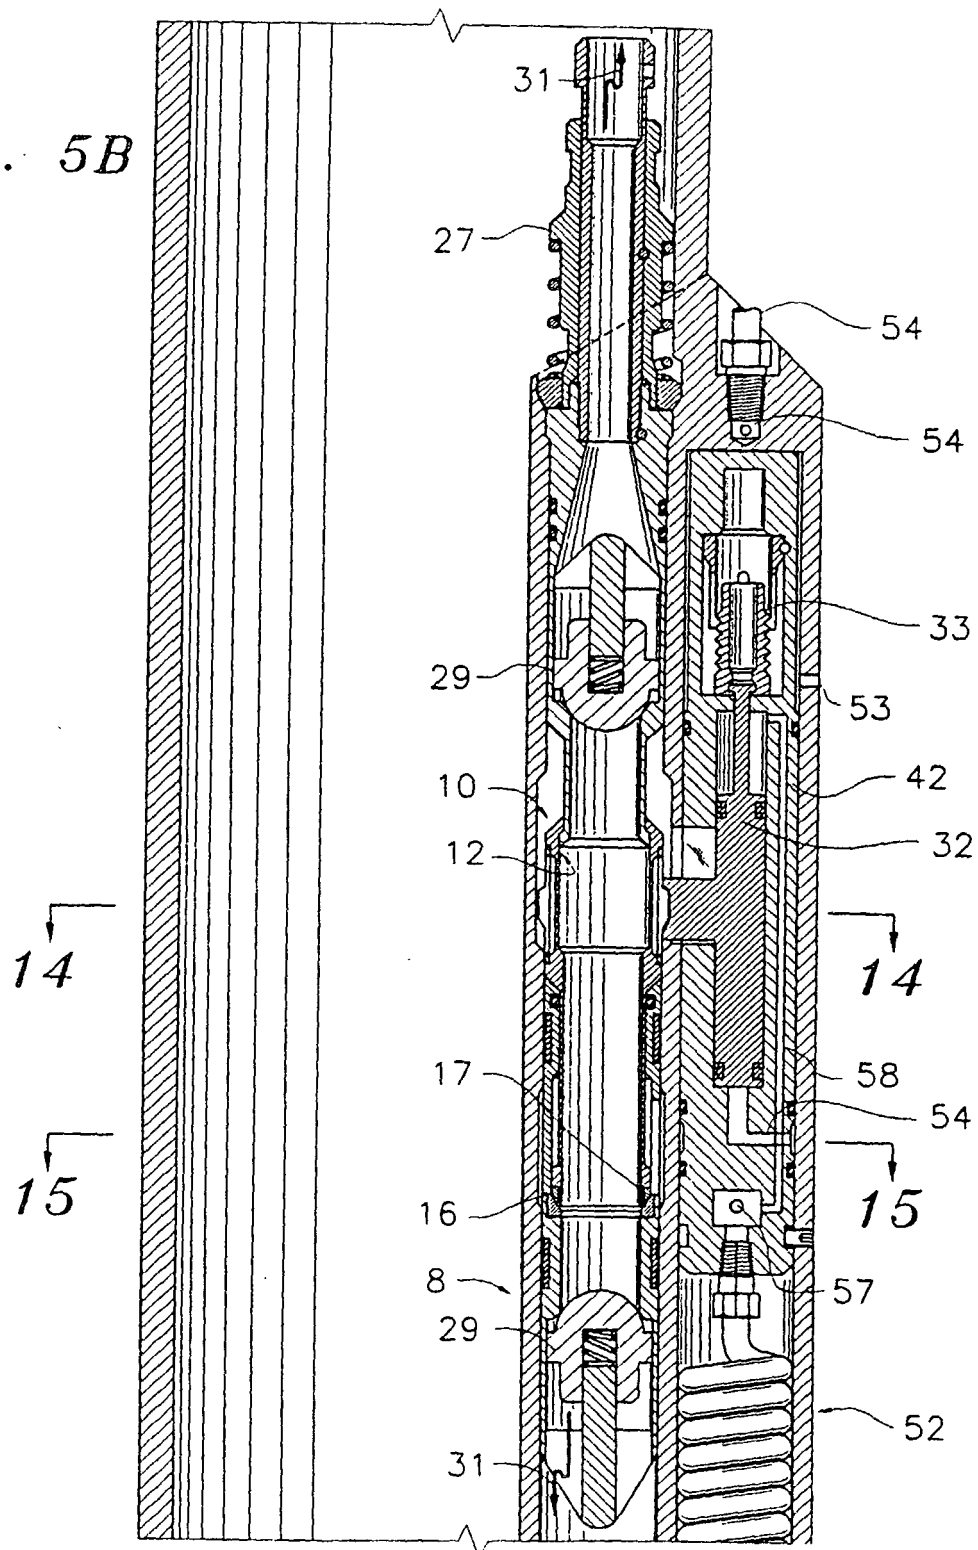


Fig. 5C

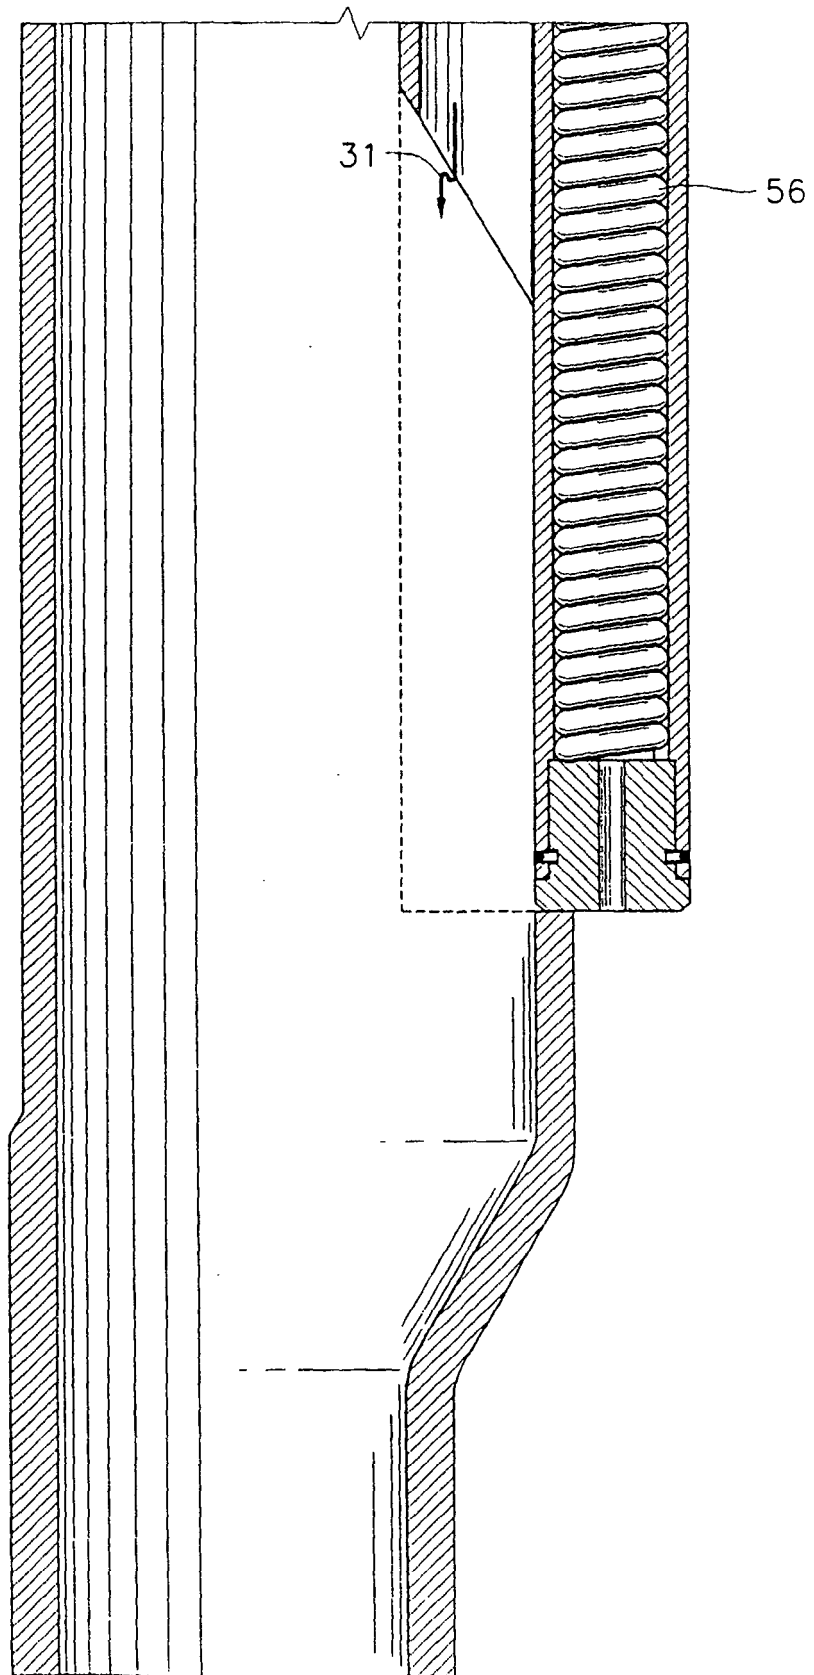


Fig. 6

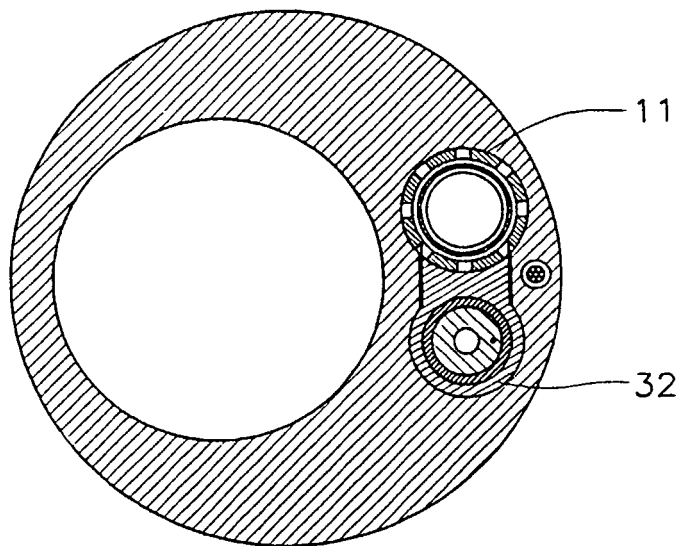


Fig. 7

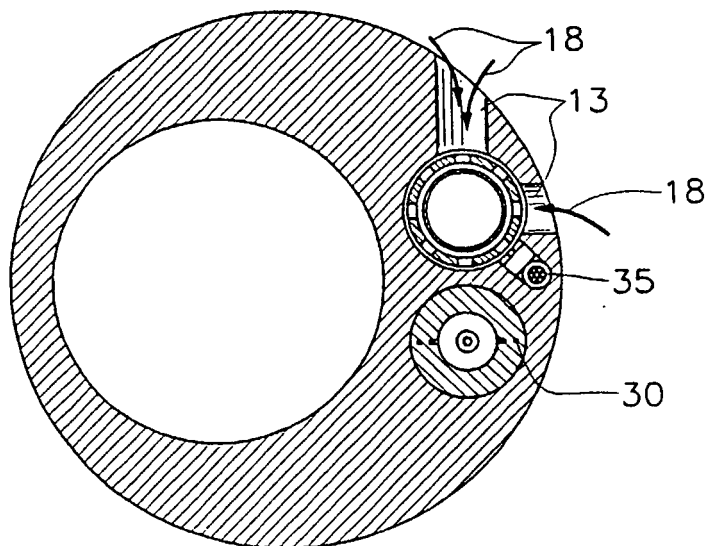


Fig. 8

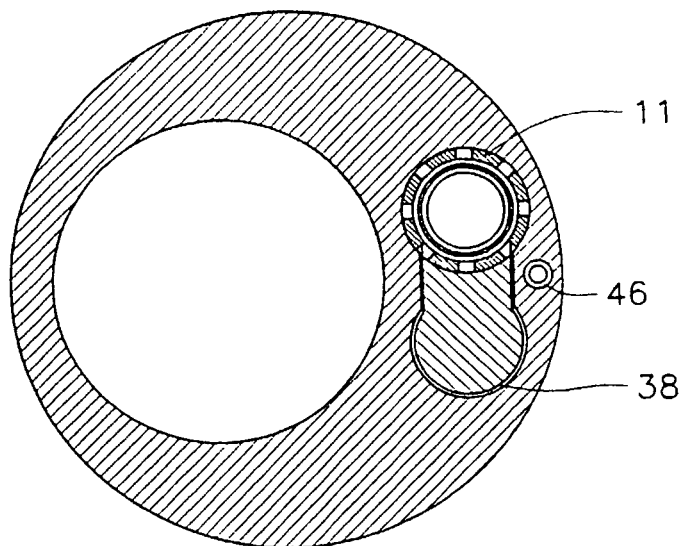


Fig. 9

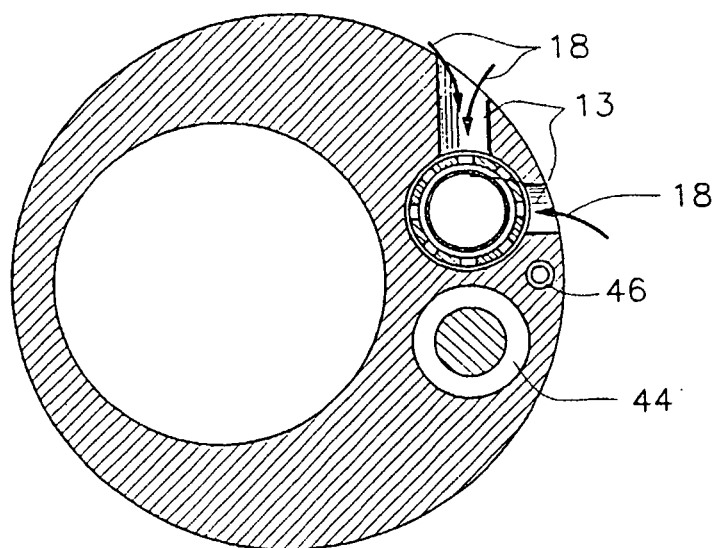


Fig. 10

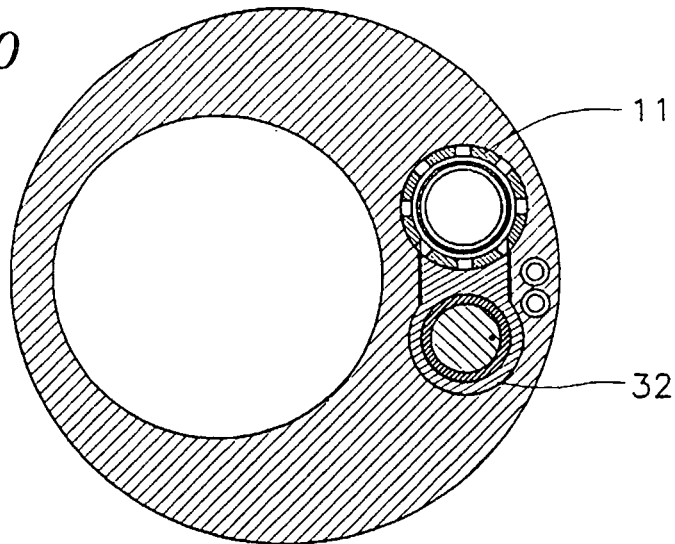


Fig. 11

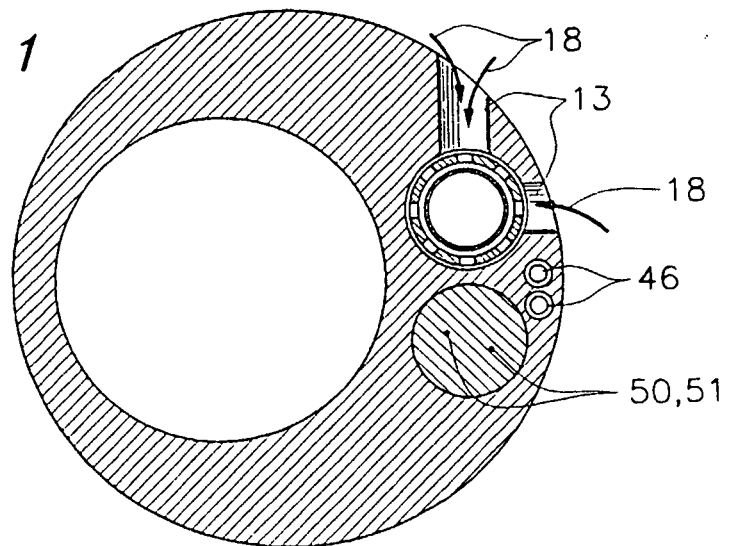


Fig. 12

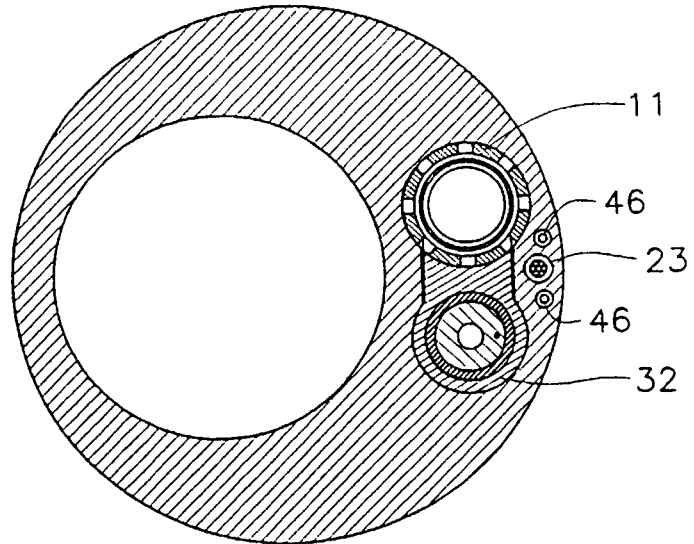


Fig. 13

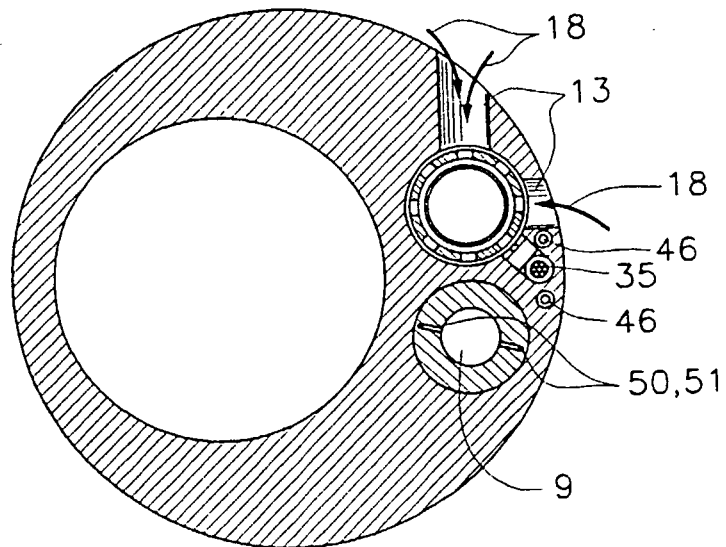


Fig. 14

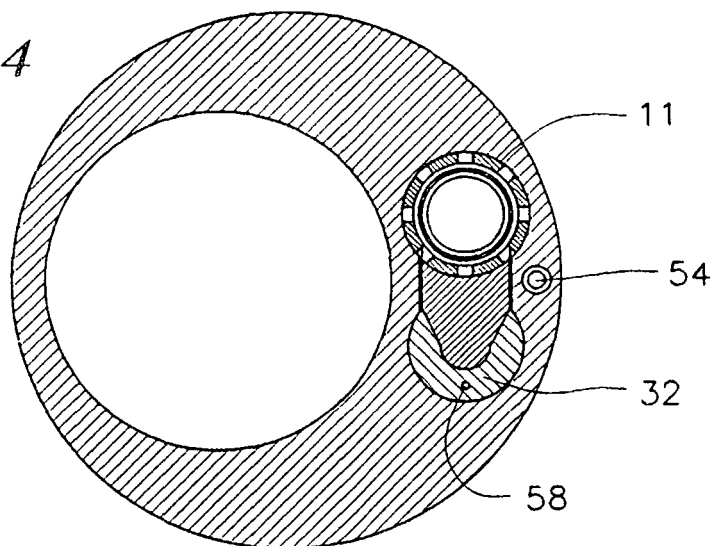
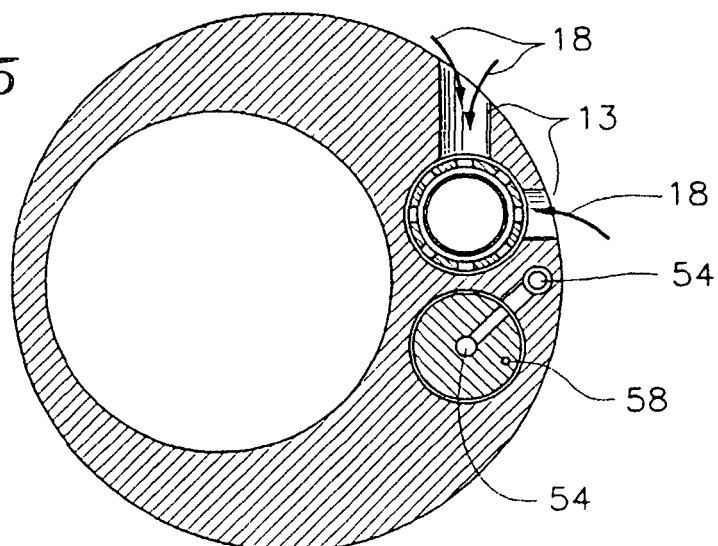


Fig. 15



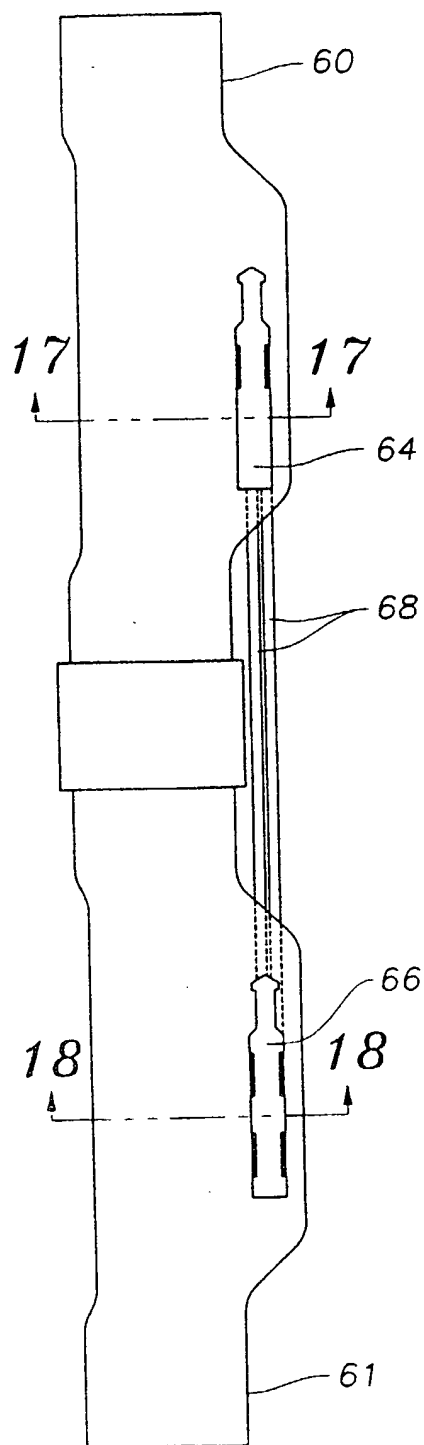


Fig. 16

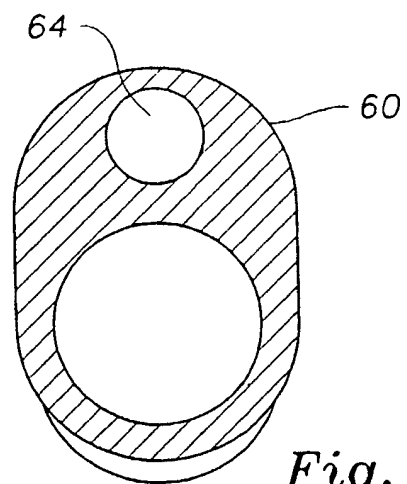


Fig. 17

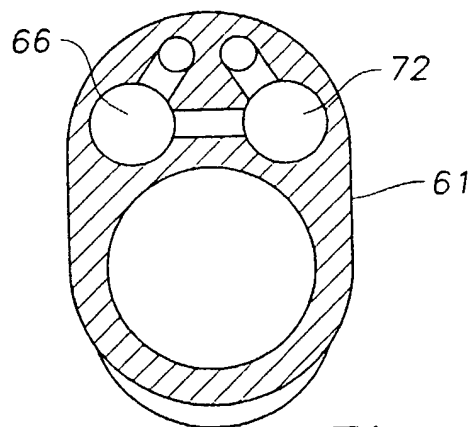


Fig. 18

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 02396596 P [0001]
- US 2137441 A [0004]
- US 2672827 A [0004]
- US 2679827 A [0004]
- US 2679903 A [0004]
- US 2824525 A [0004]
- US 4239082 A [0004]
- US 4360064 A [0004]
- US 4295796 A [0004]
- US 4625941 A [0004]
- US 5176164 A [0004]