



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 289 735 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:

**24.08.2005 Bulletin 2005/34**

(21) Application number: **01944562.6**

(22) Date of filing: **15.06.2001**

(51) Int Cl.7: **B29C 67/00**

(86) International application number:  
**PCT/US2001/019299**

(87) International publication number:  
**WO 2001/096094 (20.12.2001 Gazette 2001/51)**

(54) **CONFORMABLE LOCATING APERTURE SYSTEM AND METHOD FOR ALIGNMENT OF MEMBERS**

FORMBARES POSITIONIERUNGSSYSTEM MIT ÖFFNUNGEN UND VERFAHREN ZUM  
AUSRICHTEN VON TEILEN

SYSTEME D'OUVERTURE DE POSITIONNEMENT CONFORME ET PROCEDE D'ALIGNEMENT  
DE MEMBRES

(84) Designated Contracting States:  
**DE ES FR GB IT**

(30) Priority: **15.06.2000 US 594920**

(43) Date of publication of application:  
**12.03.2003 Bulletin 2003/11**

(73) Proprietor: **ALLIANT TECHSYSTEMS INC.**  
**Hopkins, MN 55343-8384 (US)**

(72) Inventors:  
• **ROSEVEAR, Todd, A.**  
**Taylorsville, UT 84123 (US)**

• **WHEELER, Mark, M.**  
**Kamas, UT 84036 (US)**

(74) Representative: **Altenburg, Udo**  
**Patent- und Rechtsanwälte**  
**Bardehle . Pagenberg . Dost .**  
**Altenburg - Geissler**  
**Galileiplatz 1**  
**81679 München (DE)**

(56) References cited:  
**JP-A- 4 334 434** **US-A- 5 242 523**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

### TECHNICAL FIELD

**[0001]** This invention relates to a method and apparatus for the manufacture of fiber reinforced structures.

### BACKGROUND ART

**[0002]** It is desirable to have inexpensive, strong, lightweight, easily manufactured, dimensionally accurate components in a variety of sizes and geometries for use in aircraft and aerospace applications or any application where such structures are suited for use. However, meeting such criteria for components is difficult.

**[0003]** For example, the airframe of commercial aircraft is typically constructed of aluminum forgings, titanium forgings, aluminum sheet metal, and if desired, titanium sheet metal and powered using turbofan type engines. High strength, low weight materials are used in the airframe in order to maximize the maneuverability of the aircraft, the responsiveness of the aircraft, the payload capacity of the aircraft, and the range of the aircraft. For instance, in commercial aircraft the main wing spar is typically a machined high strength aluminum forging extending most of the wing span of the aircraft including the fuselage in order to provide high strength and low weight to the wings of the aircraft and fuselage. In other instances, various portions of the wings and fuselage of an aircraft are fabricated from aluminum sheet. As the wings and fuselage are formed of complex geometric shapes, it is difficult to fabricate sheet aluminum or sheet titanium into assemblies having high strength and low weight as the various portions of the assemblies are secured together through the use of fasteners which add weight to the assembly.

**[0004]** Similarly, where possible, high strength, low weight materials are used in the aircraft engines and the nacelles of an aircraft. For instance in a commercial aircraft, a turbofan type engine includes a ducted fan, a large diameter axial-flow multi-stage compressor, as the primary source of thrust by the engine while the gas generator portion of the engine provides a smaller amount of the engine's thrust. The turbofan type engine being contained in an engine nacelle attached to the aircraft, typically, being attached to a portion of a wing or fuselage.

**[0005]** Since weight is of concern in aircraft engines and the nacelle containing the engine, it is desirable to provide the lightest engine and nacelle structure possible to meet the operational criteria for the aircraft while providing the required aircraft operational safety criteria. Typically, one of the desired operational safety characteristics for a turbofan aircraft engine is that if a fan blade, a compressor blade, or a turbine blade catastrophically fails during engine operation, the blade or pieces of the blade be contained or caught within either a portion of the engine housing or the nacelle. Typically,

aircraft manufactures have required the fan housing be such a structure for the engine thereby making the fan housing one of the heaviest engine components. Accordingly, other portions of the nacelle are required to retain portions of compressor blades or turbine blades, if the engine structure itself, such as a compressor housing or turbine housing are not strong enough to retain the failed engine part.

**[0006]** The design of inexpensive, strong, lightweight, easily manufactured, dimensionally accurate nacelle components of sizes and geometries for use in aircraft is a formidable task. For instance, a fan housing must be strong enough to contain the energy of a fan blade when the failure occurs at maximum engine speed, must be dimensionally accurate over a range of engine operating conditions, must be easily manufactured at a reasonable cost, must be low weight, etc. Fan housings have been metal structures using a variety of reinforcing grids, typically formed of metal. However, such fan housings are expensive, difficult to manufacture, require extensive tooling to manufacture to close tolerances, and heavy.

**[0007]** In other instances, some fan housings have been composite type structures including metal components and non-metallic or organic type reinforcing components in an attempt to provide a high strength, low weight structure capable of containing a broken fan blade. However, such composite type structures are difficult to construct because the reinforcing structure of non-metallic materials for the fan housing has been difficult and expensive to construct. Other portions of the nacelle have complex geometric shapes to properly control the flow of air around the engine, wing, and fuselage making such components difficult to manufacture as metal assemblies.

**[0008]** US-A-5,242,523 shows and describes a system and a method similar to that of claim 1 and claim 6, respectively, including an assembly of sheets, stringers, frames and cauls subjected to a vacuum bagging and curing process. However, this prior art fails to show an alignment member having a portion for engaging an alignment rail surrounding an aperture in a resilient caul and engaging at least a portion of a stringer to align the stringer with respect to a sheet.

**[0009]** Therefore, a need exists for a method and apparatus for the fabrication of composite structures for various aircraft components of the wings and fuselage to replace metal assemblies. Similarly, a need exists for a method and apparatus for fabrication of composite structures for aerospace vehicles and the like. Such methods and apparatus for the fabrication of composite structures for aircraft, or aerospace vehicles, or any application where low weight and high strength are required, must be capable of manufacturing an assembly that has structural integrity, reliability in operation, repeatability of manufacture, dimensional control of the structure, and a reasonable cost for the composite structure.

## DISCLOSURE OF INVENTION

**[0010]** The present invention relates to the system and to the method as claimed in claim 1 and claim 7, respectively. The present invention includes the tooling and is use for the manufacture of reinforced structures. The present invention comprises a conformable locating aperture system (CLAS) used for the formation of composite structures.

## BRIEF DESCRIPTION OF THE DRAWINGS

**[0011]**

Fig. 1 is a perspective of a portion of the present invention in conjunction with a portion of a composite structure;

Fig. 2 is a cross-sectional view taken along line 2-2 of drawing Fig. 1 illustrating a portion of the present invention;

Fig. 3 is a cross-sectional view taken along line 2-2 of drawing Fig. 1 illustrating a portion of an alternative embodiment of the present invention;

Fig. 4 is a cross-sectional view taken along line 2-2 of drawing Fig. 1 illustrating a portion of an alternative embodiment of the present invention;

Fig. 5 is a cross-sectional view taken along line 2-2 of drawing Fig. 1 illustrating a portion of the present invention;

Fig. 6 is a cross-sectional view taken along line 2-2 of drawing Fig. 1 illustrating a portion of the present invention;

Fig. 7 is a cross-sectional view taken along line 2-2 of drawing Fig. 1 illustrating a portion of the present invention;

Fig. 8 is a cross-sectional view taken along line 2-2 of drawing Fig. 1 illustrating a portion of an alternative embodiment of the present invention;

Fig. 9 is a cross-sectional view taken along line 2-2 of drawing Fig. 1 illustrating a portion of an alternative embodiment of the present invention;

Fig. 10 is a cross-sectional view taken along line 2-2 of drawing Fig. 1 illustrating a portion of an alternative embodiment of the present invention;

Fig. 11 is a cross-sectional view taken along line 2-2 of drawing Fig. 1 illustrating a portion of an alternative embodiment of the present invention;

Fig. 12 is a cross-sectional view taken along line 2-2 of drawing Fig. 1 illustrating a portion of an alternative embodiment of the present invention;

Fig. 13 is a cross-sectional view taken along line 2-2 of drawing Fig. 1 illustrating a portion of an alternative embodiment of the present invention;

Fig. 14 is a top view of a portion of the caul of the present invention;

Fig. 15 is a side view of a portion of the present invention;

Fig. 16 is a side view of a portion of the present in-

vention;

Fig. 17 is a side view of a portion of the present invention;

Fig. 18 is a side view of a portion of an alternative embodiment of the present invention;

Fig. 19 is a side view of a portion of an alternative embodiment of the present invention; and

Fig. 20 is a view of the present invention in an autoclave environment.

**[0012]** The present invention will be better understood when the drawings are taken in conjunction with the description of the invention set forth hereafter.

**BEST MODE OR MODES FOR CARRYING OUT THE INVENTION**

**[0013]** Referring to drawing Fig. 1, a portion of the present invention of a conformable locating aperture system (CLAS) 10 used for the formation of composite structures is illustrated. A sheet 1 of uncured fiber composite material, such as graphite fibers coated with a suitable uncured adhesive material, is illustrated having a plurality of reinforcing stringers 2 of uncured fiber composite material, such as graphite fibers coated with a suitable uncured adhesive material, attached thereto by the uncured adhesive of the sheet 1 and stringers 2 being in contact. The sheet 1 is formed of one or more layers or plies of suitable fiber material with the fiber material being-coated with a suitable uncured adhesive material which is to be cured under temperature and pressure in an autoclave. Typically, the sheet 1 may be formed of six, eight or more layers or plies of fiber material depending upon the desired and required strength of the sheet 1 after curing. Similarly, a stringer 2 may be formed in any desired shape from one or more layers or plies of suitable fiber material with the fiber material being coated with a suitable uncured adhesive material to be cured under temperature and pressure in an autoclave. Additionally, if the stringer 2 is to be part of a composite assembly including the sheet 1, the sheet 1 will have the stringer 2 attached thereto during the curing of the adhesive of both the sheet 1 and stringer 2 in an autoclave under temperature and pressure for the curing such adhesive material so that the cured adhesive material secures the fiber material together of each layer or ply forming the sheet 1 or stringer 2 as well as securing the sheet 1 and stringer 2 together. Typically, a stringer may be formed from six, eight or more layers or plies of suitable fiber material. The number and shape of the stringers to be attached to the sheet being determined by the desired and required strength of the sheet and attached stringers during the use of such a combination, such as a component of an aircraft, aerospace vehicle, static structure, etc.

**[0014]** The geometric shape of the sheet 1 and the stringers 2 may be any desired shape. For instance, the sheet 1 may contain simple or complex curves therein,

be of any physical size, be rectangular in shape, square in shape, triangular in shape, etc. The stringers 2 may have any desired cross-sectional shape or configuration, may be of any size, may vary in height, vary in cross-section from one location to another, include reinforcing members of any shape thereon at any desired location, etc. Also, the stringers 2 may be located on the sheet 1 in any position, such as extending longitudinally, extending transversely, extending both longitudinally and transversely, etc.

**[0015]** Further illustrated in drawing Fig. 1, the conformable locating aperture system 10 of the present invention comprises a caul 12 having a plurality of apertures 14 therein, each aperture 14 having a stringer 2 of the sheet 1 extending therethrough. It is preferred that the caul 12 be formed of layers or plies of the same fiber coated with the same adhesive as the fiber and adhesive used for sheet 1 and/or stringer 2. For example, if the sheet 1 is formed of layers or plies of graphite fiber material coated with an adhesive compound, the caul 12 is preferred to be formed of layers or plies of graphite fiber material coated with the same adhesive compound, the adhesive compound being cured, rather than being uncured or green, to form a structure having the fibers embedded in the cured adhesive. The number of layers or plies of fiber coated with adhesive used to form the caul 12 being determined by the requirements that the caul 12 must be flexible, yet strong enough to conform to the geometric shape of the sheet 1 to which the stringers 2 are to be attached while having sufficient strength to retain the stringer 2 in the desired position on the sheet 1 during curing and attachment in an autoclave. For instance, if the sheet 1 is formed of six layers or plies of graphite fiber coated with a suitable adhesive having a complex shape and one or more curves therein, the caul 12 may be a sheet of two cured layers graphite fiber secured together using the same suitable adhesive used for the sheet 1. The openings 14 in the caul 12 may be of any shape so long as they are the shape as that of the base of the stringer 2 which extends through the opening 14. An opening 14 may vary in size or width along its length, if the stringer 2 varies in size and/or width so that the stringer 2 may extend therethrough, such as is illustrated in drawing Fig. 1. An opening 14 may be formed in caul 12 by any suitable method, such as forming the caul 12 having openings therein from fiber material and adhesive, then cutting, sawing, etc. the opening 14 in a caul 12 formed as solid sheet. An opening 14 in the caul 12 should be formed having its inner edge located adjacent the bottom of the stringer 2 extending therethrough as illustrated in drawing Figs. 2 through 14 herein to locate the stringer 2 on the sheet 1 in the desired position thereon.

**[0016]** Still referring to drawing Fig. 1, surrounding each opening 14 in the caul 12 is an alignment rail 16. The alignment rail 16 is secured to the caul 12 to provide a known alignment location on the caul 12 which is placed and secured in a known location with respect to

the sheet 1 and stringers 2. The alignment rail 16 is preferred to comprise any suitable material flexible enough to comply with the caul 12 which must conform to the geometric configuration and shape of sheet 1. The preferred material to form an alignment rail 16 is one or more layers of man-made fibers for generalized use in the industrial arts, such as a para-aramid fiber produced from poly-paraphenylene terephthalamide, although any suitable fiber may be used, adhesively secured to the caul 12 and each other using an adhesive. The preferred combination of material and an adhesive used to form alignment rail 16 is TX-4401 3M Brand ETAB System, available from the 3M Company, which is a combination of a para-aramid fiber produced from poly-paraphenylene terephthalamide and an adhesive. Alternatively, the para-aramid fiber produced from poly-paraphenylene terephthalamide may be purchased as a woven material in the form of a cloth and subsequently coated with a suitable adhesive, such as TX-4400 3M Brand ETAB System, available from the 3M Company to form the alignment rail 16. In this manner, the use of a material and adhesive, such as TX-4401 3M Brand ETAB System, available from the 3M Company, provides a high strength, yet flexible, alignment rail 16 secured to the caul 12 in a known location. It should be understood that the known location of the alignment rail 16, the opening 14 in the caul 12, and the relative location of each other with respect to each other are features of the present invention as the sheet 1 of uncured or green adhesive and multi-layers or plies of material has the caul 12 of the present invention placed thereon then aligned in the proper position on the sheet 1 so that the stringers 2 of uncured adhesive and multi-layers or plies of material are then located on the sheet 1 using the openings 14 and the alignment rails 16 of the caul 12. In this manner, the stringers 2 are located in the proper desired position on the sheet 1 for the curing and attachment thereof.

**[0017]** The conformable locating aperture system 10 of the present invention further comprises side formers 18, end formers 20, and intensifier formers 22 which are used to position and temporarily secure the stringers 2 in position on the sheet 1 for the curing and attachment of the sheet 1 and stringers 2 in an autoclave under temperature and pressure. The side formers 18, end formers 20, and intensifier formers 22 may be comprised of any suitable material which is flexible to conform with the cross-sectional shape and longitudinal shape of the stringers 2 and geometric shape and configuration of the sheet 1 as well as be easily installed engaging the stringers 2 and sheet 1 and easily removed therefrom after the curing and attachment of the stringers 2 and sheet 1 under temperature and pressure in an autoclave. A preferred manufacturing method for the formers 18, 20, and 22 is to cast or form such members using precision molds having the desired mating size and configuration of the portion of the stringer 2 and sheet 1 which the former is to mate in use. A preferred material for the side

formers 18, end formers 20, and intensifier formers 22 comprises silicone based elastomeric material having a durometer hardness of thirty (30) or forty (40) or greater. The silicone based elastomeric material initially being a liquid poured into the precision mold to solidify to the desired former configuration 18, 20, and 22. Silicone based elastomer materials exhibit good casting characteristics in the desired configurations, exhibit good flexibility characteristics, good strength characteristics at elevated temperature and pressure in an autoclave, easy removal from the cured and attached stringers 2 and sheet 1, and good ability to allow movement due to the mismatch of the coefficients of thermal expansion between the material of the formers 18, 20, and 22 and the material of the stringers 2 and sheet 1 between the formers 18, 20, and 22 and the stringers 2 and sheet 1 under temperature and pressure in an autoclave during the curing and attachment and consolidation of the stringers 2 and sheet 1 while, at the same time, being capable of maintaining the position and alignment of the stringers 2 regarding the sheet 1 during the curing and attachment process in the autoclave. While silicone based elastomers are preferred for the formers 18, 20, and 22, any suitable materials having the characteristics set forth hereinabove may be used. For instance, butadiene synthetic rubber elastomers may be used for the formers 18, 20, and 22.

**[0018]** Referring to drawing Fig. 2, illustrated in cross-section is a portion of a sheet 1, stringer 2, caul 12 having an opening 14 therein for stringer 2, and portion of alignment rails 16. As illustrated, the sheet 1 comprises multi-layers or plies of fiber material and adhesive. Located on or over the sheet 1 is a stringer 2 comprising a member having an s-shaped cross-section formed of multi-ply or layers of fiber material and a suitable adhesive. The base 3 of the stringer 2 engages the sheet 1 while the stem 4 extends thereabove having the rail-like top 5 formed on the upper end of the stem 4. The stringer 2 may also include a reinforcing member 6 having any desired shape and/or cross-section located at any desired position thereon. The caul 12 is formed having an opening 14 in a known location therein for the stringer 2 to extend therethrough. The inner edge 24 of the opening 14 in the caul 12 is located adjacent the stringer 2 such that the inner edge 24 is located adjacent the edge of each side of the base 3. Preferably, the inner edges of each layer of the multi-layers or plies of material and adhesive 26 forming the alignment rail 16 form a vertical inner edge 24 adjacent each side of the base 3 of the stringer 2 while the outer edge of the alignment rail 16 formed by the multi-layers or plies of material and adhesive 26 form stepped outer edge 24'.

**[0019]** The alignment rails 16 are adhesively attached surrounding the opening 14 in caul 12 comprise one or more multiple-layers or plies of para-aramid fiber produced from poly-paraphenylene terephthalamide and an adhesive, such as TX-4401 3M Brand ETAB System, available from the 3M Company, forming vertical inner

edges 24 located adjacent the stringer 2 and stepped outer edges 24'. The stepped outer edges 24' helping facilitate removal of air from the vacuum enclosure (See Fig. 20.) during the curing and attachment and consolidation of the sheet 1 and stringers 2. As illustrated, the alignment rails 16 are formed in multiple layers 26 of multi-layered or multiple plies of material to form the vertical inner edges 24 and stepped outer edges 24'.

**[0020]** Referring to drawing Fig. 3, illustrated in cross-section are a sheet 1 having a stringer 2 and a caul 12 having an aperture 14 for the stringer 2 to extend therethrough and having alignment rails 16 formed of layers 26 surrounding the aperture 14. The stringer 2 comprises a member having a base 3, stem 4, rail-like top 5, and reinforcing members 6 and 7 located at desired locations on the stem 4 thereof to add reinforcement to the stringer 2 where desired. As illustrated in drawing Fig. 2, the alignment rails 16 are adhesively secured to the caul 12. In this instance, as well as any embodiment set forth herein of the present invention, the adhesive attachment of an alignment rail 16 to the caul 12 includes the attachment of an alignment rail 16 in an uncured state with the preferred adhesive material to a caul 12 in an uncured state using the preferred adhesive therewith and the subsequent curing of both the alignment rail 16 and caul 12. For instance, if a rubber based adhesive is used to form an alignment rail 16 and another type adhesive is used to form the caul 12, the curing of the adhesive of an alignment rail 16 and a caul 12 when in contact will form an adhesive attachment therebetween for the purposes of the present invention. In this manner, a wide variety of adhesives may be used to form an alignment rail 16 and caul 12 as a cured assembly.

**[0021]** Referring to drawing Fig. 4, illustrated cross-section are a sheet 1 having a stringer 2 and a caul 12 having an aperture 14 for the stringer 2 to extend therethrough and having alignment rails 16 formed of layers 26 surrounding the aperture 14. The stringer 2 comprises a member having a base 3, stem 4, rail like top 5, and reinforcing members 6 and 7 located at desired locations on the stem 4 thereof to add reinforcement to the stringer 2 where desired. As illustrated, the alignment rails 16 and the caul 12 are formed having apertures 28 and 30, respectively, formed therein for a suitable fastener 32 to extend therethrough to secure the alignment rails 16 to the caul 12, rather than the alignment rails being adhesively attached to the caul 12. If desired, the alignment rails 16 may both be secured adhesively and mechanically to the caul 12.

**[0022]** Referring to drawing Fig. 5, illustrated in cross-section are a sheet 1 having a stringer 2 and a caul 12 having an aperture 14 for the stringer 2 to extend therethrough and having alignment rails 16 formed of layers 26 surrounding the aperture 14. The stringer 2 comprises a member having a base 3, stem 4, rail-like top 5, and reinforcing members 6 and 7 located at desired locations on the stem 4 thereof to add reinforcement to

the stringer 2 where desired. As illustrated in drawing Fig. 2, the alignment rails 16 are adhesively secured to the caul 12. Further illustrated in drawing Fig. 5, are typical side formers 18 mating with inner edges 24 of the alignment rails 16 and portions of the stringer 2. As shown, the side formers 18 comprise a side former 34, side former 36, and side former 38. The side former 34 comprises an elongated member having a portion 39 thereof engaging inner edge 24 of alignment rail 16, a portion 40 engaging base 3 of stringer 2, a portion 42 engaging one side of stem 4 of stringer 2, a portion 44 engaging one side of rail-like top 5 of stringer 2. The side former 36 comprises an elongated member having a portion 48 engaging a portion of sheet 1, a portion 50 engaging the inner edge 24 of alignment rail 16, a portion 52 engaging a side of stem 4 of stringer 2 and of reinforcing member 6 attached to the side of stem 3 of stringer 2, a portion 54 engaging a side of rail-like top 5 of stringer 2, and an upper surface 56. The side former 38 comprises an elongated member having a portion 56 thereof engaging a portion of side former 34, a portion 58 thereof engaging upper surface 56 of side former 36 and abuts the end of rail-like top 5 of stringer 2. The side former 38 serves to enclose the stringer 2 longitudinally between side former 34, side former 36 and side former 38 so that during the curing of the sheet 1 and stringer 2 as well as attaching the stringer 2 to the sheet 1 under temperature and pressure in an autoclave, at least a portion of one of the side formers 34, 36, and 38 comprising a side former 18 engages a portion of the stringer 2 to apply pressure thereto and to keep the stringer 2 aligned and positioned with respect to the caul 12 and, more importantly, with respect to the desired location of the stringer 2 on the sheet 1. By the portion 39 of the side former 34 and the portion 50 of the side former 36 engaging the alignment rails 16 surrounding the aperture 14 in the caul 12 and the caul 12 being releasably secured in the desired position with respect to the sheet 1, the stringer 2 is properly located in the desired position for the curing of the sheet 1 and stringer 2 as well as the attachment of the stringer 2 to the sheet 1 under temperature and pressure in the autoclave. As previously discussed, while the caul 12, sheet 1, and stringer 2 have the same coefficient of thermal expansion as they are formed of the same fiber material and adhesive, the side former 18 comprised for side formers 34, 36, and 38 have a different coefficient of thermal expansion as the side formers 34, 36, and 38 are made of a suitable silicone based material for the expansion and contraction thereof with respect to the sheet 1, stringer 2, and caul 12 without substantially sticking thereto to prevent the curing and attachment of the stringer 2 to the sheet 1 at an incorrect position. Not illustrated in drawing Fig. 5, but rather refer to drawing Fig. 20, are the sheet release film and sheet of breather material covering the sheet 1, caul 12, and side formers 18, end formers 20 (not shown), and intensifier formers 22 (not shown) as well as the vacuum enclosure or bag (not shown) used

in the curing and attachment of the stringer 2 to the sheet 1 in the autoclave. If desired, the side formers 34 and 36 may either be formed having the side former 38 or portions thereof integral with one or both of side formers 34 and 36.

**[0023]** Referring to drawing Fig. 6, illustrated in cross-section are a sheet 1 having a stringer 2 and a caul 12 having an aperture 14 for the stringer 2 to extend therethrough and having alignment rails 16 formed of layers 26 surrounding the aperture 14. The stringer 2 comprises a member having a base 3, stem 4, and rail like top 5. As illustrated in drawing Fig. 2, the alignment rails 16 are adhesively secured to the caul 12. Further illustrated in drawing Fig. 6, are typical side formers 18 mating with inner edges 24 of the alignment rails 16 and portions of the stringer 2. As shown, the side formers 18 comprise a side former 34, side former 36, and side former 38. The side former 34 comprises an elongated member having a portion 39 thereof engaging inner edge 24 of alignment rail 16, a portion 40 engaging base 3 of stringer 2, a portion 42 engaging one side of stem 4 of stringer 2, a portion 44 engaging one side 5' of rail-like top 5 of stringer 2. The side former 36 comprises an elongated member having a portion 48 engaging a portion of sheet 1, a portion 50 engaging the vertical inner edge 24 of alignment rail 16, a portion 52 engaging a side of stem 4 of stringer 2, a portion 54 engaging a side 5" of rail-like top 5 of stringer 2. The side former 38 comprises an elongated member having a portion 56 thereof abutting the end or side of rail-like tip 5 of stringer 2, a portion 58 thereof engaging a portion of former 34, and a portion 62 engaging a portion of side former 36. The side former 38 serves to longitudinally enclose the stringer 2 between side former 34, side former 36, and side former 38 so during the curing of the sheet 1 and stringer 2 as well as attaching the stringer 2 to the sheet 1 under temperature and pressure in an autoclave, at least a portion of one of the side formers 34, 36, and 38 comprising a side former 18 engages the stringer 2 to apply pressure thereto and to keep the stringer 2 aligned and positioned with respect to the caul 12 and, more importantly, with respect to the desired location of the stringer 2 on the sheet 1. By the portion 39 of the side former 34 and the portion 50 of the side former 36 engaging the alignment rails 16 surrounding the aperture 14 in the caul 12 and the caul 12 being releasably secured in the desired position with respect to the sheet 1, the stringer 2 is properly located in the desired position for the curing of the sheet 1 and stringer 2 as well as the attachment of the stringer 2 to the sheet 1 under temperature and pressure in the autoclave. As previously discussed, while the caul 12, sheet 1, and stringer 2 have the same coefficient of thermal expansion as they are formed of the same fiber material and adhesive, the side former 18 comprised for side formers 34, 36, and 38 have a different coefficient of thermal expansion as the side formers 34, 36, and 38 are made of a suitable silicone based material for the expansion and contraction thereof with respect to the

sheet 1, stringer 2, and caul 12 without substantially sticking thereto to prevent the curing and attachment of the stringer 2 to the sheet 1 at an incorrect position. Not illustrated in drawing Fig. 5 are the sheet of release film and breather material (not shown) covering the sheet 1, caul 12, and side formers 18, end formers 20 (not shown), and intensifier formers 22 (not shown) as well as the vacuum enclosure (not shown) used in the curing and attachment of the stringer 2 to the sheet 1 in the autoclave. (See drawing Fig. 20.)

**[0024]** Referring to drawing Fig. 7, illustrated in cross-section are a sheet 1 having a stringer 2 and a caul 12 having an aperture 14 for the stringer 2 to extend therethrough and having alignment rails 16 formed of layers 26 surrounding the aperture 14. The stringer 2 comprises a member having a base 3, stem 4, and rail like top 5. As illustrated in drawing Fig. 2, the alignment rails 16 are adhesively secured to the caul 12. The alignment rails 16 include recesses 16' therein for the side formers 18 to have a portion thereof mate therewith for alignment purposes. Further illustrated in drawing Fig. 7, are typical side formers 18 mating with inner edges 24 and recess 16' of the alignment rails 16 and portions of the stringer 2. As shown, the side formers 18 comprise a side former 34 and side former 36. The side former 34 comprises an elongated member having a portion 39 thereof engaging inner edge 24 of alignment rail 16 and a portion 34' engaging recess 16' of alignment rail 16, a portion 40 engaging base 3 of stringer 2, a portion 42 engaging one side of stem 4 of stringer 2, a portion 44 engaging one side 5' of rail-like top 5 of stringer 2, and a portion 46 for engaging the end surface to rail-like top 5. The side former 36 comprises an elongated member having a portion 48 engaging a portion of sheet 1, a portion 50 engaging the inner edge 24 of alignment rail 16 and a portion 36' engaging recess 16' of alignment rail 16, a portion 52 engaging a side of stem 4 of stringer 2, a portion 54 engaging a side of rail like top 5 of stringer 2, and an upper surface 56 engaging a portion 46 of side former 34. By the portions 39 and 34' of the side former 34 and the portions 50 and 36' of the side former 36 engaging the alignment rails 16 surrounding the aperture 14 in the caul 12 and the caul 12 being releasably secured in the desired position with respect to the sheet 1, the stringer 2 is properly located in the desired position for the curing of the sheet 1 and stringer 2 as well as the attachment of the stringer 2 to the sheet 1 under temperature and pressure in the autoclave. As previously discussed, while the caul 12, sheet 1, and stringer 2 have the same coefficient of thermal expansion as they are formed of the same fiber material and adhesive, the side former 18 comprised for side formers 34 and 36 have a different coefficient of thermal expansion as the side formers 34 and 36 are made of a suitable silicone based material for the expansion and contraction thereof with respect to the sheet 1, stringer 2, and caul 12 without substantially sticking thereto to prevent the curing and attachment of the stringer 2 to the sheet 1 at an

incorrect position. Not illustrated in drawing Fig. 5 are the sheet of release film and breather material (not shown) covering the sheet 1, caul 12, and side formers 18, end formers 20 (not shown), and intensifier formers 22 (not shown) as well as the vacuum enclosure (not shown) used in the curing and attachment of the stringer 2 to the sheet 1 in the autoclave. (See drawing Fig. 20.)

**[0025]** Referring to drawing Fig. 8, illustrated in cross-section is a portion of a sheet 1, stringer 2, caul 12 having an opening 14 therein for stringer 2, and portion of alignment rails 16. As illustrated, the sheet 1 comprises multi-layers or plies of fiber material and adhesive. Located on or over the sheet 1 is a stringer 2 comprising a member having an s-shaped cross-section formed of multi-ply or layers of fiber material and a suitable adhesive. The base 3 of the stringer 2 engages the sheet 1 while the stem 4 extends thereabove having the rail-like top 5 formed on the upper end of the stem 4. The stringer 2 may also include a reinforcing member 6 having any desired shape and/or cross-section located at any desired position thereon. The caul 12 is formed having an opening 14 in a known location therein for the stringer 2 to extend therethrough. The inner edge 24 of the opening 14 in the caul 12 is located adjacent the stringer 2 such that the inner edge 24 is located adjacent the edge of each side of the base 3. As an alternative embodiment of the present invention, the inner edges of each layer of the multi-layers or plies of material and adhesive 26 forming the alignment rail 16 form a stepped inner edge 24 adjacent each side of the base 3 of the stringer 2 while the outer edge of the alignment rail 16 formed by the multi-layers or plies of material and adhesive 26 form stepped outer edge 24'.

**[0026]** The alignment rails 16 are adhesively attached surrounding the opening 14 in caul 12 comprise one or more multiple-layers or plies of para-aramid fiber produced from poly-paraphenylene terephthalamide and an adhesive, such as TX-4401 3M Brand ETAB System, available from the 3M Company, forming inner edges 24 located adjacent the stringer 2 and stepped outer edges 24'. As illustrated, the alignment rails 16 are formed in multiple layers 26 of multi-layered or multiple plies of material to form the stepped inner edges 24 and stepped outer edges 24'.

**[0027]** Referring to drawing Fig. 9, illustrated in cross-section are a sheet 1 having a stringer 2 and a caul 12 having an aperture 14 for the stringer 2 to extend therethrough and having alignment rails 16 formed of layers 26 surrounding the aperture 14. The stringer 2 comprises a member having a base 3, stem 4, rail-like top 5, and reinforcing members 6 and 7 located at desired locations on the stem 4 thereof to add reinforcement to the stringer 2 where desired. As illustrated in drawing Fig. 2, the alignment rails 16 are adhesively secured to the caul 12 having stepped inner edges 24 and stepped outer edges 24'.

**[0028]** Referring to drawing Fig. 10, illustrated cross-section are a sheet 1 having a stringer 2 and a caul 12

having an aperture 14 for the stringer 2 to extend there-through and having alignment rails 16 formed of layers 26 surrounding the aperture 14. The stringer 2 comprises a member having a base 3, stem 4, rail like top 5, and reinforcing members 6 and 7 located at desired locations on the stem 4 thereof to add reinforcement to the stringer 2 where desired. As illustrated, the alignment rails 16 and the caul 12 are formed having apertures 28 and 30, respectively, formed therein for a suitable fastener 32 to extend therethrough to secure the alignment rails 16 to the caul 12, rather than the alignment rails being adhesively attached to the caul 12. If desired, the alignment rails 16 may both be secured adhesively and mechanically to the caul 12. As illustrated, the alignment rails 16 are formed with stepped inner edges 24 and stepped outer edges 24'.

**[0029]** Referring to drawing Fig. 11, illustrated in cross-section are a sheet 1 having a stringer 2 and a caul 12 having an aperture 14 for the stringer 2 to extend therethrough and having alignment rails 16 formed of layers 26 surrounding the aperture 14. The stringer 2 comprises a member having a base 3, stem 4, rail-like top 5, and reinforcing members 6 and 7 located at desired locations on the stem 4 thereof to add reinforcement to the stringer 2 where desired. As illustrated in drawing Fig. 2, the alignment rails 16 are adhesively secured to the caul 12. Further illustrated in drawing Fig. 5, are typical side formers 18 mating with stepped inner edges 24 and stepped outer edges 24' of the alignment rails 16 and portions of the stringer 2. As shown, the side formers 18 comprise a side former 34, side former 36, and side former 38. The side former 34 comprises an elongated member having a portion 39 thereof engaging stepped inner edge 24 of alignment rail 16, a portion 40 engaging base 3 of stringer 2, a portion 42 engaging one side of stem 4 of stringer 2, a portion 44 engaging one side of rail-like top 5 of stringer 2, and a recess 46 formed therein. The side former 36 comprises an elongated member having a portion 48 engaging a portion of sheet 1, a portion 50 engaging the inner edge 24 of alignment rail 16, a portion 52 engaging a side of stem 4 of stringer 2 and of reinforcing member 6 attached to the side of stem 3 of stringer 2, a portion 54 engaging a side of rail-like top 5 of stringer 2, and an upper surface 56. The side former 38 comprises an elongated member having a portion 58 thereof engaging a portion of side former 34, a portion 58' thereof engaging upper surface 56 of side former 36. The side former 38 serves to enclose the stringer 2 longitudinally between side former 34, side former 36 and side former 38 so that during the curing of the sheet 1 and stringer 2 as well as attaching the stringer 2 to the sheet 1 under temperature and pressure in an autoclave, at least a portion of one of the side formers 34, 36, and 38 comprising a side former 18 engages a portion of the stringer 2 to apply pressure thereto and to keep the stringer 2 aligned and positioned with respect to the caul 12 and, more importantly, with respect to the desired location of the stringer 2 on the

sheet 1. By the portion 39 of the side former 34 and the portion 50 of the side former 36 engaging the alignment rails 16 surrounding the aperture 14 in the caul 12 and the caul 12 being releasably secured in the desired position with respect to the sheet 1, the stringer 2 is properly located in the desired position for the curing of the sheet 1 and stringer 2 as well as the attachment of the stringer 2 to the sheet 1 under temperature and pressure in the autoclave. As previously discussed, while the caul 12, sheet 1, and stringer 2 have the same coefficient of thermal expansion as they are formed of the same fiber material and adhesive, the side former 18 comprised for side formers 34, 36, and 38 have a different coefficient of thermal expansion as the side formers 34, 36, and 38 are made of a suitable silicone based material for the expansion and contraction thereof with respect to the sheet 1, stringer 2, and caul 12 without substantially sticking thereto to prevent the curing and attachment of the stringer 2 to the sheet 1 at an incorrect position. Not illustrated in drawing Fig. 12 are the sheet release film and sheet of breather material covering the sheet 1, caul 12, and side formers 18, end formers 20 (not shown), and intensifier formers 22 (not shown) as well as the vacuum enclosure or bag (not shown) used in the curing and attachment of the stringer 2 to the sheet 1 in the autoclave. If desired, the side formers 34 and 36 may either be formed having the side former 38 or portions thereof integral with one or both of side formers 34 and 36.

**[0030]** Referring to drawing Fig. 12, illustrated in cross-section are a sheet 1 having a stringer 2 and a caul 12 having an aperture 14 for the stringer 2 to extend therethrough and having alignment rails 16 formed of layers 26 surrounding the aperture 14. The stringer 2 comprises a member having a base 3, stem 4, and rail like top 5. As illustrated in drawing Fig. 2, the alignment rails 16 are adhesively secured to the caul 12 having stepped inner edges 24 and stepped outer edges 24'. Further illustrated in drawing Fig. 12, are typical side formers 18 mating with stepped inner edges 24 of the alignment rails 16 and portions of the stringer 2. As shown, the side formers 18 comprise a side former 34, side former 36, and side former 38. The side former 34 comprises an elongated member having a portion 39 thereof engaging stepped inner edge 24 of alignment rail 16, a portion 40 engaging base 3 of stringer 2, a portion 42 engaging one side of stem 4 of stringer 2, a portion 44 engaging one side of rail-like top 5 of stringer 2. The side former 36 comprises an elongated member having a portion 48 engaging a portion of sheet 1, a portion 50 engaging the stepped inner edge 24 of alignment rail 16, a portion 52 engaging a side of stem 4 of stringer 2, a portion 54 engaging a side of rail-like top 5 of stringer 2. The side former 38 comprises an elongated member having a portion 58 thereof engaging a portion of former 34, and a portion 62 engaging a portion of side former 36. The side former 38 serves to longitudinally enclose the stringer 2 between side former

34, side former 36, and side former 38 so during the curing of the sheet 1 and stringer 2 as well as attaching the stringer 2 to the sheet 1 under temperature and pressure in an autoclave, at least a portion of one of the side formers 34, 36, and 38 comprising a side former 18 engages the stringer 2 to apply pressure thereto and to keep the stringer 2 aligned and positioned with respect to the caul 12 and, more importantly, with respect to the desired location of the stringer 2 on the sheet 1. By the portion 39 of the side former 34 and the portion 50 of the side former 36 engaging the alignment rails 16 surrounding the aperture 14 in the caul 12 and the caul 12 being releasably secured in the desired position with respect to the sheet 1, the stringer 2 is properly located in the desired position for the curing of the sheet 1 and stringer 2 as well as the attachment of the stringer 2 to the sheet 1 under temperature and pressure in the autoclave. As previously discussed, while the caul 12, sheet 1, and stringer 2 have the same coefficient of thermal expansion as they are formed of the same fiber material and adhesive, the side former 18 comprised for side formers 34, 36, and 38 have a different coefficient of thermal expansion as the side formers 34, 36, and 38 are made of a suitable silicone based material for the expansion and contraction thereof with respect to the sheet 1, stringer 2, and caul 12 without substantially sticking thereto to prevent the curing and attachment of the stringer 2 to the sheet 1 at an incorrect position. Not illustrated in drawing Fig. 12 are the sheet of release film and breather material (not shown) covering the sheet 1, caul 12, and side formers 18, end formers 20 (not shown), and intensifier formers 22 (not shown) as well as the vacuum enclosure (not shown) used in the curing and attachment of the stringer 2 to the sheet 1 in the autoclave.

**[0031]** Referring to drawing Fig. 13, illustrated in cross-section are a sheet 1 having a stringer 2 and a caul 12 having an aperture 14 for the stringer 2 to extend therethrough and having alignment rails 16 formed of layers 26 surrounding the aperture 14. The stringer 2 comprises a member having a base 3, stem 4, and rail like top 5. As illustrated in drawing Fig. 2, the alignment rails 16 are adhesively secured to the caul 12. The alignment rails 16 have stepped inner edges 24 and stepped outer edges 24'. The alignment rails 16 include recesses 16' therein for the side formers 18 to have a portion thereof mate therewith for alignment purposes. Further illustrated in drawing Fig. 13, are typical side formers 18 mating with stepped inner edges 24 and recess 16' of the alignment rails 16 and portions of the stringer 2. As shown, the side formers 18 comprise a side former 34 and side former 36. The side former 34 comprises an elongated member having a portion 39 thereof engaging inner edge 24 of alignment rail 16 and a portion 34' engaging recess 16' of alignment rail 16, a portion 40 engaging base 3 of stringer 2, a portion 42 engaging one side of stem 4 of stringer 2, a portion 44 engaging one side 5' of rail-like top 5 of stringer 2, and a portion 46 for engaging the end surface to rail-like top 5. The side

former 36 comprises an elongated member having a portion 48 engaging a portion of sheet 1, a portion 50 engaging the inner edge 24 of alignment rail 16 and a portion 36' engaging recess 16' of alignment rail 16, a portion 52 engaging a side of stem 4 of stringer 2, a portion 54 engaging a side of rail like top 5 of stringer 2, and an upper surface 56 engaging a portion 46 of side former 34. By the portions 39 and 34' of the side former 34 and the portions 50 and 36' of the side former 36 engaging the alignment rails 16 surrounding the aperture 14 in the caul 12 and the caul 12 being releasably secured in the desired position with respect to the sheet 1, the stringer 2 is properly located in the desired position for the curing of the sheet 1 and stringer 2 as well as the attachment of the stringer 2 to the sheet 1 under temperature and pressure in the autoclave. As previously discussed, while the caul 12, sheet 1, and stringer 2 have the same coefficient of thermal expansion as they are formed of the same fiber material and adhesive, the side former 18 comprised for side formers 34 and 36 have a different coefficient of thermal expansion as the side formers 34 and 36 are made of a suitable silicone based material for the expansion and contraction thereof with respect to the sheet 1, stringer 2, and caul 12 without substantially sticking thereto to prevent the curing and attachment of the stringer 2 to the sheet 1 at an incorrect position. Not illustrated in drawing Fig. 13 are the sheet of release film and breather material (not shown) covering the sheet 1, caul 12, and side formers 18, end formers 20 (not shown), and intensifier formers 22 (not shown) as well as the vacuum enclosure (not shown) used in the curing and attachment of the stringer 2 to the sheet 1 in the autoclave.

**[0032]** Referring to drawing Fig. 14, illustrated is a portion of the caul 12 having a portion of the aperture 14 and a portion of the alignment rail 16 shown. The alignment rail 16 may include a plurality of recesses or notches 16' therein for mating with a side former 18 and/or end former 20 for location purposes of the side former 18 or end former 20 with respect to the caul 12 and stringer 2. The recesses or notches 16" may be of any desired configuration for location purposes. That is, the recesses or notches 16" may extend longitudinally, transversely, or both and be of any desired shape and geometric configuration.

**[0033]** Referring to drawing Fig. 15, illustrated is a portion of a stringer 2 having the base 3 thereof located on a sheet 1. As illustrated, the stringer 2 is formed having rail like top 5 varying in height 70 from the sheet 1 and formed having at least one curve surface 72 therein as well as having angular surfaces 74 therein. In this manner, a stringer 2 may be formed of any geometric shape and cross-section required for the desired strength characteristics of the composite structure of which the stringer 2 is included.

**[0034]** Referring to drawing Fig. 16, illustrated is a stringer 2 on a sheet 1 extending through an aperture 14 (not shown) in a caul 12 having alignment rail 16 sur-

rounding the aperture 14. Further illustrated, are end formers 20, and intensifier formers 22 which are formed as a unified one-piece member, rather than as separate members. The end former 20 and intensifier member 22 are used as a spacer between side formers 18, such as side formers 24 and 36 described herein, to position the side formers 34 and 36 extending on each side of stringer 2 and temporarily enclose the stringers 2 in position on the sheet 1 for the curing and attachment of the sheet 1 and stringers 2 in an autoclave under temperature and pressure. It is preferred that the end formers 20 and intensifier formers 22, whether a one-piece member or separate members, do not engage alignment rail 16 but, rather are retained between side formers 18, such as side former 34 and side former 36 described herein acting somewhat as a spacer with respect to the side former 34 and side former 36. As an alternative, in some instances, the end former 20 and end intensifiers 22 whether a one-piece member or separate members may engage alignment rail 16 so that such members are located in a known position with respect to the caul 12, opening 14 therein, and stringer 2. As illustrated, the stringer 2 is formed having a substantial vertical end surface portion 70 with respect to the sheet 1 and caul 12 and angular end surface portion 72 with respect to other portions of rail like top 5 and with respect to the sheet 1 and caul 12. As previously discussed, the side formers 18 and one-piece end formers 20 and intensifier formers 22 may be comprised of any suitable material which is flexible to conform with the cross-sectional shape and longitudinal shape of the stringers 2 and geometric shape and configuration of the sheet 1 as well as be easily installed engaging the stringers 2 and sheet 1 and removed therefrom after the curing and attachment of the stringers 2 and sheet 1 under temperature and pressure in an autoclave. A preferred manufacturing method for the side formers 18, end formers 20, and intensifier formers 22 is to cast or form such members using molds having the desired mating size and configuration of the portion of the stringer 2 and sheet 1 which the former is to mate in use. A preferred material for the side formers 18, end formers 20, and intensifier formers 22 comprises a silicone based elastomeric material having a durometer hardness of forty (40) or greater which is initially a liquid poured into the mold to solidify to the desired former configuration 18, 20, and 22. Silicone based elastomer materials exhibit good casting characteristics in the desired configurations, exhibit good flexibility characteristics, good strength characteristics at elevated temperature and pressure in an autoclave, easy removal from the cured and attached stringers 2 and sheet 1, and good ability to allow movement due to the mismatch of the coefficients of thermal expansion between the material of the side formers 18, end formers 20, and intensifier formers 22 and the material of the stringers 2 and sheet 1 between the side formers 18, end formers 20, and intensifier formers 22 and the stringers 2 and sheet 1 under temperature and pressure in an autoclave

during the curing and attachment of the stringers 2 and sheet 1 while being capable of maintaining the position and alignment of the stringers 2 regarding the sheet 1 during the curing and attachment process in the autoclave. While silicone based elastomers are preferred for the formers 18, 20, and 22, any suitable materials having the characteristics set forth hereinabove may be used. For instance, butadiene synthetic rubber elastomers may be used, rather than silicone based elastomers, for the side formers 18, end formers 20, and intensifier formers 22. The end former comprises a member having any desired geometric shape and configuration to mate with the end surface 76 of stringer 2. The intensifier former 22 comprises a member having any desired geometric shape and configuration to mating with end former 20 as a one-piece member and the surface 72 of the rail-like surface 5 of the stringer.

**[0035]** Referring to drawing Fig. 17, illustrated is a sheet 1 having a stringer 2 extending through an aperture 14 (not shown) in a caul 12 having side former 18 engaging a portion of the stringer 2, an end former 20 engaging a portion of the end of stringer 2, and intensifier former 22 formed as a one-piece member along with end former 20 and stringer 2. As illustrated, the stringer 2 includes a rail like top 5 which varies in height 70 with respect to the sheet 1 and includes angular surfaces 74 thereon. As illustrated, side former 34 is formed with a substantially constant height upper surface 80 with respect to the caul 12 having the portion 44 of the side former 36 configured to extend over the rail-like top 5 of the stringer 2, the portion 44 configured to accommodate the side 5' of the rail-like top 5 of stringer 2. The other mating side former 36 is configured having the portion 54 thereof configured to accommodate the side 5" of the rail like top 5 of the stringer 2 and having a portion thereof extending above the rail like top 5 of the stringer 2 to surface 80 of the side former 34 abutting portions of the side former 34 extending above the rail like top 5 of the stringer 2. In this manner, another side former 38, as previously illustrated, would not be required as the stringer would be surrounded by portions of both side former 34 and side former 36 in the autoclave for the curing and attachment of the sheet 1 and stringer 2. As previously discussed, the one-piece end former 20 and intensifier formed 22 do not preferably engage alignment rail 16 but, if desired, the one-piece member may do so.

**[0036]** Referring to drawing Fig. 18, illustrated is a stringer 2 on a sheet 1 extending through an aperture 14 (not shown) in a caul 12 having alignment rail 16 surrounding the aperture 14. Further illustrated, are end formers 20, and intensifier formers 22 which are used to position and temporarily secure the stringers 2 in position on the sheet 1 for the curing and attachment of the sheet 1 and stringers 2 in an autoclave under temperature and pressure. As illustrated, the stringer 2 is formed having a substantial vertical end surface portion 70 with respect to the sheet 1 and caul 12 and angular

end surface portion 72 with respect to other portions of rail like top 5 and with respect to the sheet 1 and caul 12. As previously discussed, the side formers 18, end formers 20, and intensifier formers 22 may be comprised of any suitable material which is flexible to conform with the cross-sectional shape and longitudinal shape of the stringers 2 and geometric shape and configuration of the sheet 1 as well as be easily installed engaging the stringers 2 and sheet 1 and removed therefrom after the curing and attachment of the stringers 2 and sheet 1 under temperature and pressure in an autoclave. A preferred manufacturing method for the side formers 18, end formers 20, and intensifier formers 22 is to cast or form such members using molds having the desired mating size and configuration of the portion of the stringer 2 and sheet 1 which the former is to mate in use. A preferred material for the side formers 18, end formers 20, and intensifier formers 22 comprises a silicone based elastomeric material having a durometer hardness of forty (40) or greater which is initially a liquid poured into the mold to solidify to the desired former configuration 18, 20, and 22. Silicone based elastomer materials exhibit good casting characteristics in the desired configurations, exhibit good flexibility characteristics, good strength characteristics at elevated temperature and pressure in an autoclave, easy removal from the cured and attached stringers 2 and sheet 1, and good ability to allow movement due to the mismatch of the coefficients of thermal expansion between the material of the side formers 18, end formers 20, and intensifier formers 22 and the material of the stringers 2 and sheet 1 between the side formers 18, end formers 20, and intensifier formers 22 and the stringers 2 and sheet 1 under temperature and pressure in an autoclave during the curing and attachment of the stringers 2 and sheet 1 while being capable of maintaining the position and alignment of the stringers 2 regarding the sheet 1 during the curing and attachment process in the autoclave. While silicone based elastomers are preferred for the formers 18, 20, and 22, any suitable materials having the characteristics set forth hereinabove may be used. For instance, butadiene synthetic rubber elastomers may be used, rather than silicone based elastomers, for the side formers 18, end formers 20, and intensifier formers 22. The end former comprises a member having any desired geometric shape and configuration to mate with the end surface 76 of stringer 2. The intensifier former 22 comprises a member having any desired geometric shape and configuration to mate with an associated end former 20 and the surface 72 of the rail like surface 5 of the stringer and the end former 20. Both the end former 20 and intensifier former 22 may be formed having portions 78 thereof to engage each other to retain them in position with respect to each other and portions of the stringer 2. In this instance, the end former 20 and intensifier former 22 are formed as separate members having portions 76 thereof engaging each other as well as having portions thereof engaging stringer 2.

**[0037]** Referring to drawing Fig. 19, illustrated is a sheet 1 having a stringer 2 extending through an aperture 14 (not shown) in a caul 12 having side former 18 engaging a portion of the stringer 2, an end former 20 engaging a portion of the end of stringer 2, and intensifier former 22 engaging a portion of end former 20 and stringer 2. As illustrated, the stringer 2 includes a rail like top 5 which varies in height 70 with respect to the sheet 1 and includes angular surfaces 74 thereon. As illustrated, side former 34 is formed with a substantially constant height upper surface 80 with respect to the caul 12 having the portion 44 of the side former 36 configured to extend over the rail-like top 5 of the stringer 2, the portion 44 configured to accommodate the side 5' of the rail-like top 5 of stringer 2. The other mating side former 36 is configured having the portion 54 thereof configured to accommodate the side 5" of the rail like top 5 of the stringer 2 and having a portion thereof extending above the rail like top 5 of the stringer 2 to surface 80 of the side former 34 abutting portions of the side former 34 extending above the rail like top 5 of the stringer 2. In this manner, another side former 38, as previously illustrated, would not be required as the stringer would be surrounded by portions of both side former 34 and side former 36 in the autoclave for the curing and attachment of the sheet 1 and stringer 2. As is illustrated in drawing Fig. 17, the end former 20 and intensifier former 22 are formed as separate members having portions 78 thereof engaging each other and engaging portions of stringer 2.

**[0038]** Referring to drawing Fig. 20, illustrated is a sheet 1 having stringers 2 thereon extending through apertures 14 in a caul 12 with portions of the stringers 2 having side formers 18, end formers 20, and intensifier formers 22 engaging the same for locating the stringer 2 on the sheet 1 for the curing and attachment of the sheet 1 and stringer 2 in an autoclave 100 (illustrated in broken lines). Further illustrated, is a release sheet 102 (illustrated in broken lines) of any suitable commercially available material located over the top of sheet 1 and the side formers 18, end formers 20, and intensifier formers 22. The release sheet allowing the easy removal of any member from the sheet 1, stringer 2, caul 12, side formers 18, end formers 20 and intensifier formers 22 after removal from the autoclave 100. Located over release sheet 102 is a breather sheet 104 which allows the movement of air through a vacuum enclosure 106 during the removal of the atmosphere of air therefrom. The breather sheet 104 may be any suitable commercially available material to allow the movement of air in the vacuum enclosure 106. As stated, the sheet 1, stringer 2, side formers 18, end formers 20, intensifier formers 22, and resilient sheet 102 are contained within a vacuum enclosure 106, typically referred to as a vacuum bag, for the curing and attachment of the sheet 1 and stringers 2 under temperature and pressure in the autoclave 100. While it is preferred to use an autoclave to cure and attach the sheet 1 and stringer 2, in some

instances, depending upon the adhesive used to coat the fiber material forming the sheet 1 and stringer 2, rather than use an autoclave for curing and attachment, a simple oven may be used in conjunction with the vacuum enclosure 106 with the vacuum enclosure 106, once evacuated, providing the necessary force for the curing and attachment and consolidation of the sheet 1 and stringer 2.

**[0039]** For commonly used graphite fiber material and adhesive used to form the sheet 1 and stringers 2, when placed into the autoclave 100, the vacuum enclosure 102 is evacuated of air thereby causing the resilient sheet 102 to engage the side formers 18, end formers 20, and intensifier formers 22 as well as the caul 12. The side formers 18, end formers 20, and intensifier formers 22 are positioned around the stringers 2 being located in the proper position on the caul 12 by having portions of the side formers 18 and end formers 20 engaging portions of the alignment rails 18 located on the caul 12. In turn, the caul 12 is positioned in the proper relationship to the sheet 1 having the stringers 2 extending through apertures 14 in the caul 12 with the sheet 1 and caul 12 being releasably secured together for the curing and attachment process in the autoclave 100. The curing and attachment of the sheet 1 and stringers 2 will typically proceed in the autoclave 100. Using typical commonly available graphite fiber material and adhesive material, the sheet 1 and stringers 2 will be cured and secured to each other in the autoclave at a pressure of approximately 7.05 KG/CM<sup>2</sup> or 100 pounds per square inch and at a temperature of approximately 176.7°C or 350° F for a period of time until the sheet 1 and stringers 2 are cured and attached. At such time, the sheet 1 having stringers 2 secured thereon are removed from the autoclave 100. After cooling for a period of time, the sheet 1 and stringers 2 are removed from the vacuum enclosure 104 and breather sheet 104 and the release sheet 102 removed from the sheet 1, caul 12 and side formers 18, end formers 20, and intensifier formers 22. The side formers 18, end formers 20, and intensifier formers 22 are removed from engaging portions of the sheet 1, caul 12, and stringers 2 and, the caul 12 removed from the sheet 1. In this manner, the sheet 1 and stringers 2 have been cured and attached in the autoclave to help ensure that the sheet 1 and stringers 2 are properly cured as well as properly attached under the most favorable conditions in the autoclave 100 in the proper positions on the sheet 100 using the conformable locating aperture system 10 of the present invention. It should be understood that since the alignment rails 16 surrounding the apertures 14 in the caul 12 are precisely located in known positions on the caul 12 which is positioned in the proper position engaging the sheet 1 and since the side formers 18 and end formers 20 are precision formed elastomeric materials which are assembled in position surrounding the stringers 2 on sheet 1 being positioned and aligned by portions of the side formers 18 and end formers 20 engaging portions of the align-

ment rails 16 on caul 12 with the side formers 18 and end formers engaging portions of the stringers 2, the stringers 2 are securely held in the desired positions on the sheet 1 without having the ability for relative movement with respect to each other. It should be further appreciated that when the vacuum enclosure 106 is evacuated of air, the atmospheric forces acting on the caul 12, side formers 18, end formers 20, and intensifier formers 22 increases proportionately which force is transferred to the sheet 1 and stringers 2 to more firmly hold the stringers 2 in position on the sheet 1 for the curing and attachment and consolidation of the sheet 1 and stringers 2 in the autoclave 100. It should be additionally appreciated that when the pressure is increased in the autoclave 100 for the curing and attachment process of the sheet 1 and stringers 2, the forces acting on the conformable locating aperture system 10 of the present invention are increased, which forces are transferred to the sheet 1 and stringers 2 to even more firmly hold them in proper alignment during the curing and attachment and consolidation thereof in the autoclave 100.

**[0040]** It should be appreciated and understood that modifications may be made to the present invention which is defined in the claims. For instance, depending upon the shape and configuration of the stringers to be cured and attached to the sheet, the side formers and end formers may have any required shape and configuration. Similarly, the intensifier formers may not be required depending upon the shape and configuration of the stringers. The apertures in the caul and the alignment rails may have any desired configuration so long as at least portions of the stringers extend therethrough. Additionally, either a separate release member or release coatings may be used between the sheet and caul or on the sheet and caul so long as such a member or coatings comply with the configuration of the sheet. The stringers may be located in any direction on the sheet, such as along a longitudinal axis of the sheet, a transverse axis of the sheet, or both or combinations thereof so long as it is possible to use the conformable locating aperture system of the present invention with the sheet and stringers. The alignment rail may have any desired inner edge configuration, such as stepped, vertical wall, slotted, curving wall, etc. capable of mating with an associated former. While the caul 12 is placed on the sheet 1 prior to the location of the stringers 2 thereon, the stringers 2 may be placed on the sheet 1 and the caul 12 placed thereover on the sheet 1.

## Claims

1. A conformable locating aperture system (10) for the location of a first member (1) with respect to a second member (2) located thereon during the curing and attachment of the first member (1) and the second member (2) under heat and pressure, the sys-

tem (10) comprising:

a resilient member (12) having at least one aperture (14) therein and an alignment rail (16) surrounding the aperture (14), the resilient member (12) engaging at least a portion of the first member (1), at least a portion of the second member (2) extending through the aperture (14);

**characterised in that** the system comprises at least one alignment member (18, 20, 22) having a portion engaging a portion of the alignment rail (16) surrounding the aperture (14) in the resilient member (12) and engaging at least a portion of the second member (2) to align the second member (2) with respect to the first member (1).

2. The locating aperture system of claim 1, further comprising:

a plurality of alignment members (18, 20, 22), each having a portion engaging a portion of the alignment rail (16) surrounding the aperture (14) in the resilient member (12) and engaging at least a portion of the second member (2) to align the second member (2) with respect to the first member (1), each alignment member (18, 20, 22) having reinforcing material therein.

3. The locating aperture system of claim 1, further comprising a plurality of second members (2), wherein the resilient member (12) has a plurality of apertures (14) therein, each of the plurality of apertures (14) having an alignment rail (16) surrounding each of the plurality of apertures (14), respectively, the resilient member (12) engaging at least a portion of the first member (1), at least a portion of each of the plurality of second members (2) extending through each of the plurality of apertures (14), respectively.

4. The locating aperture system of claim 1, wherein the alignment rail (16) is secured to the resilient member (12) by at least one of adhesive securing, mechanical fastener securing (32), and adhesive securing and mechanical fastener securing (32).

5. The locating aperture system of claim 1, further comprising:

at least one end alignment member (20) engaging a portion of the alignment rail (16) and at least a portion of the second member (2), the at least one alignment member (18, 22) and the at least one end alignment member (20) enclosing the second member (2), the alignment rail (16) including an inner edge (24), a recess

(16') and a notch (16'') in at least a portion thereof.

6. The locating aperture system of claim 1, further comprising:

a reinforcing member (6, 7) positioned upon the second member (2) for reinforcing a desired location thereof.

7. A method of aligning a first member (1) and a second member (2) during the curing thereof, the method comprising:

providing a resilient member (12) having at least one aperture (14) therein and an alignment rail (16) surrounding the aperture (14), the resilient member (12) engaging at least a portion of the first member (1), at least a portion of the second member (2) extending through the aperture (14);

providing at least one alignment member (18, 20, 22) having a portion engaging a portion of the alignment rail (16) surrounding the aperture (14) in the resilient member (12) and for engaging at least a portion of the second member (2) to align the second member (2) with respect to the first member (1).

8. The method of claim 7, further comprising:

providing at least one side alignment member (18) having a portion engaging a portion of the alignment rail (16) surrounding the aperture (14) in the resilient member (12) and for engaging at least a portion of the second member (2) to align the second member (2) with respect to the first member (1);

providing at least one end alignment member (20) having a portion engaging a portion of the alignment rail (16) surrounding the aperture (14) in the resilient member (12) and for engaging at least a portion of the second member (2) to align the second member (2) with respect to the first member (1);

engaging a portion of the at least one side alignment member (18) with a portion of the second member (2); and

engaging a portion of the at least one end alignment member (20) with a portion of the second member (2).

9. The method of claim 8, further comprising:

providing at least one intensifier member (22); and

engaging a portion of the at least one end alignment member (20) and a portion of the second

member (2) with a portion of the intensifier member (22).

10. The method of claim 8, further comprising:

providing at least one other side alignment member (18); and  
engaging at least a portion of the second member (2) with a portion of the at least one other side alignment member (18).

11. The method of claim 10, wherein at least a portion of the at least one other side alignment member (18) engages a portion of the alignment rail (16) of the resilient member (12).

12. The method of claim 7, further comprising:

conforming the resilient member (12) to substantially engage portions of the first member (1).

13. The method of claim 8, further comprising:

providing a vacuum member; and  
placing the first member (1), the second member (2), the resilient member (12), the at least one side alignment member (18), and at least one end alignment member (20) in the vacuum member.

14. The method of claim 13, further comprising:

removing the atmosphere from within the vacuum member.

15. The method of claim 14, further comprising:

providing an autoclave; and  
placing the vacuum member in the autoclave.

16. The method of claim 15, further comprising:

increasing the temperature in the autoclave to cure the adhesive of the first member (1), to cure the adhesive of the second member (2), and to adhesively secure the first member (1) and the second member (2) with cured adhesive.

17. The method of claim 14, further comprising:

increasing the pressure within the autoclave.

## Patentansprüche

1. Angemessenes Führungsöffnungssystem (10) zur

Führung eines ersten Bauteils (1) in Bezug auf ein zweites Bauteil (2), das sich darauf befindet, während der Aushärtung und Anbringung des ersten Bauteils (1) und des zweiten Bauteils (2) unter Hitze und Druck, wobei das System (10) aufweist:

ein nachgiebiges Bauteil (12), das wenigstens eine Öffnung (14) darin aufweist, und eine Ausrichtungsschiene (16), welche die Öffnung (14) umgibt, wobei das nachgiebige Bauteil (12) wenigstens einen Teil des ersten Bauteils (1) erfasst, wobei sich wenigstens ein Teil des zweiten Bauteils (2) durch die Öffnung (14) erstreckt;

**dadurch gekennzeichnet, dass** das System aufweist:

wenigstens ein Ausrichtungsbauteil (18, 20, 22), das einen Teil aufweist, der einen Teil der Ausrichtungsschiene (16) erfasst, welche die Öffnung (14) im nachgiebigen Bauteil (12) umgibt, und das wenigstens ein Teil des zweiten Bauteils (2) erfasst, um das zweite Bauteil (2) in Bezug auf das erste Bauteil (1) auszurichten.

2. Führungsöffnungssystem nach Anspruch 1, weiter aufweisend:

eine Vielzahl von Ausrichtungsbauteilen (18, 20, 22), von denen jedes einen Teil aufweist, der einen Teil der Ausrichtungsschiene (16) erfasst, welche die Öffnung (14) im nachgiebigen Bauteil (12) umgibt, und der wenigstens einen Teil des zweiten Bauteils (2) erfasst, um das zweite Bauteil (2) in Bezug auf das erste Bauteil (1) auszurichten, wobei jedes Ausrichtungsbauteil (18, 20, 22) darin verstärkendes Material aufweist.

3. Führungsöffnungssystem nach Anspruch 1, ferner aufweisend eine Vielzahl von zweiten Bauteilen (2), wobei das nachgiebige Bauteil (12) eine Vielzahl von Öffnungen (14) darin aufweist, wobei jede der Vielzahl von Öffnungen (14) eine Ausrichtungsschiene (16) aufweist, die jede der Vielzahl von Öffnungen (14) jeweils umgibt, wobei das nachgiebige Bauteil (12) jeweils wenigstens einen Teil des ersten Bauteils (1), wenigstens einen Teil von jedem der Vielzahl von zweiten Endbauteilen (2), die sich durch die Vielzahl von Öffnungen (14) erstrecken, erfasst.

4. Das Führungsöffnungssystem nach Anspruch 1, bei dem die Ausrichtungsschiene (16) am nachgiebigen Bauteil (12) mit wenigstens einem von Klebstoffsicherung, mechanischer Befestigungssicherung (32) und Klebstoffsicherung und mechani-

scher Befestigungssicherung (32) gesichert ist.

5. Führungsöffnungssystem nach Anspruch 1, ferner aufweisend:

wenigstens ein Endausrichtungsbauteil (20), das einen Teil der Ausrichtungsschiene (16) und wenigstens einen Teil des zweiten Bauteils (2) erfasst, wobei das wenigstens eine Ausrichtungsbauteil (18, 22) und das wenigstens eine Endausrichtungsbauteil (20) das zweite Bauteil (2) einschließen, wobei die Ausrichtungsschiene (16) eine innere Kante (24) beinhaltet, eine Vertiefung (16') und eine Nocke (16'') an wenigstens einem Teil davon.

6. Führungsöffnungssystem nach Anspruch 1, ferner aufweisend:

ein Verstärkungsbauteil (6, 7), das auf dem zweiten Bauteil (2) zur Verstärkung eines gewünschten Ortes davon positioniert ist.

7. Verfahren zur Ausrichtung eines ersten Bauteils (1) und eines zweiten Bauteils (2) während der Aushärtung davon, wobei das Verfahren aufweist:

Bereitstellung eines nachgiebigen Bauteils (12), das wenigstens eine Öffnung (14) darin und eine Ausrichtungsschiene (16) aufweist, welche die Öffnung (14) umgibt, wobei das nachgiebige Bauteil (12) wenigstens einen Teil des ersten Bauteils (1) erfasst, an wenigstens einem Teil des zweiten Bauteils (2), der sich durch die Öffnung (14) erstreckt; Bereitstellung wenigstens eines Ausrichtungsbauteils (18, 20, 22), das einen Teil aufweist, der einen Teil der Ausrichtungsschiene (16) erfasst, welche die Öffnung (14) im nachgiebigen Bauteil (12) umgibt, und zur Erfassung wenigstens eines Teils des zweiten Bauteils (2), um das zweite Bauteil (2) in Bezug auf das erste Bauteil (1) auszurichten.

8. Verfahren nach Anspruch 7, ferner aufweisend:

Bereitstellung wenigstens eines Seitenausrichtungsbauteils (18), das einen Teil hat, der einen Teil der Ausrichtungsschiene (16) erfasst, welche die Öffnung (14) im nachgiebigen Bauteil (12) umgibt, und zur Erfassung von wenigstens einem Teil des zweiten Bauteils (2), um das zweite Bauteil (2) in Bezug auf das erste Bauteil (1) auszurichten; Bereitstellung wenigstens eines Endausrichtungsbauteils (20), das einen Teil aufweist, der einen Teil der Ausrichtungsschiene (16) erfasst, welche die Öffnung (14) im nachgiebigen

Bauteil (12) umgibt, und zur Erfassung von wenigstens einem Teil des zweiten Bauteils (2), um das zweite Bauteil (2) in Bezug auf das erste Bauteil (1) auszurichten;

Erfassung eines Teils von dem wenigstens einen Seitenausrichtungsbauteil (18) mit einem Teil des zweiten Bauteils (2); und

Erfassung eines Teils von dem wenigstens einen Endausrichtungsbauteil (20) mit einem Teil des zweiten Bauteils (2).

9. Verfahren nach Anspruch (8), ferner aufweisend:

Bereitstellung von wenigstens einem Verstärkungsbauteil (22); und

Erfassung eines Teils von dem wenigstens einen Endausrichtungsbauteil (20) und einem Teil des zweiten Bauteils (2) mit einem Teil des Verstärkungsbauteils (22).

10. Verfahren nach Anspruch 8, ferner aufweisend:

Bereitstellung von wenigstens einem anderen Seitenausrichtungsbauteil (18); und

Erfassung wenigstens eines Teils des zweiten Bauteils (2) mit einem Teil des wenigstens einen anderen Seitenausrichtungsbauteils (18).

11. Verfahren nach Anspruch (10), bei dem wenigstens ein Teil von dem wenigstens anderen Seitenausrichtungsbauteil (18) einen Teil der Ausrichtungsschiene (16) des nachgiebigen Bauteils (12) erfasst.

12. Verfahren nach Anspruch (7), ferner aufweisend:

In Übereinstimmung bringen des nachgiebigen Bauteils (12), um im Wesentlichen Teile des ersten Bauteils (1) zu erfassen.

13. Verfahren nach Anspruch 8, ferner aufweisend:

Bereitstellung eines Vakuumbauteils; und Platzierung des ersten Bauteils (1), des zweiten Bauteils (2), des nachgiebigen Bauteils (12), des wenigstens einen Seitenausrichtungsbauteils (18) und des wenigstens eines Endausrichtungsbauteils (20) in dem Vakuumbauteil.

14. Verfahren nach Anspruch 13, ferner aufweisend:

Entfernung der Atmosphäre von innerhalb des Vakuumbauteils.

15. Verfahren nach Anspruch 14, ferner aufweisend:

Bereitstellung eines Autoklaven; und

Platzierung des Vakuumbauteils im Autoklaven.

**16.** Verfahren nach Anspruch 15, ferner aufweisend:

Erhöhung der Temperatur im Autoklaven, um den Klebstoff des ersten Bauteils (1) auszuhärten, um den Klebstoff des zweiten Bauteils (2) auszuhärten und das erste Bauteil (1) und das zweite Bauteil (2) fest aneinander mit dem ausgehärteten Klebstoff zu befestigen.

**17.** Verfahren nach Anspruch 14, ferner aufweisend:

Erhöhung des Drucks im Autoklaven.

**Revendications**

- 1.** Système d'ouverture de positionnement conforme (10) destiné au positionnement d'un premier membre (1) par rapport à un second membre (2) positionné sur celui-ci au cours du traitement et de la fixation du premier membre (1) sur le second membre (2) de manière thermique et sous pression, le système (10) comprenant :

un membre élastique (12) comprenant au moins une ouverture (14) et un rail d'alignement (16) entourant l'ouverture (14), le membre élastique (12) s'engageant avec au moins une partie du premier membre (1), et avec au moins une partie du second membre (2) qui s'étend au travers de l'ouverture (14) ;

**caractérisé en ce que** le système comprend :

au moins un membre d'alignement (18, 20, 22) comprenant une partie en engagement avec une partie du rail d'alignement (16) qui entoure l'ouverture (14) aménagée dans le membre élastique (12) et qui s'engage avec au moins une partie du second membre (2) afin d'aligner le second membre (2) par rapport au premier membre (1).

- 2.** Système d'ouverture de positionnement selon la revendication 1, comprenant en outre :

une pluralité de membres d'alignement (18, 20, 22), chacun comprenant une partie en engagement avec une partie du rail d'alignement (16) qui entoure l'ouverture (14) aménagée dans le membre élastique (12) et qui s'engage avec au moins une partie du second membre (2) afin d'aligner le second membre (2) par rapport au premier membre (1), chaque membre d'alignement (18, 20, 22) comprenant un matériau de

renfort.

- 3.** Système d'ouverture de positionnement selon la revendication 1, comprenant en outre une pluralité de seconds membres (2), dans lequel le membre élastique (12) comprend une pluralité d'ouvertures (14), chaque ouverture de la pluralité d'ouvertures (14) comprenant respectivement un rail d'alignement (16) qui entoure chaque ouverture de la pluralité d'ouvertures (14), le membre élastique (12) s'engageant avec au moins une partie du premier membre (1), avec au moins une partie de chaque membre de la pluralité de seconds membres (2) qui s'étendent respectivement au travers de chaque ouverture de la pluralité d'ouvertures (14).

- 4.** Système d'ouverture de positionnement selon la revendication 1, dans lequel le rail d'alignement (16) est fixé sur le membre élastique (12) au moyen d'au moins une fixation adhésive, une fixation mécanique (32), et une fixation adhésive et une fixation mécanique (32).

- 5.** Système d'ouverture de positionnement selon la revendication 1, comprenant en outre :

au moins un membre d'alignement d'extrémité (20) qui s'engage avec une partie du rail d'alignement (16) et avec au moins une partie du second membre (2), le au moins un membre d'alignement (18, 22) et le au moins un membre d'alignement d'extrémité (20) entourant le second membre (2), le rail d'alignement (16) comprenant un bord interne (24), un retrait (16') et une encoche (16'') dans au moins une partie de celui-ci.

- 6.** Système d'ouverture de positionnement selon la revendication 1, comprenant en outre :

un membre de renfort (6, 7) positionné, sur le second membre (2) afin de renforcer une position souhaitée de celui-ci.

- 7.** Procédé d'alignement d'un premier membre (1) et d'un second membre (2) au cours du traitement de ceux-ci, le procédé comprenant :

la fourniture d'un membre élastique (12) comprenant au moins une ouverture (14) et un rail d'alignement (16) entourant l'ouverture (14), l'élément élastique (12) s'engageant avec au moins une partie du premier membre (1), avec au moins une partie du second membre (2) qui s'étend au travers de l'ouverture (14) ; la fourniture d'au moins un membre d'alignement (18, 20, 22) comprenant une partie qui s'engage avec une partie du rail d'alignement

(16) qui entoure l'ouverture (14) du membre élastique (12), et qui s'engage avec au moins une partie du second membre (2) afin d'aligner le second membre (2) par rapport au premier membre (1).

8. Procédé selon la revendication 7, comprenant en outre :

la fourniture d'au moins un membre d'alignement latéral (18) comprenant une partie en engagement avec une partie du rail d'alignement (16) qui entoure l'ouverture (14) du membre élastique (12), et qui s'engage avec au moins une partie du second membre (2) par rapport au premier membre (1) ;

la fourniture d'au moins un membre d'extrémité (20) comprenant une partie en engagement avec une partie du rail d'alignement (16) qui entoure l'ouverture (14) du membre élastique (12), et qui s'engage avec au moins une partie du second membre (2) afin d'aligner le second membre (2) par rapport au premier membre (1). l'engagement d'une partie d'au moins un membre d'alignement latéral (18) avec une partie du second membre (2) ; et

l'engagement d'une partie d'au moins un membre d'alignement d'extrémité (20) avec une partie du second membre (2).

9. Procédé selon la revendication 8, comprenant en outre :

la fourniture d'au moins un membre renforceur (22) ; et  
l'engagement d'une partie d'au moins un membre d'alignement d'extrémité (20) et d'une partie du second membre (2) avec une partie du membre renforceur (22).

10. Procédé selon la revendication 8, comprenant en outre :

la fourniture d'au moins un autre membre d'alignement latéral (18) ; et  
l'engagement d'au moins une partie du second membre (2) avec une partie d'au moins un autre membre d'alignement latéral (18).

11. Procédé selon la revendication 10, dans lequel au moins une partie d'au moins un autre membre d'alignement latéral (18) s'engage avec une partie du rail d'alignement (16) du membre élastique (12).

12. Procédé selon la revendication 7, comprenant en outre :

la mise en conformité du membre élastique (12) afin qu'il s'engage essentiellement avec des parties du premier membre (1).

- 5 13. Procédé selon la revendication 8, comprenant en outre :

la fourniture d'un membre sous vide ; et  
la mise en place du premier membre (1), du second membre (2), du membre élastique (12), du au moins un membre d'alignement latéral (18), et du au moins un membre d'alignement d'extrémité (20) dans le membre mis sous vide.

- 15 14. Procédé selon la revendication 13, comprenant en outre :

le retrait de l'air atmosphérique de l'intérieur du membre sous vide.

- 20 15. Procédé selon la revendication 14, comprenant en outre :


la fourniture d'un autoclave ; et  
la mise en place du membre sous vide dans l'autoclave.

- 25 16. Procédé selon la revendication 15, comprenant en outre :

l'augmentation de la température à l'intérieur de l'autoclave afin de durcir l'adhésif du premier membre (1), de durcir l'adhésif du second membre (2), et de fixer de manière adhésive le premier membre (1) sur le second membre (2) au moyen d'adhésifs durcis.

- 40 17. Procédé selon la revendication 14, comprenant en outre :

l'augmentation de la température à l'intérieur de l'autoclave.

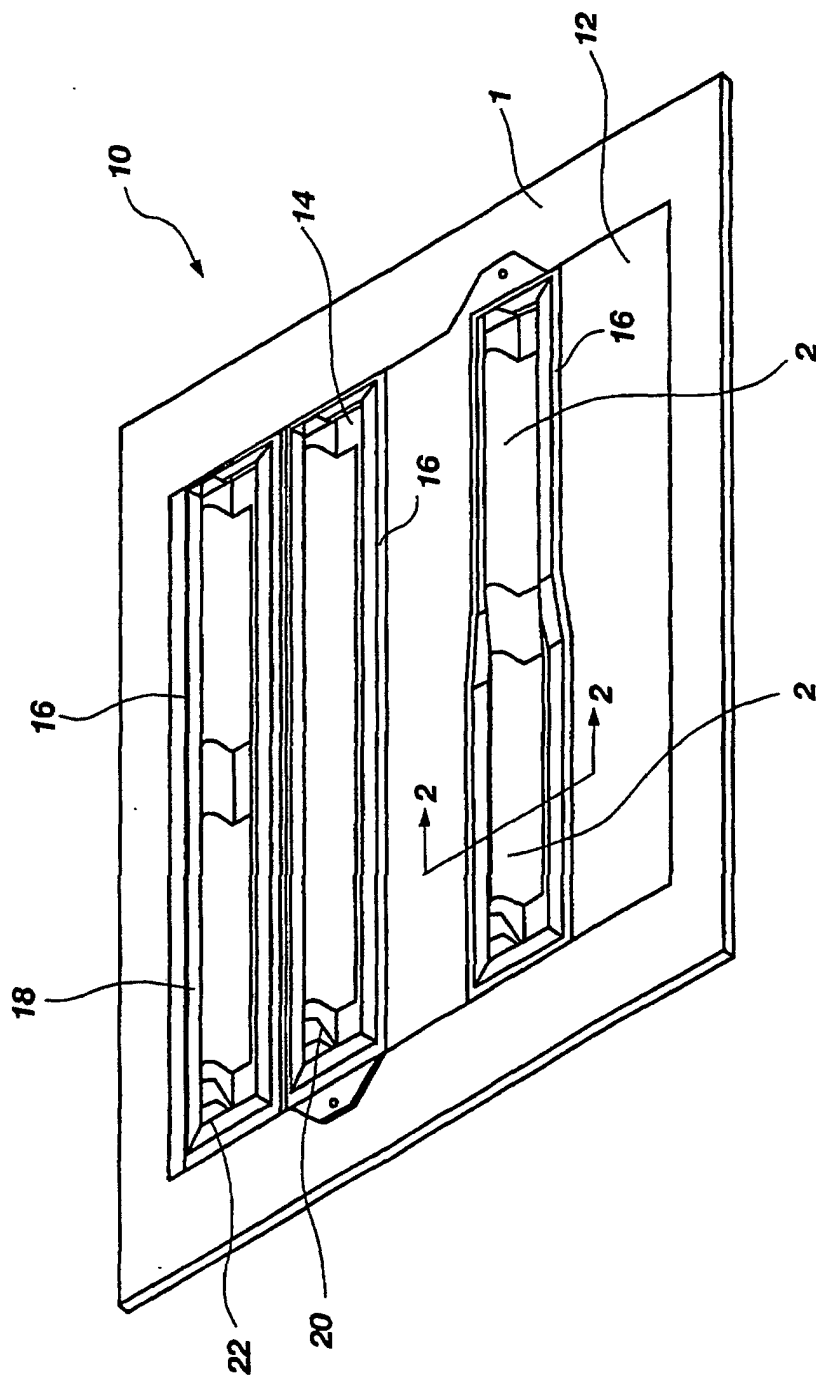

**Fig. 1**

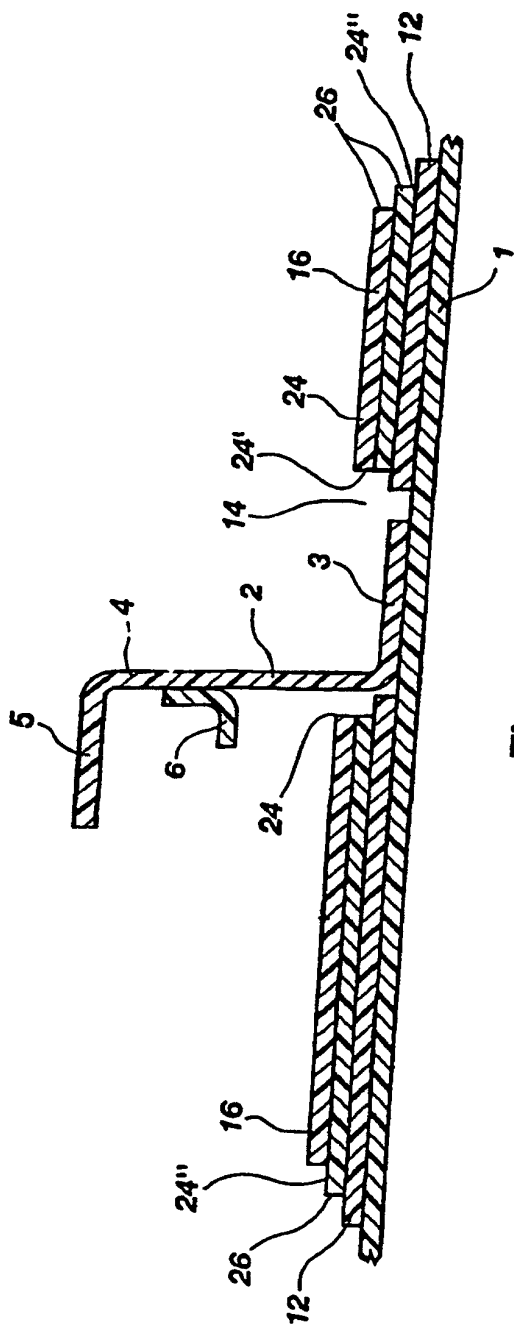


Fig. 2

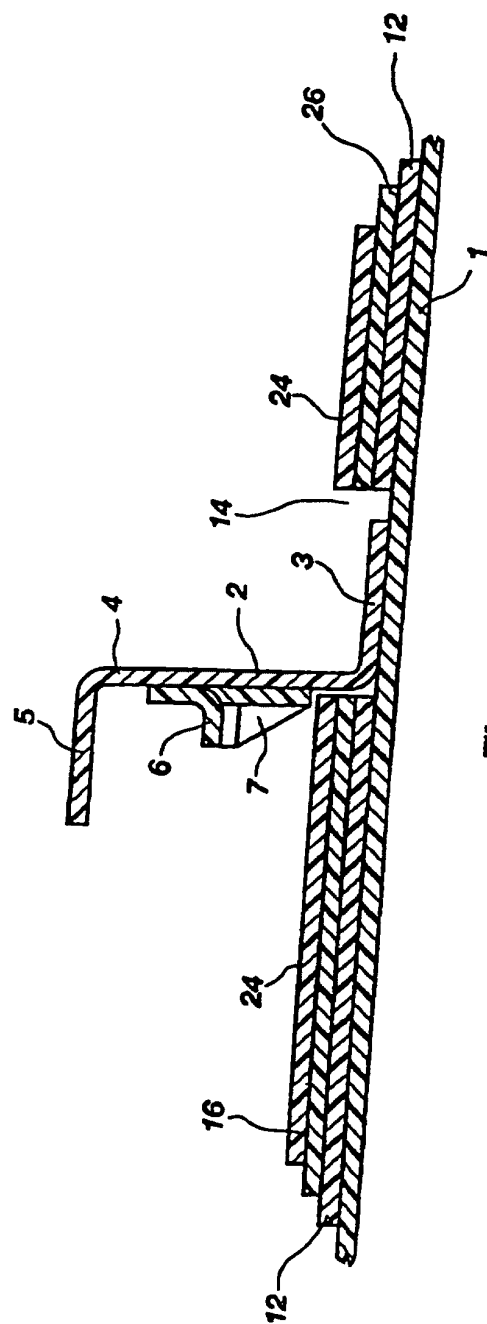


Fig. 3

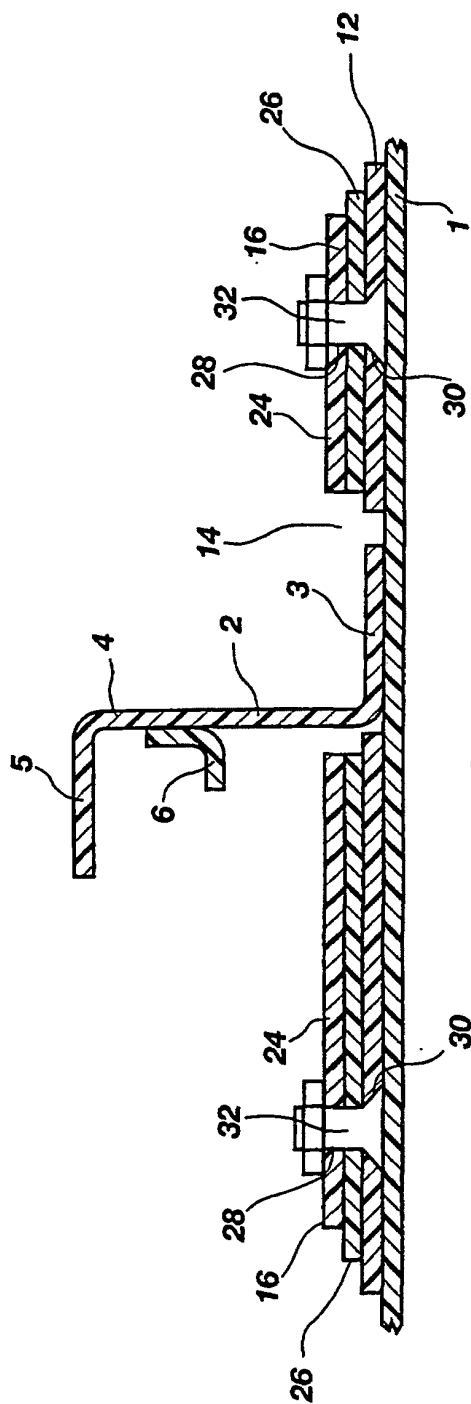


Fig. 4

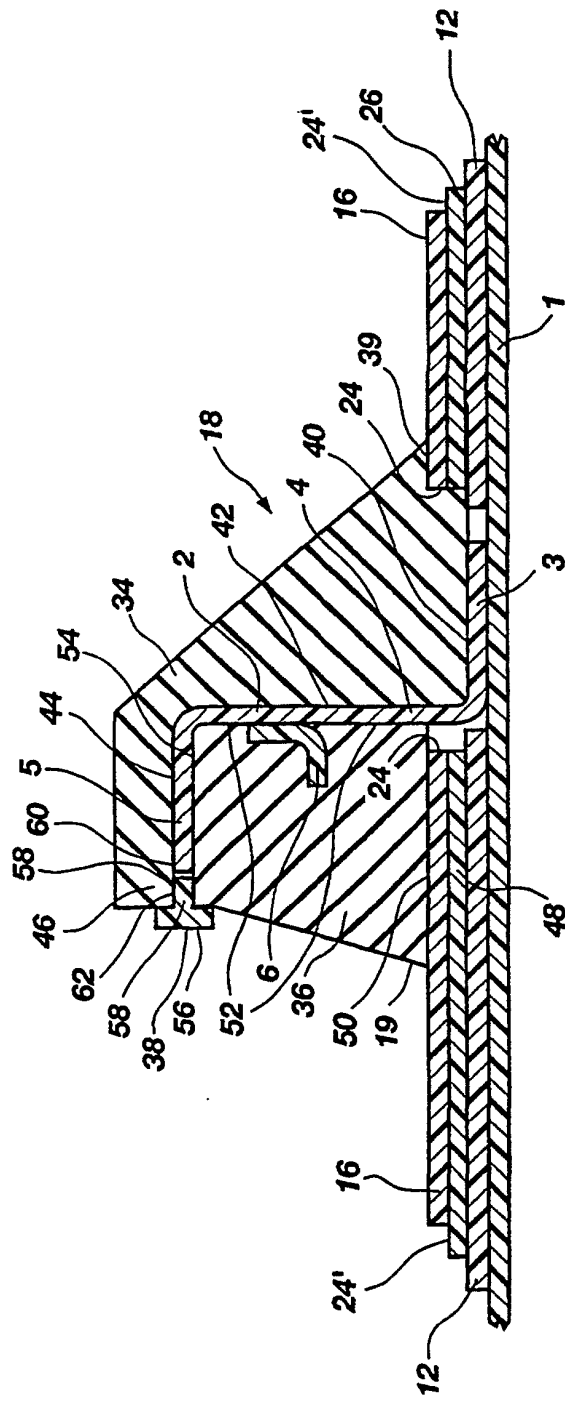
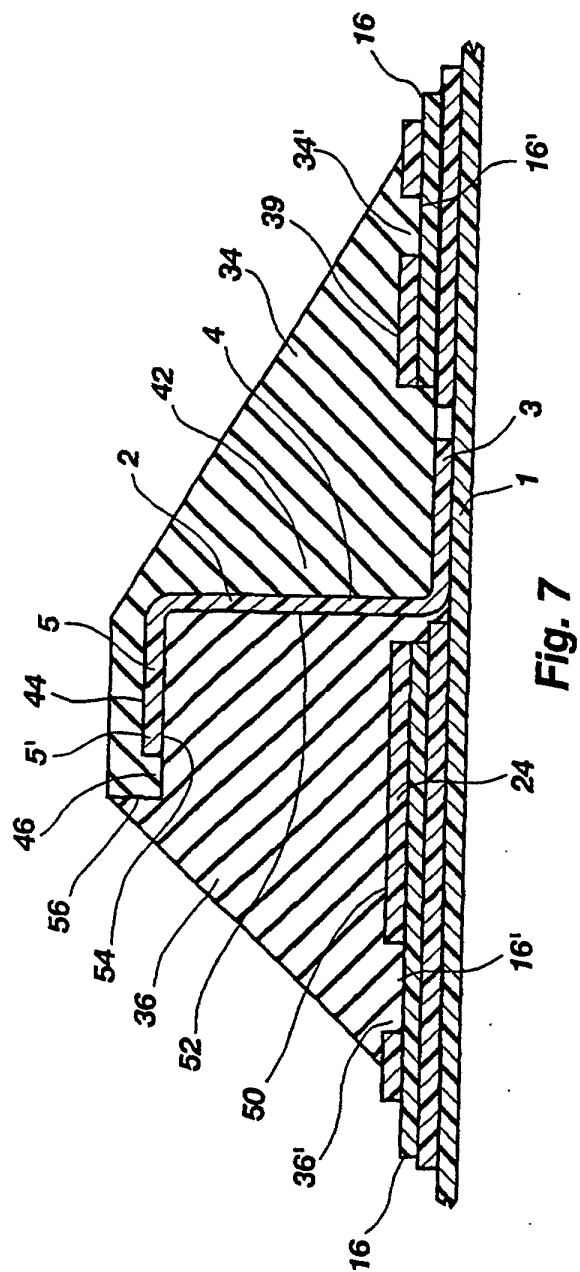
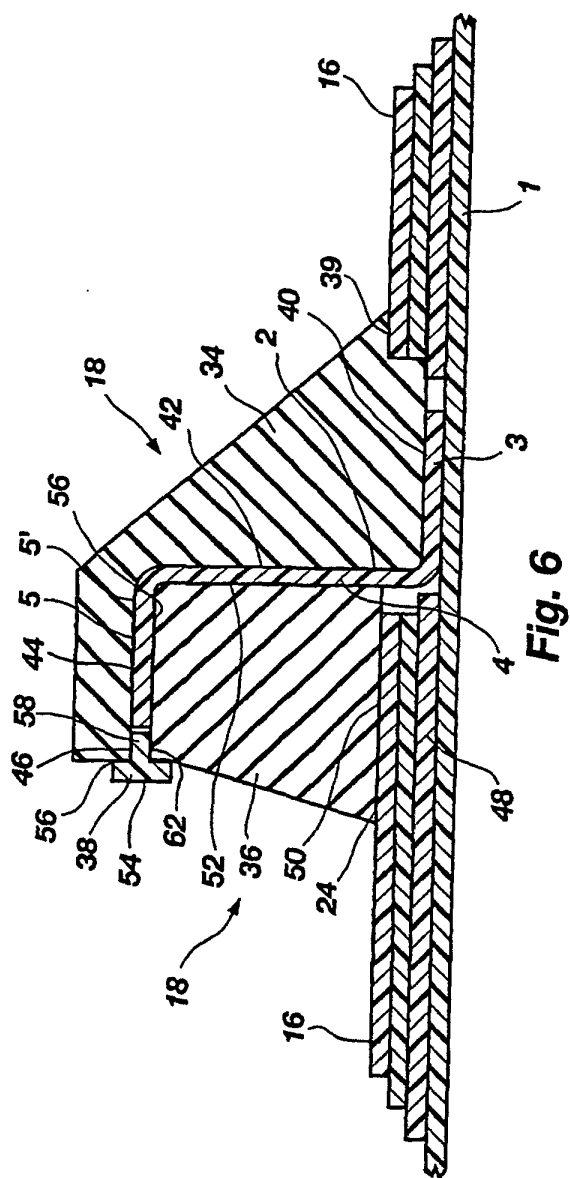


Fig. 5



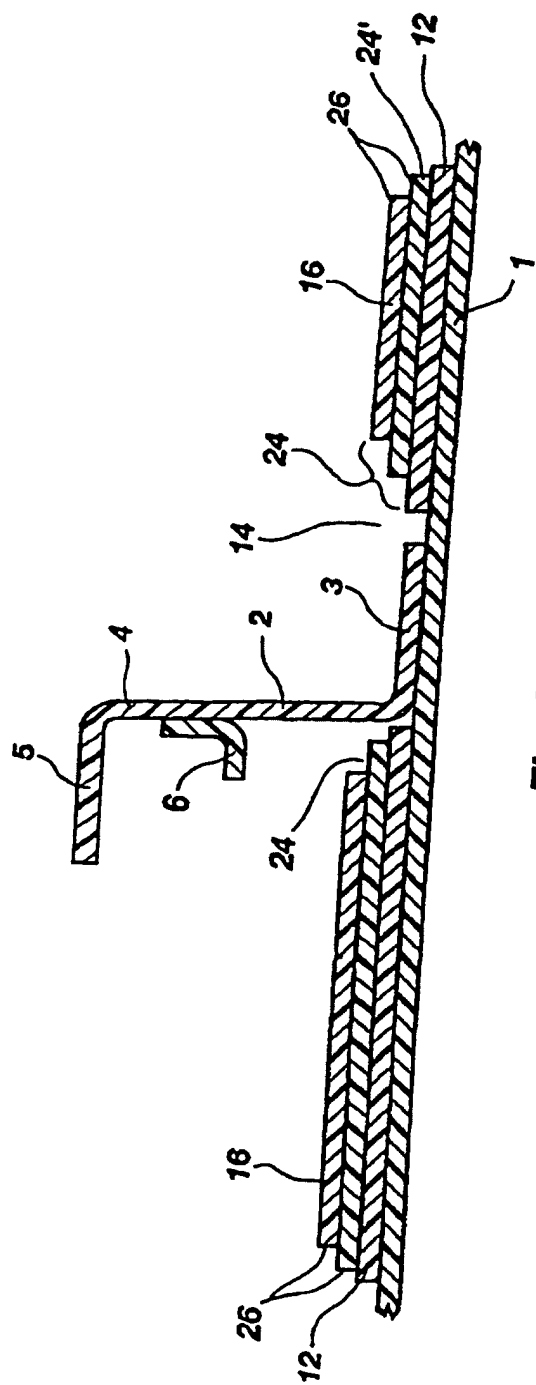


Fig. 8

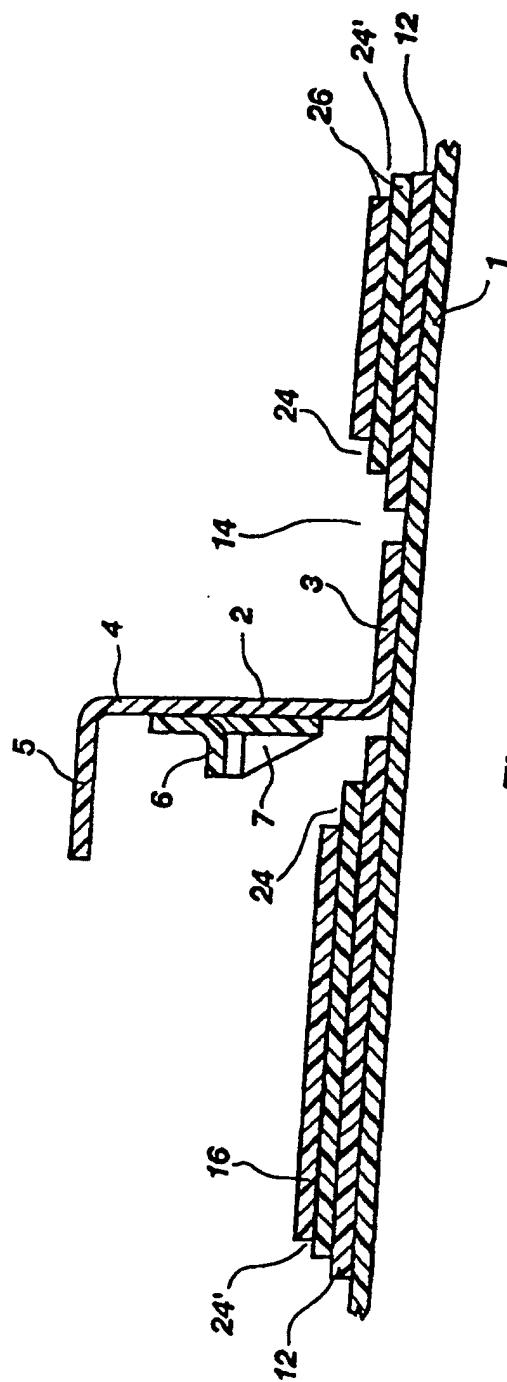


Fig. 9

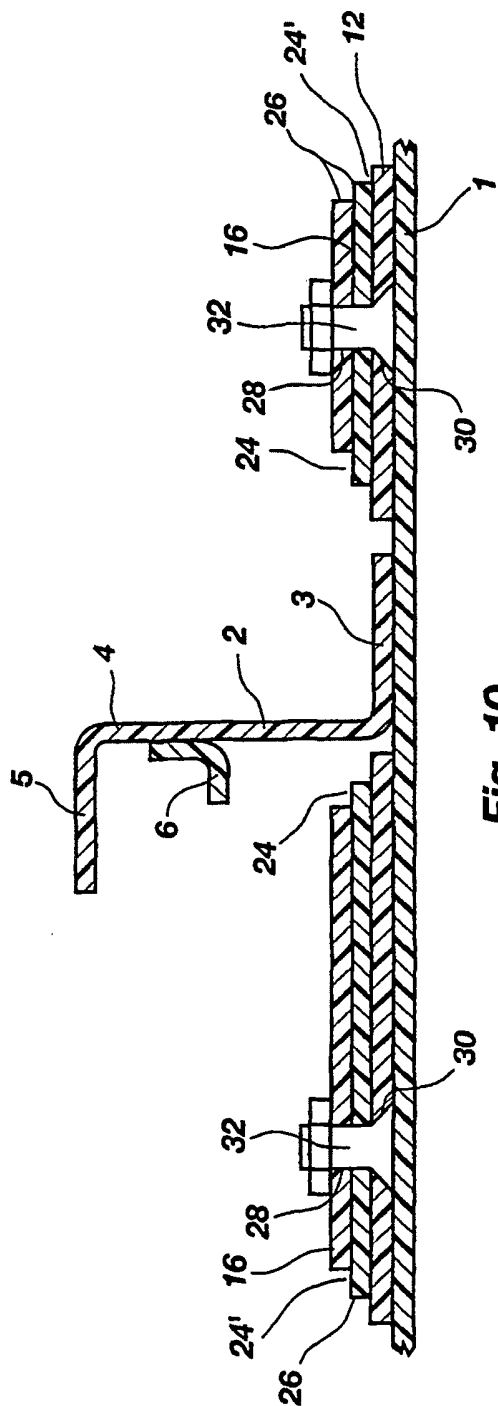


Fig. 10

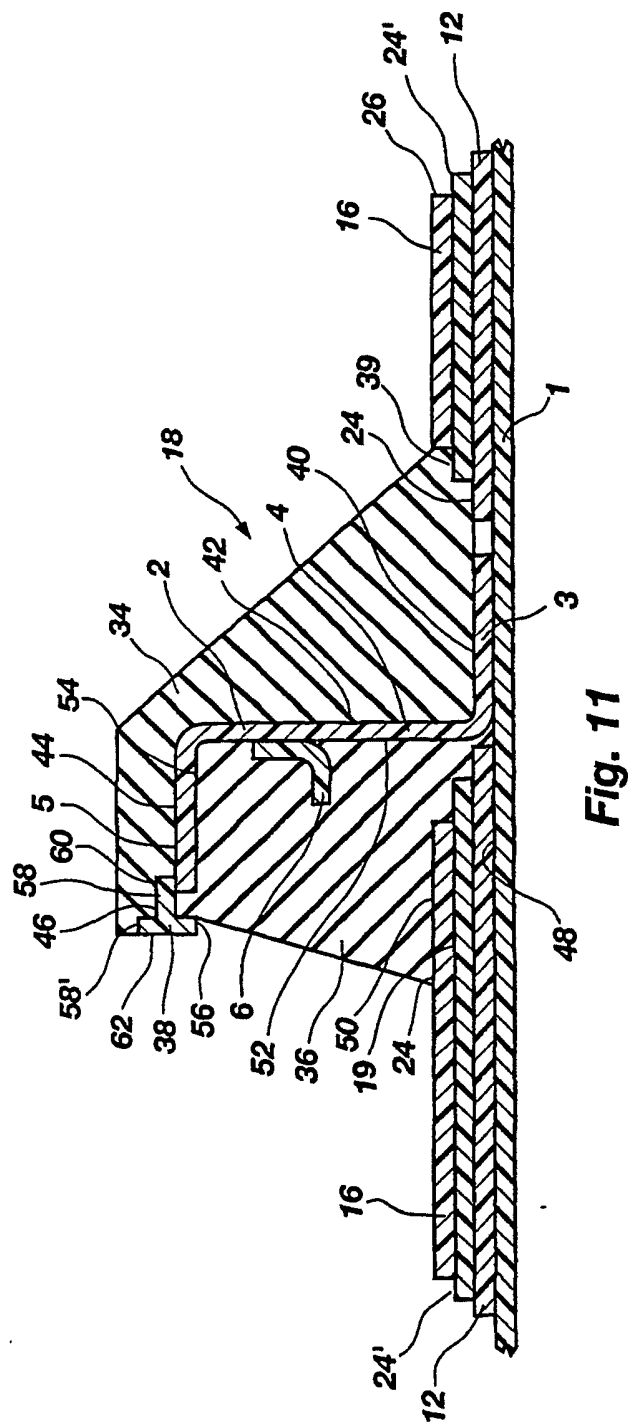


Fig. 11

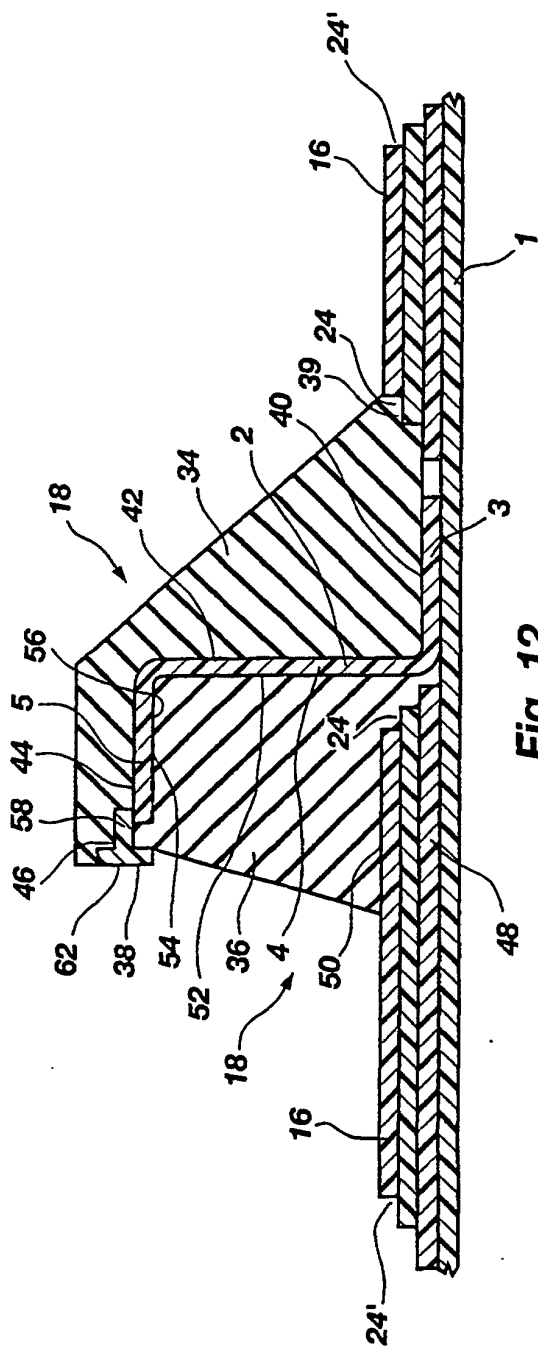


Fig. 12


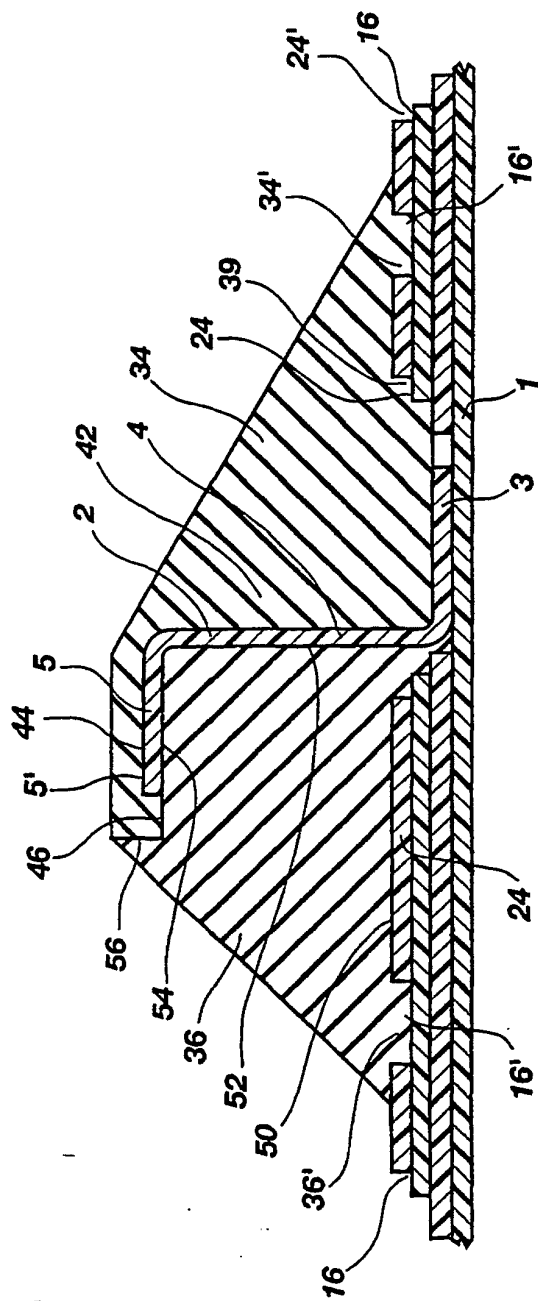


Fig. 13

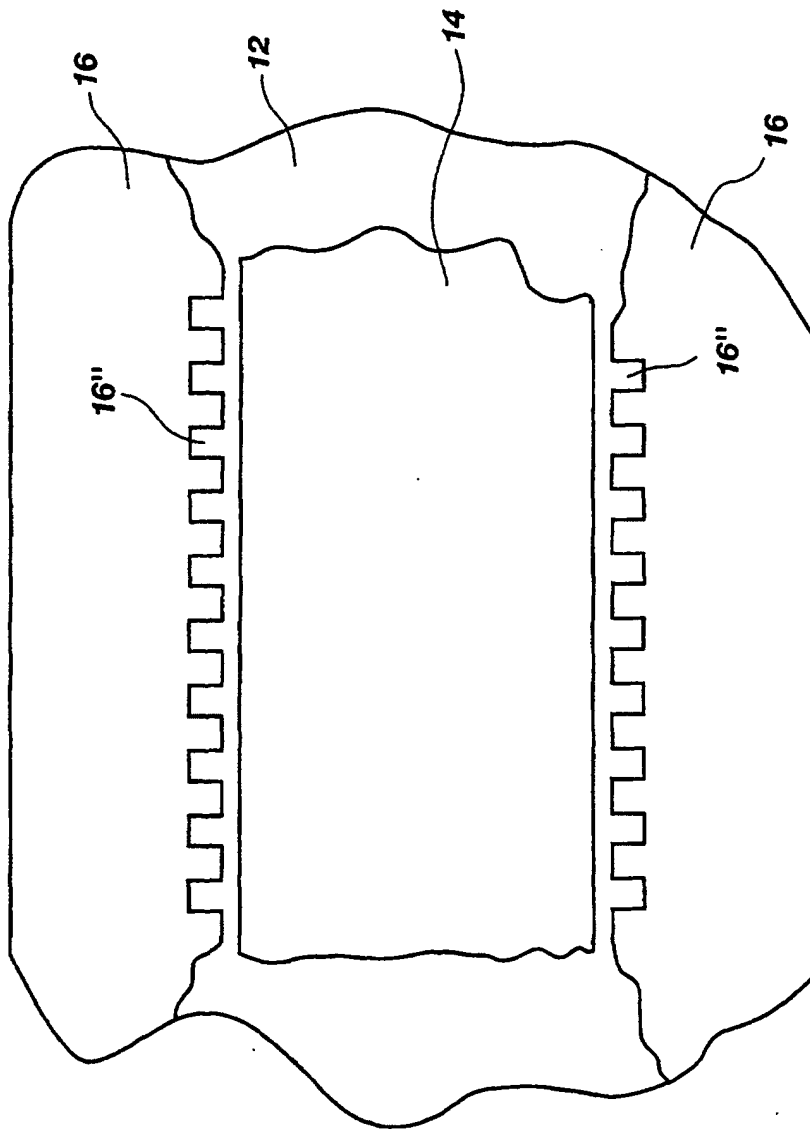

**Fig. 14**

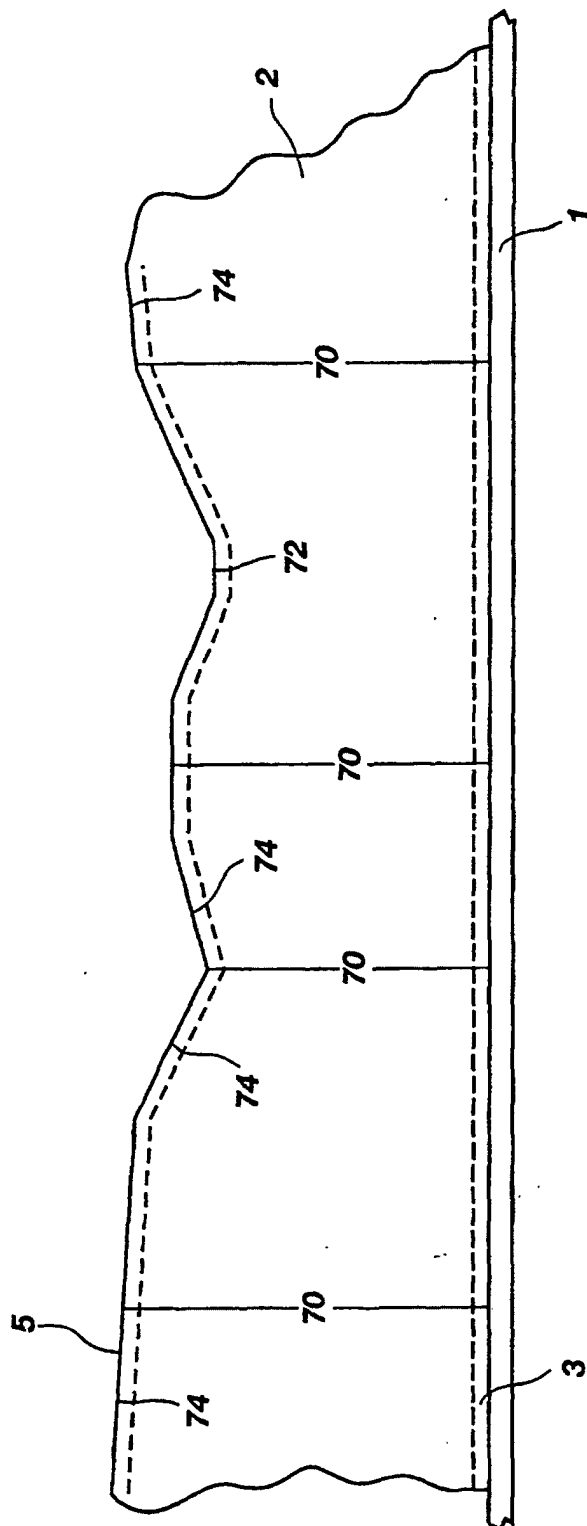


Fig. 15

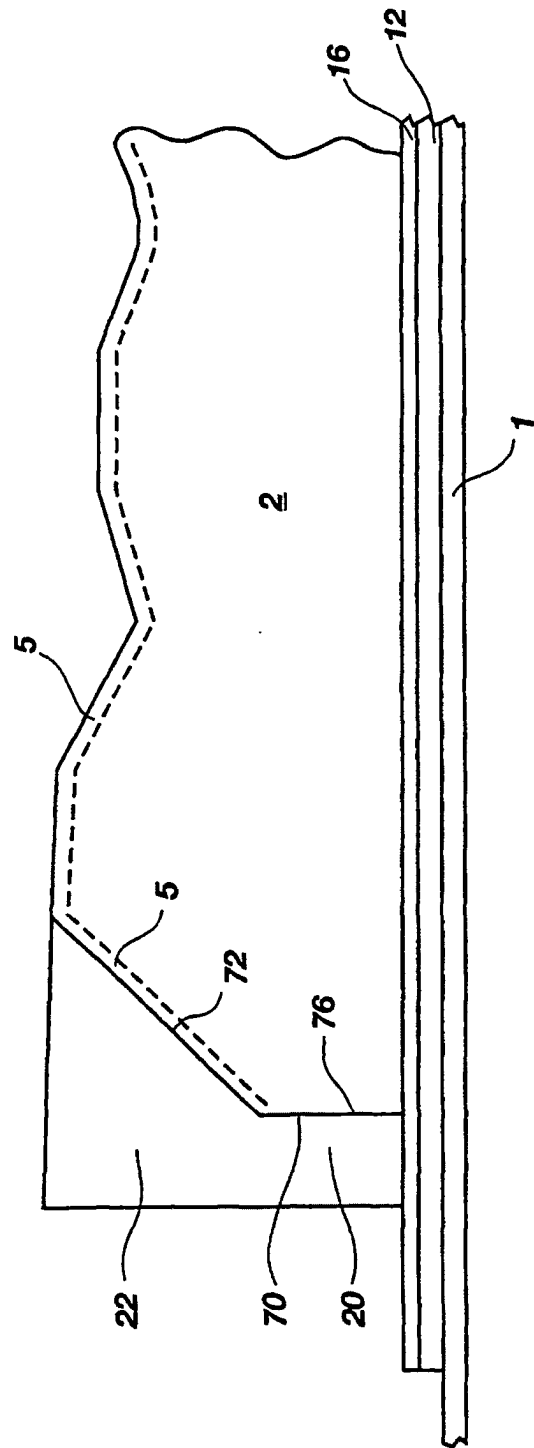


Fig. 16

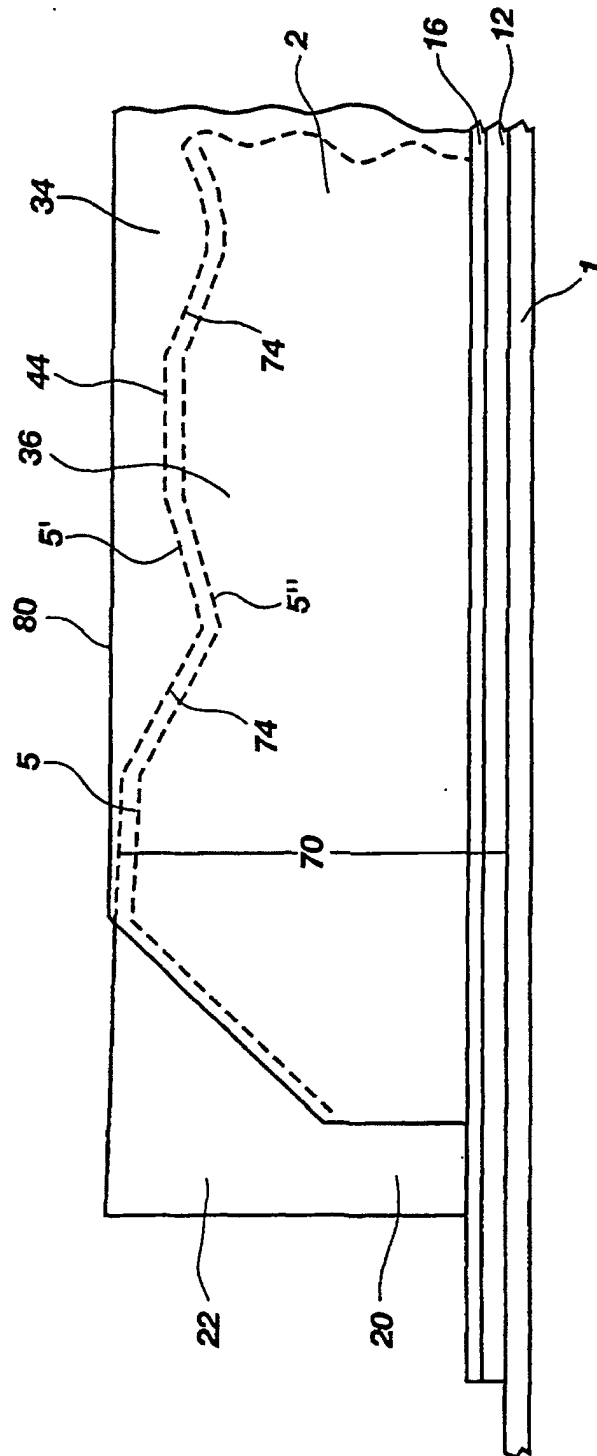


Fig. 17



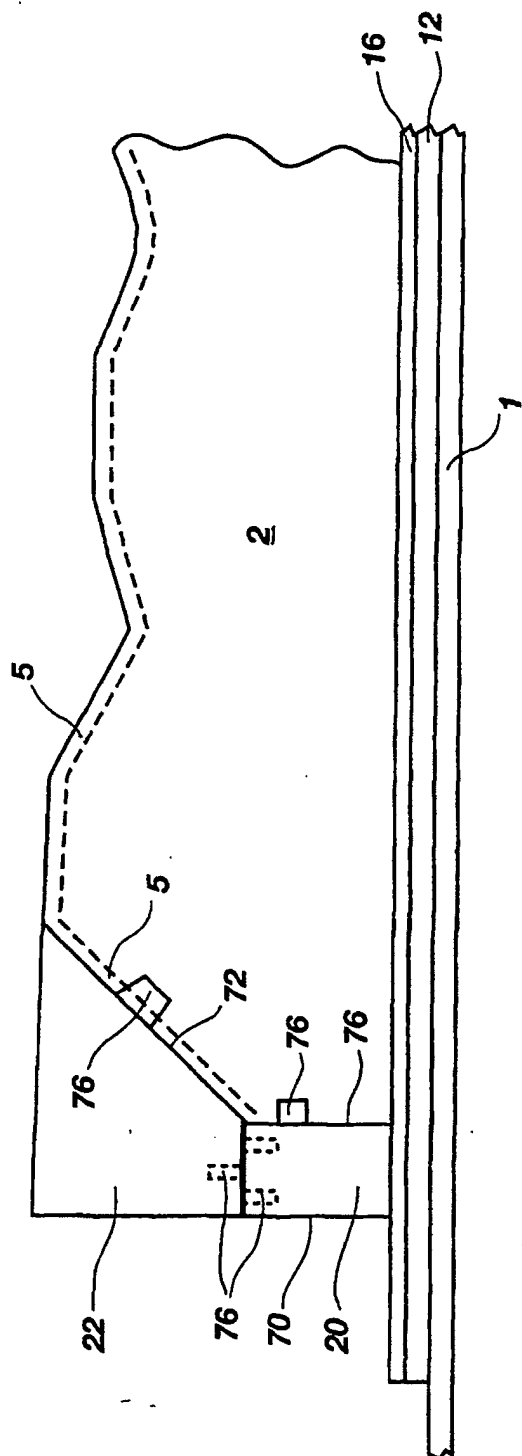


Fig. 18

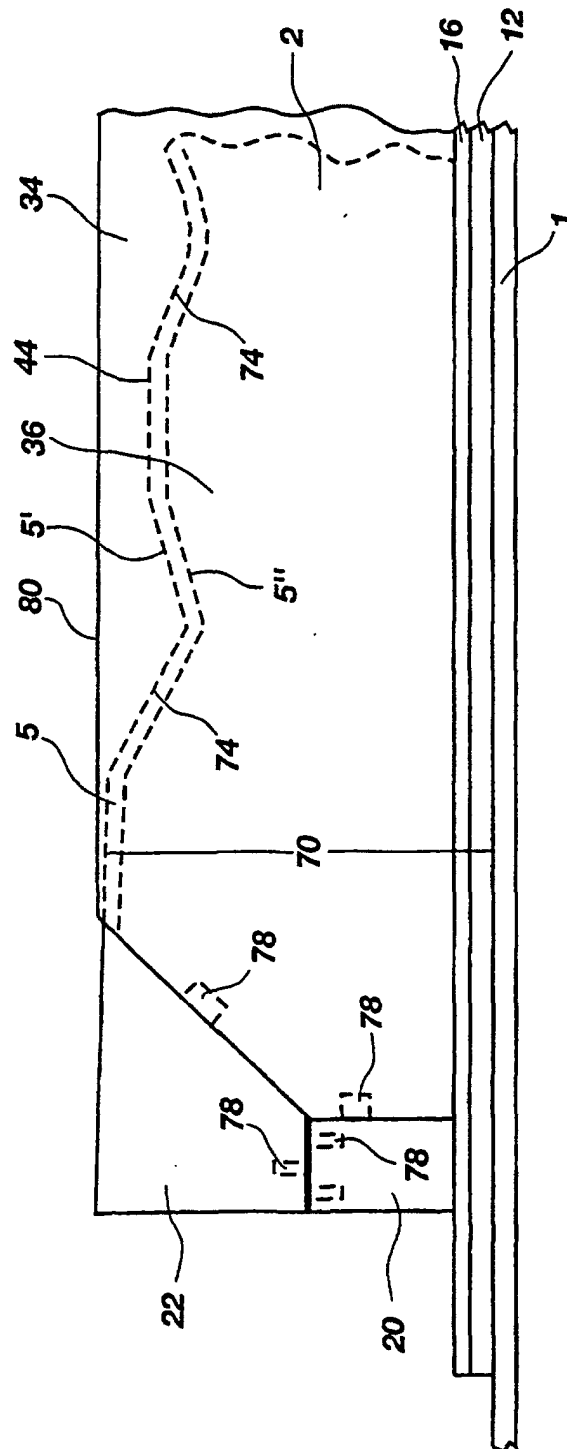

**Fig. 19**

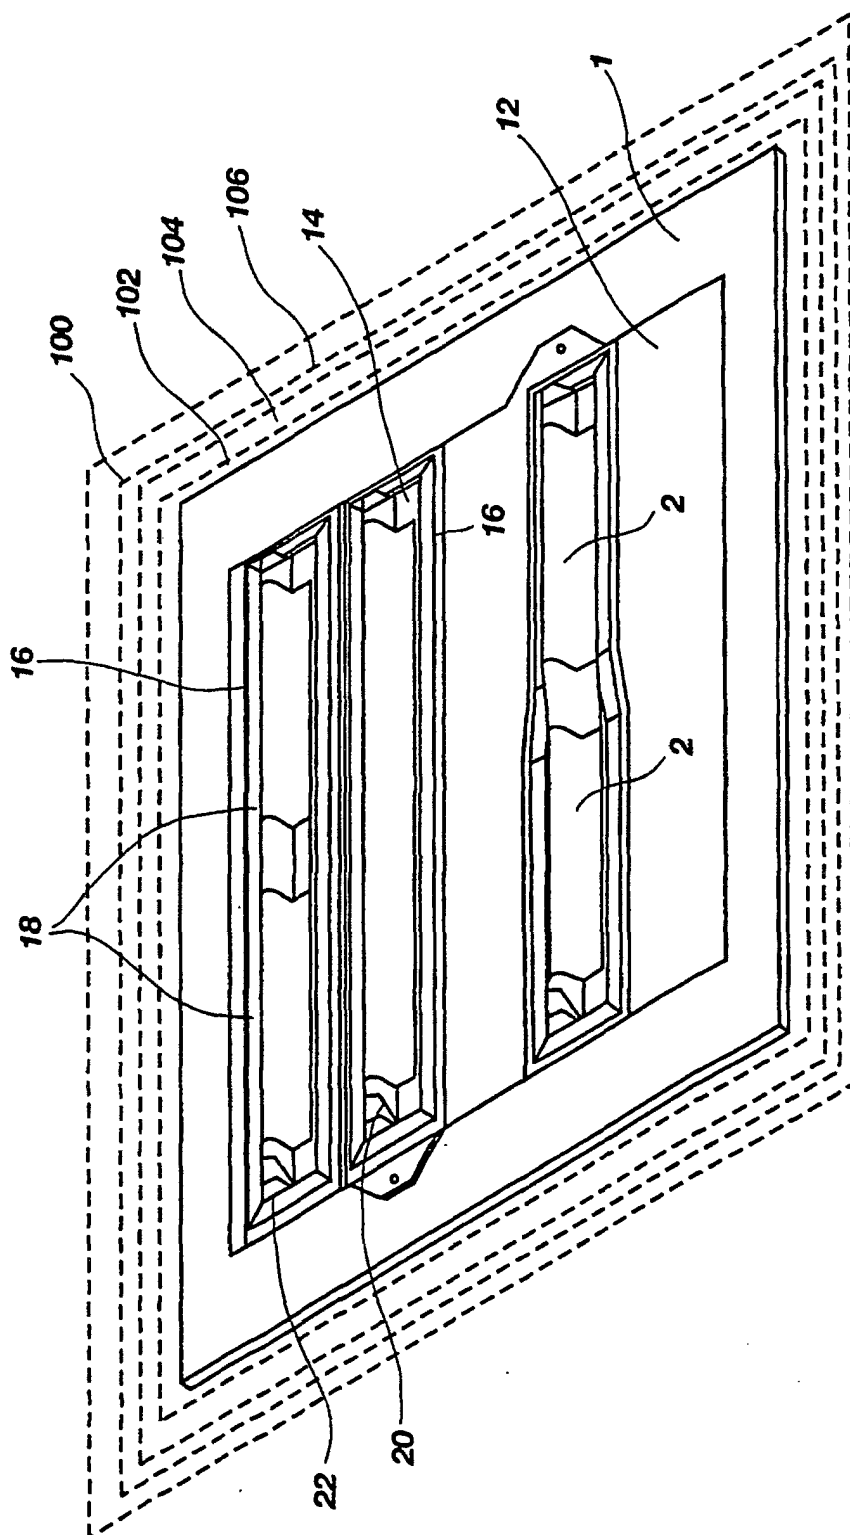

**Fig. 20**