



(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 298 186 B9

(12)

CORRECTED EUROPEAN PATENT SPECIFICATION

Note: Bibliography reflects the latest situation

(15) Correction information:

Corrected version no 1 (W1 B1)
Corrections, see page(s) 3

(51) Int Cl.:

C10G 35/095 (2006.01) **B01J 19/02** (2006.01)
B01J 8/00 (2006.01) **B01J 29/62** (2006.01)
C23C 26/00 (2006.01)

(48) Corrigendum issued on:

25.10.2006 Bulletin 2006/43

(45) Date of publication and mention
of the grant of the patent:

05.07.2006 Bulletin 2006/27

(21) Application number: **02022375.6**

(22) Date of filing: **19.11.1997**

(54) Method of removing reactive metal from a metal-coated reactor system

Verfahren zur Entfernung von reaktivem Metall aus einem metallbeschichteten Reaktorsystem

Procédé permettant d'enlever un métal réactif d'un système de réacteur à revêtement métallique

(84) Designated Contracting States:

BE DE ES FR GB IT NL

• **Chen, Hong Chiu**

San Rafael, CA94903 (US)

• **Wolpert, Richard M.**

Berkeley, CA 94707 (US)

• **Wilson, Charles R.**

San Francisco, CA 94114 (US)

• **Hagewiesche, Daniel**

Oakland, CA 94611 (US)

(30) Priority: **10.01.1997 US 781434**

(74) Representative: **Nash, David Allan et al**

HASELTINE LAKE,

Redcliff Quay

120 Redcliff Street

Bristol BS1 6HU (GB)

(43) Date of publication of application:

02.04.2003 Bulletin 2003/14

(56) References cited:

EP-A- 0 498 182

WO-A-94/15898

WO-A-96/05269

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:

97947589.4 / 0 951 522

(73) Proprietor: **CHEVRON PHILLIPS CHEMICAL
COMPANY LP**

The Woodlands, TX 77380 (US)

(72) Inventors:

• **Holtermann, Dennis L.**
Crockett, CA 94525 (US)

EP 1 298 186 B9

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**Field of Invention**

5 [0001] The invention is a method of removing reactive metal from at least a portion of a metal-coated catalytic hydro-carbon conversion reactor system, so that the reactive metal does not deactivate the hydrocarbon conversion catalyst. The method is applicable to catalytic reforming processes using halided catalysts.

Background and Relevant References

10 [0002] Platinum L-zeolite catalysts for low-sulfur reforming were invented in the early 1980's. After about 10 years of intensive effort, and much research, low sulfur reforming was commercialized in the early 1990's. Progress toward commercialization required many discoveries. Two key discoveries were the criticality of ultra-low sulfur levels in the feed, and the impact of these ultra-low sulfur levels on reactor metallurgy, i.e., the discovery of the need to prevent 15 coking, carburization and metal dusting. A preferred way to prevent coking, carburization and metal dusting utilizes a metal protective layer, especially one comprising tin.

[0003] While commercialization of ultra-low sulfur reforming was being pursued, a second generation of sulfur-sensitive platinum L-zeolite catalysts were being developed. These new catalysts are halided. They allow operations at higher severity, tolerate a wide range of hydrocarbon feeds, have high activity and long life.

20 [0004] Recent attempts to utilize this second generation of catalysts for ultra-low sulfur reforming resulted in an unexpected and undesired reduction in catalyst activity. After much research and experimentation, it was discovered that the catalyst had been partially poisoned by the metal of the protective layer specifically by tin; which had been used to prevent carburization and metal dusting of the reactor system surfaces. Somehow, some of this tin had migrated and deposited on the catalyst. In contrast, when conventional platinum L-zeolite catalysts are used for ultra-low sulfur reforming in a tin-coated reactor system, neither tin migration nor catalyst deactivation due to tin migration are observed. 25 The cause of these problems has now been traced to low levels of volatile hydrogen halides that, under certain conditions, evolve from the catalysts themselves. These halides interact with reactive tin and can deactivate the catalyst.

30 [0005] Therefore, one object of the present invention is to reduce catalyst deactivation by metals derived from a metal-coated reactor system. Another object of the invention is to reduce catalyst contamination from a freshly metal-coated reactor system which would otherwise result in catalyst deactivation. This new process will also improve the reproducibility of catalytic operations, since catalyst activity and life can be better predicted.

35 [0006] The use of metal coatings and metal protective layers, especially tin protective layers, in hydrocarbon conversion processes is known. These layers provide improved resistance to coking, carburization and metal dusting, especially under ultra-low sulfur conditions. For example, Heyse et al., in WO 92/1856 coat steel reactor systems to be used for platinum L-zeolite reforming with metal coatings, including tin. See also U.S. Patents 5,405,525 and 5,413,700 to Heyse et al. Metal-coated reactor systems are also known for preventing carburization, coking and metal dusting in dehydrogenation and hydrodealkylation processes conducted under low sulfur conditions; see Heyse et al., in US 5,406,014 and WO 94/15896. In the '014 patent, Example 3 shows the interaction of a stannized coupon with hydrocarbons, methyl chloride and hydrogen at 538 and 649 °C (1000 and 1200 °F). The coupon was stable to methyl chloride concentrations 40 of 1000 ppm at 1000 °F (538°C), showing that the tin coating is stable to halogens at reforming temperatures.

45 [0007] The use of catalysts treated with halogen-containing compounds for catalytic reforming is also known. See, for example U.S. Patent No. 5,091,351 to Murakawa et al. Murakawa prepares a Pt L-zeolite catalyst and then treats it with a halogen-containing compound. The resulting catalyst has a desirably long catalyst life and is useful for preparing aromatic hydrocarbons such as benzene, toluene and xylenes from C₆-C₈ aliphatic hydrocarbons in high yield. Other 50 patents that disclose halided L-zeolite catalysts include U.S. Patent Nos. 4,681,865, 4,761,512 and 5,073,652 to Katsuno et al.; U.S. Patent Nos. 5,196,631 and 5,260,238 to Murakawa et al.; and EP 498,182 (A).

[0008] None of these patents or patent applications disclose any problems associated with the metal-coated reactor systems. They neither teach the desirability nor the need for removing metal from the reactor system, especially not prior to catalyst loading or prior to hydrocarbon processing.

55 [0009] Indeed, the art teaches the advantages of combining one of the preferred coating metals -- tin -- with a reforming catalyst, specifically with a platinum L-zeolite catalyst. US 5,279,998 to Mulaskey et al., teaches that activity and fouling rate improvements are associated with treating the exterior of the platinum L-zeolite catalyst with metallic tin particles having an average particle size of between 1 and 5 microns (tin dust). For example, Table I of the Mulaskey patent shows improved catalyst performance when metallic tin dust is combined with a platinum L-zeolite catalyst that has been treated with fluoride according to the process of US 4,681,865.

[0010] In light of the above teachings, we were surprised to find a decrease in catalyst activity upon reforming in a freshly tin-coated reactor system using a halided platinum L-zeolite catalyst. (See Example 5 below.)

[0011] Tin-coated steels are known to be useful for a variety of purposes. For example, surface coating compositions,

known as stop-offs or resists, are temporarily applied to portions of a steel tool surface to shield them during case hardening. For example, in US 5,110,854 to Ratliff the stop-off is a water-based alkyd resin containing tin and titanium dioxide.

[0012] It is also known that reacting tin with steel at elevated temperatures results in coated steels having surface iron stannides. Aside from hydrocarbon processing, as discussed above, coated steels have been used in applications where steels with hard and/or corrosion resistant surfaces are desired. For example, Caubert in US 3,890,686 describes preparing mechanical parts having coatings consisting of three iron stannides to increase the resistance of these parts to seizing and surface wearing. In Example 2, a piece of coated steel is prepared by heating the steel to 571°C (1060°F) in the presence of tin chloride (SnCl_2) and hydrogenated nitrogen for 1.5 hours.

[0013] It is also known to treat tin-coated steels to further modify their properties. For example, Galland et al., in US 4,015,950 teach that hot dipping stainless steel into molten tin results in two intermetallic stannide layers, an outer FeSn layer and inner layer which comprises a mixture of $\text{Fe}(\text{Cr},\text{Ni},\text{Sn})$ and FeSn_2 . The inner layer has a greater hardness. They teach that the outer layer can be removed by grinding, by reacting with 35% nitric acid containing a polyamine, or by electrochemical means, leaving behind the harder and more corrosion resistant inner layer.

[deletion(s)]

[0014] Another example where tin-coated steel is modified is Carey II, et al., in US 5,397,652. Here, tin-coated stainless steels are taught as roofing materials and siding, especially for use in marine or saline environments. Carey II, et al., teach that hot-dipping stainless steel into molten tin results in a bonded tin coating and an underlying intermetallic alloy of chromium-iron-tin. They teach treating the coated steel with an oxidizing solution (aqueous nitric acid) to obtain a uniformly colored stainless steel. The nitric acid preferentially reacts with the bonded tin coating leaving behind the uniformly colored intermetallic alloy. None of these patents on coated steels are concerned with hydrocarbon conversion processing.

[0015] None of the art described above is concerned with the problems associated with reactive metals derived from metal coatings, such as tin coatings, nor with the effect of these reactive metals on catalysts, especially platinum L-zeolite reforming catalysts.

[0016] We have discovered that there are problems associated with using metal-coated reactor systems — especially freshly-coated systems — in the presence of certain catalysts, and we have discovered the cause of and solutions for these problems. Thus, one object of the present invention is to reduce catalyst contamination from a freshly metal-coated reactor system. Another object of the invention is to ensure that catalyst contamination is avoided, for example when replacing a conventional catalyst with a halided catalyst.

Summary of Invention

[0017] In one aspect of the invention there is provided a method of removing reactive metal from at least a portion of a metal-coated catalytic hydrocarbon conversion reactor system. The method comprises contacting a reactive metal-containing coating present on at least a portion of the metal-coated catalytic hydrocarbon conversion with a getter to produce a movable metal; wherein said reactive metal comprises a metal or metal compound capable of reacting with said getter, and said getter comprises a halogen containing compound that interacts with said reactive metal to produce said movable metal, and immobilizing the movable metal by contacting it with a solid or liquid adsorbent or absorbent, and removing the immobilized movable metal from the metal coated catalytic hydrocarbon reactor system.

[0018] Said removing may be performed before said immobilizing.

[0019] Said immobilizing may comprise sorbing said movable metal with a solid sorbent.

[0020] Said immobilizing may comprise sorbing said movable metal with a liquid sorbent.

[0021] Said immobilizing and said removing may both be performed by washing said movable metal from the metal-coated hydrocarbon conversion reactor.

[0022] Preferred metal coatings are those prepared from tin-, geranium, antimony-, and aluminium-containing compositions. More preferable, the reactive metal comprises a tin-containing compound including elemental tin, tin compounds or tin alloys. The reactive metal may comprise a freshly-stannided surface comprising reactive tin.

[0023] The getter may comprise a gaseous halogen-containing compound; the gaseous halogen containing compound may be selected from the group consisting of organic halides, inorganic halides, a halided support material, hydrogen halides, and mixtures thereof. More preferably the chemical composition that reacts with said metal or metal compound comprises a halogen halide, especially HCl prepared *in-situ*. A conversion catalyst may then be loaded into the reactors after the metal or metal compound capable of being mobilised is removed, and conversion operations begin.

[0024] The contacting may comprise contacting a portion of the metal-coated catalytic hydrocarbon conversion reactor system with HCl having a concentration of between approximately 0.1 to 1000 ppm. The concentration may be between 1 and 500 ppm. The concentration may be between approximately 10 and 200 ppm.

[0025] The contacting may comprise contacting a portion of the metal-coated catalytic hydrocarbon conversion reactor system with HCl having a concentration sufficient to avoid undesirable removal of a portion of a protective layer of the catalytic metal-coated hydrocarbon conversion reactor system.

[0026] In one embodiment, the invention is a method of removing reactive tin from at least a portion of catalytic hydrocarbon conversion reactor system having freshly-stannided surfaces. The method may comprise the steps of:

- 5 a) applying a tin plating, paint, cladding or other coating to a iron-containing base substrate portion of a reactor system;
- b) heating the coated substrate at temperature greater than 427°C (800°F), preferably in the presence of hydrogen to produce a reactor system having freshly stannided surfaces and which contain reactive tin; prior to
- c) removing at least a portion of the reactive tin from the reactor system by contacting the reactive tin with a halogen-containing compound to produce movable tin; and
- d) sorbing or reacting the movable tin

10 [0027] Preferably, the reactive tin is removed by contacting the surface portion with a gaseous halogen-containing compound, such as HCl. In general, the contacting is done at temperatures and flow rates sufficient to transport a significant amount of the removable tin out of the reactor and furnace tubes and onto a sorbent. Here again it is preferred that the method be conducted prior to catalyst loading.

15 [0028] The method may also be used for reducing catalyst contamination from a metal which was used to coat a reactor system. The method comprises contacting a metal-coated reactor system prior to catalyst loading with a halogen containing compound that reacts with said metal or metal compound, preferably a gaseous halogen-containing compound, to produce movable metal; and immobilizing and removing at least a portion of the movable metal from the reactor system. The conversion catalyst may then be loaded into the reactor system, and conversion operations begin with feed being converted to product in the reactor system. This method is preferably applied to a freshly coated reactor system.

20 [0029] The method of the invention may also be applied to a catalytic reforming process. The process comprises removing reactive tin from a tin-coated reforming reactor system by contacting a tin-coated reactor system with a halogen-containing compound to produce movable tin; mobilizing and sorbing the movable tin; loading a halided Pt L-zeolite catalyst into the reactor system; and reforming hydrocarbons to aromatics.

25 [0030] Among other factors, this invention is broadly based on our observation that halided Pt L-zeolite catalysts are partially deactivated during the start-up phase of a catalytic reforming process, especially when the start-up is done in a freshly tin-coated reactor. This is in contrast to what is observed with conventional Pt L-zeolite catalysts (which are not halided); here catalyst deactivation due to a tin coating has not been noted.

30 [0031] The art appears to be totally silent about the presence of reactive metal in metal-coated hydrocarbon conversion reactor systems. Moreover, the art has not appreciated the need or desire to remove this reactive metal prior to catalyst loading, especially prior to loading halided catalysts. We have found that tin-coated reactor systems, especially those with freshly prepared tin intermetallics, can lose tin from the tin-coated surfaces when contacted with halogen-containing gases, for example, during the start-up of a reforming process using a halided Pt L-zeolite catalyst which evolves acid halides, including HCl. This metal loss results in tin depositing on the catalyst and reduced catalyst activity.

35 [0032] However, we have observed that after several start-up cycles, catalyst activity stabilizes without significant further decline. Thus, we believe that a reactive tin is present in the freshly-coated reactors. When contacted with hydrogen halides (e.g., HCl and/or HF), this tin is unexpectedly mobilized and deactivates the platinum catalyst. Based on these discoveries, we have developed simple, inexpensive procedures that quickly and efficiently remove reactive tin from tin-coated reactor systems, preferably prior to catalyst loading. When the catalyst is then loaded into the reactors and hydrocarbon processing begins, the catalyst experiences little or no deactivation from the tin coating.

Description of the Figures

[0033]

45 Figure 1 shows HCl evolution (on right) from a halided reforming catalyst as a function of temperature (on left). Hydrogen was added at 260°C (500 °F) at time = 79 hours.
Figure 2 shows experimental configurations for screening tests described in Examples 5 and 6.
Figure 3 shows total tin weight loss from a stannided coupon as a function of the number of startup cycles, each done in the presence of fresh halided Pt L-zeolite catalyst (open circles). The line at the bottom (dosed circles) is a control. See Example 7.

Detailed Description of the Invention

55 [0034] In one broad aspect, the present invention is a process for removing reactive metal from at least a portion of a metal-coated catalytic hydrocarbon conversion reactor system. This process comprises contacting a reactive metal-containing coating present on at least a portion of the metal-coated reactor system with a getter to produce or movable metal. The getter comprises a halogen-containing compound, more preferably HCl. The getter interacts with the reactive

metal to produce movable metal, which is immobilized. Optionally, the movable metal may be mobilized, for example to another location in the process equipment, prior to being immobilized.

[0035] The method of the present invention may also be used for reducing catalyst contamination from a metal which was used to coat a reactor system. The method comprises contacting a metal-mated reactor system prior to catalyst loading with a getter comprising a gaseous halogen-containing compound to produce movable metal. The movable metal is then removed from the reactor system. The method of the invention may also be used for reducing contamination of a Pt L-zeolite reforming catalyst by tin from a freshly tin-coated reactor system having intermetallic stannides on the surfaces to be contacted with hydrocarbons.

[0036] Although the terms "comprises" or "comprising" are used throughout this specification, these terms are intended to encompass both the terms "consisting essentially of", and "consisting of" in various preferred aspects and embodiments of the present invention.

[0037] As used herein, the term "reactor system" is intended to include the hot sections of catalytic hydrocarbon conversion units. These units typically comprise one or more conversion reactors and one or more furnaces comprising a plurality of furnace tubes to heat the feed. The term "reactor system" is also intended to include units comprising furnace tube reactors where conversion occurs in furnace tubes (i.e., inside the furnace). The "hot sections" of these units are those sections where the feed is at or above the reaction or process temperature, and/or where the catalytic hydrocarbon conversion reactions occur.

[0038] As used herein, the term "metal-coated reactor system" is intended to include reactor systems (see above) having a metal-containing cladding, plating, paint or other coating, applied to at least a portion of the surfaces that are to be contacted with hydrocarbons at or above process temperature. Preferably at least half, more preferably at least three quarters, most preferably all of the surface area that is to be contacted with hydrocarbons at or above process temperature. The term "metal-coated reactor system" is also intended to include reactor systems having protective layers, such as intermetallic layers that are prepared from claddings, platings, paints or coatings. Depending on the metal, a reactor system having a coating applied thereto may be cured by heating, preferably in a reducing environment, to produce intermetallic layers. The metal-coated reactor system preferably comprises a base construction material (such as a carbon steel, a chromium steel, or a stainless steel) having one or more adherent metallic layers attached thereto. Examples of metallic layers include elemental chromium, aluminized surfaces and iron-tin intermetallic compounds such as FeSn_2 . Freshly-coated reactor systems, for example ones that have been freshly-stannided, are those which has not been used for hydrocarbon processing since coating, or since coating and curing.

[0039] As used herein, the term "metal-containing coating" or "coating" is intended to include claddings, platings, paints and other coatings which contain either elemental metals, metal oxides, organometallic compounds, metal alloys, mixtures of these components and the like. The metal(s) or metal compounds are preferably a key component(s) of the coating. Flowable paints that can be sprayed or brushed are a preferred type of coating.

[0040] As used herein, the term "halogen-containing compound" or "halogen-containing gas" includes, but is not limited to, elemental halogen, acid halides, alkyl halides, aromatic halides, other organic halides including those containing oxygen and nitrogen, inorganic halide salts and halocarbons or mixtures thereof. Water may optionally be present.

[0041] As used herein, the term "reactive metal", such as "reactive tin", is intended to include elemental metals or metal compounds that are present on metal-coated reactor system surfaces and that can be mobilized at process or furnace tube temperatures, for example in the presence of dilute gaseous HCl, i.e., in the presence of between about 0.1 to about 100 ppm HCl. For instance, reactive tin has been observed when a halided catalyst which can evolve HCl was used for catalytic reforming in a freshly tin-coated reactor system having freshly-prepared, intermetallic, stannide layers. When used in the context of reforming, the term "reactive tin" comprises any one of: elemental tin, tin compounds, tin intermetallics and tin alloys that will migrate at temperatures between 316-677°C (600-1250 °F) when contacted with a getter, and which would thereby result in catalyst deactivation during reforming operations or during heating of the reformer furnace tubes. In other contexts, the presence of reactive metal will depend on the particular metal, the getter, as well as the hydrocarbon conversion process and its operating conditions. Screening tests, as described in the examples, can be modified for the particular metal and process of interest to determine if reactive metal will be present during processing and therefore cause problems.

[0042] The term "movable metal" or "movable tin" is also used herein. It refers to the reactive metal (e.g., tin) after reaction with the getter. Generally, it is the movable metal that is fixated.

[0043] Although discussed hereinafter in terms of providing tin-intermetallic layers or tin coatings, it is believed that germanium-, arsenic- and antimony-intermetallic layers, especially freshly prepared layers also comprise reactive metal, and that our discoveries are also applicable to these metals. The discussion herein of tin coating or tin-intermetallic layers is merely intended to exemplify a preferred embodiment, and is not intended to limit the invention to tin coatings or tin intermetallics.

Getters and Halogen Sources

[0044] The "getter" of this invention comprises a halogen-containing compound that will interact with the reactive metal and facilitate its removal from the reactor system. Contacting the getter with the reactive metal converts it to a form that is movable and therefore can be removed from the reactor system, e.g., by a hot flowing gas. As will be appreciated by one skilled in the art, the effectiveness of a getter will depend on the contacting time and temperature, the getter concentration, the particular reactive metal and its chemical and physical form.

[0045] The getters of the invention are halogen-containing compounds or are prepared from these compounds. Useful getters comprise organic halides, including halocarbons, and inorganic halides, as well as inorganic halides, including metal halides and hydrogen halides. Some examples of halogen-containing compounds that are useful in this invention include HCl, Cl₂ MeCl, benzyl chloride, benzoyl chloride and NH₄Cl; HBr, Br₂, MeBr, benzyl bromide and; NH₄I HF, F₂, and MeF; HI, I₂, MeI, iodobenzene, and NH₄I; CCl₄, C₂Cl₄, C₂Cl₆, C₂H₂Cl₂, and CF₄, CF₃Cl, CF₂Cl₂, CFCl₃, CHFCl₂, CHF₂Cl, CHF₃, C₂F₂Cl₄, C₂F₄Cl₂ and C₂H₄F₂. Other useful organic halogen-containing compounds include those containing heteroatoms such as oxygen and nitrogen, e.g., chloropyridine, acetyl bromide and amine salts of acid halides, e.g., pyridine hydrochloride. Other useful getters include metal halides such as SnCl₄, GeCl₄, SnHCl₃; transition metal halides such as iron chloride, chromium chloride, copper chloride, nickel chloride, etc., especially in their highest oxidation state; and halided support materials or other solids which can produce HCl upon heating.

[0046] Preferred halogen-containing compounds are those that can readily produce HCl *in situ*; for example by reaction with hydrogen and a Pt catalyst. These include C₂Cl₄, MeCl, and CCl₄. The most preferred getter comprises a hydrogen halide, more preferably HCl. It is believed that other volatile acids would also be effective getters, especially when the resulting movable metal (compound) is volatile at process temperatures. The HCl can be provided as a gas; however, it is preferred to generate the HCl *in-situ*. This can readily be accomplished by reacting a halogen-containing compound such as perchloroethylene with hydrogen over a nickel or platinum catalyst, such as Raney nickel or a conventional Pt on alumina reforming catalyst, at elevated temperatures, for example at about 482°C (900 °F).

[0047] The halogen-containing compounds are preferably present in dilute concentration. Concentrations between about 0.1 and 1000 ppm are preferred, more preferably between 1 and 500 ppm, most preferably between 10 and 200 ppm. The diluent preferably comprises hydrogen, especially when HCl is prepared *in-situ*. Preferably the hydrogen is combined with an inert gas, such as nitrogen. For catalysts that are irreversibly poisoned by sulfur, such as non-acidic Pt L-zeolite catalyst, it is important to use a halogen-containing gas that is substantially free of sulfur, preferably one having less than 10 ppb sulfur. When HCl concentrations are too high, or temperatures are too hot, undesirable removal of the protective layers may occur, leaving the underlying substrate (e.g., steel) susceptible to attack.

[0048] A preferred sulfur-free gas comprises nitrogen, and the process preferably includes a step where a hydrogen-nitrogen gas mixture (e.g., 10 % hydrogen in nitrogen) is used during the metal removal step. For example, a nitrogen and/or hydrogen stream can be spiked with small amounts of getter.

[0049] While not wishing to be bound by theory, it is believed that, especially in a freshly-coated reactor system comprising surface intermetallics, there will be some metal that has not reacted with the base construction material. This unreacted coating metal is believed to be, at least in part, the reactive metal that is removed in the process of this invention. For example, when iron and nickel stannides are produced by curing/reduction of tin paints on steel, a fine tin-containing dust is observed on the stannified surface. When examined by petrographic analysis, the metal surface contains tiny microscopic tin balls which are believed to be unreacted tin. Some of these balls appear to be sitting on the intermetallic surface while others are connected to the surface via what appears to be stannide roots. It is this unreacted tin that we believe is removed by the process of this invention.

[0050] The amount of unreacted tin and tin dust that is present depends on a variety of factors. These include the thickness of the coating, the cure conditions that were used to prepare the stannides, and the type of steel or other base metallurgy to which the tin coating was applied. The process of this invention removes a substantial portion of this dust and unreacted tin from the reactor system surfaces.

[0051] Alternatively, it is envisioned that the getter would transform the reactive metal into an inactive form. For example, the getter could convert the reactive metal to an immobile form, which effectively fixates it.

Immobilizing and immobilizing Agents

[0052] Immobilizing the movable metal ensures that it will not deactivate the hydrocarbon conversion catalyst. The term "immobilizing" as used herein means to purposely immobilize the metal or metal compounds produced from the reactive metal by the getter in order to reduce or prevent catalyst contamination. Immobilizing also refers to sorbing, reacting or otherwise immobilizing the getter. This immobilizing may be done using chemical or physical treating steps or processes. The immobilized metal may be concentrated, or recovered prior to being removed from the reactor system. For example, the movable metal may be immobilized by contacting it with an adsorbent, by reacting it with compound that will immobilize the metal, or by dissolution, e.g., by washing the reactors system surfaces with a solvent and removing

the dissolved movable metal. Solid sorbents are preferred immobilizing agents.

[0053] In an especially preferred embodiment, a gas comprising HCl is used as the getter. Then effluent HCl; residual halogen-containing gas (if present) and movable metal, (e.g., in the form of SnCl_2) are all immobilized by sorption. The sorbent is a solid or liquid material (an adsorbent or absorbent) which will trap the movable metal. Solid sorbents are generally preferred as they are easy to use and subsequently easy to remove from the system. The choice of sorbent or metal trap, depends on the particular form of the movable metal and its reactivity. Suitable liquid sorbents include water, liquid metals such as tin metal, caustic, and other basic scrubbing solutions.

[0054] Suitable solid sorbents effectively immobilize the movable metal by adsorption or by reaction. The sorbent preferably has a high surface area ($>10 \text{ m}^2/\text{g}$), interacts strongly with the movable metal (has a high coefficient of adsorption) or reacts with the movable metal to immobilize the metal. The sorbent preferably retains its physical integrity after immobilizing the movable metal (e.g., has acceptable crush strength, attrition resistance etc.). Suitable sorbents include metal turnings, such as iron turnings which will react with movable tin chloride. Preferred sorbents include aluminas, clays, silicas, silica aluminas, activated carbon, and zeolites. A preferred sorbent is basic alumina, such as potassium on alumina, especially calcium on alumina.

[0055] The location of the sorbent is not critical. For example, it can be located in one or more of the reactors, or preferably at or downstream of the last reactor, or in a special knockout reactor. If the metal removal process is done prior to catalyst loading, it is preferred to place a solid sorbent at the bottom of the last reactor, or just prior to the heat exchangers. In this way, all surfaces that are contacted with getter are located before the sorbent. If the removal process is done with catalyst present, it is preferred to place solid sorbent on the top of each reactor bed. In this instance, it is envisioned that getter would be injected near each furnace inlet and the movable metal would be sorbed before reaching the catalyst beds. Here, a major portion of the coated surface would be contacted with the getter, and most of the reactive metal would be fixated.

[0056] The movable metal can be immobilized simultaneously as it is reacted with the getter or in one or more separate steps. For example, movable tin, such as tin chloride, can be formed at temperatures where tin chloride is volatile, and the tin chloride is then immediately contacted with a solid sorbent. Alternatively, after contacting the reactive tin with HCl at about 316°C (600°F), the reactor system can be cooled (e.g., to ambient temperature) and produce metal halide (e.g., tin chloride) can then be mobilized and then immobilized by washing it out of the reactor system with water or another suitable solvent. In another two-step process, tin chloride can be produced on the reactor system surfaces at a first lower temperature and then removed from the reactor system at a second higher temperature where tin chloride is volatile. The volatile tin chloride is then immobilized downstream or at the outlet of the reactor system:

[0057] The amount of immobilizing agent is not critical, so long as there is a sufficient amount to immobilize the movable metal, e.g., a sufficient amount of sorbent to sorb the desired amount of movable metal. Generally, it is also advantageous to sorb any getter, such as HCl, present in the reactor effluent.

35 Ways to Remove Reactive Metal

[0058] There are a variety of ways to remove reactive metal from a metal-coated reactor system. The method used and its effectiveness depends on the coating metal and on the configuration and planned operations of the reactor system. For example, if the reactive metal is in the furnace tubes, these tubes can be temporarily connected in a loop, and a heated solution or gaseous composition containing getter can be circulated through the loop. Here it is envisioned that the getter solution could also serve as the immobilizing agent. After sufficient contact time, it would be drained or otherwise removed. Alternatively, if the movable metal is formed as a gas, it can be immobilized e.g., by sorption, during gas circulation.

[0059] If the reactive metal is located within the reactor, then it is preferred to remove this reactive metal by contacting the metal-coated surfaces with a getter, preferably a halogen-containing gas at hydrocarbon conversion conditions. For example, a halided support material, such as a halided catalyst base (i.e., one free of catalytic metal) can be placed in the first reactor, optionally along with a catalyst that converts halogen-containing compounds and hydrogen to HCl. The halided catalyst base can be prepared, for example, by impregnating NH_4Cl onto alumina. Following typical catalyst start-up procedures, hydrogen halides will evolve gradually from the halided catalyst base as the temperature increases. This approach models conditions that will occur when catalyst is present. Here the coated reactor system is treated in a manner similar to that which will occur when catalyst is present.

[0060] It is preferred that prior to contacting the reactor system with the getter, the coated reactor system is visually inspected, and where practical, any observed excess metal is manually removed. Care should be taken so that this physical removal does not result in portions of the reactor system being unprotected during hydrocarbon processing.

[0061] The metal removal step is preferably done in the absence of the process catalysts and hydrocarbons. The metal-coated steel is contacted, preferably after curing, with a getter such as a HCl, preferably at temperatures and pressures similar to those at which the hydrocarbon conversion process will be operated. The metal removal step may remove a portion of the metal coating. However, the remaining coating is significantly less susceptible to further metal

loss, for example, in subsequent start-up cycles. Of course, it is important that a sufficiently thick coating layer remain which is still effective for its intended purpose, e.g., for preventing carburization, coking and metal dusting.

[0062] The metal removal process is continued until most of the reactive metal is removed. Preferably the removal is continued until the rate of metal removal has declined substantially. For a freshly-coated reactor system, it is preferred that metal weight loss be measured every 10 hours. The removal process is continued until the rate of metal weight loss is about 20% of the original rate of metal weight loss.

[0063] There are numerous ways to determine when to stop adding getter to the reactor system. Metal-coated, removable coupons can be used to determine when to discontinue adding getter. For example, small by-pass streams can be provided near the furnace and/or the reactor. A section of the by-pass stream can be used to house the coated coupons. This section should be able to be isolated from the other part of the by-pass stream by valves. During the metal removal process, these valves can be closed periodically and coupons can be removed for inspection or to determine the metal weight loss of the coupons. Actual metal weight loss curves for these coupons can be compared with the curve shown in Figure 3. The metal removal process can be ended after the metal weight loss has leveled off, e.g., when the knee of the curve has been passed.

[0064] In commercial operations, a pre-test using coated coupons in a pilot plant can be used to determine a target metal weight loss. Given this target, removable coated coupons can be placed in the reactor system and weighed at intervals. When the target weight loss is achieved, the metal removal process is discontinued. It is preferred that the pre-tests be done at temperatures typical of the hottest portion of the reactor system.

[0065] Alternatively, visual or microscopic inspections of the reactor system surface can be used to determine when to stop adding getter in the metal removal process. For example, the reactors can be opened and inspected. If tin dust is still present on the reactor surface, removal operations are continued. If this dust is absent or has been converted to tin chloride (which is readily identified as it is water soluble), then the addition of getter can be terminated.

[0066] Our data on tin weight losses over multiple startups suggests that a significant portion of the reactive tin is removed relatively quickly, followed by a more gradual loss. See Figure 3. Calculations show that this later gradual loss would only deposit approximately 50 ppm tin on the catalyst per start-up, which we expect will reduce catalyst activity only slightly, by less than 0.6°C (1 °F).

Platings, Claddings, Paints and Other Coatings

[0067] Metal coatings are typically applied to reactor systems to improve process operability. The reactor systems of this invention have generally had metallic protective layers applied to reduced coking, carburization and metal dusting.

[0068] The invention does not apply to all coating metals. Many metal-containing platings, claddings, paints and coatings do not produce reactive metals under conversion/process conditions. However, simple tests such as those described in the examples will readily identify metals and coatings that require the metal removal process of this invention.

[0069] The metal used in the coating depends on the requirements of the hydrocarbon conversion process of interest, for example, its temperatures, reactants, etc. Coating metals that melt below or at process conditions and form intermetallic complexes with the substrate material are especially preferred. They are able to more readily provide complete substrate coverage. These metals include those selected from among tin, antimony, germanium, arsenic, bismuth, aluminum, gallium, indium, copper, and mixtures, intermetallic compounds and alloys thereof. Preferred metal-containing coatings comprise metals selected from the group consisting of tin, antimony, germanium, arsenic, bismuth, aluminum, and mixtures, intermetallic compounds and alloys of these metals. Especially preferred coatings include tin-, antimony- and germanium-containing coatings. These metals will form continuous and adherent protective layers. Tin coatings are especially preferred -- they are easy to apply to steel, are inexpensive and are environmentally benign. The most preferred metals interact with, or more preferably react with, the base material of the reactor system to produce a continuous and adherent metallic protective layer at temperatures below or at the intended hydrocarbon conversion conditions.

[0070] Metal-containing coatings that are less useful include certain metal oxide coatings such as those containing molybdenum oxide, tungsten oxide and chromium oxides. In part this is because it is difficult to form adherent metallic protective layers from these oxides at temperatures where hydrocarbon conversion equipment is operated.

[0071] It is preferred that the coatings be sufficiently thick that they completely cover the base metallurgy, and that after removal of the movable metal, the resulting protective layer remain intact, so it can protect the steel for years of operation. At the same time, thin layers are desirable. Thin layers can be produced readily, are less costly than thicker layers, and are less likely to fracture under thermal stress. Thus, the optimum thickness of the protective layer depends on the intended use conditions and the specific coating metal. For example, tin paints may be applied to a (wet) thickness of between 1 to 6 mils, preferably between about 2 to 4 mils. In general, the thickness after curing is preferably between about 0.1 to 50 mils, more preferably between about 0.5 to 10 mils, most preferably about 1 mil. Also, it is desirable that the coating and any produced intermetallic layers at least initially be firmly bonded to the steel; this can be accomplished, for example, by curing at elevated temperatures. For example an applied tin paint can be cured in hydrogen at 593°C (1100 °F) for 24 hours.

[0072] Metal-containing coatings can be applied in a variety of ways, which are well known in the art. These include electroplating, chemical vapor deposition, and sputtering, to name just a few. Methods of applying coatings include painting and plating. Where practical, the coating can be applied in a paint-like formulation (hereinafter "paint"). Such a paint can be sprayed, brushed, pigged, etc, on reactor system surfaces.

5 [0073] Tin is a coating metal and is exemplified herein; disclosures herein about tin are generally applicable to other metals such as germanium. Paints comprise a metal component selected from the group consisting of: a hydrogen decomposable metal compound such as an organometallic compound; a finely divided metal; and a metal oxide, preferably a metal oxide that can be reduced at process or furnace tube temperatures. A cure step may be used to produce a intermetallic protective layer bonded to the steel through an intermediate bonding layer, for example a carbide-rich bonding layer. This is described in U.S. Patent No. 5,406,014 to Heyse et al., which is incorporated herein by reference in its entirety.

10 [0074] Some coatings and paint formulations are described in U. S. Ser. No. 803,063 to Heyse et al., corresponding to WO 92/15653, which is also incorporated herein by reference in its entirety. One tin paint contains at least four components or their functional equivalents: (i) a hydrogen decomposable tin compound, (ii) a solvent system, such as 15 isopropanol, (iii) finely divided tin metal and (iv) tin oxide. As the hydrogen decomposable tin compound, organometallic compounds such as tin octanoate or neodecanoate are particularly useful. Component (iv), the tin oxide is a porous tin-containing compound which can sponge-up the organometallic tin compound, and can be reduced to metallic tin. The paints preferably contain finely divided solids to minimize settling. Finely divided tin metal, component (iii) above, is also 20 added to insure that metallic tin is available to react with the surface to be coated at as low a temperature as possible. The particle size of the tin is preferably small, for example one to five microns. When tin paints are applied at appropriate thicknesses, heating under reducing conditions will result in tin migrating to cover small regions (e.g., welds) which were not painted. This will completely coat the base metal

Cure Process Conditions

25 [0075] Some coating compositions need to be cured by heat treatment to produce continuous and adherent protective layers. Cure conditions depend on the particular metal coating as well as the hydrocarbon conversion process to which the invention is applied. For example, gas flow rates and contacting time depend on the process configuration, the coating metal the components of the coating composition, and the cure temperature. Cure conditions are selected to result in a continuous and uninterrupted protective layer which adheres to the steel substrate. Cure conditions may be 30 readily determined. For example, coated coupons may be heated in the presence of hydrogen in a simple test apparatus; the formation of a continuous protective layer may be determined using petrographic analysis.

35 [0076] As discussed above, it is preferred to contact the metal-coated reactor system with the getter after a curing step, especially when intermetallics are formed during heat treatment. Tin paints are preferably cured between 482°C (900 °F) and 593°C (1100 °F), germanium and antimony paints are preferably cured between 538°C (1000 °F) and 760°C (1400 °F). Curing is preferably done over a period of hours, often with temperatures increasing over time when the paint contains reducible oxides and/or oxygen-containing organometallic compounds. Reduction/curing is preferably done using a gas containing hydrogen, more preferably in the absence of hydrocarbons.

40 [0077] As an example of a suitable paint cure for a tin paint, the system including painted portions can be pressurized with flowing nitrogen, followed by the addition of a hydrogen-containing stream. The reactor inlet temperature can be raised to 427°C (800 °F) at a rate of 28-38°C/hr (60-100 °F/hr) Thereafter the temperature can be raised to 510-524°C (950-975 °F) at a rate of 28°C/hr (60 °F/hr), and held for about 48 hours.

45 [0078] In a preferred embodiment the metal-coated reactor system comprises an intermetallic layer. This layer (which covers a base construction material such as a steel substrate) contains two or more metals, the metals being present in a stoichiometric ratio, i.e., as intermetallic compounds. Intermetallic compounds are well known in the art; they are more structured than molecular mixtures or alloys. Moreover, they have physical properties (such as color) and chemical properties that are unique to the intermetallic phase.

50 [0079] For example, an intermetallic stannide layer contains tin intermetallic compounds comprising tin and at least one other metal, the tin and the other metal(s) being present in compounds which have a stoichiometric ratio of elements that vary only within a narrow range. Examples of these tin intermetallic compounds are Fe_3Sn , $FeSn_2$, Ni_3Sn_2 , Ni_3Sn , Ni_3Sn_4 . Other examples include mixed metal intermetallic stannides, for example $(Fe,Ni)_xSn_y$ where Fe and Ni substitute freely for one another, but summed together are present in a stoichiometric ratio with the tin.

The Base Construction Material

55 [0080] There are a wide variety of base construction materials to which the process of this invention may be applied. In particular, a wide range of steels and alloys may be used in the reactor system. In general, steels are chosen so they meet minimum strength and flexibility requirements needed for the intended hydrocarbon conversion process. These

requirements in turn depend on process conditions, such as operating temperatures and pressures. Additionally, the steel is chosen so it is not susceptible to expected corrosion hazards.

[0081] Useful steels include carbon steel; low alloy steels such as 1.25, 2.25, 5, 7, and 9 chrome steel with or without molybdenum; 300 series stainless steels including type 304, 316 and 347 stainless steel; heat resistant steels including HK-40, HP-50 and manurite, as well as treated steels, such as aluminized or chromized steels

Conversion Processes

[0082] The method of the invention can be applied to a variety of conversion processes which use catalysts to convert feed to products in metal-coated reactor systems. In particular, the invention is applicable to hydrocarbon conversion processes that use catalysts which can be deactivated by reactive metal from the reactor system coating. Preferred hydrocarbon conversion processes include dehydrocyclization, especially dehydrocyclization of C₆ to C₈ paraffins to aromatics; catalytic reforming; non-oxidative and oxidative dehydrogenation of hydrocarbons to olefins and dienes; dehydrogenation of ethylbenzene to styrene and/or dehydrogenation of isobutane to isobutylene; conversion of light hydrocarbons to aromatics; transalkylation of toluene to benzene and xylenes; hydrodealkylation of alkylaromatics to aromatics; alkylation of aromatics to alkylaromatics; production of fuels and chemicals from syngas (H₂ and CO); steam reforming of hydrocarbons to H₂ and CO; production of phenylamine from aniline; methanol alkylation of toluene to xylenes; and dehydrogenation of isopropyl alcohol to acetone. More preferred hydrocarbon conversion processes include dehydrocyclization, catalytic reforming, dehydrogenation, isomerization, hydrodealkylation, and conversion of light hydrocarbon to aromatics, e.g., Cyclar-type processing. These processes and the useful range of process conditions are all well known in the art.

[0083] Preferred processes include those where a catalyst, preferably a platinum catalyst is used. Preferred processes include dehydrogenation of a C₃-C₄ paraffin to an olefin, for example the Oleflex® process, or dehydrocyclization of a paraffin feed containing feed and C₆, C₇, and/or C₈ hydrocarbons to aromatics (for example, processes which produce benzene, toluene and/or xylenes) such as the Aromax® process. The method of removing reactive metal may be applied to a metal-coated dehydrogenation reactor system having a major portion of its furnace tubes and reactor surfaces coated with said coating metal, preferably with tin..

[0084] The present invention is especially applicable to hydrocarbon conversion processes which require catalysts, especially halided catalysts, having noble metals such as Pt, Pd, Rh, Ir, Ru, Os, particularly Pt containing catalysts. These metals are usually provided on a support, for example, on carbon, on a refractory oxide support, such as silica, alumina, chlorided alumina or on a molecular sieve or zeolite. Preferred catalytic processes are those utilizing platinum on alumina, Pt/Sn on alumina and Pt/Re on chlorided alumina; noble metal Group VIII catalysts supported on a zeolite such as Pt, Pt/Sn and Pt/Re on zeolites, including Type zeolites, ZSM-5, SSZ-25, SAPO's, silicalite and beta.

[0085] Examples of such processes include catalytic reforming and/or dehydrocyclization processes, such as those described in U.S. Patent No. 4,456,527 to Buss et al. and U.S. Patent No. 3,415,737 to Kluksdahl; catalytic hydrocarbon isomerization processes such as those described in U.S. Patent No. 5,166,112 to Holtermann; and catalytic hydrogenation / dehydrogenation processes.

[0086] Metal-coated reactor systems are especially useful in processes operated under low sulfur conditions, since the coating provides improved resistance to coking, carburization and metal dusting. The hydrocarbon conversion process may be conducted under conditions of "low sulfur". In these low-sulfur systems, the feed will preferably contain less than 50 ppm sulfur, more preferably, less than 20 ppm sulfur and most preferably less than 10 ppm sulfur. In another preferred embodiment, the invention is conducted under conditions of "ultra-low sulfur". Here sulfur levels are preferably below 100 ppb, more preferably below 50 ppb, and most preferably below 20 ppb S, with sulfur levels below 10 ppb and especially below 5 ppb being particularly preferred.


[0087] The method of the invention may involve the use of a medium-pore size or large-pore size zeolite catalyst including an alkali or alkaline earth metal and charged with one or more Group VIII metals. Such a catalyst may be used in reforming or dehydrocyclization of a paraffinic naphtha feed containing C₆, and/or C₈ hydrocarbons to produce aromatics, for example a C₆ to C₈ UDEX raffinate. The invention may also be applicable to ultra-low sulfur reforming using an intermediate or large pore zeolite catalyst containing halogens, especially a halided platinum on non-acidic L-zeolite catalyst.

[0088] By "intermediate pore size" zeolite is meant a zeolite having an effective pore aperture in the range of about 5 to 6.5 Angstroms when the zeolite is in the H-form. These zeolites allow hydrocarbons having some branching into the zeolitic void spaces and can differentiate between n-alkanes and slightly branched alkanes compared to larger branched alkanes having, for example, quaternary carbon atoms. Useful intermediate pore size zeolites include ZSM-5 described in U.S. Patent Nos. 3,702,886 and 3,770,614; ZSM-11 described in U.S. Patent No. 3,709,979; ZSM-12 described in U.S. Patent No. 3,832,449; ZSM-21 described in U.S. Patent No. 4,061,724; and silicalite described in U.S. Patent No. 4,061,724. Preferred zeolites are silicalite, ZSM-5, and ZSM-11. A preferred Pt on zeolite catalyst is described in U.S. Patent No. 4,347,394 to Detz et al.

[0089] By "large-pore size zeolite" is meant a zeolite having an effective pore aperture of about 6 to 15 Angstroms. Preferred large pore zeolites which are useful in the present invention include type L-zeolite, zeolite X, zeolite Y and faujasite. Zeolite Y is described in U.S. Patent No. 3,130,007 and Zeolite X is described in U.S. Patent No. 2,882,244. Especially preferred zeolites have effective pore apertures between 7 to 9 Angstroms. A medium-pore size or large-pore size zeolite catalyst containing an alkali or alkaline earth metal and charged with one or more Group VIII metals, may be used.

[0090] The zeolitic catalysts used are charged with one or more Group VIII metals, e.g., nickel, ruthenium, rhodium, palladium, iridium or platinum. Preferred Group VIII metals are iridium and particularly platinum. If used, the preferred weight percent platinum in the catalyst is between 0.1% and 5%. Group VIII metals can be introduced into zeolites by synthesis, impregnation or exchange in an aqueous solution of appropriate salt. When it is desired to introduce two Group VIII metals into the zeolite, the operation may be carried out simultaneously or sequentially.

[0091] Especially preferred catalysts are Group VIII metals on large pore zeolites, such as L-zeolite catalysts containing Pt, preferably Pt on non-acidic L-zeolite. Halided Pt L-zeolite catalysts are particularly preferred. The composition of type L-zeolite expressed in terms of mole ratios of oxides, may be represented by the following formula:



[0092] In the above formula M represents a cation, n represents the valence of M, and y may be any value from 0 to about 9. Zeolite L, its x-ray diffraction pattern, its properties, and methods of preparation are described in detail in, for example, U.S. Patent No. 3,216,789, the contents of which is hereby incorporated by reference. The actual formula may vary without changing the crystalline structure. Useful Pt on L-zeolite catalysts also include those described in U.S. Patent No. 4,634,518 to Buss and Hughes, in U.S. Patent No. 5,196,631 to Murakawa et al., in U.S. Patent No. 4,593,133 to Wortel and in U.S. Patent No. 4,648,960 to Poeppelmeir et al., all of which are incorporated herein by reference in their entirety. Preferably, the catalyst be substantially free of acidity.

[0093] The method of the invention may be applied to a catalytic reforming method which uses a halided Pt L-zeolite catalyst. Prior to catalyst loading and reforming, reactive metal is removed from a tin-coated reforming reactor system. The process comprises:

- 30 a) removing reactive metal from a metal-coated reforming reactor system by contacting the metal-coated reforming reactor with a getter to produce movable metal;
- b) sorbing the movable metal;
- c) loading a halided Pt L-zeolite catalyst into the reactor system; and
- d) reforming hydrocarbons to aromatics.

[0094] Preferably the mobile metal is sorbed onto a solid sorbent and the sorbent is located before the feed effluent heat exchanger.

[0095] Preferably, the reforming process comprises:

- 40 a) coating a reforming reactor system with a tin-containing paint;
- b) contacting the painted reactor system with a hydrogen-containing gas at 427-621°C (800-1150 °F) to produce stannides;
- c) removing reactive tin from said reforming reactor system by contacting the reactor system with a gaseous stream containing HCl to produce movable tin;
- d) fixating the movable tin by adsorption onto a solid sorbent;
- e) loading a halided Pt L-zeolite catalyst into the reactor system; and
- f) catalytically reforming hydrocarbons to aromatics under ultra-low sulfur reforming conditions of less than 10 ppb sulfur.

[0096] Thus, the processes may use Pt L-zeolite catalysts treated with halogen-containing compounds, referred to herein as halided catalysts. These special types of catalysts have recently been disclosed. For example, U.S. Patent No. 5,091,351 to Murakawa et al., discloses preparing a Pt L catalyst, and then treating it with a halogen-containing compound. Other related patents that disclose halided L-zeolite catalysts include EP 498,182 A which discloses co-impregnation with NH₄Cl and NH₄F; U.S. Patent Nos. 4,681,865, 4,761,512 and 5,073,652 to Katsuno et al.; U.S. Patent Nos. 5,196,631 and 5,260,238 to Murakawa et al. These catalysts also include spent catalysts that have been rejuvenated by adding halogen-containing compounds (see, e.g., 5,260,238). These patents are all incorporated herein by reference. The halided catalysts described in these patents have been treated with halogen-containing compounds, generally with chlorine-containing and/or fluorine-containing compounds. Preferably, the catalysts have been treated with both chlorine and fluorine-containing compounds or with one or more compounds containing both chlorine and fluorine. These halided

catalysts have a desirably long catalyst life and activity. They are especially useful for preparing aromatic hydrocarbons such as benzene, toluene and xylenes from C₆-C₈ aliphatic hydrocarbons.

[0097] We have observed that these halided catalysts evolve small amounts of HCl and/or HF when these special types of catalysts are heated at elevated temperatures (e.g., at process conditions), or when contacted with hydrogen at temperatures above about 300-400 °F. And, this produced acid halide gas reacts with reactive metal present in metal-coated reactor systems. Hence the need for the present invention. It should be noted that the above-described treatment with halogen-containing compounds differs from that typically associated with platinum loading, e.g., by impregnation or ion exchange with compounds comprising platinum and halogen. This treatment also differs from that associated with wash solutions used during impregnation or ion exchange of conventional catalysts, where small amounts of halides may be added.

[0098] In some applications, for example in ultra-low sulfur reforming using a non-acidic Pt L-zeolite catalysts, it is preferred that the feed to the catalyst be substantially free of sulfur, i.e. sulfur levels be maintained at below 50 ppb, preferably below 10 ppb and more preferably below 5 ppb.

[0099] Preferred reforming process conditions include a temperature between 371 and 566°C (700 and 1050 °F), more preferably between 427 and 552°C (800 and 1025 °F), and a gauge pressure between 0 and 2757 kPa (0 and 400 psig), more preferably between 103 and 1034 kPa (15 and 150 psig), a recycle hydrogen rate sufficient to yield a hydrogen to hydrocarbon mole ratio for the feed to the reforming reaction zone between 0.1 and 20, more preferably between 0.5 and 10; and a liquid hourly space velocity for the hydrocarbon feed over the reforming catalyst of between 0.1 and 10, more preferably between 0.5 and 5.

[0100] To achieve the suitable reformer temperatures, it is often necessary to heat the furnace tubes to higher temperatures. These temperatures can often range from 427-677°C (800 to 1250°F), usually from 454 and 649°C (850 and 1200°F), and more often from 482 and 621°C (900 and 1150°F).

[0101] In summary, the present invention relates to the following subject matter.

25 A. A method of removing reactive metal from a metal-coated catalytic hydrocarbon conversion reactor system, comprising contacting at least a portion of a metal-coated hydrocarbon conversion reactor system contacting reacting metal with a getter to produce a movable metal and fixating either the movable metal, the getter or both. In this method;

- 30 • The movable metal is immobilized.
- The getter comprises a halogen-containing compound wherein said halogen-containing compound may be selected from the group consisting of organic halides, inorganics halides, a halided support material and hydrogen halides. Preferably, said gaseous halogen-containing compound comprises HCl.

- 35 • The immobilizing of movable metal may be by adsorption onto or reacted with a solid sorbent.
- The metal-coated catalytic hydrocarbon conversion reactor system may comprise a metal coating comprising tin, germanium, antimony, or aluminum.
- The metal coating may comprise metallic tin, tin compounds or tin alloys.
- Said method may further comprise loading a hydrocarbon conversion catalyst into the reactor system and converting hydrocarbons, or loading a halided, platinum-containing, hydrocarbon conversion catalyst into the reactor system and converting hydrocarbons, or loading a reforming catalyst into the reactor system and producing aromatics.

40 B. A method of removing reactive tin from at least a portion of a reactor system having freshly-stannided surfaces. This method may comprise the steps of: a) applying a tin plating, paint, cladding or other coating to a iron-containing base substrate portion of a reactor system; b) heating the coated substrate at temperatures greater than 427°C (800°F), preferably in the presence of hydrogen, to produce a reactor system having freshly-stannided surfaces and which contains reactive tin; c) removing at least a portion of the reactive tin from the reactor system by contacting the reactive tin with a getter to produce movable tin; and d) sorbing or reacting the movable tin; wherein at least some of the reactive tin may be removed by treating the stannided reactor system with a halogen-containing gas where said halogen-containing gas may comprise HCl.

- 45 • The said method may further comprise loading a hydrocarbon conversion catalyst into the reactor system and converting hydrocarbons.
- The sorbent used for sorbing the moveable metal in step (d) may be located prior to a catalyst bed and the getter may be added after a catalyst bed, or may be located in the last reactor or before the feed effluent heat exchangers.

50 The present invention may also be applicable to the following methods. C. A method for reducing catalyst contam-

inations from a metal which was used to coat a reactor system, the method comprising contacting a metal-coated reactor system prior to catalyst loading with a getter comprising a gaseous halogen-containing compound to produce movable metal; removing the movable metal from the reactor system; loading a conversion catalyst into the reactor system; and converting feed to product in the reactor system. In this method; the metal may be tin.

5 D. A catalytic reforming process using a halided platinum L-zeolite catalyst where, prior to catalyst loading and reforming, reactive metal is removed from a metal-coated reforming reactor system, said process comprising; a) removing reactive metal from a metal-coated reforming reactor system by contacting the metal-coated reforming reactor system with a getter comprising a hydrogen halide to produce moveable metal; b) mobilizing and sorbing said movable metal; c) loading a halided Pt L-zeolite catalyst into the reactor system; and d) reforming hydrocarbons to aromatics.

10 In this process;

- 15 • The movable metal may be sorbed onto a solid sorbent comprising alumina.
- The sorbent may be located prior to the effluent heat exchanger.
- The metal may be tin.

20 E. A catalytic reforming process using a halided platinum L-zeolite catalyst where, prior to catalyst loading and reforming, reactive tin is removed from a tin-coated reforming reactor system, said process comprising; a) coating a reforming reactor system with a tin-containing paint; b) contacting the painted reactor system with a hydrogen-containing gas at 427-621°C (800-1150°F) to produce stannides; c) removing reactive tin from said reforming reactor system by contacting the reactor system with getter comprising a hydrogen halide to produce movable tin; d) fixing the movable tin by adsorption onto a solid sorbent; e) loading a halided Pt L-zeolite catalyst into the reactor system; and f) catalytically reforming hydrocarbons to aromatics under ultra-low sulfur reforming conditions of less than 10 25 ppb sulfur; wherein said gaseous stream containing HCl may be produced from a halogen-containing compound and hydrogen by reaction with a platinum- or nickel-containing catalyst.

[0102] To obtain a more complete understanding of the present invention, the following example illustrating certain aspects of the invention are set forth. It should be understood, however, that the invention is not intended to be limited in any way to the specific details of the example.

30 EXAMPLE 1A — Stanniding Steel Using a Tin Paint

[0103] Coupons of type 321 type or type 347 stainless steel were coated with a tin containing paint. The paint consisted of a mixture of 2 parts powdered tin oxide, 2 parts finely powdered tin (1-5 microns), 1 part stannous neodecanoate in neodecanic acid (20% Tin Tem-Cem manufactured by Mooney Chemical Inc., Cleveland, Ohio which contained 20% tin as stannous neodecanoate) mixed with isopropanol, as described in WO 92/15653. The coating was applied to the steel surface by painting and letting the paint dry in air. After drying, the painted steel was contacted with flowing hydrogen at 593°C (1100°F) for 40 hr to produce a stannided steel surface comprising intermetallics including iron stannides.

[0104] Some experiments were done in a pilot plant having 6.35 mm (1/4") OD reactor tube made of 316 stainless steel. The reactor tube was coated with the tin-containing paint described above. The coating was applied to the inner surface of the pilot plant by filling the reactor tube with paint and letting the paint drain. After drying, the painted steel was cured with flowing hydrogen at 593°C (1100°F.) for 40 hr.

45 EXAMPLE 1B - Analysis of Stannided Steel

[0105] The resulting tin coated steels with their intermetallic tin layers were examined visually for completeness of coating. Samples were mounted in a clear epoxy resin and then ground and polished in preparation for analysis with the petrographic and scanning electron microscopes (SEM). EDX analysis can be used to determine the chemical composition of the layers. The cross-sections of the materials showed that the tin paint had reduced to metallic tin under these conditions and formed a continuous and adherent metallic (iron/nickel stannide) protective layer on the steel surface. Nickel- and iron-containing stannides were present at a thickness of between about 2 to 5 microns. A nickel depleted underlayer (2-5 microns thick) was also present. On the surface, microscopic tin balls and globules were observed.

Example 2

Preparing a Halided Platinum L-zeolite Catalyst

5 [0106] A halided platinum L-zeolite catalyst was prepared in a manner similar to EP , 498,182A1, Example 4. Experiments showed that this catalyst evolved HCl and HF when heated to 260°C (500 °F) in the presence of hydrogen. Figure 1 shows HCl evolution as a function of temperature. HF loss is also observed. Gastec tubes were used to measure HCl concentration. Gas rates were 1300 GHSV, once-through. Hydrogen was added at time = 79 hours. This catalyst was used for all the activity tests described below and as a source of HCl and HF in some of the following examples.

10 Example 3 -- Stability of Stannided Coupon

15 [0107] A freshly-stannided coupon was prepared using the procedure described in Example 1. The coupon was weighed before stanniding. After stanniding the coupon had increased 86.5 mg in weight. This coupon was placed in a stainless steel pilot plant and was heated to 482°C (900 °F) in a H₂/N₂ mixture. After about 80 hr, the coupon was weighed again. It had lost less than 1 mg of weight. This example shows that in the absence of a getter (such as HCl), reactive tin does not readily migrate.

20 Example 4 - (Comparative)

25 [0108] A freshly-stannided coupon was prepared using the procedure described in Example 1. The coupon was weighed before stanniding. After stanniding the coupon had increased 84.3 mg in weight. The stannided coupon was placed in a pilot plant and was heated to 538°C (1000 °F) using a H₂/N₂ mixture containing 1000 ppm HCl. After 7 hours, the coupon had lost 40.3 mg of weight. Assuming for calculation purposes that all this weight loss was tin loss, 48 % of the tin was removed after 7 hr. After 22 hr, 87% of the tin had been removed.

[0109] This treatment procedure was too harsh; it removed too much of the stannide layer. The combination of temperature and HCl concentration was too aggressive.

30 Example 5 -- Reforming Screening Tests

35 [0110] The impact of tin on catalyst performance was assessed in pilot plant tests. Run 1 (144-181) was done in a type 316 stainless steel reactor that was not stannided. One hundred and thirty cc of catalyst, prepared per Example 2, was loaded upstream of another catalyst layer of 60 cc. The set up shown in Figure 2-1 was used. The catalyst served as an HCl/HF source. A startup treatment of the catalyst was done. This startup included drying the catalyst in N₂ from room temperature to 260°C (500 °F) for 79 hr; then heating the catalyst in a mixture of 10% H₂ in N₂ from 260 to 500°C (500 to 932 °F) at a rate of 5.6°C/hr (10 °F/hr) over a period of about 43 hr, and then maintaining the catalyst at about 500°C (932 °F) for 24 hr. GHSV was maintained at 1300 hr⁻¹ for the drying and reduction periods. Thereafter, the entire reactor was cooled to room temperature.

40 [0111] The upper catalyst layer was removed under a nitrogen blanket. A catalyst performance test was done using the lower catalyst only. Test conditions were gauge pressure of 689 kPa (100 psig), 1.6 LHSV, 3.0 H₂/hydrocarbon and a target yield of 46.5 wt % aromatics. The feed was a C₆-C₈ UDEX raffinate from an aromatics extraction unit.

45 [0112] Run 2 (144-182) was set up as shown in Figure 2-2. Here, a freshly-stannided reactor and freshly-stannided type 347 stainless steel coupons were used. Because of the process configuration, the ratio of stannided surface area to total catalyst volume was equal to about 20 times that of commercial scale equipment. Eighty cc of catalyst prepared per Example 2 was loaded upstream of a stannided coupon prepared as in Example 1. Another catalyst layer of 80 cc was loaded downstream of the stannided coupons. Then the startup procedure of Run 1 was done. After cooling, the upper catalyst layer and the coupon were removed under a nitrogen blanket. A catalyst performance test (as in Run 1) was done using the lower catalyst only. After the performance test, the lower catalyst layer was analyzed and found to contain about 1,000 ppm tin.

50 [0113] After 1200 hours on stream, start-of-run (SOR) temperatures were determined for Runs 1 and 2 by extrapolating the line-out temperature needed to achieve the target aromatic yield back to time = 0. SOR temperatures showed that the catalyst of Run 2 was about 5.6°C (10 °F) less active than the catalyst of Run 1. It is believed that reactive tin had reacted with evolving halides, including HCl, from the first catalyst layer, producing movable tin. This movable tin had deactivated the catalyst in the second catalyst layer.

55 Example 6 -- Catalyst Performance After Coupon Pre-treatment

[0114] Pretreatment conditions were developed for removing reactive tin from stannided coupons. A freshly-stannided

coupon that had increased 77.5 mg in weight after stanniding was placed in a pilot plant. The coupon was heated to 482°C (900 °F) using a H₂/N₂ mixture containing 100 ppm HCl. Movable tin was formed; it migrated downstream to the cooler portions of the pilot plant and plated out. The pilot plant was cooled at various time intervals so that the coupon could be weighed. It was then reheated to 482°C (900 °F). After 7.5 hours, the coupon had lost 6.3% of the total tin (0.65 mg/hr); after 13.5 hr, 9.0% (0.35 mg/hr); after 28.5 hours, 13.4% of the tin (0.23 mg/hr); after 44.5 hr, 16.5% (0.15 mg/hr); after 60.3 hr, 18.8% (0.11 mg/hr). When these numbers were plotted (time versus wt % tin loss) The knee in the curve was observed at about 15 wt % tin loss.

[0115] The impact of a tin removal step prior to catalyst loading was assessed in a pilot plant test. Six stannided coupons were pretreated with 100 ppm HCl at 482°C (900 °F). Based on the above experiments, it was decided to remove about 15 wt % of the tin by pretreatment. It was estimated that this would take 40 hours. After 40 hours only 6-10 wt % of the tin had been removed, so the coupons were heated again for an additional 20 hr. This process removed between 19-23 wt % of the added tin. These coupons were used in the following test, Run 4, below.

[0116] A separate pilot plant test, Run 3 (60-313), was set up as in Figure 2-1 with 80 cc of halided Pt L-zeolite catalyst in each bed. As in Run 1, a start-up procedure was done. This was followed by a catalyst performance test using the lower catalyst only.

[0117] In Run 4 (60-314), the set up of Figure 2-2 was used with a uncoated 316 stainless steel reactor and with catalyst beds of 80 cc each. The six tin-pretreated coupons described above were placed between the catalyst beds. The stannided surface area / catalyst volume in the second bed was about two times the stannided surface area / catalyst volume of a coated commercial reforming reactor system. After following the startup procedures in Example 5, the coupons were weighed; they had lost an additional 2-4 wt % of tin. A catalyst performance test using the lower catalyst layer was done.

[0118] The catalyst performance in Run 4 was compared with Run 3. Performance test conditions were similar to those in Runs 1 and 2, except that after 500 hr, the severity was increased to 84 wt % aromatics. SOR temperatures showed that the catalyst of Run 3 had the same SOR temperature as the catalyst of Run 4. These results show that the reactive tin had been removed in the pretreatment process. The remaining stannide layer apparently did not react with evolving halides (HCl and/or HF) from the first catalyst bed, so catalyst deactivation was not observed in the second catalyst bed.

Example 7 -- Multiple Startup Test

[0119] Multiple startup tests, using a fresh charge of catalyst each time, were done in a stainless steel reactor that was not stannided. A halided Pt L-zeolite catalyst (20 cc) was placed in the reactor and freshly-stannided coupons of type 347 steel were prepared as in Example 1 and cured at 593°C (1100 °F). The weight gain associated with this stanniding was measured. This gain was assumed to be 100% tin. These coupons and an uncoated type 347 stainless steel coupon were placed downstream of the catalyst bed. The stannided coupons were weighed prior to testing. The catalyst and coupons were first dried in nitrogen at 1,300 GHSV. The catalyst was heated from room temperature to 260°C (500 °F) at this flow rate. The coupons were kept at about 67°C (120 °F) higher temperature than the catalyst during the heat treatment. This simulated furnace temperatures relative to catalyst temperatures under commercial conditions.

[0120] Then hydrogen was introduced and the rate of nitrogen decreased, keeping the total flow rate constant. The rate of hydrogen was maintained at 10% of the total flow. The catalyst was activated by treatment with this hydrogen in nitrogen stream (H₂/N₂=1/9) while the catalyst was heated at a rate of 5.6°C/hr (10° F/hr) from 260 to 500°C (500 °F to 932 °F) over a period of about 43 hours. Meanwhile, the coupons were heated at 5.6°C (10 °F/hr) from 316°C to about 566 °C (600 °F to about 1050 °F). Afterwards, the catalyst was maintained at about 500°C (932 °F) and the coupons at about 566°C (1050 °F) for 24 hr in the absence of feed.

[0121] The reactor was then allowed to cool to room temperature in nitrogen and opened. After removing the catalyst, the coupons were removed and weighed. The coupons were then placed back into the reactor along with a charge of fresh catalyst. The heating procedure was repeated for a second cycle. Additional cycles were done in the same manner.

[0122] Figure 3 shows the results of this test. It shows the tin weight loss in the coupons (e.g., wt % tin loss compared to the total tin added above) as a function of the number of start-up cycles. The bare, uncoated coupon did not show any weight loss (closed circles). As can be seen, the initial metal (tin) loss for the stannided coupon (open circles) was high in the first cycle. In later cycles this weight loss decreased. Looking at Figure 3, it can be seen that the original weight loss was 12 wt % of the initial tin in the first cycle, 4 wt % in the second cycle and 2 wt % in the third cycle. This third cycle weight loss is about 10% of the initial weight loss rate (2% vs. 12%) and would be an appropriate time to discontinue metal removal operations, as most of the reactive metal has been removed.

Example 8 — Calculations for Commercial Scale Operations

[0123] The tin loss per unit area of coupons was calculated using the weight loss data from Example 7. Based on the tin loss per unit area, the total tin loss expected in a commercial scale plant was calculated. It was assumed that the total surface area in the reactors, furnace tubes and associated piping would be covered by tin. Assuming all the lost tin deposits on the catalyst, the tin content of the catalysts and the catalyst performance impact in a commercial unit were estimated. The results are shown below:

Estimated Tin Content of Commercial Catalyst and Performance Impact

Startup Cycle	Incremental Tin Deposit in Catalyst, ppm	Estimated Catalyst Activity Debit, (1) °C/F
1	800	4.4/8.0
2	250	1.4/2.5
3	150	0.8/1.5
4	50	0.3/0.5
5	50	0.3/0.5
Total	1300	7.2/13.0

(1) Assumes 5.6°C (10 °F) activity debit from 1000 ppm tin deposit in catalyst

[0124] This 7.2°C (13 °F) start-of-run activity loss will significantly decrease run length. Additionally impacts on catalyst stability could further shorten catalyst life.

Example 9 — A Large Scale Test

[0125] This example describes a large scale test and demonstrates a preferred embodiment of the invention.

[0126] A small, commercial scale, catalytic reformer is to be operated at ultra-low sulfur reforming conditions using a platinum L-zeolite catalyst with a C₆-C₈ UDEX raffinate feed. The sulfur content of the feed contacting the catalyst is less than 5 ppb sulfur. The reactor system includes a sulfur converter/sulfur sorber, followed by four reforming reactors, their associated furnaces and furnace tubes. The reactors are made of 1 1/4 Cr, 1/2 Mo steel. The furnace tubes are made of 304 stainless steel.

[0127] Prior to catalyst loading, the reactors, the furnace tubes and the associated piping of the reactor system are treated with a reducible tin paint. Several coupons are also placed in the reactor system. The paint is applied to the coupons and to all reactor system surfaces that are to contact hydrocarbon feed at reforming or higher temperatures. The paint consists of 1 part 20% Tin Ten-Cem (manufactured by Mooney Chemical Inc., Cleveland, Ohio), 2 parts powdered stannic oxide, 2 parts finely powdered tin metal (1-5 microns in size) and isopropyl alcohol (for flowability). The Tin Ten-Cem contains 20% tin as stannous octanoate in octanoic acid. After the paint is applied to a wet thickness of about 3 mils, the coated reactor system is heated in a mixture of flowing hydrogen and nitrogen (1/9 ratio) for about 24 hours and then is maintained at about 566°C (1050 °F) for about 48 hours. It is then cooled to room temperature. This procedure results in the painted surfaces being stannided (with iron and nickel stannides). The tin migrates to cover small regions (e.g., welds) which are not painted. The reactors and furnace tubes are inspected, and any chunks of tin that can be readily removed are removed. The coupons are analyzed by petrographic microscopy; they show the presence of shiny microscopic tin balls.

[0128] Reactive tin is removed from this freshly-stannided reactive system. A bed of calcium on alumina is placed at the bottom of the last reactor and prior the effluent heat exchanger. A getter mixture consisting of about 1 volume % perchloroethylene (PERC) in hydrogen is passed over a Pt on alumina catalyst at 482°C (900 °F), to generate HCl *in-situ*. The resulting gas is diluted with nitrogen to produce a gas containing 100 ppm HCl which is passed into the freshly-stannided reactor system described above. The reactor system is heated to 316°C (600 °F) over 6 hours and then held at 316°C (600 °F) until the reactive tin is converted to a movable form, believed to be tin chloride. The time at 316°C (600 °F) is determined by using a set of freshly-stannided removable coupons of known tin content. When the reactive tin has been converted to stannous chloride, PERC addition is terminated. This is done by placing the coupons in a vessel connected to the transfer piping located between the reactor and the furnace. Valves allow removal of the coupons for analysis. A coupon is removed every ten hours, washed with water, dried and weighed. Weight percent tin loss vs time is plotted. This graph is used to determine when sufficient reactive tin is reacted and thus when to stop adding getter. Additionally, as the process nears completion, analysis using petrographic and electron microscopy shows that the stannided surfaces of the coupons are substantially free of microscopic tin balls.

[0129] Thereafter, the reactor system is heated to 538°C (1000 °F) in H₂/N₂ and then is held at 538°C (1000 °F) for

24 hours. The volatile SnCl_2 is fixated by adsorption onto the alumina sorbent in the last reactor. After the alumina sorbent is removed, the catalysts are loaded into the reactors. The halided platinum L-zeolite catalyst of Example 2 is used to reform the raffinate feed to aromatics at temperatures between 427 and 538°C (800 and 1000 °F).

[0130] The metals removal process is shown to be effective. The catalyst does not show any decline in activity as measured by SOR temperature compared to what is expected for this catalyst in a non-stannided reactor system.

[0131] While the invention has been described above in terms of preferred embodiments, it is to be understood that variations and modifications may be used as will be appreciated by those skilled in the art. Indeed, there are many variations and modifications to the above embodiments which will be readily evident to those skilled in the art, and which are to be considered within the scope of the invention as defined by the following claims.

10

Claims

1. A method of removing reactive metal from a metal-coated catalytic hydrocarbon conversion reactor system, comprising:

20 contacting a reactive metal-containing coating present on at least a portion of the metal-coated catalytic hydrocarbon conversion reactor system with a getter to produce a movable metal; wherein said reactive metal comprises a metal or metal compound capable of reacting with said getter, and said getter comprises a halogen-containing compound that interacts with said reactive metal to produce said movable metal; and immobilizing the movable metal by contacting it with a solid or liquid adsorbent or absorbent; removing the immobilized movable metal from the metal-coated catalytic hydrocarbon conversion reactor system.

25 2. The method of claim 1 wherein said removing is performed before said immobilizing.

30 3. The method of claim 1 or 2, wherein said immobilizing comprises sorbing said movable metal with a liquid sorbent.

35 4. The method of claim 1 or 2, wherein said immobilizing comprises sorbing said movable metal with a solid sorbent.

5. The method of claims 1 or 2, wherein said removing and said immobilizing are both performed by washing said movable metal from the metal-coated hydrocarbon conversion reactor.

6. The method of any of claims 1-5, wherein said chemical composition that reacts with said metal or metal compound comprises a gaseous halogen-comprising compound.

7. The method of claim 6, wherein said gaseous halogen-containing compound is selected from the group consisting of organic halides, inorganic halides, a halided support material, hydrogen halides, and mixtures thereof.

40 8. The method of claim 7, wherein said gaseous halogen-containing compound comprises HCl .

9. The method of claim 8, wherein said contacting comprises contacting a portion of the metal-coated catalytic hydrocarbon conversion reactor system with said HCl having a concentration of between approximately 0.1 to 1000 ppm.

45 10. The method of claim 9, wherein said concentration is between approximately 1 and 500 ppm.

11. The method of claim 10, wherein said concentration is between approximately 10 and 200 ppm.

50 12. The method of claim 8, wherein said contacting comprises contacting a portion of the metal-coated catalytic hydrocarbon conversion reactor system with said HCl having a concentration sufficient to avoid undesirable removal of a portion of a protective layer of the catalytic metal-coated hydrocarbon conversion reactor system.

13. The method of any of claims 1-12, wherein the metal-coated catalytic hydrocarbon conversion reactor system comprises a metal-containing coating selected from the group consisting of tin, germanium, antimony, aluminium, and mixtures thereof.

55 14. The method of claim 13, wherein said metal-containing coating is selected from the group consisting of metallic tin, tin compounds, tin alloys, and mixtures thereof.

15. The method of claims 13 or 14, wherein the metal-coated catalytic hydrocarbon conversion reactor system comprises a freshly-stannided surface comprising reactive tin.

5 16. The method of any of claim 1-15, wherein said fixating step is performed upstream of a catalyst bed in said metal-coated catalytic hydrocarbon conversion reactor system, and said contacting step comprises the step of adding said chemical composition that reacts with said metal or metal compound downstream, of said catalyst bed.

10 Patentansprüche

1. Verfahren zum Entfernen von reaktivem Metall aus einer metallbeschichteten Reaktoranlage für die katalytische Umwandlung von Kohlenwasserstoff, umfassend das Zusammenbringen einer reaktiven Metall enthaltenden Beschichtung auf mindestens einem Bereich der metallbeschichteten Reaktoranlage für die katalytische Kohlenwasserstoffumwandlung mit einem Getter unter Bildung von beweglichem Metall, wobei das reaktive Metall ein Metall oder eine Metallverbindung enthält, die mit dem Getter reagieren kann und der Getter eine halogenhaltige Verbindung enthält, die mit dem reaktiven Metall unter Bildung des beweglichen Metalls wechselwirkt; das Immobilisieren des beweglichen Metalls durch dessen Zusammenbringen mit einem festen oder flüssigen Adsorbens bzw. Absorbens; und das Entfernen des immobilisierten beweglichen Metalls aus dem metallbeschichteten Reaktorsystem für die katalytische Kohlenwasserstoffumwandlung.
2. Verfahren nach Anspruch 1, wobei das Entfernen vor der Immobilisierung erfolgt.
3. Verfahren nach Anspruch 1 oder 2, wobei die Immobilisierung das Sorbieren des beweglichen Metalls mit einem flüssigen Sorbens umfasst.
4. Verfahren nach Anspruch 1 oder 2, wobei das Immobilisieren durch Sorbieren des beweglichen Metalls mit einem festen Sorbens erfolgt.
5. Verfahren nach Anspruch 1 oder 2, wobei das Entfernen und das Immobilisieren beide erfolgen durch Waschen des beweglichen Metalls aus dem metallbeschichteten Reaktor für die Kohlenwasserstoffumwandlung.
6. Verfahren nach irgendeinem der Ansprüche 1 bis 5, wobei die chemische Zusammensetzung, die sich mit dem Metall oder der Metallverbindung umsetzt, eine gasförmige halogenhaltige Verbindung aufweist.
- 35 7. Verfahren nach Anspruch 6, wobei die gasförmige halogenhaltige Verbindung ausgewählt ist aus der Gruppe organische Halide, anorganische Halide, haliertes Trägermaterial, Wasserstoffhalide und deren Gemische.
8. Verfahren nach Anspruch 7, wobei die gasförmige halogenhaltige Verbindung HCl enthält.
- 40 9. Verfahren nach Anspruch 8, wobei das Zusammenbringen erfolgt durch Zusammenbringen eines Teils der metallbeschichteten Reaktoranlage für die katalytische Kohlenstoffumwandlung mit HCl bei einer Konzentration von etwa 0,1 bis 1000 ppm.
10. Verfahren nach Anspruch 9, wobei die Konzentration zwischen etwa 1 und 500 ppm liegt.
- 45 11. Verfahren nach Anspruch 10, wobei die Konzentration zwischen etwa 10 bis 200 ppm liegt.
12. Verfahren nach Anspruch 8, wobei das Zusammenbringen umfasst das Zusammenbringen eines Teils der metallbeschichteten Kohlenwasserstoffanlage für die katalytische Kohlenwasserstoffumwandlung mit HCl bei einer solchen Konzentration, dass das unerwünschte Entfernen eines Teils der Schutzschicht der metallbeschichteten Reaktoranlage für die katalytische Kohlenwasserstoffumwandlung vermieden wird.
- 50 13. Verfahren nach irgendeinem der Ansprüche 1 bis 12, wobei die metallbeschichtete Reaktoranlage für die katalytische Kohlenwasserstoffumwandlung eine metallhaltige Beschichtung aufweist, ausgewählt aus der Gruppe Zinn, Germanium, Antimon, Aluminium und deren Gemische.
14. Verfahren nach Anspruch 13, wobei die metallhaltige Beschichtung ausgewählt ist aus der Gruppe metallisches Zinn, Zinnverbindungen, Zinnlegierungen und deren Gemische.

15. Verfahren nach Anspruch 13 oder 14, wobei die metallbeschichtete Reaktoranlage für die katalytische Kohlenwasserstoffumwandlung eine frisch verzinnte Oberfläche mit reaktivem Zinn aufweist.

5 16. Verfahren nach irgendeinem der Ansprüche 1 bis 15, wobei der Fixierschritt stromaufwärts des Katalysatorbetts in der metallbeschichteten Reaktoranlage für die katalytische Wasserstoffumwandlung erfolgt und der Kontaktierschritt den Schritt umfasst des Zusetzens der chemischen Zusammensetzung, die sich mit dem Metall oder der Metallverbindung umsetzt, stromabwärts des Katalysatorbetts.

10 **Revendications**

1. Procédé pour éliminer un métal réactif d'un système de réacteur revêtu de métal pour la conversion catalytique d'hydrocarbures, comprenant :

15 la mise en contact d'un revêtement contenant un métal réactif présent sur au moins une partie du système de réacteur revêtu de métal pour la conversion catalytique d'hydrocarbures avec un absorbeur pour produire un métal mobile ; ledit métal réactif comprenant un métal ou composé métallique capable de réagir avec ledit absorbeur, et ledit absorbeur comprenant un composé halogéné qui interagit avec ledit métal réactif pour produire ledit métal mobile ; et

20 l'immobilisation du métal mobile en le mettant en contact avec un adsorbant ou absorbant solide ou liquide ; l'élimination du métal mobile immobilisé du système de réacteur revêtu de métal pour la conversion catalytique d'hydrocarbures.

2. Procédé suivant la revendication 1, dans lequel ladite élimination est effectuée avant ladite immobilisation.

25 3. Procédé suivant la revendication 1 ou 2, dans lequel ladite immobilisation comprend la sorption dudit métal mobile avec un sorbant liquide.

30 4. Procédé suivant la revendication 1 ou 2, dans lequel ladite immobilisation comprend la sorption dudit métal mobile avec un sorbant solide.

35 5. Procédé suivant la revendication 1 ou 2, dans lequel ladite élimination et ladite immobilisation sont toutes deux effectuées en éliminant par lavage ledit métal mobile du réacteur revêtu de métal pour la conversion d'hydrocarbures.

6. Procédé suivant l'une quelconque des revendications 1 à 5, dans lequel ladite composition chimique qui réagit avec ledit métal ou composé métallique comprend un composé halogéné gazeux.

40 7. Procédé suivant la revendication 6, dans lequel ledit composé halogéné gazeux est choisi dans le groupe consistant en des halogénures organiques, des halogénures inorganiques, une matière halogénée de support, des halogénures d'hydrogène et leurs mélanges.

8. Procédé suivant la revendication 7, dans lequel ledit composé halogéné gazeux comprend le HCl.

45 9. Procédé suivant la revendication 8, dans lequel ladite mise en contact comprend la mise en contact d'une partie du système de réacteur revêtu de métal pour la conversion catalytique d'hydrocarbures avec ledit HCl ayant une concentration comprise dans l'intervalle d'approximativement 0,1 à 1000 ppm.

10. Procédé suivant la revendication 9, dans lequel ladite concentration est comprise dans l'intervalle d'approximativement 1 à 500 ppm.

50 11. Procédé suivant la revendication 10, dans lequel ladite concentration est comprise dans l'intervalle d'approximativement 10 à 200 ppm.

12. Procédé suivant la revendication 8, dans lequel ladite mise en contact comprend la mise en contact d'une partie du système de réacteur revêtu de métal pour la conversion catalytique d'hydrocarbures avec ledit HCl ayant une concentration suffisante pour éviter l'élimination indésirable d'une partie d'une couche protectrice du système de réacteur revêtu de métal pour la conversion catalytique d'hydrocarbures.

13. Procédé suivant l'une quelconque des revendications 1 à 12, dans lequel le système de réacteur revêtu de métal pour la conversion catalytique d'hydrocarbures comprend un revêtement contenant un métal choisi dans le groupe consistant en l'étain, le germanium, l'antimoine, l'aluminium et leurs mélanges.

5 14. Procédé suivant la revendication 13, dans lequel ledit revêtement contenant un métal est choisi dans le groupe consistant en l'étain métallique, des composés d'étain, des alliages d'étain et leurs mélanges.

15 15. Procédé suivant la revendication 13 ou 14, dans lequel le système de réacteur revêtu de métal pour la conversion catalytique d'hydrocarbures comprend une surface fraîchement stannurée, comprenant de l'étain réactif.

10 16. Procédé suivant l'une quelconque des revendications 1 à 15, dans lequel ladite étape de fixage est mise en oeuvre en amont d'un lit de catalyseur dans ledit système de réacteur revêtu de métal pour la conversion catalytique d'hydrocarbures, et ladite étape de mise en contact comprend l'étape d'addition de ladite composition chimique qui réagit avec ledit métal ou composé métallique en aval, dudit lit de catalyseur.

15

20

25

30

35

40

45

50

55

FIGURE 1


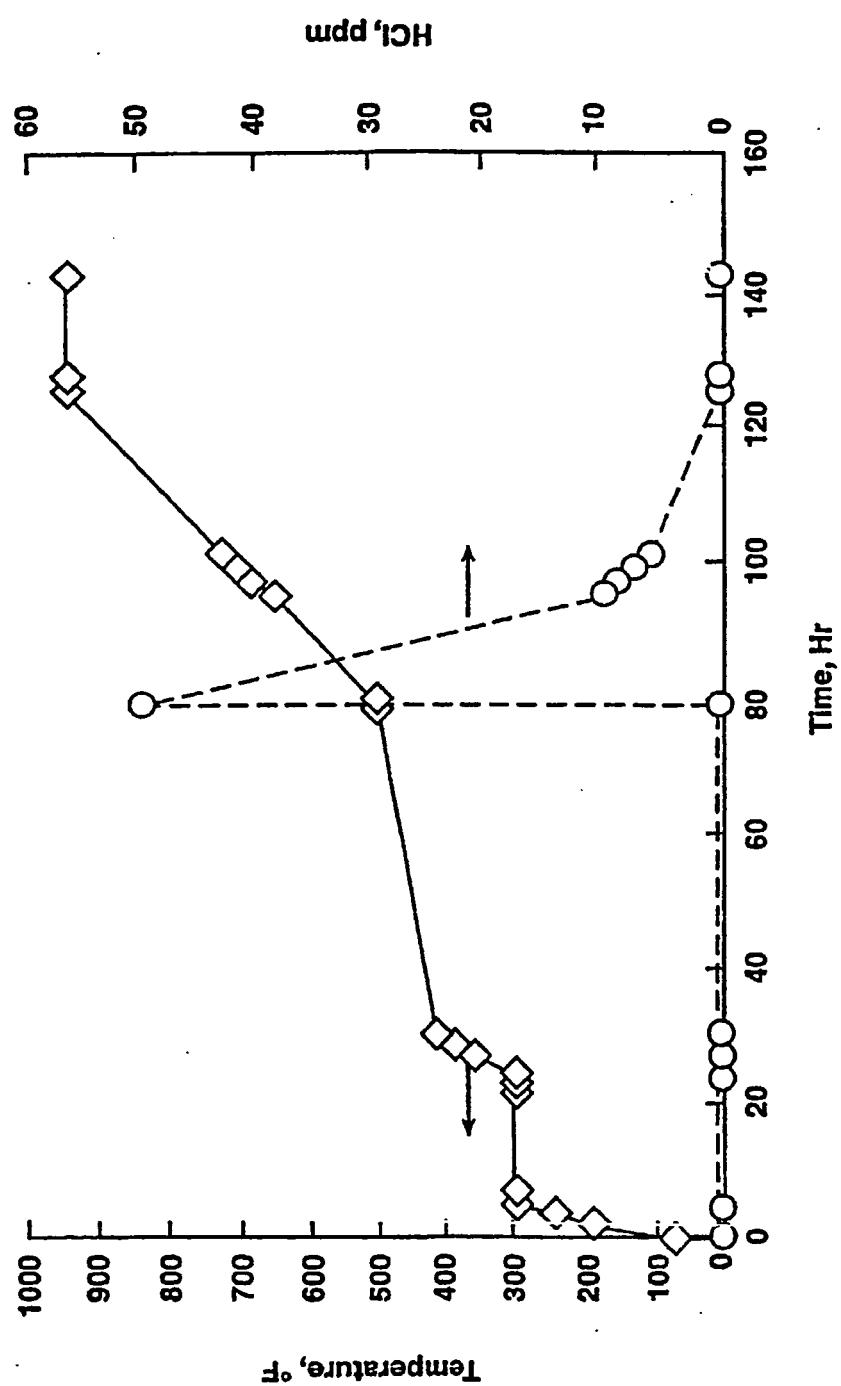


Figure 2

2-2

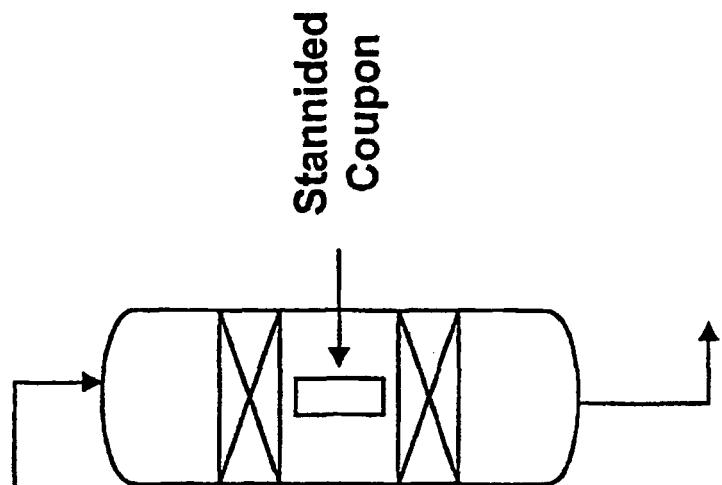

2-1

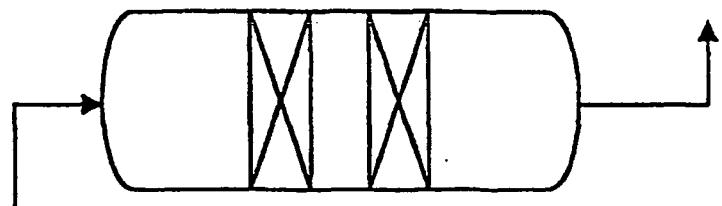


FIGURE 3

