



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 298 404 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**02.04.2003 Bulletin 2003/14**

(51) Int Cl.7: **F28F 9/02, F28D 7/06**

(21) Application number: **01203660.4**

(22) Date of filing: **26.09.2001**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(71) Applicant: **BRONSWERK HEAT TRANSFER B.V.**  
**NL-3862 CG Nijkerk (NL)**

(72) Inventor: **de Leeuw, Pieter Theunis**  
**7335 BM Apeldoorn (NL)**

(74) Representative: **Prins, Adrianus Willem et al**  
**Vereenigde,**  
**Nieuwe Parklaan 97**  
**2587 BN Den Haag (NL)**

(54) **Heat exchanger**

(57) A heat exchanger (1), comprising a shell (2) designed as a pressure vessel, provided with shell-sided supply (3) and discharged (4) means with which the shell (2) can be flowed through with a first medium under pressure. The heat exchanger (1) further comprises a nest (5) of tubes (6) extending at least partly within the shell (2), provided with tube-sided supply (14A) and discharge (14B) means with which the tubes (6) from the nest (5) can be flowed through with a second medium

in heat exchanging contact with the first medium under pressure. The individual tubes (6) of the nest (5) are each included with a supply and a discharge side in tube bores (11) extending substantially transversely to the plane of a tube plate (9) included in the shell (2). The heat exchanger (1) has the special feature that the tubes (6) are connected with the tube-sided supply (14A) and discharge (15A) means via connecting channels (12A, 12B) located in the plane of the tube plate (9) and crossing the tube bores (11).

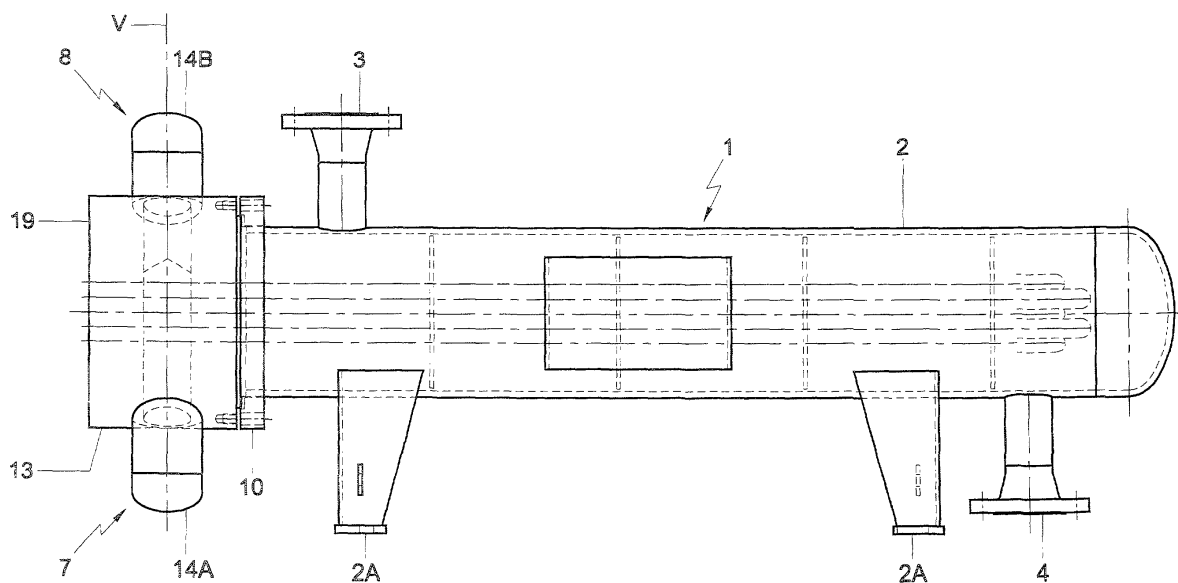


Fig. 1

EP 1 298 404 A1

## Description

[0001] The invention relates to a heat exchanger, comprising a shell designed as a pressure vessel, provided with shell-sided supply and discharge means with which the shell can be flowed through with a first medium under pressure, further comprising a nest of tubes extending at least partly within the shell, provided with tube-sided supply and discharge means with which the tubes from the nest can be bowed through with a second medium in heat exchanging contact with the first medium under pressure, of which nest the individual tubes are each included with a supply and discharge side in tube bores extending substantially transversely to the plane of a tube plate included in the shell.

[0002] Such a heat exchanger is known from practice as a heat exchanger of the "shell and tube type" and is used for exchanging heat between two mediums under pressure.

[0003] With the known heat exchanger, in the event of high pressures of the mediums, the tube-sided supply and discharge means are connected with the tubes via a so-called D-head, as mentioned in the TEMA 8<sup>th</sup> edition, Figs. N1.2, or variations thereon. The D-head comprises a tube plate manufactured from wrought iron, in which tube bores are provided. The tube plate is provided with an integrated upright circumferential edge, which can be closed with the aid of a detachable cover part to form a central pressure chamber extending along the tube plate. Often, the central pressure chamber is divided into a supply and a discharge part by means of a partition. The supply and discharge means are designed as tubes which are each connected with the central pressure chamber via a tube-sided supply and discharge opening, provided in the upright circumferential edge.

[0004] During use, the nest of tubes is flowed through with the second medium via the tube-sided supply and discharge means. The second medium flows from a supply tube via the tube-sided supply opening into the supply part of the central chamber. Subsequently, the second medium flows from the supply part of the central chamber in a flow direction extending substantially transversely to the plane of the tube plate via the tube bores into the tubes. Subsequently, the second medium flows via the tube bores substantially transversely to the plane of the tube plate from the tubes into the discharge part of the central chamber. Then, the second medium flows into a discharge tube via the tube-sided discharge opening through the upright edge.

[0005] In the above-mentioned case, the nest of tubes is substantially U-shaped from the supply part of the central chamber to the discharge part of the central chamber. The supply and discharge sides of the individual tubes are included in the same tube plate.

[0006] However, the heat exchanger according to the opening paragraph can also comprise two D-heads between which the nest of tubes extends. In such a case,

the supply and discharge sides of the individual tubes from the nest of tubes are included in tube bores of different tube plates; then, two tube plates are included in the shell. The central chamber of the second D-head can function as a connecting chamber, but can also function as a separate outflow chamber, the central chamber in the first D-head only functioning as inflow chamber.

[0007] A drawback of the known heat exchanger of the shell and tube type is that the D-head has to be of very robust design. In particular, this is the case when the difference between the pressure exerted by the second medium in the central chamber and the pressure exerted by the first medium in the pressure vessel is large. The pressure exerted by the second medium actually results in a large pressure load on the plane of the tube plate. Further, as a result of the high pressure of the second medium, the cover part and its connection also have to be of very robust design. The robust D-head is heavy, relatively expensive in manufacture and, further, takes up relatively much space. Additionally, to clean the nest of tubes, the cover part has to be detached and placed back, which, considering the pressure-resistant robust sealing of the cover part, is a time-consuming operation.

[0008] The invention has for its object to provide a heat exchanger of the type mentioned in the opening paragraph, in which the above-mentioned drawbacks are avoided. To that end, the heat exchanger according to the invention is characterized in that the tubes are connected with the tube-sided supply and discharge means via connecting channels situated in the plane of the tube plate and crossing the tube holes. The use of connecting channels integrated into the tube plate ensures that a central pressure chamber extending along the plane of the tube plate can be avoided. In particular, the connecting channels integrated into the tube plate can ensure that the resulting pressure load exerted on the tube plate is substantially neutral, so that the construction of the tube plate can be considerably lighter. Furthermore, as the use of the central pressure chamber extending along the plane of the tube plate is avoided, the upright edge and the cover part of the conventional D-head can be omitted. Thus, the construction can be considerably lighter and can be of simpler design, and the length of the heat exchanger can be reduced.

[0009] In an advantageous embodiment, the connecting channels are designed as straight connecting bores, each crossing at least two tube bores. One connecting bore can cross, for instance, one row of tube bores. One connecting bore can also cross, for instance, parallel rows of tube bores.

[0010] In a further advantageous embodiment, the tube bores are designed to be continuous, and the tube bores, at their free ends, are sealed with plugs. This ensures that the tubes, each individually, can be accessible for cleaning purposes. Preferably, the tube bores are

provided with screw thread for detachably receiving a plug provided with corresponding screw thread. Preferably, clamping means are provided for clampingly receiving a sealing ring between a top face of the tube plate and the plug.

**[0011]** The supply and discharge means can be designed as tube ends provided on the peripheral edge of the tube plate or as radially outwardly extending distribution chambers. Further, the supply and discharge means can be designed as tubes connected with the connecting channels via a tee. Optionally, the connecting bores can be interconnected by means of one or more central connecting channels.

**[0012]** Further advantageous embodiments of the invention are represented in the subclaims.

**[0013]** The invention will be explained in more detail with reference to an exemplary embodiment represented in a drawing. In the drawing:

Fig. 1 shows a schematic side view of a heat exchanger according to the invention;

Fig. 2 shows a schematic front view of the heat exchanger of Fig. 1 from the tube plate;

Fig. 3 shows a schematic top plan view of the tube plate and the nest of tubes of the heat exchanger of Fig. 1;

Fig. 4 shows a longitudinal section of an alternative embodiment of the tube plate;

Fig. 5 shows a cross section along the line A-A of the tube plate of Fig. 4;

Fig. 6A shows a detail of a free end of a tube bore of the tube plate of Fig. 4;

Fig. 6B shows a perspective view of a sealing plug for the tube bore of 6A in a taken-apart condition.

**[0014]** In the Figures, identical or corresponding parts are designated by the same reference numerals. The Figures are mere schematic representations in elucidation of a preferred embodiment of the invention.

**[0015]** With reference to Fig. 1 - Fig. 3, a heat exchanger 1 is shown. The heat exchanger 1 comprises a shell 2 designed as a pressure vessel. The shell 2 of the heat exchanger is positioned on supports 2A. The shell 2 is provided with shell-sided supply means 3 and with shell-sided discharge means 4 with which the shell 2 can be flowed through with a first medium, for instance water under pressure, for instance at least 3 bar. The heat exchanger 1 further comprises a nest 5 of tubes 6 extending within the shell 2. The nest 5 is provided with tube-sided supply means 7 and tube-sided discharge means 8 with which the tubes 6 from the nest 5 can be flowed through with a second medium, for instance natural gas under pressure, for instance 300 bar, such that the first medium and the second medium are in heat exchanging contact.

**[0016]** Depending on the mediums and the use of the heat exchanger, the pressure of the first medium can be chosen to be from, for instance, practically zero (vacu-

um) to 300 to 400 bar, while the pressure of the second medium can be chosen to be between, for instance, 80 to 700 to 1000 bar.

**[0017]** In the shell 2 of the heat exchanger 1, a tube plate 9 is included. The tube plate 9 is received in the shell 2 of the heat exchanger 1, such that it forms an integral part of the wall. To that end, a tube-shaped end of the wall 2 is screwed onto the tube plate 9 with the aid of a flange 10.

**[0018]** The tube plate 9 is designed as a round disc extending in a plane V. The tube plate 9 is provided with a large number of blind tube bores 11 extending transversely to the plane V. In each tube bore 11, a supply side 6A or a discharge side 6B of a tube 6 is included.

**[0019]** In the tube plate 9, two connecting channels 12A, 12B are provided. The connecting channels 12A, 12B are each designed as a cylindrical bore. The first connecting channel 12A crosses a first group of tube bores 11A, such that the supply sides 6A of the tubes 6 from the nest 5 included in the tube bores 11 are connected with the tube-sided supply means 7. In a corresponding manner, a second connecting channel 12B crosses the tube bores 11B, such that the discharge sides 6B of the tubes 6 from the nest 5 included in the tube bores from that group are connected with the tube-sided discharge means 8.

**[0020]** The tube-sided supply and discharge means are designed as radially outwardly extending tube ends 14A, 14B of respective supply and discharge conduits, provided on the circumferential edge 13 of the tube plate 9.

**[0021]** The tube bores 11 in the tube plate 9 can be designed to be blind, but can also be designed to be continuous and are sealed with plugs as will be explained below in more detail with reference to Figures 5 and 6.

**[0022]** Referring to Figs. 4 - 6, it is shown in detail how the tubes 6 with their respective supply sides 6A and discharge sides 6B are included in tube bores 11 of a tube plate 9. The tube bores 11 in the body part of this tube plate are designed to be continuous and extend from a first end 15 located near a back face 20 of the tube plate 9, in which end the tubes 6 are included, to a second free end 16 located near a top face 19 of the tube plate 9, in which end a plug 17 can be received for sealing purposes. Preferably, the tubes 6 are provided in the tube bores 11 by means of a welded joint 18. Such a welded joint 18 can be provided with the aid of a hole weld extending from the top face 19 of the tube plate 9 into the tube bore 11. The tubes 6 can also be provided in the tube bores in different manners, for instance by means of clamping, rolling or screw thread. It is noted that the back face 20 of the tube plate 9 forms part of the wall of the shell 2 of the heat exchanger 1.

**[0023]** With reference to Fig. 5, it is shown that the connecting channels 12 are designed as blind connecting bores 12C-12F, each crossing a row of parallel tube bores 11. As appears from Fig. 4 and 5, the connecting

channels and tube bores 11 are, in each case, surrounded by material of the tube plate 9, so that the pressure exerted by the second fluid can be absorbed on all sides and no resultant pressure force is created on the tube plate 9.

**[0024]** The bores 12C - 12F can be connected via a tee with a supply or a discharge conduit, for instance the bores 12C and 12D via an inlet tee and the bores 12E and 12F via an outlet tee.

**[0025]** The second free ends 16 of the tube bores 11 are provided with screw thread 21, as shown in Fig. 6A.

**[0026]** In the screw thread 21, a plug 17 provided with corresponding screw thread 22 can be detachably received. The plug 17 comprises a body part 23 which can be received in the free end 16 of the tube bore 11. Further, the plug 17 comprises a sealing ring 24 which can be screwed onto the body part 23 with the aid of a bolt (not shown), such that a sealing ring 25 and, optionally, a support ring 26 can be sealingly screwed onto the top face 19 of the tube plate 9. A suitable sealing ring is the "variseal" from the firm of Busak + Shambam. By detaching the plug 17, a tube 6 from the nest 5 can be made individually accessibly for cleaning purposes.

**[0027]** It will be clear that the invention is not limited to the embodiments represented here. The heat exchanger can comprise, for instance, two tube plates 9 between which a tube nest 5 is provided in a stretched configuration. Then, the shell can be formed by connecting the back faces of the two tube plates with the aid of a tube. The connecting channels from one tube plate can be coupled to the tube-sided supply means, while the connecting channels from the second tube plate are connected with the tube-sided discharge means. It is, however, also possible to connect a first group of tube bores in the first tube plate, via connecting channels, with the tube-sided supply means and to connect a second group of tube bores in the first tube plate, via other channels, with the tube-sided discharge means, while in the second tube plate the connecting channels form a connection between a first group of tube bores and a second group of tube bores.

**[0028]** Further, it is noted that the tube plate can have another shape, for instance rectangular, square or oval.

**[0029]** Furthermore, the tube bores can be sealed in different manners, for instance with hole welds, and the tubes can be connected in different manners, for instance by clamping. Additionally, the plugs can be designed differently, for instance as bolts whose heads function as clamping means for clamping a sealing ring against the top face of the tube plate. Further, the connecting channels can be designed to be continuous and be sealed on one side with a plug or hole weld. Additionally, the channels can be curved.

**[0030]** Such variants will be clear to those skilled in the art and are deemed to be within the scope of the invention as defined in the appended claims.

## Claims

1. A heat exchanger, comprising a shell designed as a pressure vessel, provided with shell-sided supply and discharge means with which the shell can be flowed through with a first medium under pressure, further comprising a nest of tubes extending at least partly within the shell, provided with tube-sided supply and discharge means with which the tubes from the nest can be flowed through with a second medium in heat exchanging contact with the first medium under pressure, of which nest the individual tubes are each included with a supply and discharge side in tube bores extending substantially transversely to the plane of a tube plate included in the shell, **characterized in that** the tubes are connected with the tube-sided supply and discharge means via connecting channels located in the plane of the tube plate and crossing the tube holes.
2. A heat exchanger according to claim 1, wherein the connecting channels comprise straight bores each crossing at least two tube bores.
3. A heat exchanger according to claim 1 or 2, wherein the tube bores are designed to be continuous and are sealed with plugs.
4. A heat exchanger according to claim 3, wherein the plugs are detachable.
5. A heat exchanger according to any one of the preceding claims, apparently intended or suitable for a heat exchanger according to any one of the preceding claims, comprising a flat body part with a number of tube bores extending substantially transversely to the plane of the body part between a back face and a top face and one or more connecting channels located in the plane of the tube plate and crossing the tube holes.

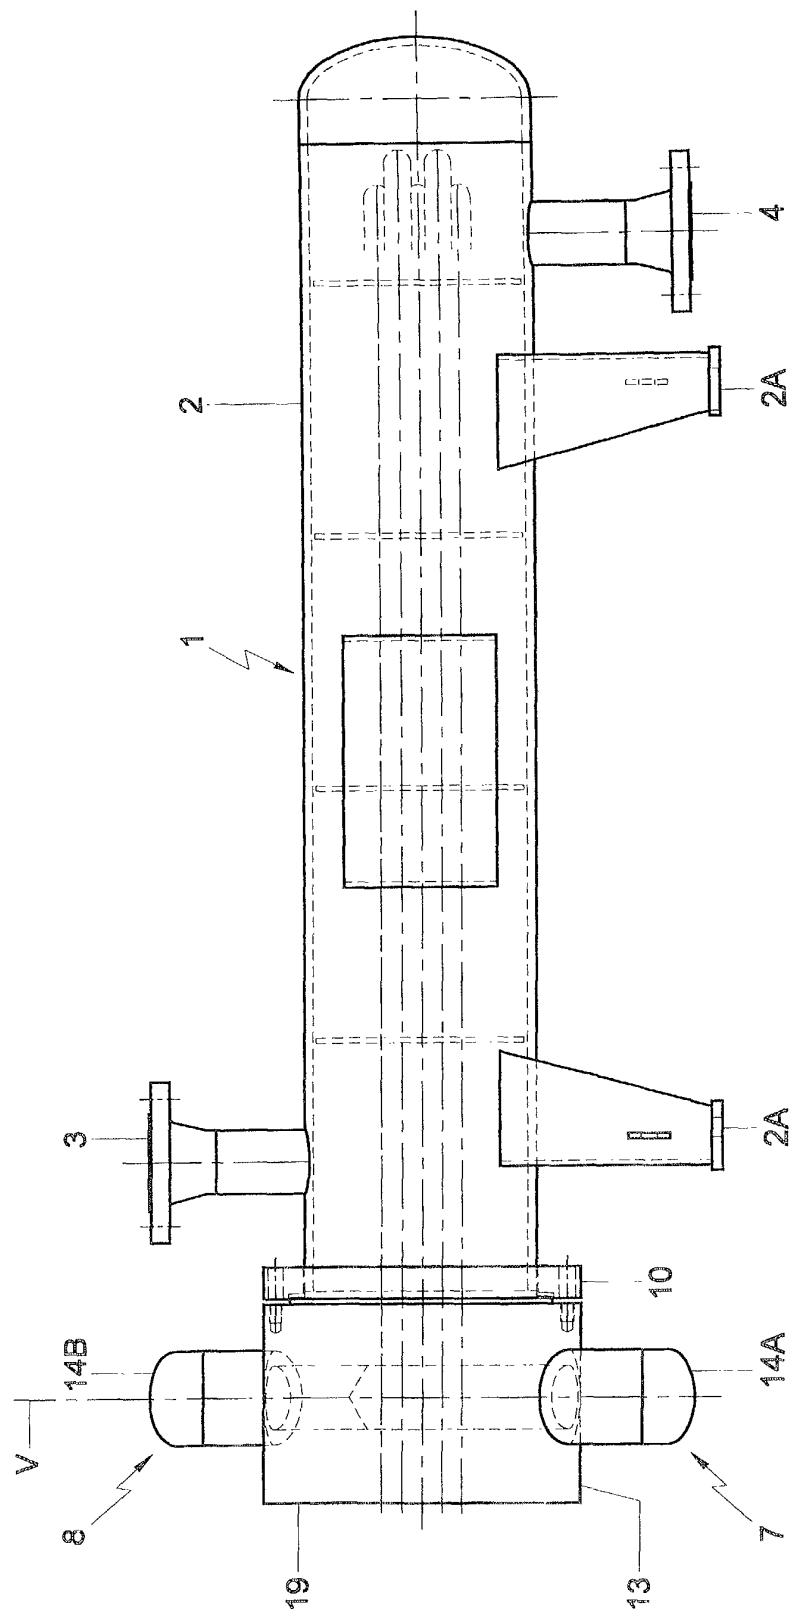


Fig. 1

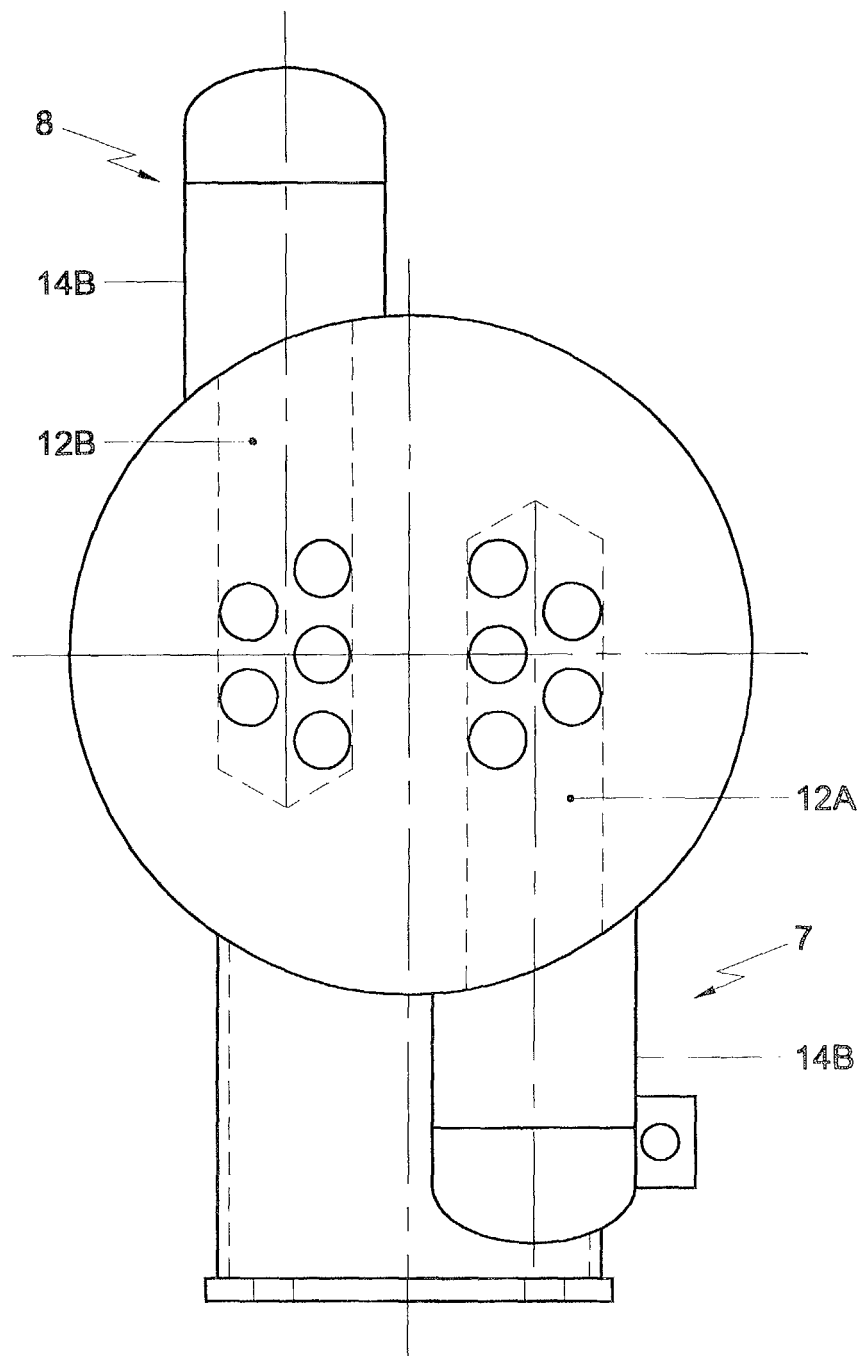


Fig. 2

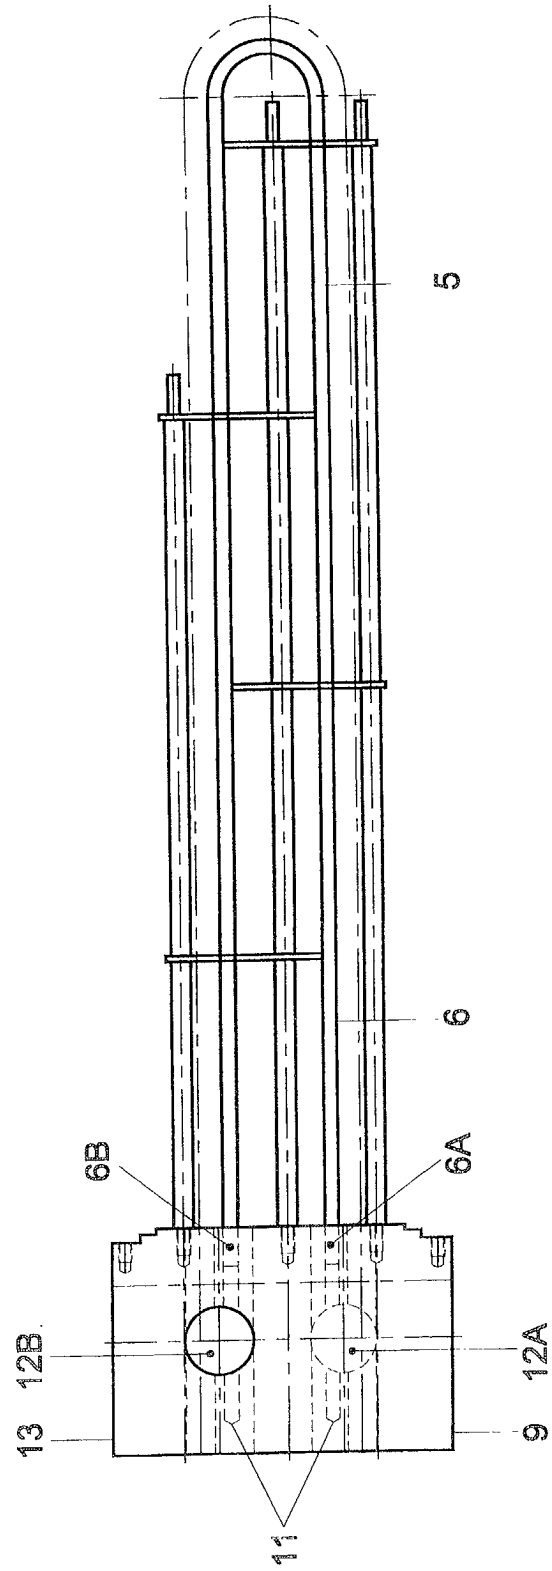


Fig. 3

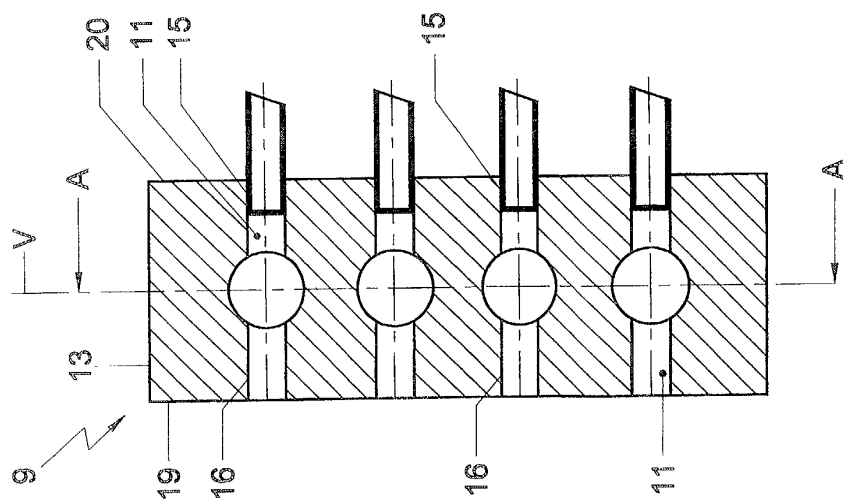


Fig. 4

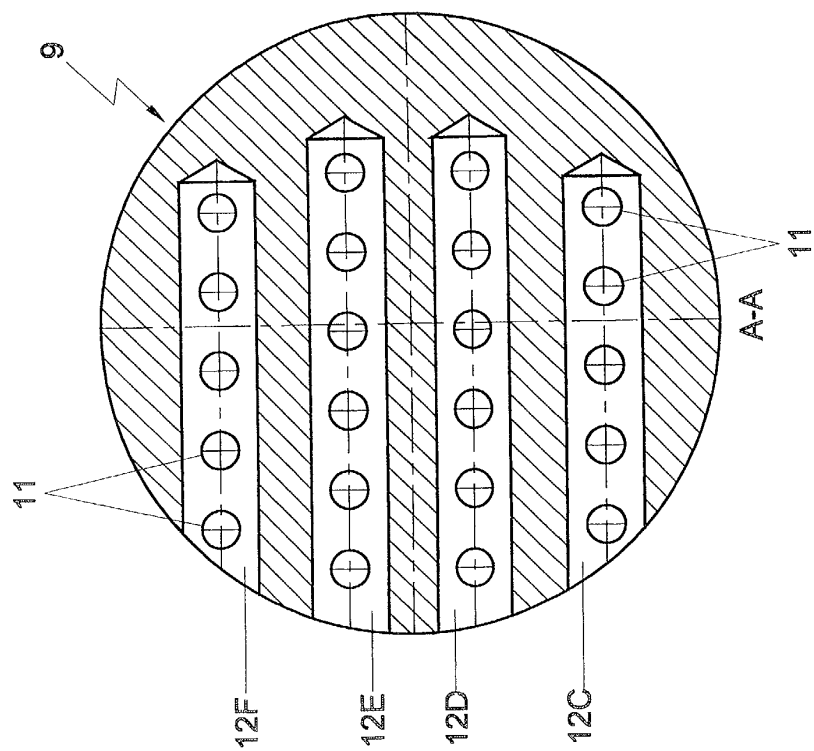


Fig. 5



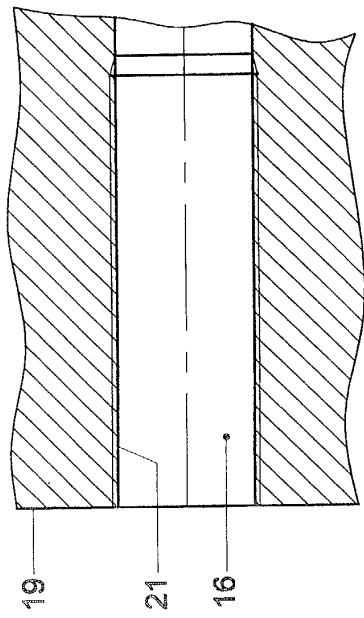


Fig. 6A

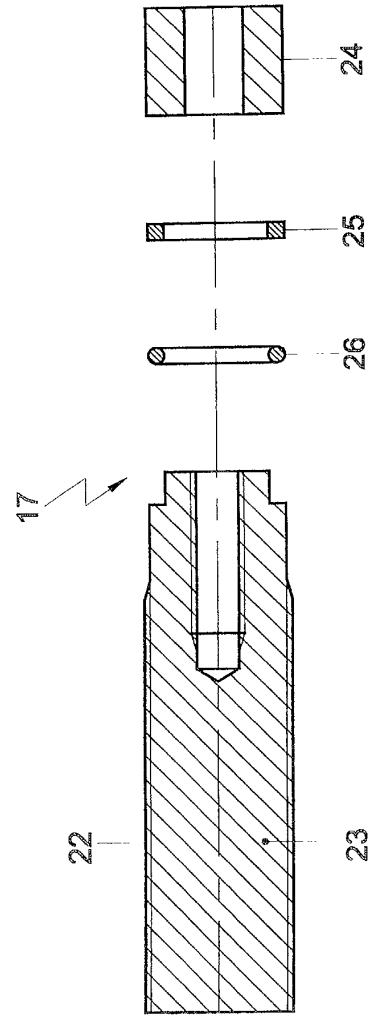


Fig. 6B



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 01 20 3660

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 5 035 283 A (BRUECHER PETER ET AL) 30 July 1991 (1991-07-30) * column 2, line 44 - column 4, line 5; figures *	1	F28F9/02 F28D7/06
A	DE 44 30 338 C (GEA LUFTKUEHLER HAPPEL GMBH) 4 May 1995 (1995-05-04) * column 3, line 43 - column 5, line 4; figures *	1	
A	US 5 813 453 A (BRUCHER PETER) 29 September 1998 (1998-09-29) * abstract; figures 1,2 *	1	
E	NL 1 014 916 C (BRONSWERK HEAT TRANSFER BV) 12 October 2001 (2001-10-12) * the whole document *	1-5	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			F28F F28D
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>22 February 2002</b>	Examiner <b>Van Dooren, M</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 20 3660

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

22-02-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5035283	A	30-07-1991	DE 3930205 A1	14-03-1991
			AT 95303 T	15-10-1993
			AU 632607 B2	07-01-1993
			AU 6025590 A	14-03-1991
			BR 9004567 A	10-09-1991
			CA 2024900 A1	10-03-1991
			CN 1050928 A ,B	24-04-1991
			DD 297697 A5	16-01-1992
			DE 59002909 D1	04-11-1993
			EP 0417428 A2	20-03-1991
			JP 3113295 A	14-05-1991
			JP 3129727 B2	31-01-2001
			KR 145700 B1	17-08-1998
			RU 2011942 C1	30-04-1994
DE 4430338	C	04-05-1995	DE 4430338 C1	04-05-1995
US 5813453	A	29-09-1998	DE 19622139 A1	04-12-1997
			EP 0810414 A2	03-12-1997
			JP 10062078 A	06-03-1998
NL 1014916	C	12-10-2001	NL 1014916 C2	12-10-2001

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82