



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 310 626 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**14.05.2003 Bulletin 2003/20**

(51) Int Cl.7: **E06B 3/72**

(21) Application number: **01126406.6**

(22) Date of filing: **07.11.2001**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventor: **Chen Wang, Kuei-Yung  
Taipei (TW)**

(74) Representative: **Helms, Joachim, Dipl.-Ing.  
Patentanwalt  
Dantestrasse 27  
80637 München (DE)**

(71) Applicant: **NAN YA PLASTICS CORP.  
Taipei (TW)**

(54) **Framed door with reinforcing irons**

(57) The assembly structure of the super-high door of this invention comprises members of two hubbed door skins (1-1, 2-1), a top edge-sealing angle bar (3-1), a bottom edge-sealing angle bar (3-2), a left edge-sealing angle bar (4-2), and a right edge-sealing angle bar (4-1). Said hubbed door skins (1-1, 2-1) are integrally molded flush-edged structures which are positioned by the flange ribs (4-3, 4-4) of the left edge-sealing angle bar (4-2) and the right edge-sealing angle bar (4-1); meanwhile, the top edge-sealing angle bar (3-1) and the bottom edge-sealing angle bar (3-2) are positioned by the milled notches at the top and the bottom ends of the left edge-sealing angle bar (4-2) and the right edge-sealing angle bar (4-1). This invention is characterized in: the inner side of the upper longer region (above the handle) of the left edge-sealing angle bar (4-2) and the inner side of the lower shorter region (below the handle) of the left edge-sealing angle bar (4-2) are respectively inlaid with two U-shape reinforcing irons (6-1, 6-2) of which each length is corresponding to each length of said two regions, then a wood strip (5-1) with a length a

little bit shorter than that of the left edge-sealing angle bar (4-2) is inserted into the inner of the two U-shape reinforcing irons (6-1, 6-2) having different length, then closely joined, by a nail gun and an adhesive, to another wood strip (5-2) of which the handle position is inlaid with a reinforcing angle bar (7); besides, the inner side of the right edge-sealing angle bar (4-1) is inlaid with an U-shape reinforcing iron (6-3) of which the length is a little bit shorter than that of the right edge-sealing angle bar (4-1), then a wood strip (5-1) with a length corresponding to that of the U-shape reinforcing iron (6-3) is inserted thereto and closely joined, by a nail gun and adhesives, to another wood strip (5-2); thereafter, said structure is coated with an adhesive and press-assembled with two hubbed door skins (1-1, 2-1); after assembling, the bottom edge-sealing angle bar (3-2) is drilled a hole thereof and filled up with ammonium polyester foamed plastic (8) to form a super-high door structure which will not bent nor deform.

EP 1 310 626 A1

## Description

### BACKGROUND OF THE PRESENT INVENTION

#### 1. Field of this invention

[0001] This invention relates to an improvement on the assembly structure of a super-high door by installing multiple reinforcing structures such as the U-shape reinforcing iron and the wood strip to prevent the door from bending and deforming caused by its height too high.

#### 2. Description of Prior Art

[0002] Referring to the traditional doors in the market, there are roughly two kinds of door; one is the door with an ordinary height of about 200 cm (6 ft 8 in), the other one is the super-high door with a height of about 240 cm (8 ft). In general the assembly structure of the super-high door is not strong enough to support the weight of itself due to its height too high, which causes bending and deformation to affect its application and safety. Therefore, reinforcing the assembly structure of the super-high door is worthy of the endeavor of the industry to research and develop.

### SUMMARY OF THIS INVENTION

[0003] The main purpose of this invention is to reinforce the assembly structure of a super-high door to prevent the super-high door from bending and deforming, by inlaying an U-shape reinforcing iron of which the inner is inserted with a wood strip and another wood strip is then closely joined to said wood strip by a nail gun and an adhesive joint, to improve the assembly structure and the firmness of the super-high door.

[0004] The other purpose of this invention is to disclose an assembly structure of a super-high door comprising members of two hubbed door skins, a top edge-sealing angle bar, a bottom edge-sealing angle bar, a left edge-sealing angle bar, and a right edge-sealing angle bar. Said hubbed door skin is an integrally molded flush-edged structure which is positioned by the flange ribs of the left edge-sealing angle bar and the right edge-sealing angle bar; meanwhile, the top edge-sealing angle bar and the bottom edge-sealing angle bar are positioned by the milled notches at the top and the bottom ends of the left edge-sealing angle bar and the right edge-sealing angle bar. This invention is characterized in: the inner side of the upper longer region (above the handle) of the left edge-sealing angle bar and the inner side of the lower shorter region (below the handle) of the left edge-sealing angle bar are respectively connected with two U-shape reinforcing irons of which each length is corresponding to each length of said two regions, then a wood strip with a length a little bit shorter than that of the left edge-sealing angle bar is inserted into the inner of the two U-shape reinforcing irons, then

by a nail gun and an adhesive joint, another wood strip is closely joined together to the wood strip; besides, the inner side of the right edge-sealing angle bar is connected with an U-shape reinforcing iron of which the length is a little bit shorter than that of the right edge-sealing angle bar, then a wood strip with a length corresponding to that of the U-shape reinforcing iron is inserted thereto and by a nail gun and adhesives joint, another wood strip is closely joined to the wood strip; thereafter, said structure is coated with an adhesive and press-assembled with two hubbed door skins; after assembling, the bottom edge-sealing angle bar is drilled a hole thereof and filled up with ammonium polyester foamed plastic to form a super-high door structure which will not bent nor deform.

### BRIEF DESCRIPTION OF THE DRAWING FIGURES

#### [0005]

Fig. 1 is an assembly drawing of a door structure.  
Fig. 2 is an exploded view drawing of a door structure.  
Fig. 3 is a transverse section drawing of a door assembly.  
Fig.4 is a vertical section drawing of a door assembly.  
Fig.5 is a schematic drawing of a reinforced structure.  
Fig.6 is a schematic drawing of the assembly procedure of a reinforced structure. Symbols of the drawings are explained as follows:

- 1, 2 : skin of hubbed door
- 1-1: top skin
- 2-1: bottom skin
- 3: top and bottom edge-sealing angle bar
- 3-1: top edge-sealing angle bar
- 3-2: bottom edge-sealing angle bar
- 4: left and right edge-sealing angle bar
- 4-1: right edge-sealing angle bar
- 4-2: left edge-sealing angle bar
- 4-3: flange rib of the left and right edge-sealing angle bar
- 4-4: drilled notch at the top and bottom ends of the left and right edge-sealing angle bar
- 5: left and right reinforcing angle bar
- 5-1: wood strip 1 (needed to be edge-drilled)
- 5-2: wood strip 2
- 6: left and right U-shape reinforcing iron
- 6-1: left longer U-shape reinforcing iron
- 6-2: left shorter U-shape reinforcing iron
- 6-3: right U-shape reinforcing iron
- 7: handle area reinforcing angle bar
- 8: ammonium polyester foamed plastic

## DETAILED DESCRIPTION OF THIS INVENTION

**[0006]** This invention improves the assembly structure of the conventional super-high door by installing multiple reinforcing structures such as the U-shape reinforcing iron and the wood strip so as to have the advantage of preventing the door from bending and deforming caused by its height too high. To help be clearly understood, the essence of the skill of this invention in combination of drawings is described in detail as follows:

**[0007]** Referring to Fig.1 and Fig. 2, the assembly structure of the super-high door of this invention comprises two hubbed door skins 1 or 2, a top edge-sealing angle bar 3-1, a bottom edge-sealing angle bar 3-2, a left edge-sealing angle bar 4-2, a right edge-sealing angle bar 4-1, a couple of left and right wood strips 5-1, another couple of left and right wood strips 5-2, a left longer U-shape reinforcing iron 6-1, a left shorter U-shape reinforcing iron 6-2, a right U-shape reinforcing iron 6-3, and a handle area reinforcing angle bar 7.

**[0008]** The thickness of the hubbed door skin 1 or 2 of this invention is about 1 ~ 4 mm, of which the material can be strengthened glass fiber, wood fiber, steel, or natural wood. The outer surface of the hubbed door skin is provided with smooth surface or to simulate wood graining. The depth of wood graining simulated is about 0.05 ~ 0.2 mm. The hubbed door skins 1 or 2 can be a flat surface or is embellished as 3 panels door, 4 panels door, or 6 panels door. The opposite side of the hubbed door skins 1 or 2 is then provided with rough surfaces to increase the abrasiveness while adhere-joined. The four edges of the hubbed door skins 1 or 2 are designed to be flush-edged to be closely adhere-joined to and assembled with the top edge-sealing angle bar 3-1, the bottom edge-sealing angle bar 3-2, the left edge-sealing angle bar 4-2, and the right edge-sealing angle bar 4-1. The material of said top edge-sealing angle bar 3-1 and bottom edge-sealing angle bar 3-2 can be PVC foam profile, wood, steel, or ejected plastic.

**[0009]** Referring to Fig. 2, the assembling procedure of the super-high door of this invention is as follows: the door skins 1 or 2, the top edge-sealing angle bar 3-1, the bottom edge-sealing angle bar 3-2, the left edge-sealing angle bar 4-2, and the right edge-sealing angle bar 4-1 are closely adhere-joined and assembled. The hubbed door skins 1 or 2 are integrally molded flush-edged structures which are position-joined (referring to Fig. 3 and Fig. 4) by the flange ribs 4-3 of the left edge-sealing angle bar 4-2 and the right edge-sealing angle bar 4-1; meanwhile, the top edge-sealing angle bar 3-1 and the bottom edge-sealing angle bar 3-2 are positioned by the milled notches 4-4 at the top and the bottom ends of the left edge-sealing angle bar 4-2 and the right edge-sealing angle bar 4-1.

**[0010]** In addition, the inner side of the left edge-sealing angle bar 4-2 and the inner side of the right edge-sealing angle bar 4-1 are inlaid with a reinforcing struc-

ture (referring to Fig. 5) of the super-high door of this invention comprising: a couple of the left and the right wood strips 5-1, another couple of the left and the right wood strips 5-2, a left longer U-shape reinforcing iron 6-1, a left shorter U-shape reinforcing iron 6-2, a right U-shape reinforcing iron 6-3, and a handle area reinforcing angle bar 7. After the completion of assembling, the internal of the two hubbed door skins 1 or 2 forms a sealed space; and the bottom edge-sealing angle bar 3-2 is drilled a hole thereof and filled up with ammonium polyester foamed plastic 8 to compose a super-high door.

**[0011]** Referring to Fig. 2, Fig.3, Fig.4, Fig.5, and Fig. 6, to reinforce the strength of super-high door, the preferred embodiment of the super-high door structure of this invention is that the left and the right wood strips 5-1 are capably inlaid into a left longer U-shape reinforcing iron 6-1, a left shorter U-shape reinforcing iron 6-2, and a right U-shape reinforcing iron 6-3 respectively.

**[0012]** Therefore, the super-high door structure of this invention comprises members of two hubbed door skins 1 or 2, a top edge-sealing angle bar 3-1, a bottom edge-sealing angle bar 3-2, a left edge-sealing angle bar 4-2, and a right edge-sealing angle bar 4-1. Said hubbed door skins 1 or 2 are integrally molded flush-edged structure which are positioned by the flange ribs 4-3 of the left edge-sealing angle bar 4-2 and the right edge-sealing angle bar 4-1; meanwhile, the top edge-sealing angle bar 3-1 and the bottom edge-sealing angle bar 3-2 are positioned by the milled notches 4-4 at the top and the bottom ends of the left edge-sealing angle bar 4-2 and the right edge-sealing angle bar 4-1. In addition, the inner side of the upper longer region (above the handle) of the left edge-sealing angle bar 4-2 and the inner side of the lower shorter region (below the handle) of the left edge-sealing angle bar 4-2 are respectively connected with a left longer U-shape reinforcing iron 6-1 and a left shorter U-shape reinforcing iron 6-2 of which each length is corresponding to each length of said two regions; then a wood strip 5-1 with a length a little bit shorter than that of the left edge-sealing angle bar 4-2 is inserted into the inners of the left longer U-shape reinforcing iron 6-1 and the left shorter U-shape reinforcing iron 6-2. Furthermore, by a nail gun and adhesive joint another wood strip 5-2 is closely joined together onto the wood strip 5-1, and at area of handle to be installed on the wood strip 5-2 another reinforcing angle bar 7 is then jointed to the wood strip 5-2 to reinforce the strength of handle to be installed. Besides, the inner side of the right edge-sealing angle bar 4-1 is connected with an U-shape reinforcing iron 6-3 of which the length is a little bit shorter than that of the right edge-sealing angle bar 4-1, then a wood strip 5-1 with a length corresponding to that of the U-shape reinforcing iron 6-3 is inserted thereto, and by a nail gun and adhesives joint, another wood strip 5-2 is closely joined together to the wood strip 5-1. Thereafter, said structure is coated with an adhesive and press-assembled with two hubbed

door skins 1 or 2; after assembling, the bottom edge-sealing angle bar 3-2 is drilled a hole thereof and filled up with ammonium polyester foamed plastic 8 to form a super-high door structure with reinforced strength.

**[0013]** The super-high door of this invention will not bent nor deform by using the assembly of the left longer U-shape reinforcing iron 6-1, the left shorter U-shape reinforcing iron 6-2, the right U-shape reinforcing iron 6-3, and a couple of wood strips 5-1 and 5-2 to compose an unique structure of a reinforced super-high door.

#### Claims

1. Improvement on the assembly structure of a super-high door, comprising two hubbed door skins (1-1, 2-1), a top edge-sealing angle bar (3-1), a bottom edge-sealing angle bar (3-2), a left edge-sealing angle bar (4-2), and a right edge-sealing angle bar (4-1); said hubbed door skins (1-1, 2-1) are integrally molded flush-edged structures which are positioned by the flange ribs (4-3, 4-4) of the left edge-sealing angle bar (4-2) and the right edge-sealing angle bar (4-1); meanwhile, the top edge-sealing angle bar (3-1) and the bottom edge-sealing angle bar (3-2) are positioned by the milled notches at the top and the bottom ends of the left edge-sealing angle bar (4-2) and the right edge-sealing angle bar (4-1); **characterised in that** the inner side of the upper longer region (above the handle) of the left edge-sealing angle bar (4-2) and the inner side of the lower shorter region (below the handle) of the left edge-sealing angle bar (4-2) are respectively inlaid with an U-shape reinforcing iron (6-1, 6-2) of which the length is corresponding to each length of said two regions, then a wood strip (5-1) with a length a little bit shorter than that of the left edge-sealing angle bar (4-2) is inserted into the inner of the two U-shape reinforcing irons (6-1, 6-2) having different length, then closely joined, by a nail gun and an adhesive, to another wood strip (5-2) of which the handle position is inlaid with a reinforcing angle bar (7); and the inner side of the right edge-sealing angle bar (4-1) is inlaid with an U-shape reinforcing iron (6-3) of which the length is a little bit shorter than that of the right edge-sealing angle bar (4-1), then a wood strip (5-1) with a length corresponding to that of the U-shape reinforcing iron (6-3) is inserted thereto and closely joined, by a nail gun and adhesives, to another wood strip (5-2); thereafter, said structure is coated with an adhesive and press-assembled with two hubbed door skins (1-1, 2-1); after assembling, the bottom edge-sealing angle bar (3-2) is drilled a hole thereof and filled up with ammonium polyester foamed plastic (8) to form a super-high door structure which will not bent nor deform.

2. The improvement on the assembly structure of a super-high door as defined in claim 1, **characterised in that** the material of the hubbed door skin (1-1, 2-1) is sheet molding compound of strengthened glass fiber, wood fiber, steel, or natural wood.
3. The improvement on the assembly structure of a super-high door as defined in claim 2, **characterised in that** the material of the edge-sealing angle bar (3-1, 3-2, 4-1, 4-2) is PVC profile, or PVC foam profile, or wood, or steel, or ejected plastic.
4. The improvement on the assembly structure of a super-high door as defined in claim 2, **characterised in that** the surface of the hubbed door skin (1-1, 2-1) is a smooth surface without vein or a surface with vein.
5. The improvement on the assembly structure of a super-high door as defined in claim 4, **characterised in that** the vein depth of the hubbed door skin (1-1, 2-1) surface is 0.05 ~ 0.2 mm.
6. The improvement on the assembly structure of a super-high door as defined in claim 5, **characterised in that** the material of the edge-sealing angle bar (3-1, 3-2, 4-1, 4-2) is PVC profile, or PVC foam profile, or wood, or steel, or ejected plastic.
7. The improvement on the assembly structure of a super-high door as defined in claim 5, **characterised in that** the hubbed door skin (1-1, 2-1) is a flat surface or is embellished as 3 panels door, 4 panels door, or 6 panels door.
8. The improvement on the assembly structure of a super-high door as defined in claim 7, **characterised in that** the material of the edge-sealing angle bar (3-1, 3-2, 4-1, 4-2) is PVC profile, or PVC foam profile, or wood, or steel, or ejected plastic.

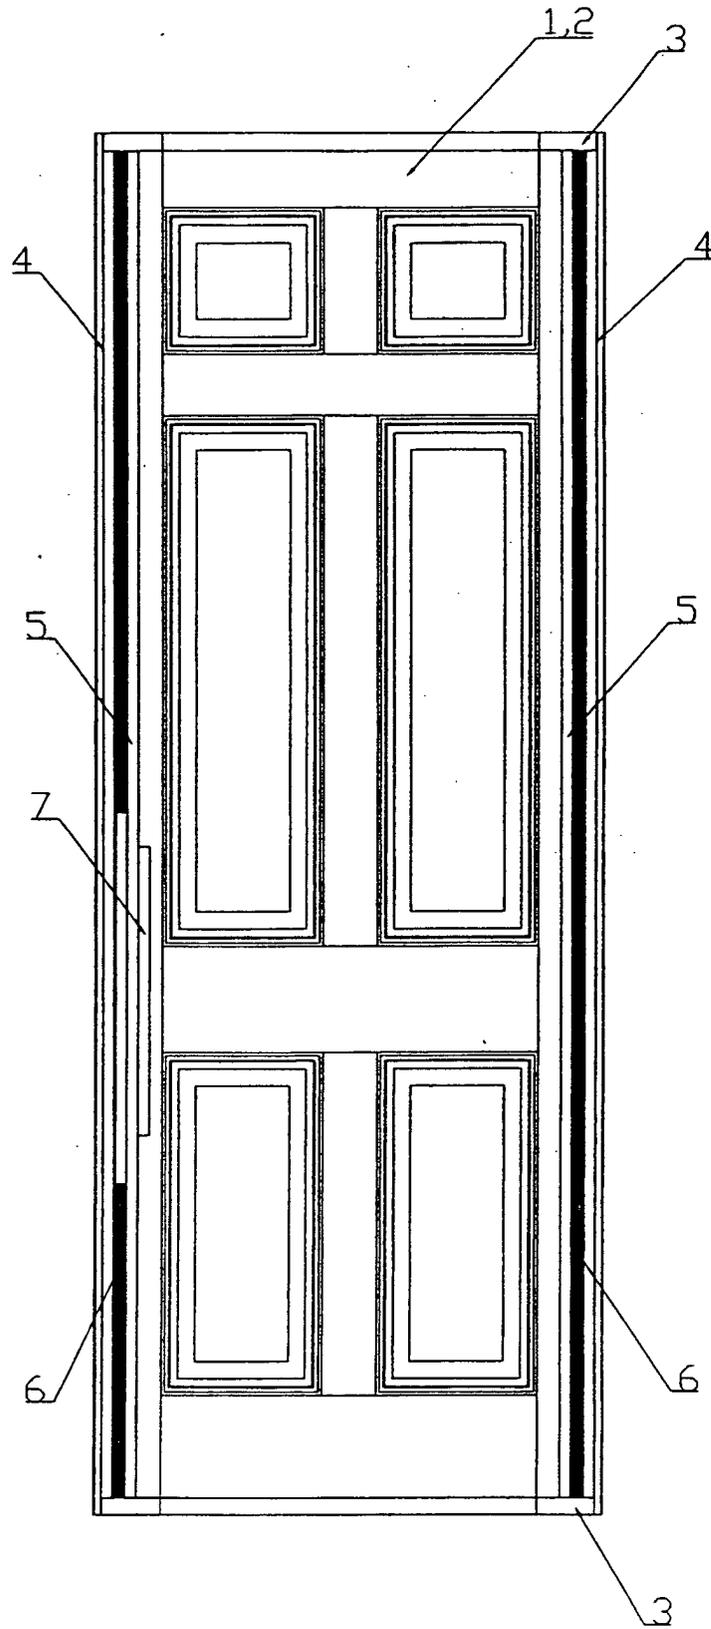


Fig.1

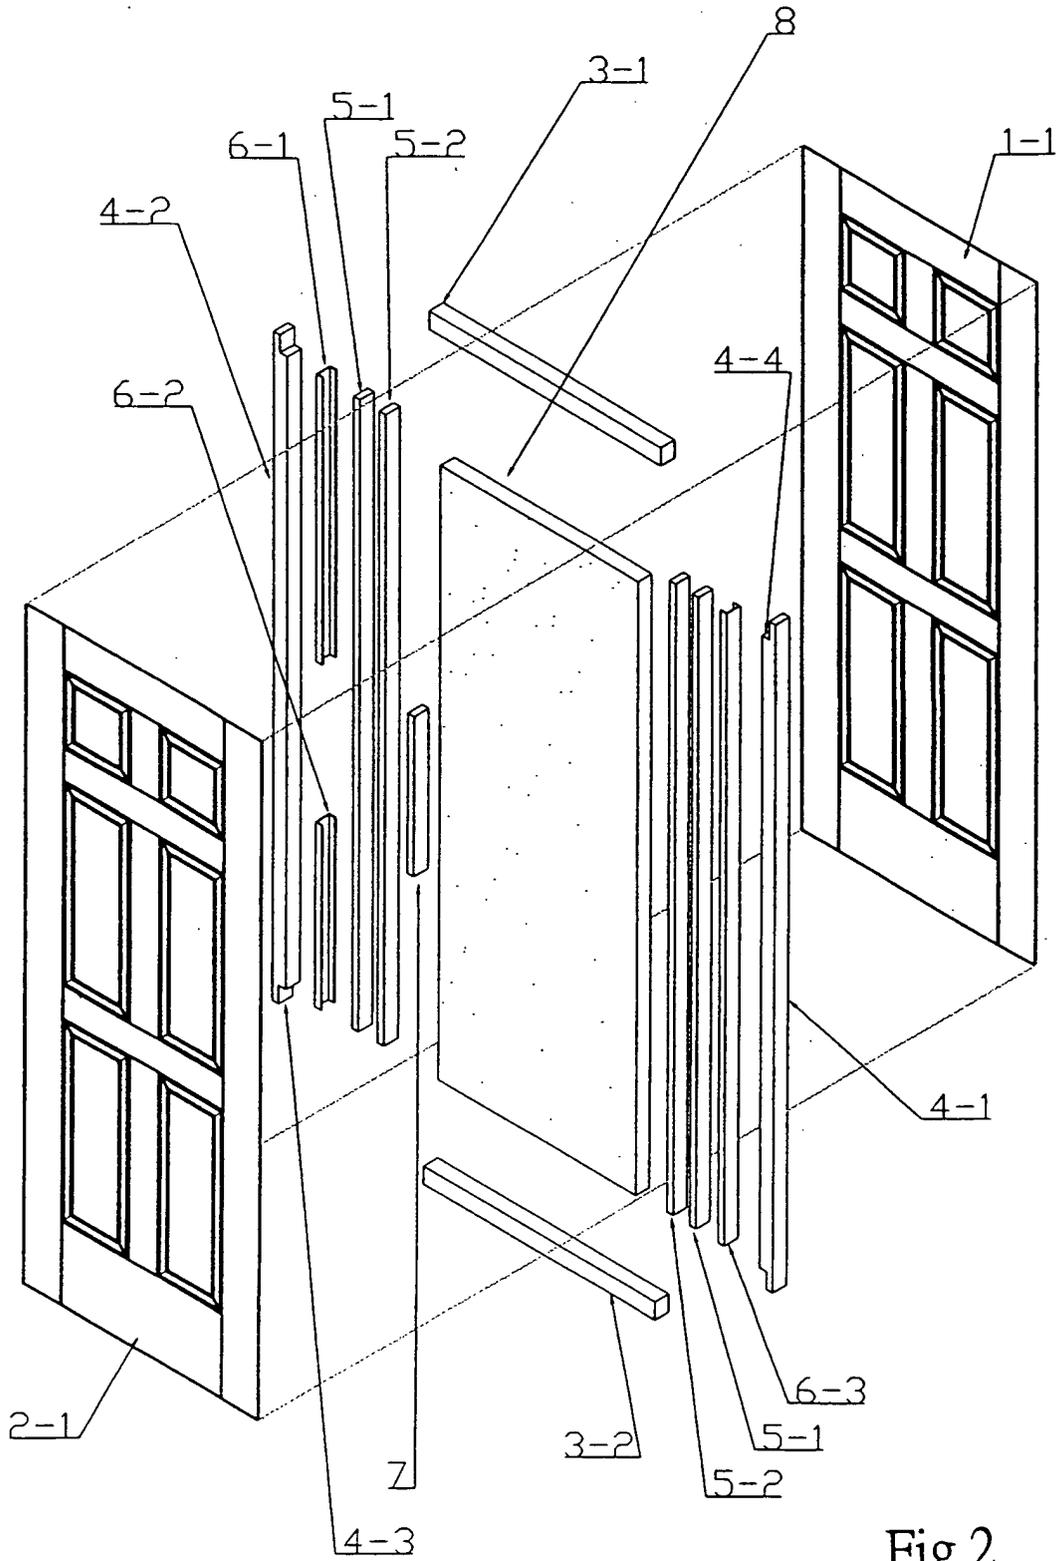


Fig.2

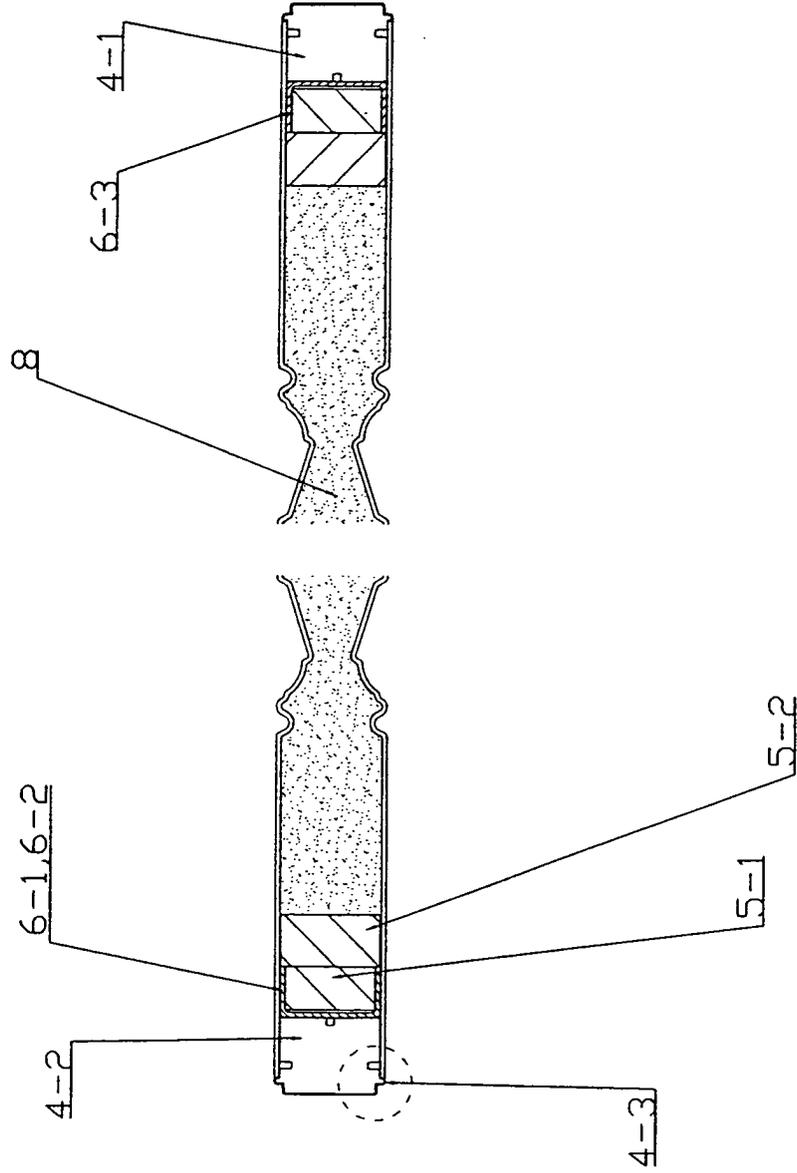


Fig.3

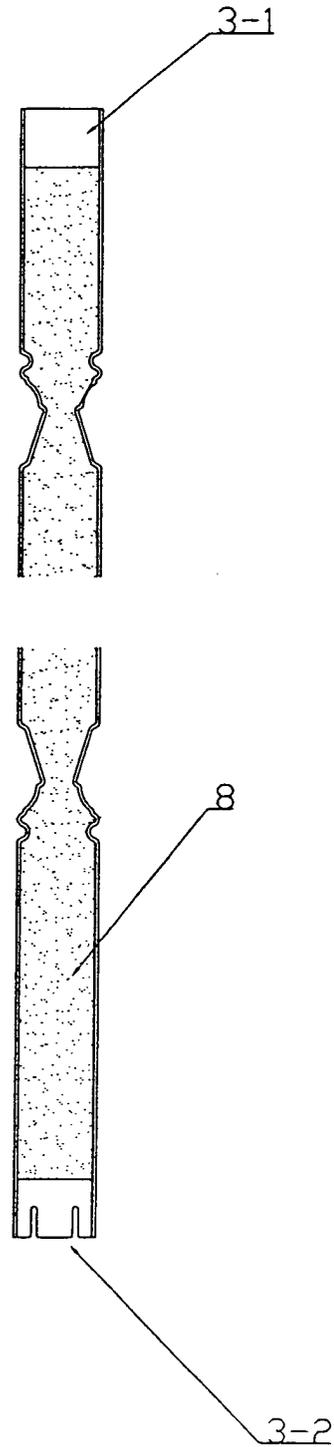


Fig.4

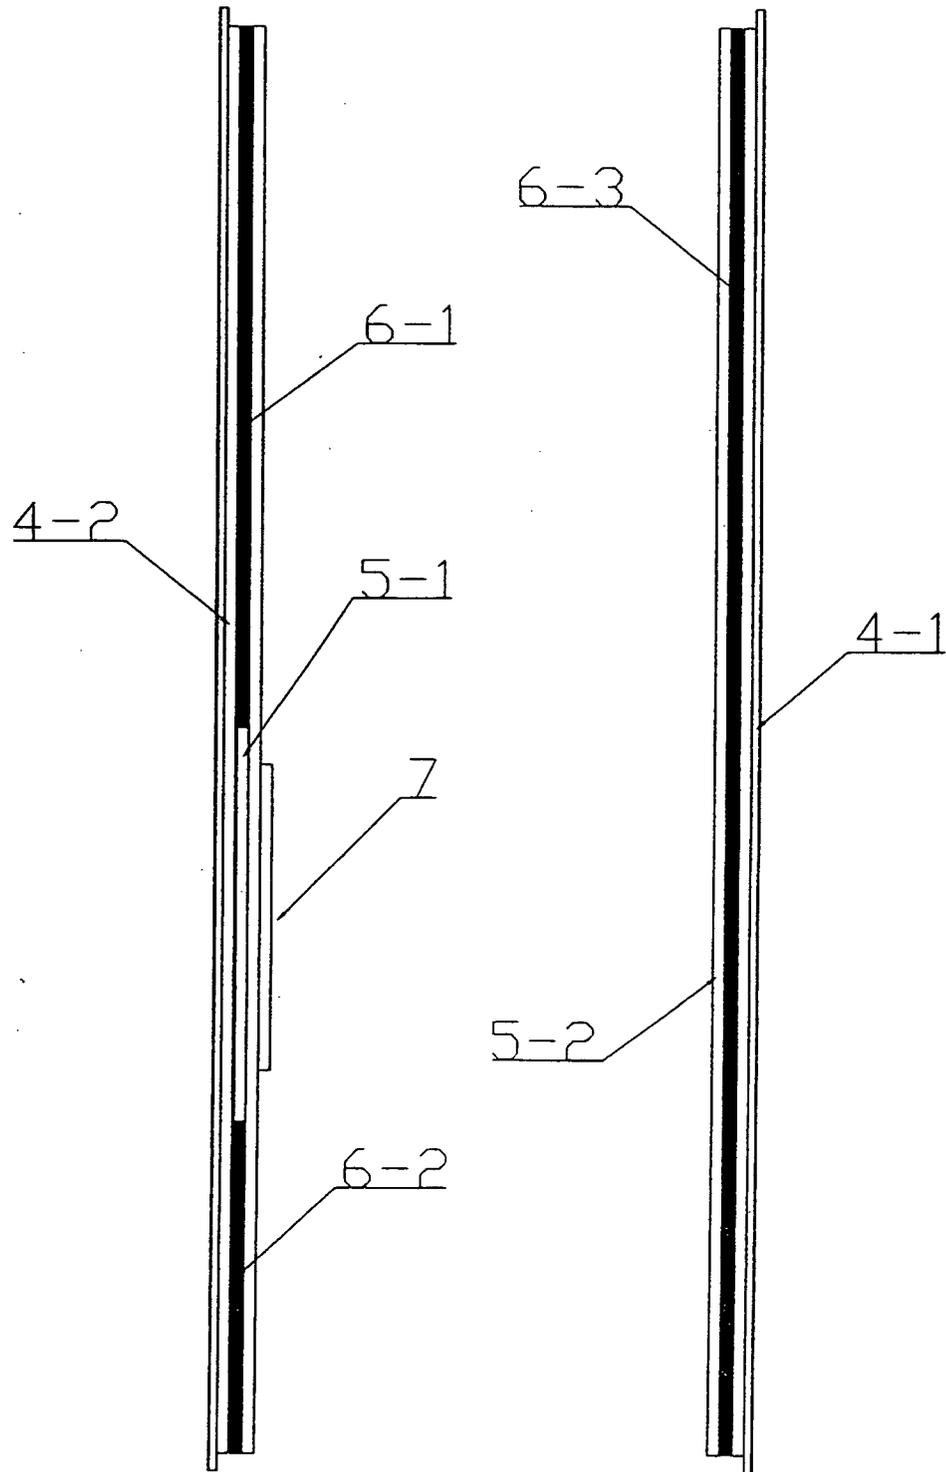


Fig.5

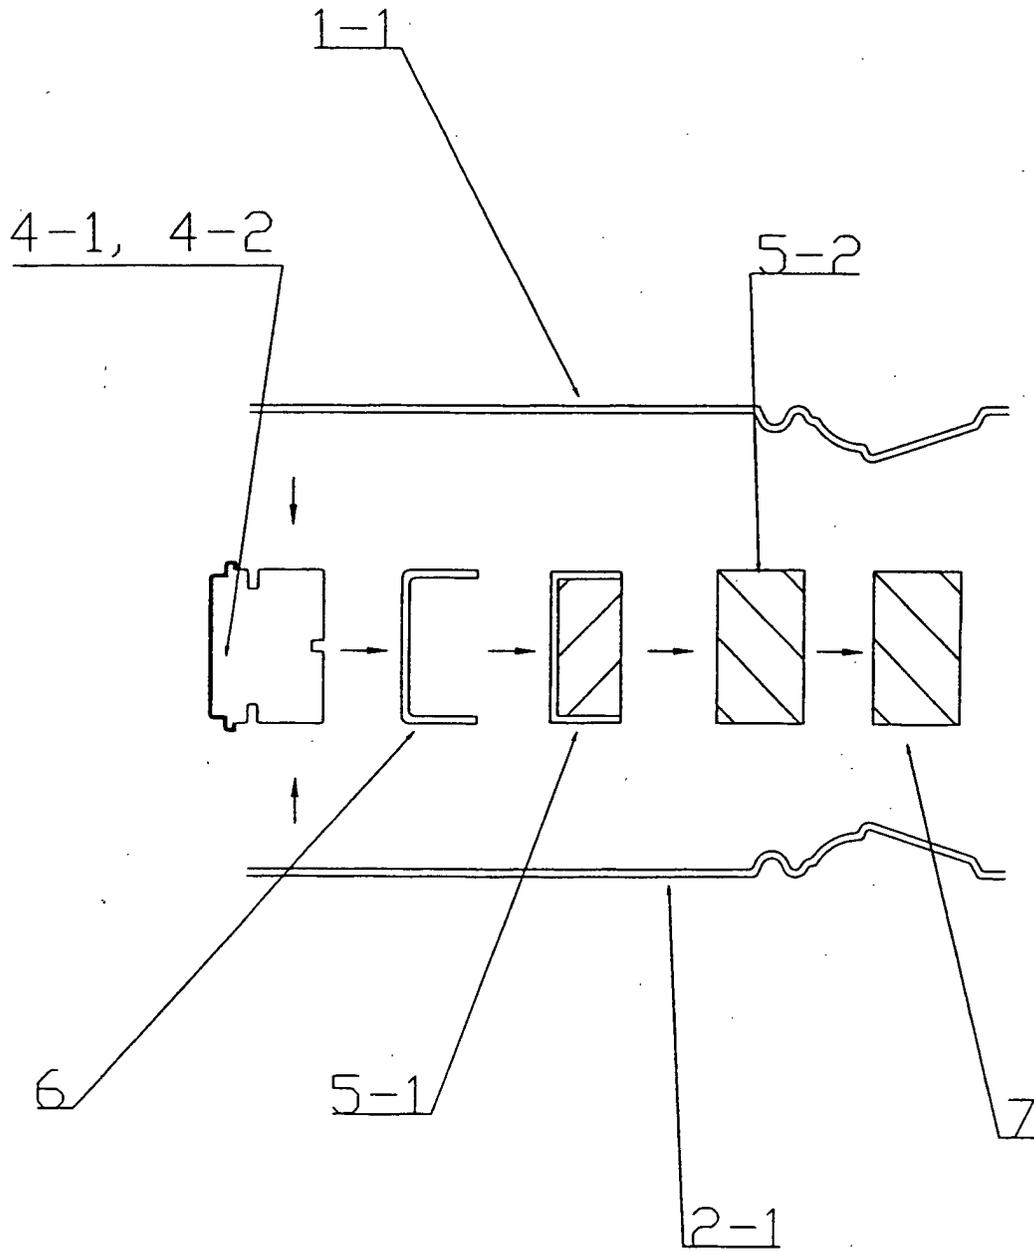


Fig.6



European Patent Office

EUROPEAN SEARCH REPORT

Application Number  
EP 01 12 6406

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	FR 2 116 834 A (BICHON ROGER) 21 July 1972 (1972-07-21) * page 2, line 9-34; figure 1 *	1-8	E06B3/72
Y	WO 87 05355 A (PUR GRUPPEN I PARTILLE AB) 11 September 1987 (1987-09-11) * abstract; figure 2 *	1-8	
A	FR 2 785 329 A (PAC DAMAS) 5 May 2000 (2000-05-05) * claim 3; figures 2,3 *	1	
A	DE 296 08 281 U (FINPEMA OY) 1 August 1996 (1996-08-01) * claim 1; figure 1 *	1	
A	BE 670 131 A (VAN WYNSBERGHE) * the whole document *	1	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			E06B
The present search report has been drawn up for all claims			
Place of search <b>MUNICH</b>		Date of completion of the search <b>28 February 2002</b>	Examiner <b>Kofoed, P</b>
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P/AC01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 12 6406

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

28-02-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
FR 2116834	A	21-07-1972	FR 2116834 A6	21-07-1972
WO 8705355	A	11-09-1987	SE 455872 B	15-08-1988
			AU 7082387 A	28-09-1987
			DK 553687 A ,B,	22-10-1987
			NO 874479 A ,B,	27-10-1987
			SE 8600895 A	29-08-1987
			WO 8705355 A1	11-09-1987
FR 2785329	A	05-05-2000	FR 2785329 A1	05-05-2000
DE 29608281	U	01-08-1996	FI 2391 U1	17-04-1996
			DE 29608281 U1	01-08-1996
			NO 962819 A	15-08-1997
			SE 9602326 A	15-08-1997
BE 670131	A		NONE	