



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 312 388 A8**

(12) **CORRECTED EUROPEAN PATENT APPLICATION**

Note: Bibliography reflects the latest situation

(15) Correction information:
Corrected version no 1 (W1 A1)
INID code(s) 71

(51) Int Cl.7: **A61M 5/168**, A61M 5/14

(48) Corrigendum issued on:
17.12.2003 Bulletin 2003/51

(43) Date of publication:
21.05.2003 Bulletin 2003/21

(21) Application number: **02021419.3**

(22) Date of filing: **25.09.2002**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
IE IT LI LU MC NL PT SE SK TR
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• **Scagliarini, Massimo**
40136 Bologna (IT)
• **Bettini, Emanuele**
40050 Monte San Pietro (Bologna) (IT)

(30) Priority: **20.11.2001 IT MI20012444**

(74) Representative: **Ripamonti, Enrico, Dr. Ing. et al**
Ing. A. Giambrocono & C. s.r.l.,
19/B, Via Rosolino Pilo
20129 Milano (IT)

(71) Applicant: **GVS S.p.A.**
40069 Zola Predosa (Bologna) (IT)

(54) **Device for regulating the flow rate of medical liquid directed towards a patient**

(57) A device for regulating the flow rate of a liquid in a medical infusion line, said device (1) comprising a body (2) presenting elements (40, 59) for its connection to a first and to a second conduit connected to a container of said liquid and directed to a patient respectively, the body (2) presenting a plurality of parts (3, 4) connected together but torsionally free about a common axis of rotation (K) to enable flow rate variation means (54, 55, 67), associated with the body (2), to modify the flow rate of the liquid fed to the patient. The flow rate variation means are a plurality of recesses (54, 55, 67) provided in a single part (4) of said body (2), a first recess (54) being annular and of constant depth, and at least one second recess (55, 67) being in the form of a broken ring and of variable depth, said recesses (54, 55, 67) being concentric.

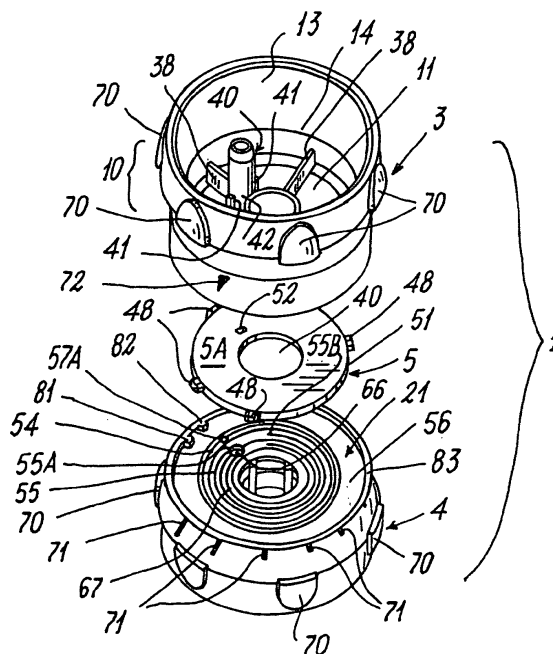


FIG. 4