



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
27.08.2003 Bulletin 2003/35

(51) Int Cl.7: **E04H 4/16**

(21) Application number: **03076262.9**

(22) Date of filing: **10.07.1998**

(84) Designated Contracting States:
DE ES FR GB IT PT

(30) Priority: **11.07.1997 US 52296 P**
15.07.1997 US 52625 P

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
98934409.8 / 0 994 995

(71) Applicants:

- **Moyra A. Phillipson Family Trust**
Longwood, FL 32779 (US)
- **Daniela Sebor Family Trust**
Heathrow, FL 32746 (US)

(72) Inventors:

- **Phillipson, Brian H.**
Longwood, FL 32779 (US)
- **Sebor, Paul**
Heathrow, FL 32746 (US)
- **Sebor, Daniela**
Heathrow, FL 32746 (US)

(74) Representative: **Hector, Annabel Mary et al**
D Young & Co.,
21 New Fetter Lane
London EC4A 1DA (GB)


Remarks:

This application was filed on 01 - 05 - 2003 as a
divisional application to the application mentioned
under INID code 62.

(54) **Submerged surface pool cleaning device**

(57) A swimming pool cleaning device (10) for automatically cleaning a submerged surface (12) includes a forwardly inclined housing (100) forming a flow passage (110) between the surface (12) to be cleaned and a suction hose (16). A flow control valve (200) is operable within the flow passage (110) and includes a flap (202) pivotable from a seated position against the forward wall (102) of the housing (100) for blocking flow through the passage (110) to an unseated position in a spaced relation to the forward wall (102), permitting. A shoe (302) is carried at an inlet (112) to the flow passage (110) and a flexible planar flange (304) extends around the shoe (302) for engaging the surface (12) to be cleaned. A groove (310) within the shoe bottom surface forms a channel with the surface (12) to be cleaned for passage of debris and fluid flow through the channel. The flexible planar flange (304) includes slits extending from the peripheral edge inward toward the central opening to form a pedal-like segmented flange for splaying of each segment in response to travel of the cleaner over an irregularly contoured surface and facilitate an effective frictional contact with the surface. A steering mechanism (400) is operable between the housing (100) and shoe (302) for rotating the housing (100) about the shoe (302) and flange (304), and includes a ratchet and pawl (402) operable between upper and lower steering members for providing free rotation in one direction in response

to a pulsating fluid flow through the flow passage (110), while biasing against rotation in an opposing direction.

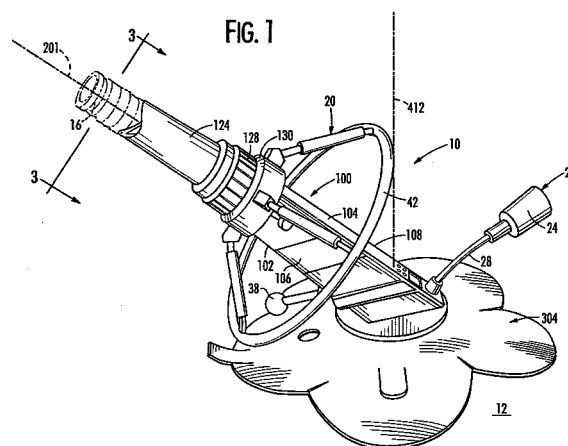

Description

RELATED APPLICATIONS

[0001] This Application is related to Provisional Applications having Serial No. 60/052,296, filed on July 11, 1997 for "Steering Apparatus and Method for Pool Cleaner" and Serial No. 60/052,625, filed July 15, 1997 for "Submerged Surface Cleaning Device," both commonly owned with the instant application.

FIELD OF INVENTION

[0002] This invention relates generally to self-propelled devices for cleaning submerged surfaces. More particularly, it relates to a swimming pool cleaning device incorporating a flow control valve for establishing intermittent flow of a fluid through the cleaner and a rotating mechanism to assist the cleaner to steer away from obstructions and avoid repetitive patterns of travel across the surface to be cleaned.

BACKGROUND OF INVENTION

[0003] Mechanical pool cleaners which utilize the flow of water drawn through the cleaner by means of a connectable flexible suction pipe in communication with a filtration system pump are well known. Such pool cleaners are termed suction cleaners. Some suction cleaners interrupt the flow of the water induced through at least one passage through the cleaner to provide the propulsive force to move the cleaner in a random manner across the surface to be cleaned.

[0004] In U.S. Patent No. 3,803,658 to Raubenheimer discloses a cleaning device which employs a water cut-off valve carried in rotational movement by a wheel driven by the flow of liquid through the cleaner. As is typical for a suction cleaner, a flexible hose leads from the suction chamber of the device to the suction side of the filtration system pump. When in use for cleaning a swimming pool, the hose becomes filled with water and the continuous opening and closing of the valve causes the hose to jerk. As the suction against the surface to be cleaned is momentarily released each time the gate closes, the jerking movement of the hose causes the head to move over the surface.

[0005] A water interruption pool cleaner developed by Chauvier and described in U.S. Patent No. 4,023,227 uses the oscillatory movement of a flapper valve of substantially triangular cross-section displaceably located in the operating head of the cleaner and between two valve seats to alternately close off the flow of water drawn through a pair of passages in the cleaner which is connected by means of a suction pipe to the filtration system pump. The passages are located parallel to each other and are preferably oriented at an angle of 45° from the surface to be cleaned. The sudden halt of the flow of liquid through one passage applies an impul-

sive force to the apparatus due to the kinetic energy of the fluid flowing in the passage. This impulsive force is sufficient to displace the pool cleaner along the surface to be cleaned. Further, due to the inertia of the liquid in the passage to which flow is transferred, the pressure differential between the low pressure in the head and the ambient pressure of the water surrounding the cleaner is temporarily reduced, thereby decreasing the frictional engagement between the head of the pool cleaner and the surface, allowing the cleaner to be displaced.

[0006] By way of further example, water interruption pool cleaners which are more compact than the Chauvier device described above are disclosed in U.S. Patent Nos. 4,133,068 and 4,208,752 issued to Hofmann. They employ an oscillatable valve adapted to alternately close a pair of passages in the head of the cleaner. A baffle plate is disposed in the head between the inlet and valve to cause one of the passages to be more restricted and less direct between inlet and outlet.

[0007] U.S. Patent Nos. 4,682,833 and 4,742,593 to Stoltz and Kallenbach respectively, achieve autonomous water interruption by providing an assembly including a tubular flow passage at least partly defined by a transversely contractible and expandable tubular diaphragm, the tubular flow passage and tubular diaphragm are enclosed within a chamber formed by the body of the cleaner. The assembly includes means whereby pressures internally of the tubular diaphragm member and externally of tubular diaphragm member within the chamber formed around the member by the body are controlled so that, in use with fluid flowing through the diaphragm, it will be caused to automatically and repeatedly contract and expand. A pulsating flow of fluid through the assembly results and in forces cause the displacement of the pool cleaner apparatus over a surface to be cleaned.

[0008] To effect interruption of an induced flow through a swimming pool cleaner, U.S. Patent No. 4,807,318 to Kallenbach discloses a tubular axially resilient diaphragm located within a chamber. One end of the diaphragm is closed and adapted to hold normally closed a rigid passage from the head of the pool cleaner to the usual form of suction pipe which connects the pool cleaner to the filtration unit. The diaphragm and its closed end also provide means for subjecting the interior of the diaphragm to variations in the pressure of water flow through the cleaner during use.

[0009] U.S. Patent No. 4,769,867 to Stoltz describes a water interruption pool cleaner having a passage there through from an inlet end to an outlet in communication with a suction source. A valve in the form of jaw-like members is located at the fluid intake end of a rigid tubular section within a passage of the cleaner. In response to an induced flow of water through the valve and the tubular section, the jaw-like members automatically move relative to each other about an axis transverse to the length of and adjacent the end of the tubular

section. The members are tapered towards each other to an inlet between them at their free ends with flexible membranes located between the sides of the jaws.

[0010] In another pool cleaner invention described in U.S. Patent No. 4,817,225 to Stoltz, water interruption is achieved by means of a spherical closure member which is free to move in the head of the cleaner towards and away from a closure valve seat located at the upstream end of the outlet from the head. A hollow axially contractible resilient member is connected to the outlet at one end with its other end is connected to a flexible suction pipe.

[0011] U.S. Patent No. 5,404,607 to Sebor for a Self Propelled Submersible Suction Cleaner uses an oscillator pivotally mounted within the flow path of a suction chamber to cause abrupt changes in water flow and thereby impart vibratory motion to the housing. Shoe means incorporating angled tread elements cooperate to move the housing along a forwardly direction of travel in response to the vibratory motion. Means are provided for converting a reciprocal angular movement or to and fro movement of the oscillator to an angular movement in one direction for purposes of driving a shaft. To enable the Sebor '607 cleaner to turn at established intervals throughout its travel over the surface to be cleaned, a drive gear is affixed to the shaft and engages a gear train which, in turn, engages a rotatable coupling at defined intervals to generate rotation of the coupling at these defined intervals. When in use, the rotatable coupling is connected to a flexible suction hose in communication with a filtration system pump.

[0012] Typically, a flapper valve used in such devices emit a hammering sound which can be irritating to a user. By way of example, if the swimming pool is located close to a building, the sound may resonate through the structure and be audible inside the rooms. Many devices known in the art are large and cumbersome. This impairs its maneuverability and effectiveness in smaller-sized pools and those where the transitions between the walls and/or between the floor and walls are sharp or tight. Debris such as twigs, berries and stones may become trapped in the operating head between the flapper valve and the valve seats. In order to clear debris or perform other maintenance tasks, it is difficult to gain access to the valve chamber, the flapper valve, valve seats and the openings in communication with the passages.

[0013] Sticks and larger pieces of debris may damage or puncture the flexible tubular member or may become entrapped in the members. Access to and removal of the flexible tubular member which is enclosed within a chamber is difficult and typically a non-technical person will avoid attempting easy repair. Replacement of the member may require tools which a typical homeowner may not have or be comfortable using. Often times, the pool cleaner provides a strong suction for effectively moving over the surface to be cleaned, but to its detriment fails to create a suction flow through the cleaner sufficient to remove sand located on the surface to be

cleaned.

SUMMARY OF INVENTION

[0014] In view of the foregoing background, it is therefore an object of the present invention to provide a device for cleaning submerged surfaces such as those found in swimming pools. In particular, it is intended that the device is minimally intrusive with regard to both noise and overall size, is functionally and mechanically simple, is easy to install, is less prone to entrap debris than existing devices, incorporates easy access to the suction chamber for the removal of entrapped debris and includes means for maneuvering away from obstacles. Yet another object of the invention is to provide steering for directing the cleaning device on the submerged surface to maneuver away from obstacles. Further objects and advantages of the invention will become more apparent from a reading of the following description of the invention and embodiments thereof. It is also contemplated that the system and method are useful in fluid environments other than swimming pools and spas.

[0015] According to the invention, there is provided a device for cleaning surfaces submerged in a liquid. The device includes a housing in communication with a suction pump and motor by means of a flexible elongated hose connected to a coupling located at an exit end of the device. The coupling is rotatable in a preferred embodiment. The cleaning device incorporates at least one suction chamber or flow passage comprising an entrance end in proximity to the submerged surface to be cleaned and an exit end communicating with the coupling. The axis of a passage through the chamber is angled in a forward direction of travel with respect to the surface to be cleaned. A flow control valve is provided within the chamber or flow passage to cause, upon application of suction flow through the chamber, an automatic, repetitive interruption of the fluid flow there-through, and thereby resultant forces capable of propelling the cleaner forward in the general direction indicated by the exit end of the chamber and the hose coupling.

[0016] The suction chamber comprises at least two sides, a front wall and a rear wall. The front wall is generally lateral to the direction of travel of the cleaner. To provide access to the inside of the chamber and the flow control valve, at least a portion of a wall or a side is detachable from the remainder of the chamber.

[0017] The flow control valve comprises at least one flap member mounted within at least one suction chamber. The flap member comprises two ends, two sides, a front face, a rear face, and at least one substantially rigid portion engaging the flexible portion. In a preferred embodiment, the flexible portion comprises resilient rubber-like material. Alternately, the flexible portion comprises multiple components or materials (including non-resilient materials) in a cooperative arrangement designed to perform the function of the flexible portion.

Each end of the flap member is mounted between two sides of a suction chamber about axes generally transverse to the flow of liquid through the chamber. The flap member and the chamber in which it is mounted are dimensioned such that at least two sides of the flap member remain in close communication with at least two sides of the chamber. A substantially rigid portion of the flap member is pivotally mounted closer to the exit end of the chamber and away from both the front and rear walls. A flexible portion of the flap member is mounted closer to the chamber entrance end and attached to or in close proximity to the rear wall of the suction chamber. At least a portion of the flap member must be capable of travel into a position of close proximity or contact with the front wall of the chamber to thereby substantially close the passage through the chamber between the front wall of the chamber and the front face of the flap member. The dimensions of the chamber and the rigid and flexible portions of the flap member as well as the positions in which the flap member portions are attached within the suction chamber, will in combination determine the rate and intensity of interruption of fluid flow through the chamber.

[0018] When the suction pump is activated, it causes a flow of fluid through the chamber and primarily through a first passage between the front face of the flap member and the front wall of the chamber. The flow through this passage will cause the flap member to be drawn to a position in close proximity or contact with the front wall of the chamber. This action will substantially close the first passage, substantially interrupt the flow of fluid through the first passage, and cause a quantity of water to impact a front face of the flexible portion of the flap member. Restricted flow of fluid will occur between a side of the flexible portion and a wall of the chamber and then via a second passageway between a rear face of the flap member and a rear wall of the chamber. In this manner, the flexible portion acts as a baffle to water flow through the second passageway. Simultaneous with the interruption of fluid flow, the action of the pump will cause a lower fluid pressure zone in the suction hose and in the volume of the chamber downstream of a flexible portion of the flap member. The impact of fluid on the front face of a flexible portion and the lower pressure impinging upon the rear face of a flexible portion of the flap member each cause the flexible portion to deflect towards the lower pressure zone. This action upon and of the flexible portion will apply leverage to the rigid portion and cause the rigid portion and remainder of the flap member to pivot away from the front wall of the chamber, thereby reopening the passage for fluid to be drawn through the chamber. This sequence of events is repeated for as long as the pump is in operation, and causes an automatic reciprocating movement of the rigid portion of the flap member and a regular interruption in fluid flow through the suction chamber for providing a forward movement of the pool cleaner along the surface to be cleaned.

[0019] In a preferred embodiment, the flexible portion comprises two lengths of resilient rubber-like material separately mounted closer to the chamber entrance end and attached to or in close proximity to the rear wall of the suction chamber. This arrangement provides a volume between the two flexible portions and the walls of the chamber. The sides of the flexible portions are in close proximity with at least two walls of the chamber thereby enabling the flexible portions to perform as baffles and restrict the flow of water from said volume and the flow passage through the chamber. At least one aperture in a section of the wall of the chamber may be provided to allow, when the cleaner is submerged in a liquid, communication between water contained in said volume and water outside of the chamber. During operation of the device, this arrangement provides a buffer zone of relatively higher pressure impinging on one face of each length of flexible portion, the other face of each such flexible portion being in contact with water at a lower pressure as it is drawn through the chamber towards the hose and suction pump. This arrangement significantly diminishes the propensity of water-borne debris to become lodged between a side of a flexible portion of the flap member and a wall of the chamber which would impair operation of the flap valve.

[0020] Sealing means is attached to the rigid portion of the flap member to minimize the flow of water between the sides of a rigid portion and the walls of the suction chamber. The head of the cleaner is connected to surface engaging means such as a detachable shoe suitable for engaging the surface to be cleaned and for supporting the head. To improve the ability of the cleaner to orient the surface engaging means against the surface to be cleaned, floats and weights are attached to parts of the cleaner. To improve the suction grip of the cleaner to the surface to be cleaned, a flexible sealing flange is detachably connected to the shoe. In a preferred embodiment, at least one aperture is provided in the sealing flange such that water and debris may be drawn through the aperture from the upper surface of the sealing flange and then into the entrance end of the suction chamber proximate the surface to be cleaned.

[0021] To enable the cleaner to maneuver away from obstacles, the cleaning head may be rotatably attached to the ground engaging means. Automatic means are provided to continuously or intermittently positively rotate at least a portion of the body of a swimming pool cleaner in at least one direction relative to the surface engaging means of the cleaner. Yet further, means are provided to automatically rotate the body of a swimming pool cleaner in a first direction and then another direction relative to the surface engaging means of the cleaner.

[0022] To assist the steering, improve maneuverability of the cleaner and help avoid the establishment of repetitive courses across the surface to be cleaned, the sealing flange includes at least one out of round side and/or finger and/or stiffening means suitable for engag-

ing a swimming pool wall or obstacle while the surface engaging means are engaged with the floor of the swimming pool.

BRIEF DESCRIPTION OF THE DRAWINGS

[0023] A preferred embodiment, as well as alternate embodiments, of the invention is described by way of example with reference to preferred embodiments in which:

FIG. 1 is a perspective view of a swimming pool cleaner according to the present invention operative within a swimming environment;

FIG. 2 is an exploded perspective view of the embodiment of FIG. 1;

FIG. 3 is a partial cross section view of the embodiment of FIG. 1, illustrating a fluid flow through the embodiment of FIG. 1;

FIG. 4 is a partial perspective view of the invention used in a swimming pool environment;

FIG. 5 is a forward top perspective view of an alternate embodiment according to the present invention;

FIG. 6 is a top rear perspective view of the embodiment of FIG. 5;

FIG. 7 is an exploded perspective view of the embodiment of FIG. 5;

FIG. 8 is a partial perspective view of a top rear portion of the present invention;

FIG. 9 is a partial cross section and exploded view illustrating a removable housing top wall feature of a preferred embodiment;

FIG. 10 is a partial cross section view illustrating an alternate embodiment of a flow control valve in accordance with the present invention;

FIG. 10A is a top plan view of a show in accordance with the present invention;

FIG. 11 is a cut-away top perspective view illustrating a fluid flow through the flow passage;

FIGS. 12 and 13 are side cut-away views illustrating the flow passage with the flow control valve in a seated position, stopping flow, and in an unseated position, permitting flow, respectively;

FIGS. 14A and 14B-18A and 18B are side and top views of five alternate embodiments of a flap useful within the flow control valve, respectively of the present invention;

FIGS. 19A-19C are perspective and cross section views illustrating alternate seals for the flap;

FIGS. 20 and 21 are cross section views through the flow passage illustrating seated and unseated positions of an alternate embodiment of the flap in accordance with the present invention;

FIG. 22 is a cross section view taken through lines 22-22 of FIG. 20;

FIG. 23A is a top plan view of a sealing flange in accordance with the present invention;

FIGS. 23B and 23C are cross section views taken through 23B-23B and 23C-23C, respectively of FIG. 23A;

FIG. 24A is a top plan view of a sealing flange in accordance with the present invention;

FIGS. 24B and 24C are cross section views taken through 24B-24B and 24C-24C, respectively of FIG. 24A;

FIGS. 25A and 25B are cross section views taken through 25-25 of FIG. 25A for varying flow strengths;

FIG. 26 is a side elevation view illustrating an embodiment of the present invention in use in a swimming pool environment;

FIG. 27 is a side elevation view of a prior art swimming pool cleaner;

FIG. 28 is a partial cross section view of a flow control valve in accordance with the present invention illustrating operation within an alternate flow passage;

FIG. 29 is a forward top perspective view of an alternate embodiment according to the present invention;

FIG. 30 is a top rear perspective view of the embodiment of FIG. 29;

FIG. 31 is an exploded perspective view of the embodiment of FIG. 29;

FIG. 32 is a diagrammatic top view of a cleaning device in accordance with the present invention;

FIG. 33 is an exploded perspective view of an alternate embodiment of the present invention;

FIGS. 34A-34C are top views illustrating pawl engaging positions for a steering means in accordance with the present invention;

FIG. 34D is a side elevation view in cross section taken through the center thereof;

FIG. 35 is an exploded perspective view of an alternate embodiment of the present invention;

FIGS. 36 and 37 are partial top views of a ratchet and pawl embodiment in accordance with the present invention illustrating alternating biasing positions of the pawl;

FIG. 38 is an exploded cut-away view of a steering device in accordance with the present invention;

FIGS. 39 and 40 are top plan views of alternate ratchet and pawl embodiments in accordance with a steering means of the present invention;

FIG. 41 is a top plan view of a cooperating upper portion of the steering means operable with FIGS. 39 and 40;

FIG. 42 is a top plan view of another ratchet and pawl embodiment in accordance with a steering means of the present invention;

FIG. 43 is a top plan view of a cooperating upper portion of the steering means operable with FIG. 42;

FIG. 44 is a bottom view of an alternate embodiment of a shoe; and

FIG. 45 is an exploded perspective view of an alter-

nate embodiment of the present invention illustrating the use of the show in FIG. 44.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0024] The present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which preferred embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Like numbers refer to like elements throughout.

[0025] As initially described with reference to FIGS. 1-4, a swimming pool cleaning device, the pool cleaner **10**, for automatically cleaning a surface **12** submerged in liquid **14** comprises a forwardly inclined housing **100** having rigid walls **102**, **104**, **106**, and **108** forming a flow passage or chamber **110** extending therethrough from an inlet or entrance end **112** which in use is proximate the surface **12** to be cleaned, to an outlet or exit end **114** for connection to a flexible suction hose **16**. A flow control valve **200** is operable within the chamber **110**. Surface engaging means **300** comprises a shoe **302** carried by the housing **100** at the inlet **112** for engaging the surface **12** of a pool **18** to be cleaned. A flexible planar member, herein after referred to as a sealing flange **304** extends around the shoe **302**. When in use, the shoe **302** and sealing flange **304** engage the surface **12** to be cleaned. In an alternate embodiment of the present invention, steering means **400** is carried by the housing **100** and is operable therewith for rotating the housing **100** about the surface engaging means **300**, the shoe **302** and the sealing flange **304**, as will herein be described in further detail.

[0026] As described, the water interruption type pool cleaner **10** according to the invention includes the flow control valve **200** communicating with the housing **100** and the shoe **302** with which the cleaner **10** engages the surface **12** to be cleaned. In a second embodiment, and with reference to FIGS. 5-7, a foot **118** is attached to the housing **100**. A flange **116** is formed around the entrance end **112** of the housing **100** to facilitate attachment of the housing **100** to the foot **118**.

[0027] In the preferred embodiments, the sealing flange **304**, manufactured from flexible, resilient rubber-like material and incorporating a central opening **306** is attached to the shoe **302**.

[0028] As illustrated with reference again to FIG. 3, at least one inlet **120** to the housing **100** is in communication with the entrance end **112** and an exit end **114** of the suction chamber **110** to provide fluid flow **122** through the suction chamber **110** and into a flexible hose **16**.

[0029] As illustrated again with reference to FIGS.

1-7, the flexible hose **16** is connected to the cleaner **10** by means of a hose coupling **124** in communication with the exit end **114** of the housing **100** carrying the flow control valve **200**. In one preferred embodiment, to facilitate the turning of the cleaner **10** about an axis **126** extending through the hose coupling **124** and the flow control valve **200**, the coupling **124** is rotatable. As illustrated with reference again to FIGS. 2 and 3, the hose coupling **124** incorporates a nut **128** for attaching the coupling **124** to the exit end **114** of the housing **100**. Washers **130** reduce friction during rotation of the hose coupling **124** about the axis **126**. An annular recess **132** is formed between the nut **128** and the exit end **114** to facilitate attachment of devices such as a deflector to the cleaner or bumper **20**.

[0030] As illustrated with reference again to FIGS. 2, 3 and 7, the shoe **302** comprises a resilient, flexible, rubber-like material and is attached to the foot **118** by engagement of a retaining lip **306** with a recess **308** located substantially around the perimeter of the foot **118** of the FIG. 7 embodiment or housing entrance end **112** in FIG. 3. To provide fluid access to the suction chamber **110** foot **118** incorporates an opening **136** and the shoe **302** includes grooves **310** and an opening **312**.

[0031] In one preferred embodiment, as illustrated in FIG. 1, the sealing flange **304** does not rotate relative to foot **118** or shoe **302**. At least one locating tab **314** (illustrated with reference to FIG. 2) engages with a cooperating recess or notch within recess **308** to orient the sealing flange **304** in a desired position as illustrated with reference again to FIG. 2. The sealing flange **304** increases the suction grip of the shoe **302** to the surface **12**, assists with the cleaning action, helps the cleaner **10** move through the curved transitions between floors and walls of the pool **18** and helps maintain adherence to the walls of a pool. Alternate means of attaching the shoe **302** or sealing flange **304** may be employed without departing from the functions of the foot **118**, shoe **302** and sealing flange **304**.

[0032] With reference again to FIGS. 5 and 6, the peripheral region of the sealing flange **304** in one embodiment has corrugations **316** such that it may be resiliently extended to more easily conform with the shape of the surface **12** to be cleaned and thereby more effectively maintain a suction grip against the surface **12**.

[0033] In the preferred embodiment as illustrated with reference again to FIG. 3, fluid flow **122**, illustrated with arrows, indicate the passageways for fluid flow **122** to enter suction chamber **110**. Fluid is drawn towards the foot **118** of the cleaner through at least one fluid intake aperture **318** in the sealing flange **304**, and from between the sealing flange **304** and the surface to be cleaned **12**. The fluid then travels into the chamber **110** via the groove **310** and the opening **312** of the shoe **302**, and via the opening **136** through the foot **118**. The suction necessary to induce fluid flow **122** through the housing **100** helps to bias it toward and in contact with the surface **12** to be cleaned. Dirt particles and other debris

such as leaves and twigs are thus carried by the fluid flow **122** through the cleaner **10** and into the attached flexible hose **16** towards the swimming pool's pump and filtration system. As illustrated again with reference to FIG. 3, at least two independent inlets **120** from the surface side and a rear wall inlet **138** to the chamber **110** are desirable to help avert possible damage to the cleaner and suction pump system in the event a single passageway become blocked. In particular, the multiple independent inlets **120**, **138**, by way of example, will help avoid personal injury should a single inlet be blocked by part of a person's body.

[0034] As illustrated with reference again to FIG. 3, a valve **140** is fitted to the cleaner **10** to regulate the flow of fluid through the inlet **138**. The valve **140** comprises a flexure or spring loaded member placed at least partially across the opening of inlet **138** so that the member will deflect in response to decreased pressure in the chamber **110** and thereby allow a greater volume of fluid to enter the chamber **110**.

[0035] In the preferred embodiment herein shown with reference to FIG. 3, the primary route of fluid flow **122** into the chamber **110** is via a fluid intake aperture **318** in the sealing flange **304** and thereafter through an inlet **120** in the operating head **154** which inlet is located between a lower surface of the sealing flange **304** and the surface **12** to be cleaned. The greater fluid flow **122** between the sealing flange **304** and the surface **12** to be cleaned improves the ability of the cleaner **10** to lift dirt and debris from the surface **12** to be cleaned.

[0036] Typically, apertures are found in the sealing flanges of many cleaners. However their function is not that of a primary route by which fluid will enter the cleaner. Rather, their function is to sufficiently reduce the suction between the sealing flange and the surface to be cleaned to allow the cleaner to travel more effectively over the surface to be cleaned. The aperture **318** provides improved removal of debris and thus improved cleaning of the surface **12**.

[0037] By way of example, and with reference again to FIGS. 5-7, the primary inlet **120** for fluid flow **122** to enter into the entrance end **112** of housing **100** extends above an upper surface of the sealing flange **304**. The inlet **138** is also provided through an aperture **136** in the foot **118**.

[0038] As illustrated with reference again to FIG. 1 and 4, to assist the foot **118** or shoe **302** of the cleaner **10** to make contact with the surface to be cleaned **12** in a desired attitude, e.g. where the plane formed by the underside of the foot **118** or shoe **302** is generally parallel with the plane formed by surface **12** in contact with the foot **118** or shoe **302**, a buoyancy member **22** comprises a float **24** hingedly attached to the top side or rear wall **104** of the cleaner **10**. A hinge **26** is attached to a top wall of the flow control valve **200**, preferably at the base of the rear wall **104**, with the use of a flexible stem **28**. As illustrated with reference again to FIG. 4, the buoyancy member **22** and its range of movement rela-

tive to its point of attachment to the cleaner **10**, assists the cleaner **10** to change its direction of travel away from the surface of the fluid. By way of example, when the cleaner **10** is against a vertical wall **30** of the swimming pool **18**, the buoyancy member **22** urges the cleaner **10** to turn and travel towards the floor **32** of a swimming pool. With the buoyancy member **22** attached at the base of the rear wall **104**, as the cleaner **10** travels up a wall **30** of a swimming pool, the point of attachment will be urged to become the portion of the flow control valve **200** closest to the surface of the water. This action, as illustrated in FIG. 4 by the series of cleaner positions A through E and in turning the cleaner toward the floor **32**. The orientation of the buoyancy member **22** relative to the rest of the cleaner **10**, particularly when the cleaner itself is in a certain position relative to the surface **12** to be cleaned (e.g. against a wall **30**), is adjusted through preferred geometric shapes **34** incorporated into the hinge **26** as shown in FIG. 8. Interaction between the shape **34** and the stem **28** of the buoyancy member **22** controls the position of the buoyancy member **22**.

[0039] As illustrated with reference again to FIGS. 1 and 3, a weight **38** attached near the base of a front wall **102** of the flow control valve **200**, compliments the action of a buoyancy member **22** to turn the cleaner **10** traveling across a wall **30** of a swimming pool by urging the front wall **102** of the cleaner **10** to turn towards the floor **32** of the swimming pool. The weight **38** may be used without the buoyancy member **22**.

[0040] To further assist the cleaner in attaining a desired attitude, weights are attached to the housing of the cleaning apparatus. With reference again to FIGS. 5 and 6, one embodiment includes multiple weights **320** located on and around the peripheral region of the sealing flange. Further, in lieu of or in addition to attached weights **320**, density increasing additives such as Barium Sulfate may be incorporated into the materials forming the cleaner **10**; particularly the sealing flange **304**, shoe **302**, or foot **118**.

[0041] As earlier described and with reference again to FIG. 3, the suction chamber **110** is located between and communicates with the operating head **154** and the hose coupling **124** to provide a fluid passage through the cleaner **10**. In operation, the suction chamber **110** comprises the entrance end **112** in proximity to the submerged surface **12** to be cleaned and an exit end **114** connected to the hose coupling **124**. As illustrated with reference to FIGS. 11-13, the housing **100** and thus the suction chamber **110** can be described as having two sides **108** and **106** the front wall **102** and the rear wall **104**. The front wall **102** is generally lateral to the direction of travel indicated by arrows **40**. As illustrated again with reference to FIG. 3, the axis **126** of the passage through the suction chamber **110** is angled in a forward direction **22** with respect to the surface **12** to be cleaned. Further, as illustrated with reference to FIG. 9, the top/rear wall **102** is detachable.

[0042] As illustrated with reference again to FIG. 3

and FIGS. 9-13, a flap member **202** is mounted within the suction chamber **110** and includes at least one substantially rigid portion **204** joined to at least one flexible portion **206**. The flap member **202** comprises at least two ends **208**, at least two sides, a front face **210** and a rear face **212**. In a preferred embodiment, the flexible portion **206** comprises a single piece of resilient rubber-like material. Alternately, the flexible portion **206** may comprise multiple elements in a cooperative or hinged arrangement designed to perform the function of the flexible portion **206** as illustrated with reference to FIGS. 18A and 18B.

[0043] Each end **208** of the flap member **202** is pivotally mounted between two sides **108** and **106** of a suction chamber **110** about axes which are generally transverse to the flow of liquid through the suction chamber **110**. As illustrated with reference to FIG. 14B, the flap member **202** and the chamber **110** in which it is mounted are dimensioned such that at least two sides **210** of the flap member **202** remain in close communication with the sides **108** and **106** of the chamber **110**. As illustrated with reference again to FIGS. 3, 9, 11, and 13 illustrate that the substantially rigid portion **204** of the flap member **202** is pivotally mounted closer to the exit end **114** of the chamber **110** and in spaced relation to both the front and rear walls **102** and **104**. The flexible portion **206** of the flap member **202** is mounted closer to the chamber entrance end **112** and attached to or in close proximity to the rear wall **104** of the chamber **110**. At least a portion of the flap member **202** must be capable of travel into a position of close proximity or contact with the front wall **102** of the chamber **110** to thereby substantially restrict flow there through or close a first passage **142** through the chamber **110**.

[0044] The ends **208** of the flap member **202** incorporate attachment means **228** which will facilitate simple attachment and detachment of the flap member **202** into the chamber **110**. FIGS. 9-13 illustrate the use of a C-clip to attach an end **208** of the rigid portion **204** to a shaft **31** fitted between the sides **108** and **106** of the chamber **110**.

[0045] FIG. 9 illustrates the detachable rear wall (or lid) **104** and the flap member **202** in an exploded view detached from the chamber **110**. The detachable wall **104** includes a hook **144** at the entrance end **112** and a tongue/suction clip **146** at the exit end **114** for removably attaching the wall **104** to the chamber **110**. The tongue **146** is held in position by a portion of the nut **128**. Easy access is provided to the interior of the chamber **110** for removal of debris, replacement of the flap member **202**, and other maintenance tasks without the need for tools. Other means of attachment may be employed to attain the benefits of this invention.

[0046] In operation, and as illustrated with reference again to FIGS. 11 through 13, when the suction pump is activated, it causes fluid flow **122** through a first chamber **110** and primarily through a passage **142** between the front face **210** of the flap member **202** and the front

wall **102** of the chamber. The fluid flow **122** in the first passage **142** will cause the flap member **202** to be drawn towards, and may cause a portion of the flap member **202** to make contact with the front wall **102** of the chamber **110**, as illustrated with reference to FIG. 12. This action will substantially restrict or interrupt the fluid flow **122** through the passage **142** and cause a quantity of water to impact a front face of the flexible portion **206** of the flap member **202**. Restricted fluid flow **122** will occur between a side **210** of the flexible portion **206** and a side wall **108**, **106** of the chamber **110** and then through a second passage **148** between a rear face **212** of the flap member **202** and a rear wall **104** of the chamber **110**. In this manner, the flexible portion **206** act as as a baffle to fluid flow **122** through the second passage **148**. Simultaneous with the interruption of fluid flow **122**, the action of the pump will cause a lower fluid pressure zone in the suction hose **16** and in the second passage **148** of the chamber downstream of a flexible portion **206** of the flap member **202**. The impact of fluid on a front face of the flexible portion **206** and the lower pressure impinging upon a rear face **212** of a flexible portion **206** of the flap member **202**, each cause the flexible portion **206** to then deflect towards the lower pressure zone of second passage **148**. This action upon and of the flexible portion **206** will apply leverage to the rigid portion **204** and cause the rigid portion **204** and remainder of the flap member **202** to now pivot away from the front wall **102** of the chamber, thereby reopening the first passage **142** for fluid flow through the chamber **110**, as illustrated in FIG. 13. This sequence of events is repeated for so long as the pump is in operation, and causes a regular interruption in fluid flow **122** through the suction chamber **110** and an automatic to and fro reciprocating movement of the rigid portion **204** of the flap member **202**.

[0047] The dimensions of the chamber **110**, rigid portion **204** and flexible portion **206** of the flap member **202** and the positions in which the flap member **202** is located within the chamber **110**, will in combination determine the rate and intensity of interruption of fluid flow **122** through the chamber **110**. It is anticipated that particular rates and intensities of interruption of fluid flow will be suited to particular tasks.

[0048] In general, the flow control valve **200** of the present invention is therefore well suited for incorporation into water interruption type swimming pool cleaners as a means for providing a propulsive force. As disclosed in the prior art and by Chauvier in U.S. Patent No. 4,023,227 and Raubenheimer in U.S. Patent No. 3,803,658 in particular, sudden interruption of the fluid flow **122** through the chamber **110**, transfers the kinetic energy which had been developed by the fluid flow **122** as an impulsive force. In this case, the energy is transferred to the flap member **202** and thus cause the suction chamber **110**, which in a preferred embodiment is angled in a forward direction, to travel in that direction with respect to the surface **12** to be cleaned. The kinetic

energy transferred to the angled suction chamber **110** will have a vertical component and a horizontal component, the horizontal component being in the direction of the arrow **40**, as illustrated by way of example in FIGS. 11-13. The interruption in fluid flow **122** also causes the flexible hose **16** to jerk. Further, the suction against the surface **12** to be cleaned is momentarily reduced each time that the fluid flow **122** is halted or restricted, thereby decreasing the frictional engagement of the foot **118**, shoe **302**, and sealing flange **304** against the surface **12**. This impulsive force, hose jerk and reduction in frictional engagement is sufficient to displace the cleaner **10** and travel across the surface **12** to be cleaned in the direction of the arrow **40**.

[0049] It should be noted that during operation of the flow control valve **200** one wall of the chamber **110** may be impacted more vigorously by a portion of the flap member **202** than the opposite chamber wall. As illustrated with reference again to FIG. 12, the front wall **102** of a preferred embodiment is impacted by the flap member **202** in the general region of the connection between a rigid portion **204** and a flexible portion **206**. The force of the latter impact is greater than the occurrence as described earlier with reference to FIG. 13, which reveals that when the flap member **202** moves towards the rear wall **104**, the surface area of the flexible portion **206** in close proximity or contact with the rear wall **104** will progressively increase which, together with resistance occurring upon flexing or hinging of the flexible portion **206**, will cushion the force applied against the rear wall.

[0050] In preferred embodiments, the flap member **202** is mounted within the chamber **110** in a manner such that the particular wall of the chamber **110** which, upon interruption of fluid flow **122** is impacted more forcefully by a portion of the flap member **202**, is the front wall **102**. This will enable the horizontal component of the force with which the flap member **202** impacts the front wall **102** to complement the horizontal component of the force derived from the interruption of fluid flow **122**, and thus enhance the forward displacement of the cleaner **10** across the surface **12**.

[0051] It has been found that the flow control valve **200** will operate and provide propulsive force even when fluid flow **122** through the chamber **110** is weak, for example, because of a low capacity pump, dirty filters, or other factors which are well known in the industry. The same flow control valve **200** has also been found to operate effectively at the other, higher, end of the fluid flow **9** spectrum usually experienced within the swimming pool industry. With lower fluid flow **122**, the rigid portion **204** will reciprocate to and fro through a lesser arc than it will with greater fluid flow. The greater the arc, the greater the opening to the primary passage **142** through the chamber **110** between the front wall **102** and the flap member **202**, consequently allowing a greater volume of fluid and debris to pass through the chamber.

[0052] As illustrated with reference again to FIGS.

11-13, the arc and rate of reciprocating movement of the rigid portion **204** may be governed by the placement of a limiting means or stop **214** between a wall **104**, of the chamber **110** or housing **100** and a face of the flap member **202**. A buffer **216** of rubber-like material is attached to the limiting means **214** or to the wall **104**, **102** in an alternate arrangement.

[0053] In a preferred embodiment, the rigid portion **204** of the flap member **202** is manufactured using a substantially rigid plastic material. The flexible portion **206** is manufactured from a softer, flexible, resilient, plastic or rubber-like material. The hardness of the flexible material is typically between 40 and 90 using the Shore A Durometer scale. To help avoid tears, the flexible material may be reinforced with flexible ribs **218**, as illustrated with reference to FIGS. 17A and 17B, and/or fibers, cloth or other suitable means.

[0054] A fluid flow seal **220** is provided in the general area of the connection between the rigid **204** and flexible portions **206**, as illustrated in FIGS. 14A-18. Upon contact or proximity with the front wall **102** of the chamber **110**, the fluid flow seal **220** will substantially interrupt fluid flow **122** through the chamber **110**. Preferably, in order to buffer the impact of the seal against a wall **102**, the seal **220** may be manufactured from an impact absorbing material such as a resilient plastic or rubber-like material or incorporate an impact absorbing buffer **222** as shown, by way of example, in FIG. 18A. As shown in FIG. 10 an impact absorbing buffer **216** may also be attached adjacent the front wall **102**. While the noise emitted by the subject invention is significantly less than that emitted by interruption-type pool cleaners typically found in the art, the use of the seal **220** made with an impact absorbing material or the inclusion of the buffers **216**, **222** will further reduce the noise emitted by contact between the seal **220** and the front wall **102**. Buffers **216**, **222** will also reduce the possibility of wear and damage to the cleaner **10** caused by repetitive impacts of the flap member **202** against a wall of the cleaner **10**.

[0055] In another preferred embodiment illustrated with reference to FIGS. 20 and 21, a recess **150** is provided in the front wall **102** of the chamber **110** to receive seal **220** when the flap member **202** is drawn towards the front wall **102**. The recess **150** is preferably oversized relative to the seal **220**. With this arrangement, it has been found that the seal **220** need not make contact with the front wall for fluid flow **122** to be sufficiently interrupted to provide the force for propelling the cleaner **10**. Yet further improvement in lower noise levels is achieved and the cleaner is less prone to trap and hold debris between the wall **102** and the seal **220**.

[0056] As earlier described, dirt particles and debris such as leaves and twigs will be drawn by the fluid flow **122** into and through the chamber **110** and flexible hose **16** towards the swimming pool filtration system. As illustrated with reference again to in FIGS. 14A, 14B, and 20, to optimize the function of the flow control valve **200**, the dimensions of the flap member **202** and the chamber

are proportioned to minimize fluid flow **122** between a gap **226** formed between the edges **210** of the flap member **202** and the sides **108**, **106** of the chamber **110**. A small gap **226** will minimize fluid flow **122** there through, but has the disadvantage that dirt and debris often become lodged in the gap **226**. To help prevent the entrapment of dirt or debris in the gap **226**, the sides **210** of the rigid portion **204** are dimensioned to be further away from the chamber sides **108**, **106**, is attached to at least a portion of the rigid portion **204** to extend substantially across the gap **226**. The flexible edge seal **224** will flex to allow larger pieces of dirt or debris to pass through the gap **226**.

[0057] FIGS. 20 and 22 illustrate more than one seal **224** attached to a side **210** of the rigid portion **204** of the flap member **202**. This preferred embodiment provides a buffer of water sandwiched between the seals **224** and further reduces the possibility of entrapment of debris in gap **226** due to seepage of fluid flow between passageways **142** and **148**.

[0058] In the embodiment shown in FIGS 9, 14A, and 14B, the edge seal **224** is formed as an integral part of the flexible portion **206** of the flap member **202**, and extends towards the end **208** of an attached, narrower, rigid portion **204**. Alternately, as illustrated in FIGS. 18A and 18B, the edge seal **224** may be a separate part attached to the flap member **202**, usually the rigid portion **204**.

[0059] FIGS. 15A, 15B, 17A, and 17B illustrate embodiments of the flap members **202** where the rigid portion **204**, the flexible portion **206** and the edge seals **224** are integrally formed from the same rubber-like material, and where the flexible portion **206** and the edge seals **224** are thinner than the rigid portion **204**, thereby achieving the necessary rigidity and flexibility of the respective elements. FIGS. 17A and 17B illustrate the use of at least one rib **218** to achieve reinforcement or stiffening as may be required for desired operation of the flow control valve **200**.

[0060] At least one bushing **230** may be incorporated into an attachment means **228**, as in FIGS. 15A and 17A, for example.

[0061] In addition, by way of example, a sliding seal of the type disclosed by Sebor in U.S. Patent No. 5,371,910 may be incorporated into the flap member **202**. Further with reference to FIGS. 19A and 19B, a seal **232** may be pivotally attached along the edge of at least one side edge **210** of the flap member **202** in an alternate embodiment of the present invention. FIG. 19C illustrates a flexible, resilient seal **234** attached at an angle to and outwardly extending from the edge of the flap member **202**.

[0062] As illustrated with reference again to FIGS. 20 and 21, a flap member **202**, in an alternate flap embodiment, includes multiple flexible portions **206** separately mounted closer to the chamber entrance end **112** and attached to or in close proximity to the rear wall **104** of the suction chamber **110**. This arrangement provides at

least one buffer of water in a third or additional passageway **152** located between the passages **142** and **148**. This buffer of water in passageway **152** and the action of the additional flexible portion **206** significantly diminishes the propensity of water-borne debris to become lodged between a side **210** of a flexible portion **206** of the flap member **202** and a wall **108**, **106** of the chamber **110** which would impair operation of the flap member **202**.

[0063] As illustrated in FIGS. 20 and 21, one flexible portion **206** will separate flow passages **142** and **152**, while another flexible portion will separate flow passages **152** and **148**. This means that only one of the two flexible portions **206** is in direct contact with debris-laden fluid flow **122** entering passageway **142**. The sides of the flexible portions **206** are in close proximity with at least two walls **108**, **106** of the chamber **110**, thereby enabling the flexible portions **206** to perform as baffles and restrict the flow of water from the volume of water in passageways **152** and the flow passages **142** and **148**. At least one aperture (inlet **138**) in a section of the wall **104** of the chamber **110** is provided to allow, when the cleaner **10** is submerged, water to enter directly into passageway **152**. The latter water will usually carry significantly less debris than water drawn into passageway **142** of the cleaner **10** via the operating head **154**.

[0064] During operation of the cleaner **10**, the pressure in passageway **148** will always be lower than in passageway **152**. Consequently, some of the water in the passageway **152** (which separates passages **142** and passageway **148**) will seep between a side **210** of a flexible portion **206** and the wall **108** or **106** of the chamber **110** into the passageway **148**. This occurrence avoids seepage of debris-laden water around the side **210** of a flexible portion **206** from the passage **142** into passage **148**. When the passage **142** is open, as illustrated in FIG. 20, the pressure in that passage **142** and passage **148** will be lower than in passageway **152**. Consequently, water will seep from the passageway **152** into both passages **142** and **148**, thereby preventing debris from the debris-laden water entering passageway **142** from becoming lodged between the wall **108**, **106** of the cleaner **10** and the side **210** of a flexible portion **206** of the flap member **202**. Further, as also depicted in FIG. 20, the flexible member **206** in contact with fluid flow **122** in the passage **142** will be bowed into the stream and present a convex shape less conducive to the entrapment of debris than the concave shape (earlier described with reference to FIG. 3) that would be presented to the fluid flow **122** by embodiments using a single flexible portion **206**.

[0065] Alternate embodiments for the sealing flange **304** suitable for the cleaner **10** of the present invention which does not employ positive steering means are illustrated with reference to FIGS. 23A-24C. Further, the sealing flanges **304** are intended for use with a cleaner embodiment such as that illustrated in FIG. 3 in which the primary route of fluid intake into the suction chamber

110 is via an intake aperture **318** in the sealing flange **304**. The intake aperture **318** is improved by the incorporation of a resilient flap **322** which automatically adjust in response to the flow of fluid through the apertures **318**. A resilient flap **322** may be integrally formed with the sealing flange **304** and oriented such that when the cleaner **10** is not in operation, the resilient flap **322** extends into the intake aperture **318** to partially close such aperture **318**. To reduce the possibility that the flap **322** become snagged on an obstacle, the free end of the resilient flap **322** is directed rearwardly and to more than **90** degrees from the direction of travel **40** for the embodiments herein described. At least one rib **324** or other suitable stiffening means is integrally formed with the flap **322**. At least one rib **326** or other suitable stiffening means is integrally formed with the sealing flange **304** and located, for example where it reduces the flexibility and strengthens a portion of the sealing flange **304**.

[0066] By way of example, and as illustrated with reference to FIG. 23A, during operation of the cleaner, fluid flow **122** will travel across the upper surface of the sealing flange **304** and through the aperture **322** towards the foot **118** as earlier described. The greater the fluid flow **122** through the cleaner **10**, the greater the extent to which the resilient flap **322** will flex in response to that flow and thereby increase the cross-sectional area or opening of the aperture **318** to allow more fluid to pass there through as illustrated with reference to FIGS. 25A and 25B. In this manner, the adherence of the sealing flange **304** against the surface **12** to be cleaned will be controlled within a range conducive to optimum cleaner **10** performance. In circumstances where fluid flow **122** is at a lower end of that range usually provided by swimming pool suction pumps, due perhaps to a weaker pump or a dirty filtration system, the flap **322** will flex to a lesser degree and thereby make maximum use of the available suction and flow **122** to adhere the cleaner **10** properly to the surface **12**. Conversely, the flap **322** will flex more in circumstances where the suction and flow **122** is stronger and thereby avoid excessive adherence to the surface **12** to be cleaned which would otherwise be detrimental to cleaner operation and inhibit proper movement over the surface **12** to be cleaned. The flexing action is also useful should one intake aperture **318** become partially or fully blocked by, for example, a large leaf. In such a situation, the flap **322** will flex further in response to the greater suction caused by the blockage and, in so doing, may increase the opening sufficiently to allow the leaf to pass through. The flaps **322** will also flex in response to changes in the flow **122** through the groove **310** or grooves in the shoe **302** (described earlier with reference to FIG. 2) due, for example, to undulations in the floor of a swimming pool.

[0067] To help the cleaner **10** turn away from an obstacle or small radius transition in a swimming pool, for example a drain cover or where a step joins the floor, it is desirable that the peripheral portion **328** of the sealing flange **304** which typically engages the obstacle or small

radius be able to flex to allow the flange **304** and its peripheral portion **328** to move over the obstacle or through the small radius. Since only a portion of the sealing flange will typically come into contact with the obstacle or radius, only a section of peripheral portion **328** of the sealing flange need flex at any one time. It is desirable that a section be capable of flexing independently of the remainder of the sealing flange **304**. FIGS. 23A and 24A illustrate flanges **304** which are segmented in a petal-like manner about their peripheries. Except at the rear of the sealing flange, it is preferred that the segmentation or slit not extend a distance greater than half of the distance between an outer extremity of the flange **304** and the opening control **306**.

[0068] It is also preferred that the sealing flange **304** be fixed in position by suitable means such as the locating tab **314**, earlier described. This will ensure that the leading portion **330** cannot rotate relative to the foot **118** of the cleaner **10** and will always point in the direction of travel **40**.

[0069] In operation, when the leading portion **330** of the sealing flange **304** engages a small radius such as at the base of a step, unless it travels across the radius, there is a chance that the cleaner **10** will not be able to move away from the step. If the leading portion **330** flexes through the radius as illustrated in FIG. 26, the cleaner **10** will travel at least part way up the step and then disengage itself and fall to one side or gradually turn to one side and move away from the area.

[0070] The deeper segmentation or slit at the rear of the sealing flange **304** enables two segments to splay apart when the cleaner travels through a small radius to allow the underside of the sealing flange **304** to maintain contact with the surface **12** to be cleaned. This action facilitates good frictional contact with the surface **12** and assists with continued forward propulsion of the cleaner **10**. If necessary, the cut or space between the segments may be substituted by a pleat **332**, as illustrated in FIG. 24A. This configuration will allow the desired splaying between segments, but will limit the seepage of liquid through the space between segments.

[0071] The ability of the leading portion **330** of the sealing flange **304** to flex through a small radius or to pass over obstacles such as drain covers may be further improved by the incorporation of at least one lipped section **334** or at least one fin **336** protruding forward of the outer edge of a leading portion of the sealing flange **304**, as illustrated with reference to FIGS. 23 and 24. The shoe **302** may be integrally formed with the sealing flange **304**.

[0072] The ability of the cleaner **10** to move away from obstacles such as a step is further assisted by the employment of a bumper ring **20**, as illustrated with reference again to FIG. 1. In a preferred embodiment, a conical shaped bumper ring **20** is removably and rotatably attached to the cleaner **10** by engagement with the annular recess **132** earlier described with reference to FIG. 3. The bumper ring **20** may be removed without the use

of tools by loosening the nut **128**. Given equal diameters of the rims in each case, the conical shape is an improvement over a planar ring because, when attached as shown in FIG. 26, the distance **44** of the lowermost portion of the rim **42** above the surface **12** to be cleaned is minimized. This enables the bumper ring **20** to be extended around the chamber **110** and thus hold the cleaner **10** away from obstacles. If appropriate for the conditions in a particular swimming pool, the bumper ring **20** may be inverted to increase the distance **44**. The alternate embodiments include the bumper ring **20** made from substantially rigid plastic material and from resilient rubber-like material.

[0073] The cleaner **10** described thus far need not employ positive steering means to navigate the surface **12** of the pool to be cleaned. The subject invention includes the ability to either incorporate such means into a flow interruption cleaner, or to provide means to simply attach positive steering to a cleaner **10**.

[0074] In order to accommodate steering means, particularly the means disclosed herein, a head **154** of the cleaner **10** is formed from two pieces **156** and **158**, each having flanges suited for interlocking connection, as shown in FIG. 31. In a preferred embodiment, the upper piece **156** is formed as an integral part of the housing **100** forming the suction chamber **110**. The passageway **120** through the operating head **154** is in communication with the entrance end **112** and exit end **114** of a suction chamber **110** to draw fluid flow **122** from above the foot **118** of the cleaner **10** and into a flexible hose **16**, as earlier described.

[0075] As again illustrated with reference to FIGS. 29, 30, and 31, the operating head **154** and flow control valve **200** are rotatably connected to and supported by a foot **118** and a resilient shoe **302** with which the cleaner **10** engages the surface **12** to be cleaned. This will enable the operating head **154** and flow control valve **200** to rotate relative to the foot **118** and shoe **302** about an axis **412** substantially normal to the surface **12** to be cleaned and which extends through the center of the foot **118** and shoe **302**.

[0076] As illustrated again with reference to FIG. 31, a steering means to positively rotate the foot **118**, shoe **302** and sealing flange **304** may be accommodated in a position **202** between a lower portion of the operating head **158** and the foot **118** or shoe **302**. Embodiments of steering means are disclosed in detail later within this section.

[0077] FIG. 32 illustrates a cleaner **10** where the grip of the sealing flange **304**, foot **118** and shoe **302** against the surface **12** (the foot **118** and shoe **302** are hidden in this view by the sealing flange **304**) minimizes or eliminates rotation of those components relative to the surface **12** to be cleaned. The same illustration shows the housing **100**, head **154** and flow control valve **200** rotatable about axis **412**. This embodiment does not include positive steering means. However, the ability of the head **154** simply to rotate relative to the surface engaging

means is by itself sufficient to assist the cleaner **10** to avoid entrapment, for example, in corners of a swimming pool or by obstacles therein.

[0078] Flow interruption cleaners **10** having an inclined chamber **110** or housing **100** travel in the general direction **40** in which the hose coupling **124** points. As the cleaner **10** moves, it will push a length of the hose **16** ahead of itself. Consequently, as the length of the hose **16** is pushed towards, for example, the walls or a corner in a swimming pool, the hose **16** will bend and a force will be applied to the coupling **124** of the cleaner **10**. This will cause the coupling **124** and cleaner **10** to rotate through an arc relative to its foot **118**, other surface engaging means and surface **12** to be cleaned; thus a new course will be established. In cleaners which cannot rotate relative to their surface engaging means, the adherence of the cleaner to the surface **12** makes it more difficult for the hose to bend away early enough to avoid entrapment of the cleaner. The ability of a cleaner of this invention to rotate enables the hose **16** to bend away earlier and consequently the cleaner will follow the new direction indicated by the hose coupling **124**.

[0079] A free rotating arrangement as described in the previous paragraphs works best in smaller pools where the walls of the pool interact with and alter the orientation of the hose **16**. This interaction will help avoid a repetitive travel pattern which may otherwise be established by the cleaner **10**. Without frequent interference with the walls to randomly alter the position of the hose, the inherent resilience of the flexible hose **16** eventually directs the cleaner to a position where the hose is generally more relaxed, and the cleaner may adopt a repetitive pattern of travel (typically a figure eight) across the surface **12** to be cleaned. To overcome this limitation, a positive steering means **202** as herein described is provided for the cleaner **10** to positively rotate the cleaning head **154** relative to the cleaner's surface **12** engaging means, which in the above described embodiment is the foot **118**, the shoe **302** and the sealing flange **304**. The steering means may rotate the cleaning head **154** continuously in one direction only, in one direction intermittently, in opposing directions without an intermittent period between directions, or in opposing directions with an intermittent period between directions. Further, the number of rotations or partial rotations before intermittent disengagement of the steering means in either direction may be varied. The speed of rotation in one or both directions is also controlled.

[0080] As shown in FIG. 33 and FIGS. 34A, 34B, 34C, and 34D, an embodiment of a steering means suitable for incorporation into a cleaner **10** of the water interruption type having an inclined chamber **110**, may conveniently be incorporated within an annular chamber **404** formed by the mating of a lower portion of the operating head **158** and a cylindrical portion **408** of the foot **118**. As illustrated in FIG. 33, the lower portion of the operating head **158** may include means for easy attachment to another part **156** of the operating head. Other suitable

receiving means for attaching positive steering components to the housing **100** of a cleaner **10** include the flange **116** as described earlier with reference to FIG. 6.

[0081] The steering means **400** depicted in FIG. 33 and FIGS. 34A, 34B, 34C, and 34D, will enable the housing **100** to rotate in opposing directions with an intermittent period between directions. At least one resiliently biased pawl **402** is mounted to the lower portion **156** of the operating head **154** within the annular chamber **404** and dimensioned such that a free end of the pawl **402** is capable of movement through a limited arc and may obliquely engage a raised portion **406** of the cylindrical wall **408** of the foot **118**, but will be spaced away from any portion which is not raised. A suitable means for resiliently biasing the pawl **402** is a tab **410** made from a flexible, resilient plastic material, the free end of such resilient tab **410** being capable of engagement with a portion of or part fixed to a lower portion **158** of the operating head **154**. The tab or tabs **410** may be positioned so that when the free end of the pawl **402** is not engaged with a raised portion **406** of the foot **118**, the tab or tabs **410** may position the pawl **402** so that it will approximately coincide with a radial extending from the center of the foot **118** towards the cylindrical wall **408**. The interior face of the cylindrical wall **408** may incorporate teeth or other means to engage with the free end of the pawl.

[0082] In operation, the pulsating fluid flow **122** through the chamber **110** causes the operating head **154**, housing **100** and flexible hose **16** to jerk or vibrate and, as previously described, resultant forces move the cleaner **10** in a forward direction. Additionally, this action will cause slight movement of the foot **118** relative to the lower portion **144** of the operating head **154**. If, as depicted in FIG. 34B, the pawl **402** is not engaged with a raised portion **406** of the cylindrical wall **408**, the cleaner **10** will move forward until such movement causes the position of the attached flexible hose to alter and thereby apply a force against the hose coupling **16** to rotate the head **154**. The incorporated lower portion **158** and attached pawls **402** moves toward the raised portion **406** of the cylindrical wall **408** of the foot. Continued application of the latter force rotates or deflects the pawl **402** and an attached flexible tab **410** until the pawl **402** engages the raised wall portion **406**, as is illustrated with reference to FIGS. 34A and 34B. Once so engaged with the raised wall portion **406**, the pawl **402** provides greater resistance to rotational movement in one direction than in the opposite direction. Consequently, the vibration of the cleaner **10** and a ratcheting action of at least one pawl **402** will cause rotation of the lower portion **158** of the operating head **154** relative to the cylindrical wall **408** of the foot **118**. This ratcheting action and rotation about axis **412** will continue until the end of the raised portion **406** of the cylindrical wall **408**. Those elements of the cleaner **10** fixed to the operating head **154** will also rotate relative to the foot **118** and the surface **12** to be cleaned. Since the cleaner **10** will move in the direc-

tion in which the hose coupling **16** points or is directed, if unobstructed, the cleaner will typically follow a curved course across the surface **12** to be cleaned. If the cleaner is lodged against a wall, a step or other obstacle in a swimming pool, when the pawl **402** is engaged, the cleaner will rotate in an opposition direction and thus away from the obstacle and then proceed in a new curved forward direction until the pawl **402** disengages. This process will be repeated as the hose **15** interacts with the cleaner to re-engage the pawl **402** and thereby recommence the ratcheting rotational action. In this manner, the tendency of a swimming pool cleaner **10** to establish a repetitive action or to become trapped by an obstacle, will be reduced or eliminated.

[0083] If continuous rotation in one direction is desired, the raised portion **406** of the cylindrical wall **408** may be continued around the wall **408**, without any break. The pawls **402** can then be installed to provide rotation in a chosen clockwise or anti-clockwise direction.

[0084] It is expected that, without departing from the principles disclosed, modifications may be made to the embodiment of the above-described steering means. For example a pawl **402** may be attached to a foot (instead of an operating head) and engage a wall or other suitable surface of the operating head (instead of the wall **408** or other inside portion of a foot) of the cleaner **10**. By way of further example, for frictional engagement with a pawl, a resilient insert is substituted for teeth of inner surface **412**. These examples are not intended to exhaust the possible alternate embodiments of this invention.

[0085] An alternate embodiment of steering means which will provide a cleaner **10** of the water interruption type having an inclined chamber **100** with steering in opposing directions without an intermittent period between directions is depicted in FIGS. 35-45. As with the previous embodiment, the steering means may conveniently be installed within the annular chamber **404** formed by the mating of a lower portion **158** of the operating head **154** and the cylindrical portion **408** of the foot **118**. Each end of at least one resilient means such as a flexure **418** is connected to a sleeve **416**, the resilient means and sleeves dimensioned to be rotatably attached to at least two shafts **414** fixed to the lower portion **158** of the operating head **154**. The distance between the axes of rotation extending through the center of two shafts **414** shall, prior to attachment of the steering means to said shafts **414**, be less than the distance between the center of the holes through two sleeves **416** interconnected by, for example, the flexure **418**. Thus when each sleeve **416** is slid over a shaft **414**, the flexure **418** must deform and thereby bias each sleeve **416** to a predetermined position relative to the shafts **414**. An engagement means such as a finger **420** communicates with at least one sleeve **416** and, upon rotation of the foot **118**, occasionally engages with means such as tab **422** attached with respect to the foot **118** or driven by the ro-

tation of the foot **118**. With reference to FIGS. 36 and 37, when the finger **420** and flexures **418** are positioned in a first position as shown in FIG. 36, the application towards the right of increasing force against the left hand side of the finger **420**, will, upon application of sufficient force, overcome the force stored in the deformed flexures **418**, whereupon the flexures will rapidly deform and take up a second position as depicted in FIG. 37. Upon such deformation of the flexure **418** into the second position, the sleeves **416** will rotate through an arc to a second predetermined sleeve position. Attached to at least one sleeve **416** are two pawls **424** and **426** dimensioned so that when the sleeves **416** and flexure **418** are in a first position, a first pawl will engage an inner toothed surface **412** of the cylindrical wall **408** of the foot **118**, and when the sleeves **416** and flexure **418** are in a second position, the second pawl will engage such surface **412**. To facilitate frictional engagement, the face of a pawl and/or the inner surface **412** of the cylindrical wall **408** incorporate teeth **430** or comprise at least one resilient layer attached to the cylindrical wall **408**.

[0086] In operation, the pulsating fluid flow **122** through the chamber **110** causes the operating head **154**, chamber **110** and flexible hose **16** to jerk or vibrate and, as previously described, resultant forces move the cleaner **10** in a forward direction. Additionally, this action will cause slight movement of the foot **118** relative to the lower portion of the operating head **158**. In this embodiment, at least one pawl **424** will be engaged with the surface **412** and will provide greater resistance to rotational movement of the lower portion of the operating head **158** relative to the foot **118** in one direction than in the opposite direction. By means of a ratcheting action, the pawl **424** will cause the lower portion **158** of the operating head **154** to rotate relative to the foot **118**. This ratcheting action and rotation will continue in a first direction until a tab **422** driven by the rotation of the foot **118** engages a finger **420** and applies sufficient force thereto to cause the flexure **418** to deform to a second position and cause the first pawl **424** to disengage the surface **412** and a second pawl **426** to engage the inner surface **412**. The ratcheting action and second pawl **426** will cause rotation in a second direction, opposite to the first direction. As earlier described, the tendency of a swimming pool cleaner **10** to establish a repetitive action or to become trapped by an obstacle, is greatly reduced or eliminated.

[0087] In a preferred embodiment as illustrated in FIG. 38, the inside surface **412** of the cylindrical wall **408** is formed using a resilient, rubber-like layer **428** suitable for frictional engagement with pawls **424** and **426**. The pawls **424** and **426** are camming pawls. When a free end of a camming pawl, say **424**, is in frictional engagement with the resilient friction surface **412**, vibration of the cleaner and a ratcheting action of the pawl **424** will result in rotation of the operating head **154** relative to the foot **118** in a first direction. Use of the resilient layer

428 on the surface **412** of the wall **408** or on the free end of a pawl **424** or **426** has an advantage over the use of teeth on either of those surfaces. The advantage is that the action of the pawl **424** or **426** is not limited by the size of any teeth and the need for the free end of a pawl **424** or **426** to consistently traverse any such teeth in order to provide an efficient ratcheting action. While the increments may become small if the hose, for example, applies significant torque in a direction opposite to that in which the steering means is rotating, a resilient friction layer **428** has been found to be effective in enabling the rotation to continue until the steering means switches rotation to a second direction.

[0088] The number of rotations that the lower portion **158** of the operating head **154** makes relative to the foot **118** is determined by the placement of tab or tabs **422** driven by the rotation of the foot. FIG 38 illustrates a means employing at least one ring **800A**, **800B**, and additional tabs **422B**, **C**, **D**, whereby tab **422D** will engage finger **420** after more than one rotation in either direction. More than one rotation in each direction is particularly useful for consistent disengagement of a cleaner **10** from obstacles in a swimming pool.

[0089] FIG. 40 illustrates that multiple linked flexures **418** and more than one engagement finger may be employed in this embodiment of steering means.

[0090] In yet another embodiment, as illustrated with reference to FIG. 42, linkage arms **430** are used to link more than one pair of pawls **424** and **426**. This arrangement is useful to assure that both flexures **418** and both pairs of pawls reliably orient themselves in a first and then a second position as required for operation of the invention. As will be obvious to those reasonably skilled in the art, a similar arrangement employing only a single flexure in combination with a linkage arrangement **430** will also satisfy the requirements and will fall within the scope of the invention.

[0091] FIGS. 44 and 45 illustrate out-of-round shoes **302** and sealing flanges **304** either of which, upon engagement with a wall or obstacle, will reduce rotation of the shoe **302**, sealing flange **304** and other surface engaging means relative to the surface **12** to be cleaned. This feature improves the rotation of the housing **100** and hose connector **16** relative to the surface to be cleaned. Once the housing **100** and hose connector have been driven through an arc by the steering means, the hose connector will point in a direction free of the obstruction, and the cleaner will move away from the obstacle. Resilient members **432** may be attached or integrally formed with the shoe **302**. Such resilient members **432** enhance the grip of the shoe against a wall or obstacle. Other improvements which may be made to a shoe **302** are to increase its height and deepen the grooves **310** for increased fluid flow through a passageway formed between the shoe **302** and the surface **12** to be cleaned. Also, to reduce slippage of surface engaging means of the flange **12** against the surface **12** to be cleaned, sealing flange stiffeners **338** are attached

to or integrally formed with the sealing flange **304**.

[0092] A reading by those skilled in the art will bring to mind various changes without departing from the spirit and scope of the invention.

[0093] To this point, the embodiments of cleaners **10** incorporating the flow control valve **200** have all described at least the chamber **110** and consequently a significant dimension of the cleaner **10** to be forwardly inclined with respect to the surface **12** to be cleaned. FIGS. 1 through 6 illustrate such embodiments. The flow control valve **200** is, as a source of vibration or oscillatory motion, also suited for incorporation in cleaners in which the suction chamber **110** is substantially normal to the surface **12** to be cleaned. As illustrated with reference to FIG. 28, useful in the swimming pool cleaner described in U.S. Patent No. 5,404,607 to Sebor. FIG. 28 illustrates a flow control valve of this invention incorporated into the suction chamber **110** of a cleaner **10A** where the suction chamber **110A** is not inclined. A preferred embodiment of a cleaner described in the '607 patent further requires that a shaft disposed in the chamber be driven and engage a means to translate the reciprocating angular movement of the shaft into one directional angular movement of a driven gear. The flow control valve **200** of the present invention will provide a reciprocating angular movement to a sleeve **102** or drive shaft **234**, which movement may be translated and coupled with other mechanisms necessary to perform a number functions for a pool cleaning device, including steering functions.

[0094] Many modifications and other embodiments of the invention will come to the mind of one skilled in the art having the benefit of the teachings presented in the foregoing descriptions and the associated drawings. The specific embodiment shown in the accompanying drawings and described herein is offered by way of illustration only. Therefore, it is to be understood that the invention is not to be limited to the specific embodiments disclosed, and that modifications and alternate embodiments are intended to be included within the scope of the appended claims.

[0095] Further aspects and features of the invention are set out in the following numbered clauses.

1. A swimming pool cleaning device for automatically cleaning a surface submerged in liquid, the cleaning device comprising:

a forwardly inclined housing having rigid walls forming a flow passage extending therethrough from an inlet which in use is proximate a surface to be cleaned, to an outlet for connection to a flexible suction hose;
a flow control valve operable within the flow passage, the flow control valve comprising:

a rigid flap member having a pivot end pivotably connected to the housing and an op-

posing seat end movable from a seated position biased against a first wall portion of the housing, to an unseated position in a spaced relation to the first wall portion; and a flexible flap member having first and second ends, and opposing sides therebetween, the first end of the flexible portion attached to a second wall portion of the housing opposing the first wall portion, the second end of the flexible portion attached to the seat end of the rigid flap member, the flexible flap member extending across the flow passage for blocking flow there-through when the rigid flap member is in the seated position, and retractable from the second wall portion for permitting fluid flow through the flow passage when the rigid flap member is in the unseated position;

a shoe carried by the housing at the inlet for engaging a surface of a pool to be cleaned; and a flexible planar member extending around the shoe, when in use, the shoe and planar member frictionally engaging the surface to be cleaned.

2. The cleaning device according to clause 1, wherein the first wall includes a recess for receiving the seat end of the rigid flap member, and wherein the valve further comprises an impact absorbing buffer carried on the seat end for cushioning an impact of the seat end with the first wall.

3. The cleaning device according to clause 1, wherein the first wall of the housing comprises a forward wall.

4. The cleaning device according to clause 1, wherein the flexible flap member comprises:

an upstream portion having first and second ends, the first end of the upstream portion attached to the second wall portion of the housing and the second end of the upstream portion attached to the seat end of the rigid portion; and a downstream portion having first and second ends, the first end of the downstream portion attached to the second wall portion of the housing at a position displaced downstream from the first end of the upstream portion, and the second end of the downstream portion attached to the second end of the rigid flap member, the upstream and downstream portions forming a fluid buffer chamber with the side wall portion.

5. The cleaning device according to clause 4, wherein the side wall portion includes an aperture therethrough, and wherein the aperture is posi-

tioned for providing fluid flow into the fluid buffer chamber.

6. The cleaning device according to clause 1, wherein the valve further comprises a stop operable with the rigid flap member for limiting the spaced relation of the rigid flap member to the first wall and thus govern the an arc through which the rigid flap moves and a rate of reciprocating movement thereof.

7. The cleaning device according to clause 1, wherein the flexible flap member comprises at least two hingedly attached rigid elements.

8. The cleaning device according to clause 1, further comprising a seal extending along an edge of the rigid flap member for biasing against side wall of the housing in a sealing relationship between the rigid flap member and the side wall of the housing.

9. The cleaning device according to clause 1, wherein the housing further comprises attaching means for removably attaching the first wall thereto, the first wall readily removable from the housing for access to the flow passage.

10. A swimming pool cleaning device for automatically cleaning a surface submerged in liquid, the cleaning device comprising:

a forwardly inclined housing having rigid walls forming a flow passage extending therethrough from an inlet which in use is proximate a surface to be cleaned, to an outlet for connection to a flexible suction hose;
a flow control valve operable within the flow passage;
a shoe carried by the housing at the inlet for engaging a surface of a pool to be cleaned, the shoe having comprising a resilient body having a bottom surface for engaging the surface to be cleaned and a central opening for passage of debris and fluid flow therethrough to the inlet of the housing, the resilient body having a groove within the bottom surface extending from the opening radially outward to the periphery, the groove forming a channel with the surface to be cleaned for passage of debris and fluid flow through the channel; and
a flexible planar member extending around the shoe, when in use, the shoe and planar member engaging the surface to be cleaned, the flexible planar member having a central opening therethrough communicating with the central opening of the shoe and a peripheral edge extending therefrom and around the central opening, the flexible planar member further

having an intake aperture for providing fluid flow therethrough to the channel, and a flexible flap extending into the intake aperture, the flexible flap adjusting the size of the intake aperture in response to fluid flow therethrough.

11. The cleaning device according to clause 10, wherein the flexible planar member further comprises slits extending from the peripheral edge inward toward the central opening to form a pedal-like segmented flange for splaying of each segment in response to travel of the cleaner over an irregularly contoured surface and thus facilitate an effective frictional contact therewith, the slits extending to less than half a distance from the peripheral edge to the opening,

12. The cleaning device according to clause 11, wherein the flexible planar member further comprises a pleat affixed across the slit for allowing the splaying while limiting seepage of fluid through slits.

13. The cleaning device according to clause 10, wherein the housing is rotatable about the shoe and planar member.

14. The pool cleaning device according to clause 10, further comprising a bumper assembly rotatable about the housing, the bumper assembly comprising:

a ring spaced from and extending around the housing;
a coupling rotatably attached to the hose coupling; and
elongated spokes extending radially outward from the coupling to the ring for holding the ring in a spaced relation to and around the housing.

15. The pool cleaning device according to clause 10, further comprising a buoyancy means operable with the housing for upwardly buoying a trailing edge portion of the housing.

16. The pool cleaner according to clause 15, wherein the buoyancy means comprises:

a float; and
a flexible rod having a proximal end hingedly attached to the housing trailing edge portion and a distal end attached to the float.

17. The pool cleaner according to clause 15, further comprising the housing trailing edge portion having an arcuate slot transversely extending across the housing and wherein the proximal end of the flexible rod is slidable within the arcuate slot.

18. The pool cleaner according to clause 15, further comprising a weight extending outwardly and forwardly from the housing for urging a leading edge of the housing downward, the weight positioned for cooperating with the buoyancy means in turning the cleaner downward when the cleaner is traveling along a swimming pool side generally vertical side wall.

19. A swimming pool cleaning device for automatically cleaning a surface submerged in liquid, the cleaning device comprising:

a forwardly inclined housing having rigid walls forming a flow passage extending therethrough from an inlet which in use is proximate a surface to be cleaned, to an outlet for connection to a flexible suction hose;
a flow control valve operable within the flow passage;
a shoe carried by the housing at the inlet for engaging a surface of a pool to be cleaned;
a flexible planar member extending around the shoe, when in use, the shoe and planar member engaging the surface to be cleaned; and
steering means carried by the housing and operable therewith for rotating the housing about the shoe and planar member.

20. The cleaning device according to clause 19, wherein the steering means comprises:

an upper member carried by the housing;
a lower member carried by the shoe, the lower member rotatably with the upper member about an axis of rotation, when in use, the axis of rotation generally perpendicular to the surface to be cleaned; and
ratchet and pawl means operable between the upper and lower members for providing free rotation in one direction about the axis in response to a pulsating fluid flow through the flow passage, while biasing against rotation in an opposing direction.

21. The cleaning device according to clause 20, wherein the ratchet and pawl means comprise:

a pivot pin carried by the upper member;
the lower member having a cylindrical surface extending around the axis of rotation for engagement by the pawl; and
a pawl pivotally attached to the pin and engaging the cylindrical surface.

22. The cleaning device according to clause 21, wherein the cylindrical surface includes a smooth surface portion over which the pawl will slide and

thus provide free rotation of the housing through an arc of the smooth surface.

23. The cleaning device according to clause 20, wherein the ratchet and pawl means comprise:

a tab carried by the upper member;
a pawl having first and second pawl portions pivotable about a center pawl portion for engaging the lower member with the first pawl portion for providing free rotation of the housing about the axis in the one direction while biasing against rotation in the opposing direct, and for pivoting about the center pawl portion for engaging the lower member with the second portion for providing free rotation of the housing about the axis in the opposing while biasing against rotation in the one direction;
a lever arm extending from the center pawl portion, the lever arm biasing against the tab from a first side when rotated about the one direction for causing the first pawl portion to engage the lower member, and the lever arm biasing against the tab from an opposing second side of the tab when rotated about the opposing direction for causing the second pawl portion to engage the lower member, thus providing a steering of the cleaning device.

24. The cleaning device according to clause 19, further comprising a hose coupling rotatable carried by the housing at the outlet for connection of a flexible hose.

25. The pool cleaning device according to clause 19, further comprising a bumper assembly rotatable about the housing, the bumper assembly comprising:

a ring spaced from and extending around the housing;
a coupling rotatably attached to the hose coupling; and
elongated spokes extending radially outward from the coupling to the ring for holding the ring in a spaced relation to and around the housing.

[0096] The features of the following claims may be present in combinations other than these specified.

Claims

1. A pool cleaning device (10) for automatically cleaning a surface (12) submerged in a liquid (14), the cleaning device (10) comprising a housing (100) having a flow passage (110) extending there-through from an inlet (120) which in use is proximate

the surface (12) to be cleaned, to an outlet (114) for connection to a flexible suction hose (16), a flow control valve (200) operable within the flow passage (110), and a flexible flange (304) extending around the inlet (120) for engaging the surface (12), the pool cleaning device (10) **characterized by:**

a steering mechanism (400) carried by the housing (100) and operable therewith for rotating the housing (100) relative to the surface (12) being cleaned and generally perpendicular thereto.

2. The cleaning device (10) according to Claim 1, wherein the steering mechanism (400) comprises an upper member (158) carried by the housing (100) and a lower member (118) rotatable therewith about an axis of rotation (412) generally perpendicular to the surface (12).

3. The cleaning device (10) according to Claim 2, wherein the steering mechanism (400) comprises:

ratchet and pawl means (402) operable between the upper and lower members (158, 118) for providing free rotation in one direction about the axis (412) in response to a pulsating fluid flow (122) through the passage (110), while biasing against rotation in an opposing direction.

4. The cleaning device (10) according to Claim 3, wherein the ratchet and pawl means (402) comprise:

a pivot pin (414) carried by the upper member (158);
the lower member (118) having a cylindrical surface (408) extending around the axis (412) for engagement by a pawl (402); and
a pawl (402) pivotally attached to the pin (414) and engaging the cylindrical surface (408).

5. The cleaning device (10) according to Claim 4, wherein the cylindrical surface (408) includes a smooth surface portion over which the pawl (402) will slide and thus provide free rotation of the housing (100) through an arc of the smooth surface.

6. The cleaning device (10) according to Claim 3, wherein the ratchet and pawl means (402) comprise:

a tab (422) carried by the upper member (158);
a pawl having first and second pawl portions (424, 426) pivotable about a center pawl portion (418) for engaging the lower member (118) with the first pawl portion (424) for providing free rotation of the housing (100) about the axis (412)

in the one direction while biasing against rotation in the opposing direction, and for pivoting about the center pawl portion (418) for engaging the lower member (118) with the second pawl portion (426) for providing free rotation of the housing (100) about the axis (412) in the opposing direction while biasing against rotation in the one direction;

a lever arm (420) extending from the center pawl portion (418), the lever arm (420) biasing against the tab (422) from a first side when rotated about the one direction for causing the first pawl portion (424) to engage the lower member (118), and the lever arm (420) biasing against the tab (422) from an opposing second side thereof when rotated about the opposing direction for causing the second pawl portion (426) to engage the lower member (118), thus providing a steering of the cleaning device (10).

7. The cleaning device (10) according to Claim 1, wherein the flow control valve (200) comprises:

a rigid flap member having a pivot end pivotably connected to the housing (100) and an opposing seat end (220) movable from a seated position biased against a first wall portion (102) of the housing (100), to an unseated position in a spaced relation to the first wall portion (102); and

a flexible flap member (206) having first and second ends, and opposing sides therebetween, the first end of the flexible portion attached to a second wall portion (104) of the housing (100) opposing the first wall portion (102), the second end of the flexible portion attached to the seat end (220) of the rigid flap member (204), the flexible flap member (206) extending across the flow passage (110) for blocking flow therethrough when the rigid flap member (204) is in the seated position, and retractable away from the first wall portion (102) for permitting fluid flow through the flow passage (110) when the rigid flap member (204) is in the unseated position.


8. The cleaning device (10) according to Claim 1, further comprising a shoe (302) carried by the housing (100) at the inlet (120), wherein the shoe (302) comprises a resilient body having a bottom surface for engaging the surface (12) and a central opening (136) for passage of debris and fluid flow therethrough to the inlet (133) of the housing (100), the resilient body having a groove (310) within the bottom surface extending from the opening (136) radially outward to the periphery, the groove (310) forming a channel with the surface (12) to be cleaned for passage of debris and fluid flow through the

channel.

9. The cleaning device (10) according to Claim 1, wherein the flexible flange (304) comprises a generally disc shaped sealing flange having a central opening (306) therethrough and a peripheral edge extending therefrom and around the opening, the flange (304) further having an intake aperture (318) and flexible flap (322) extending therein, the flexible flap (322) adjusting the size of the intake aperture (318) in response to fluid flow (122) therethrough. 5 10
10. The cleaning device (10) according to Claim 1, further comprising a rotatable hose coupling (124) carried by the housing (100) at the outlet (114) for connection of a flexible hose (16). 15
11. The cleaning device (10) according to Claim 1, further comprising a bumper assembly (20) carried by the housing (100), the bumper assembly (20) comprising: 20
 - a ring (42) spaced from and extending around the housing (100);
 - a coupling (130) attached to the hose coupling (124); and 25
 - elongated spokes extending outward from the coupling (130) to the ring (42) for holding the ring in a spaced relation to and around the housing (100). 30
12. The cleaning device (10) according to Claim 1, further comprising buoyancy means (22) operable with the housing (100) for upwardly buoying a trailing edge portion thereof. 35
13. The cleaning device (10) according to Claim 12, further comprising a weight (38) extending outwardly and forwardly from the housing (100) for urging a leading edge of the housing (100) downward, the weight (38) positioned for cooperating with the buoyancy means (22) in turning the cleaning device (10) downward when traveling along a generally vertical swimming pool side wall (30). 40 45

50

55

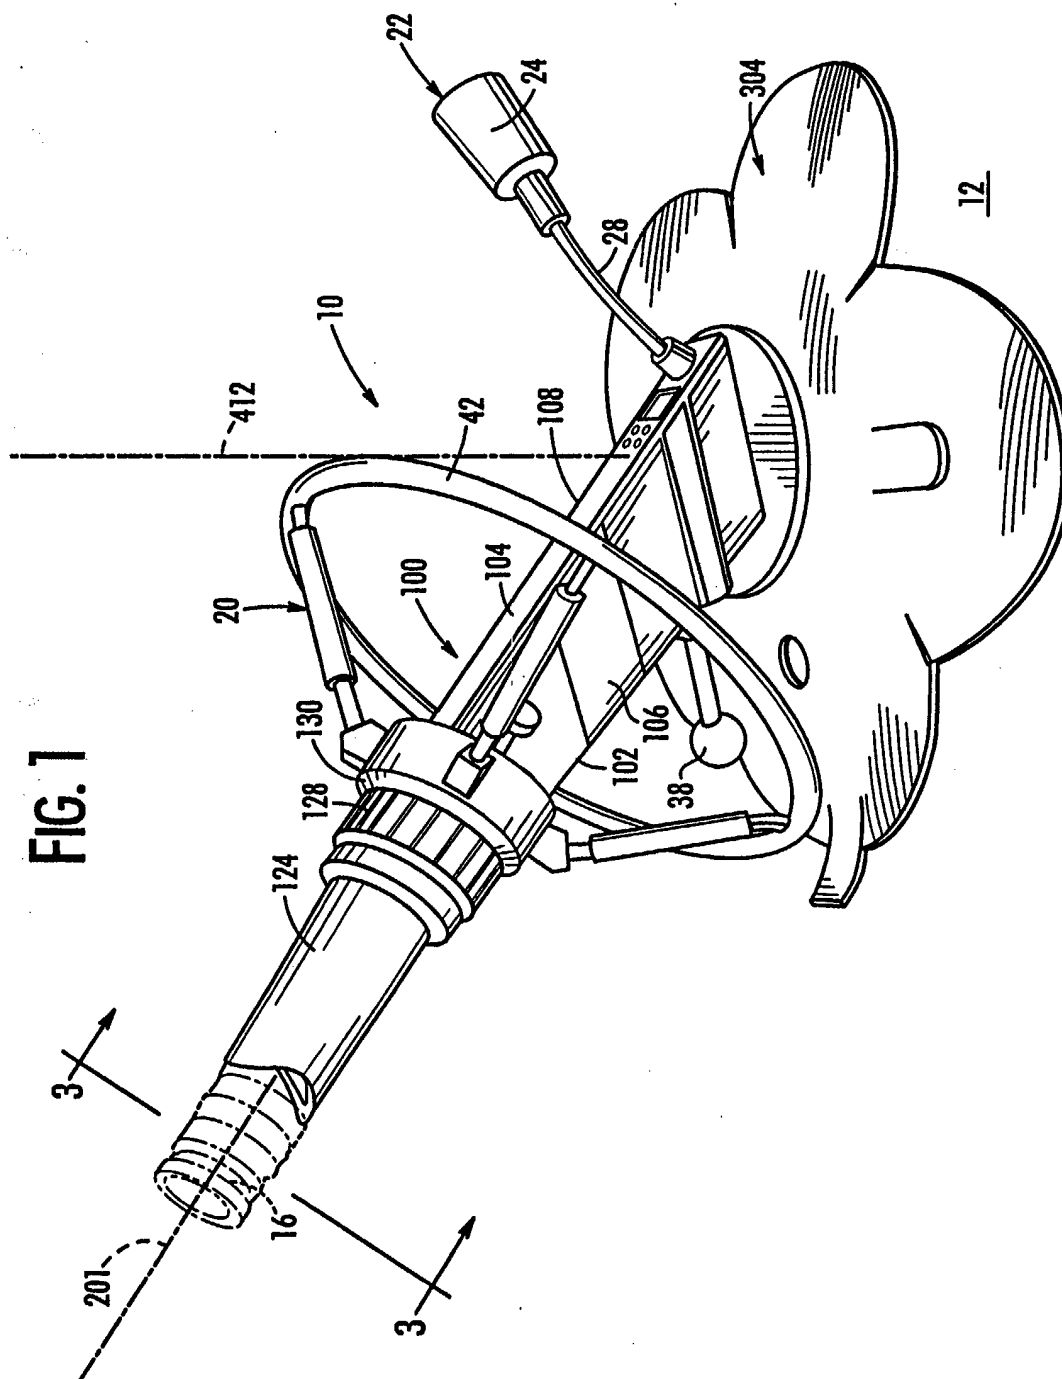

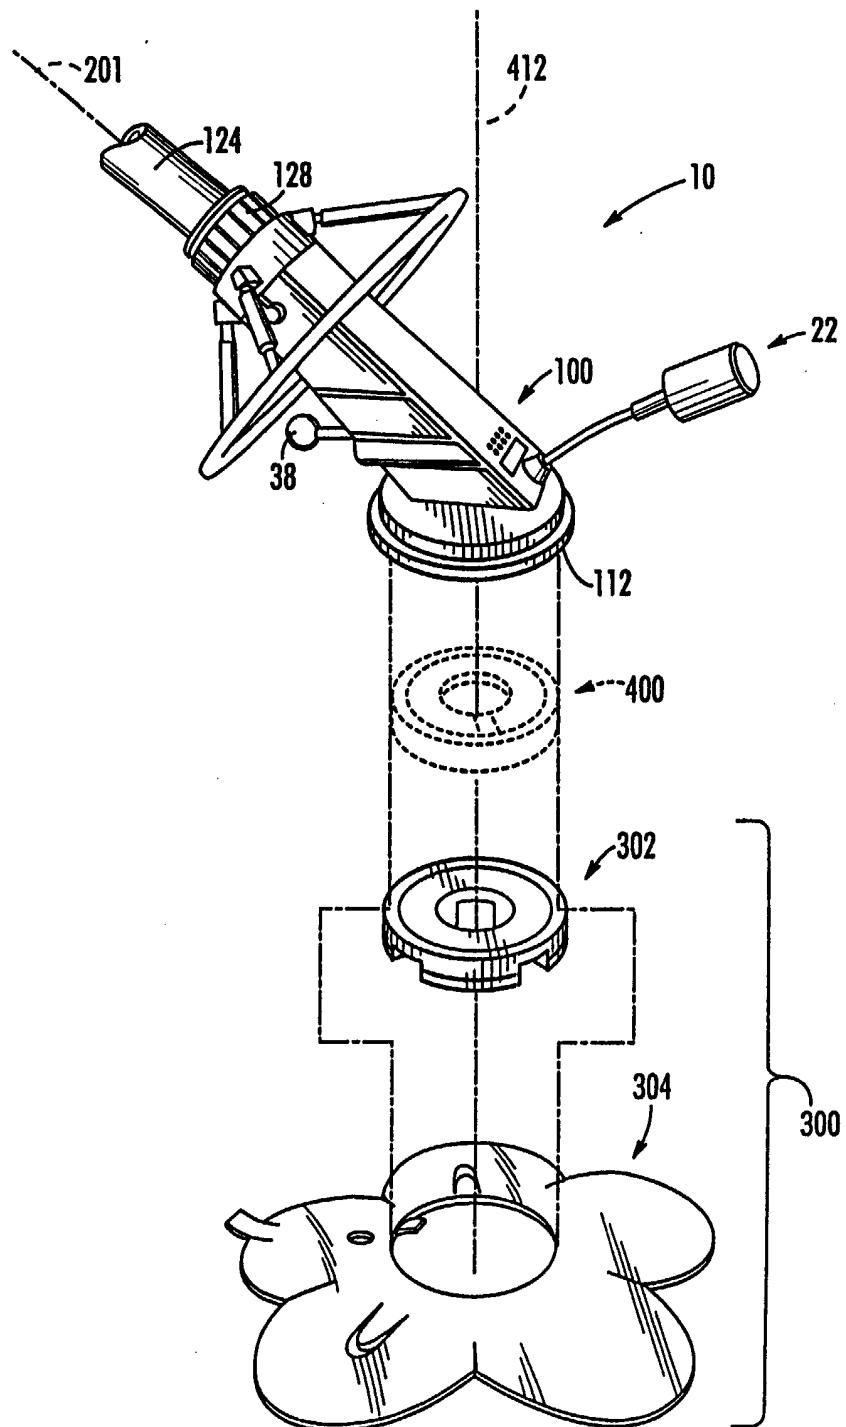


FIG. 2

FIG. 3

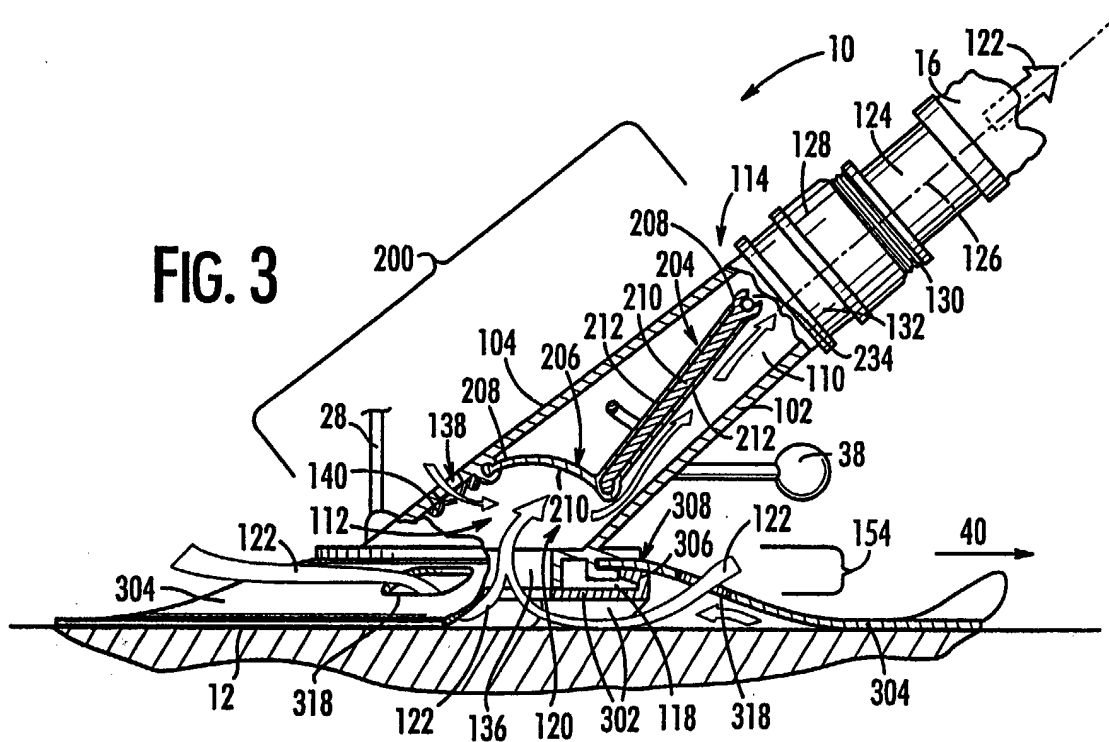


FIG. 32

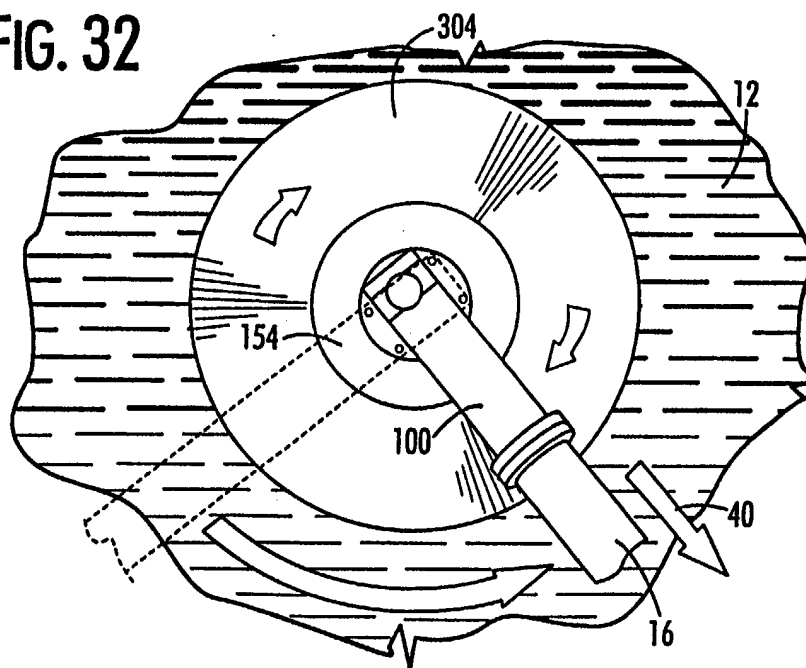


FIG. 4

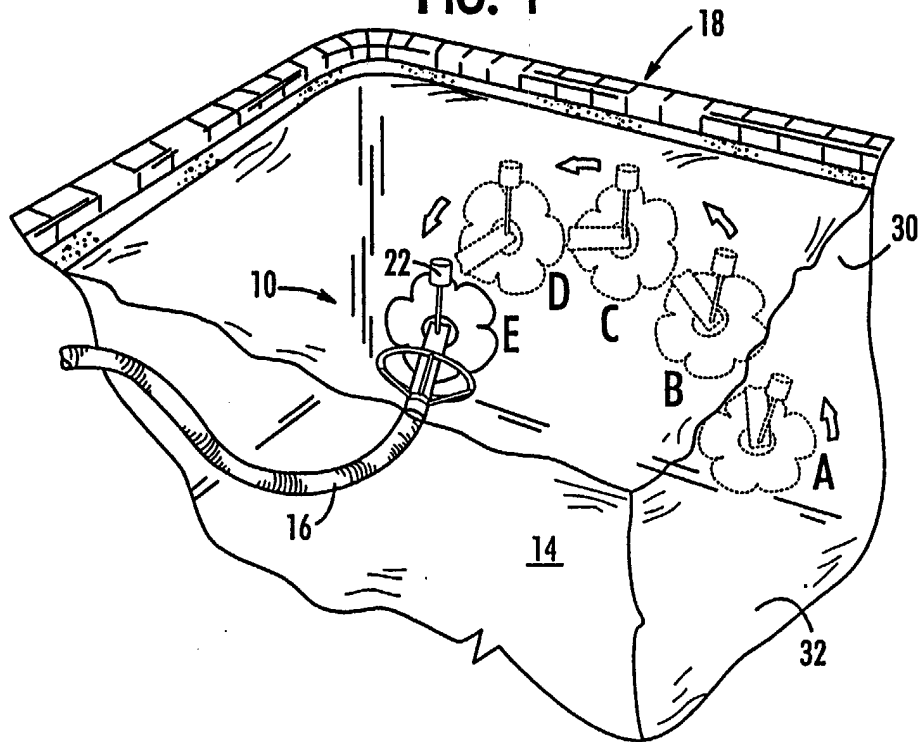


FIG. 26

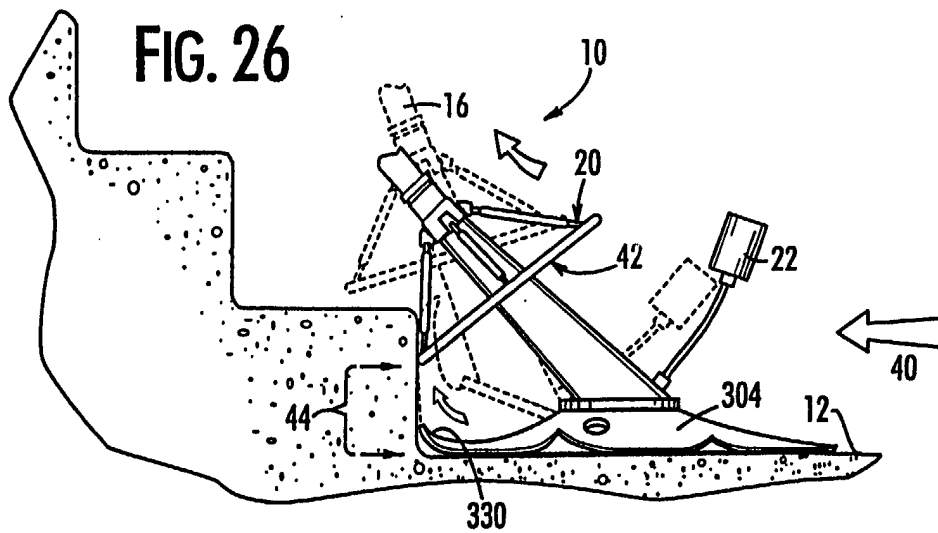


FIG. 5

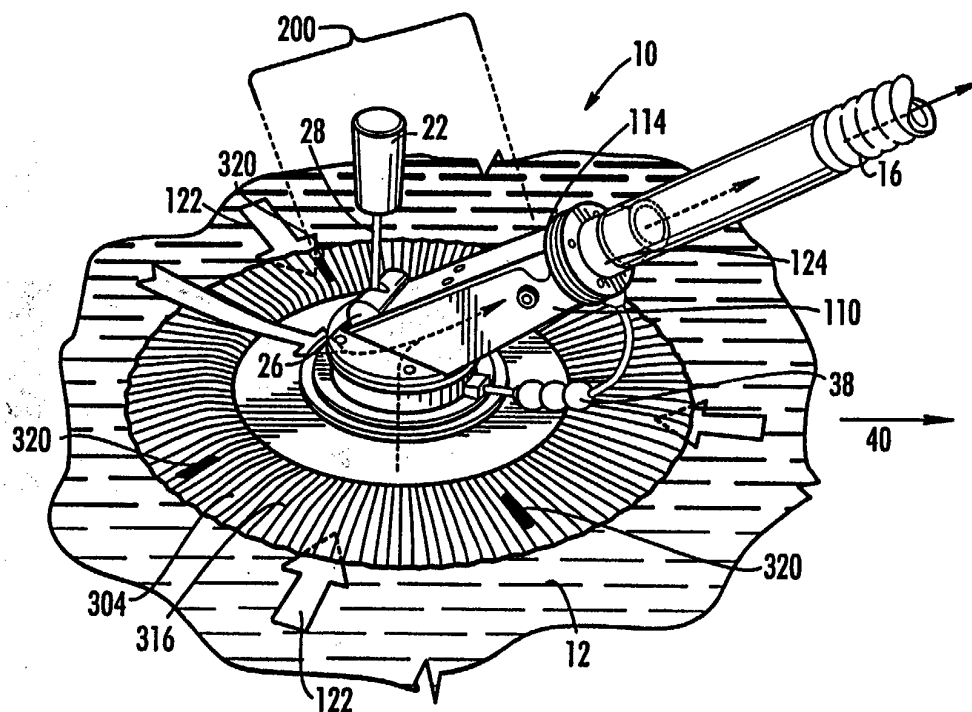
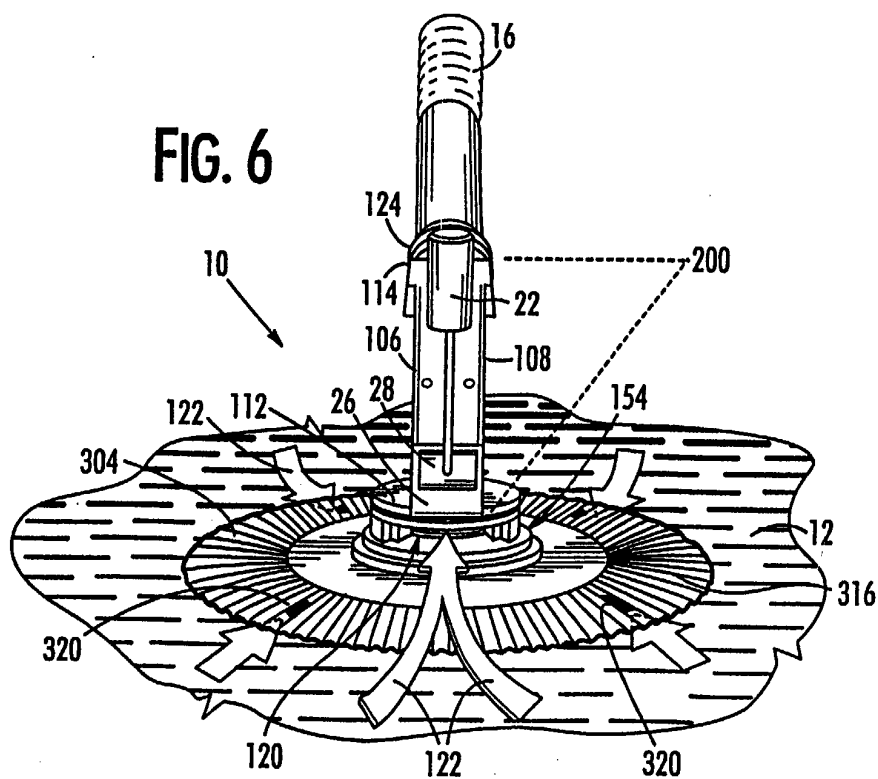


FIG. 6



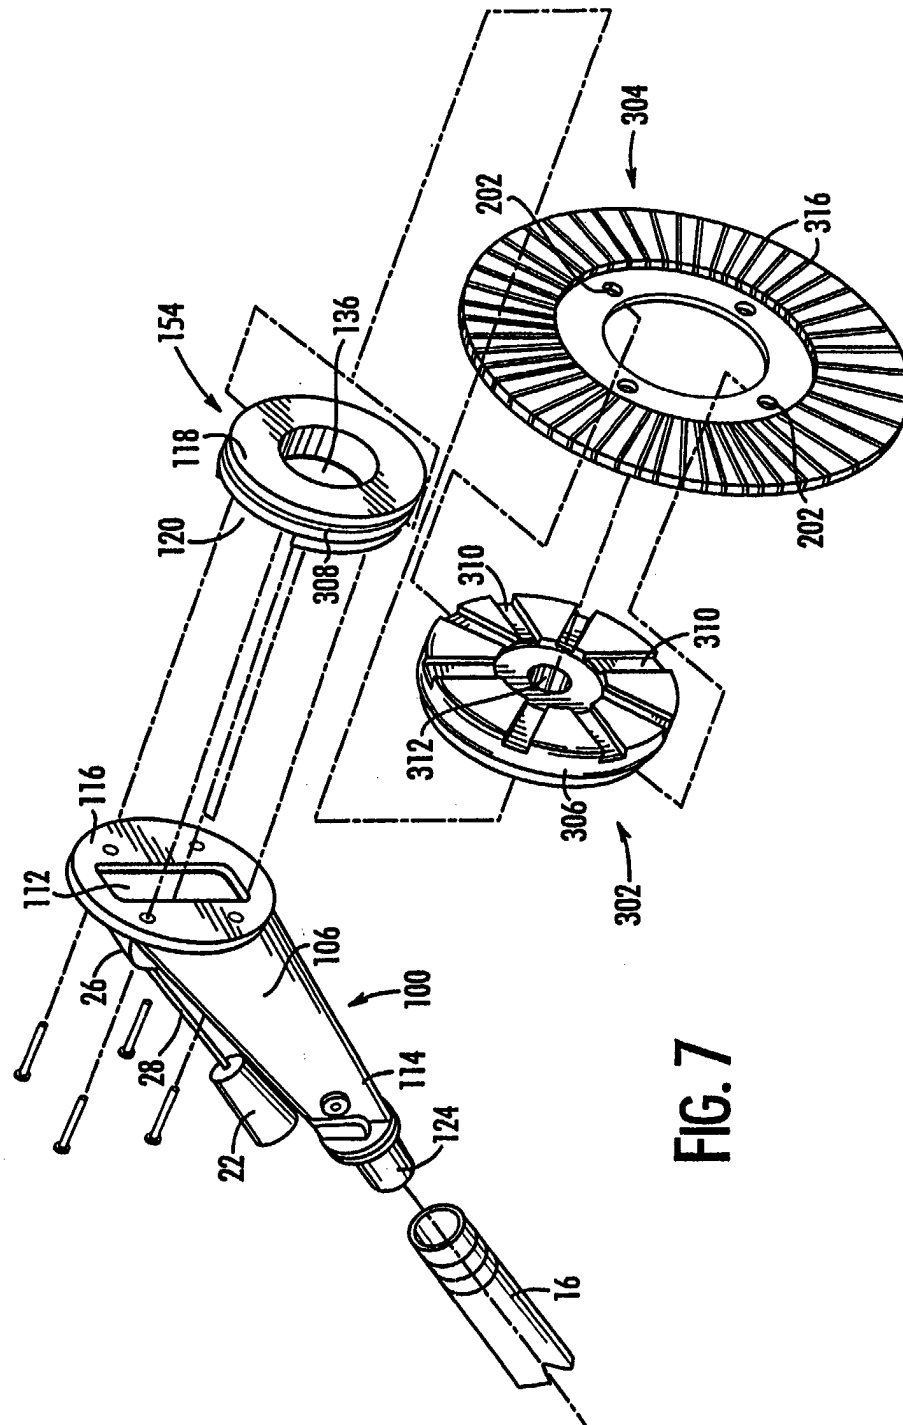


FIG. 7

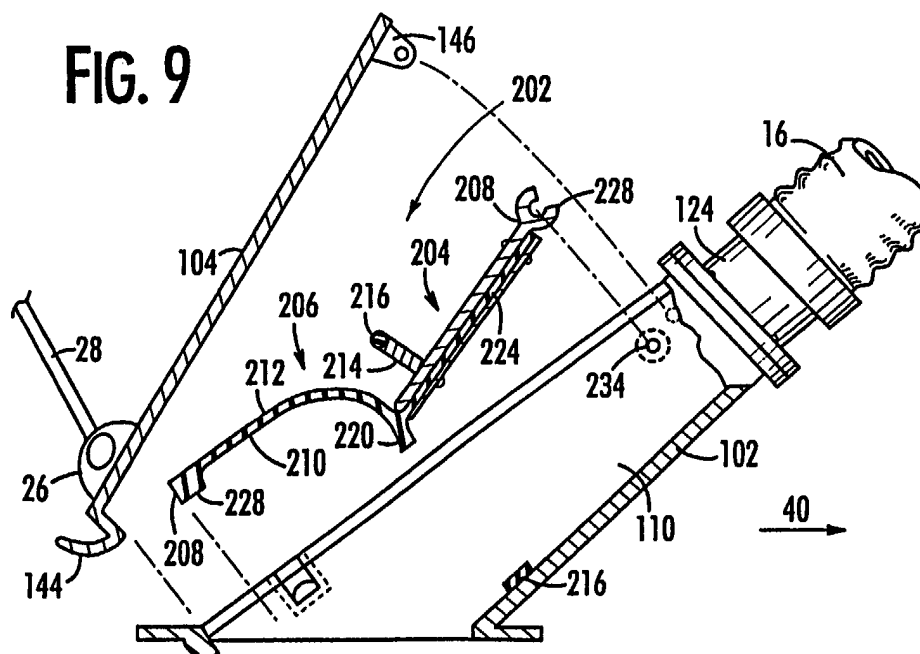
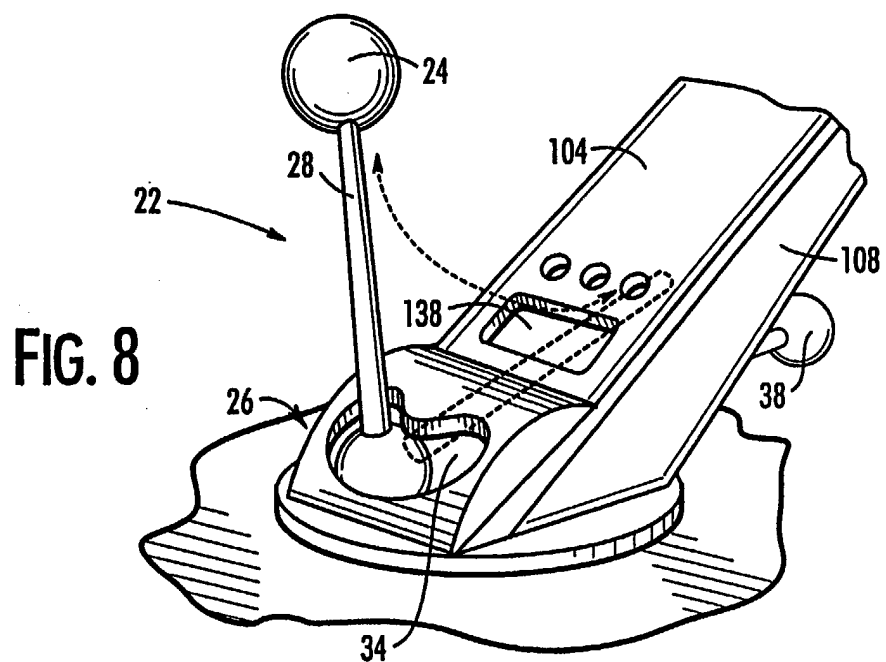


FIG. 10

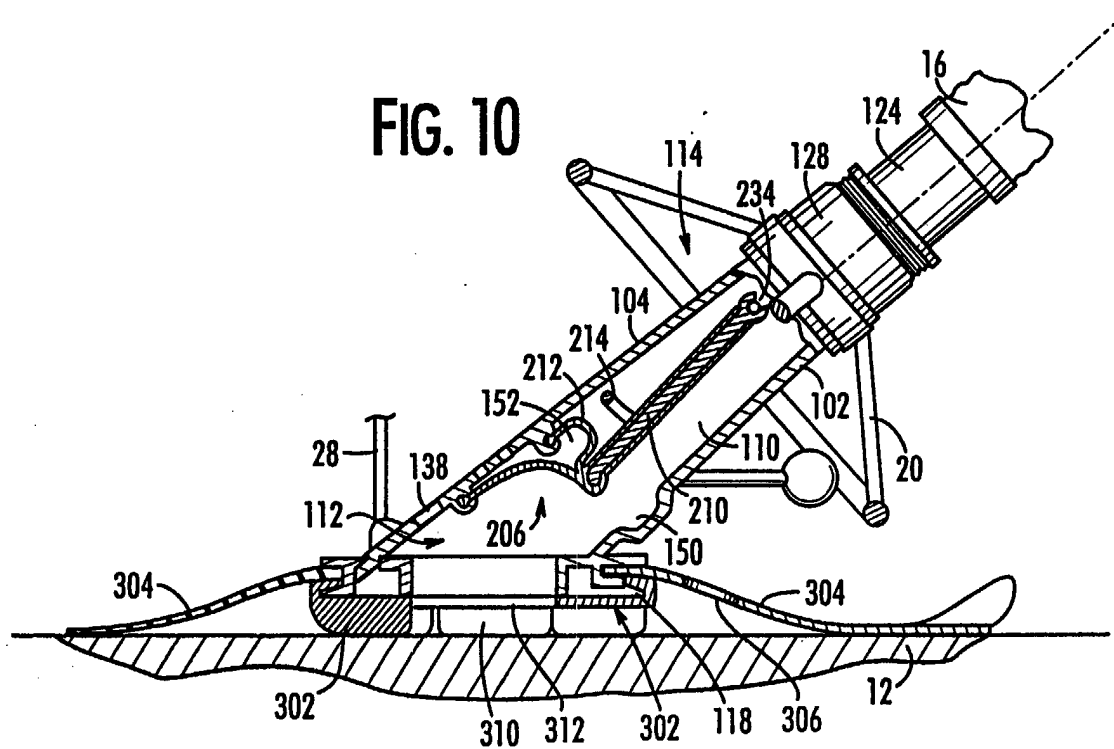
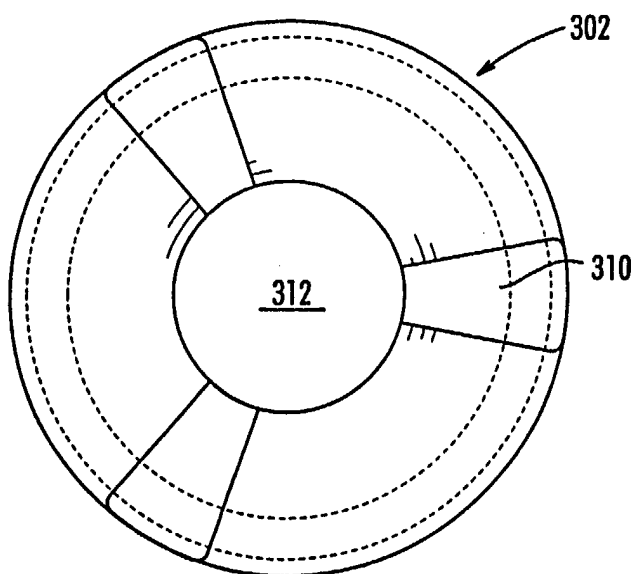


FIG. 10A



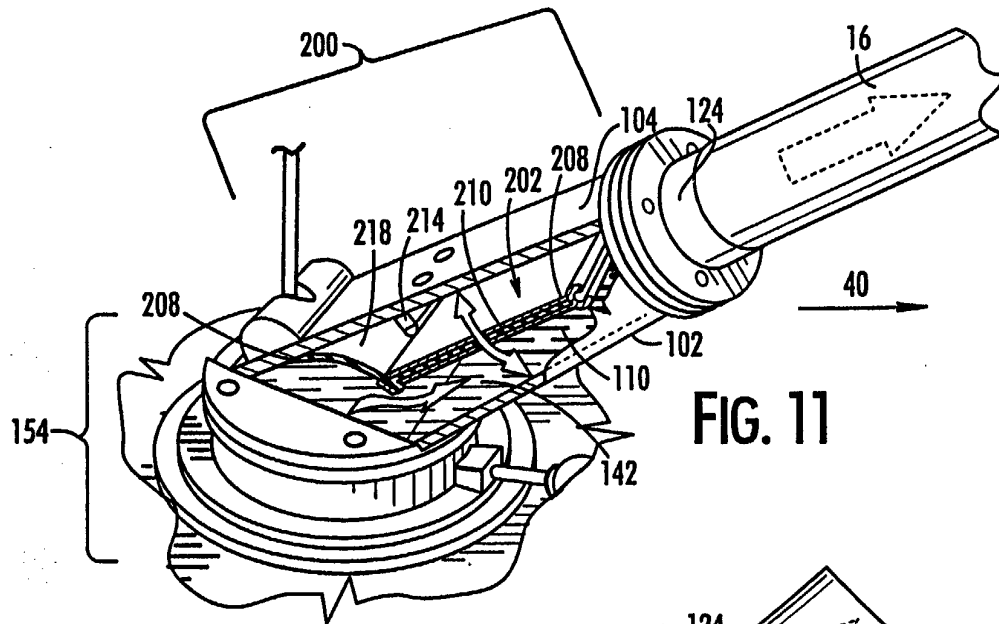


FIG. 11

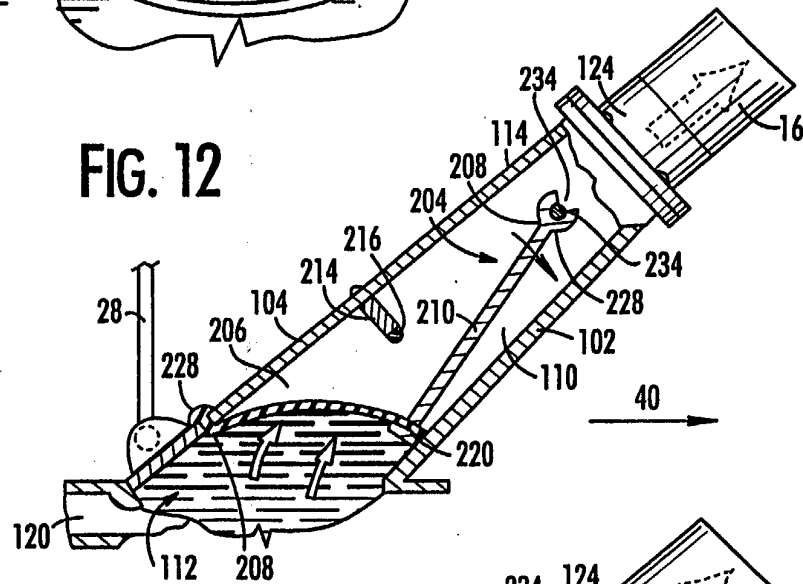


FIG. 12

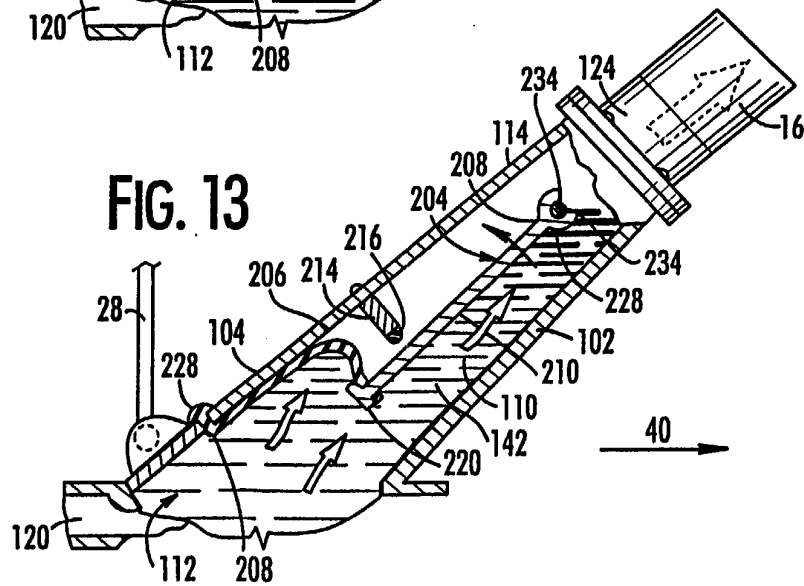


FIG. 13

FIG. 14A

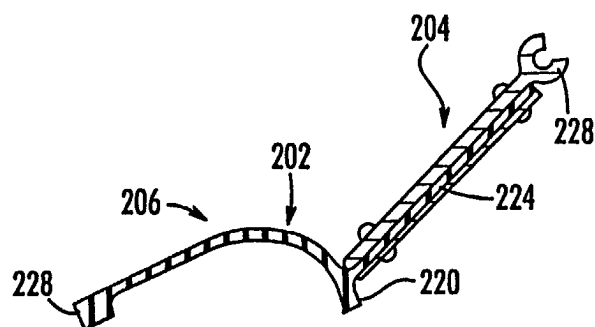


FIG. 14B

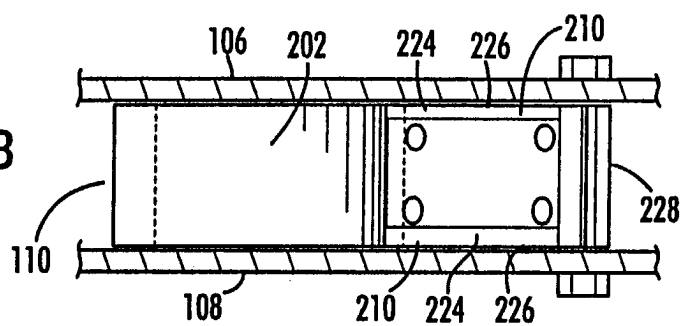


FIG. 15A

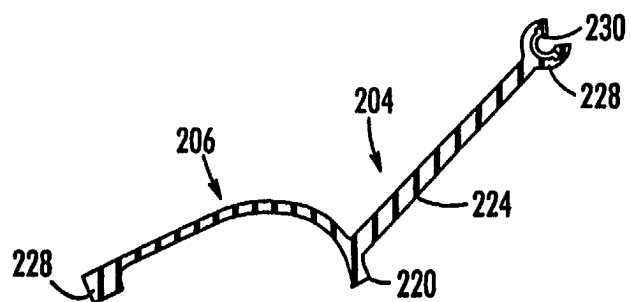


FIG. 15B

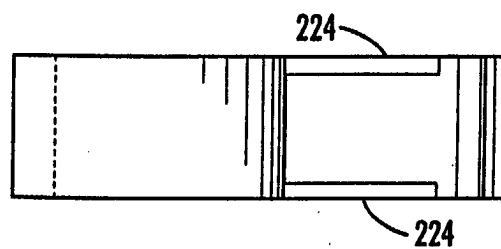


FIG. 16A

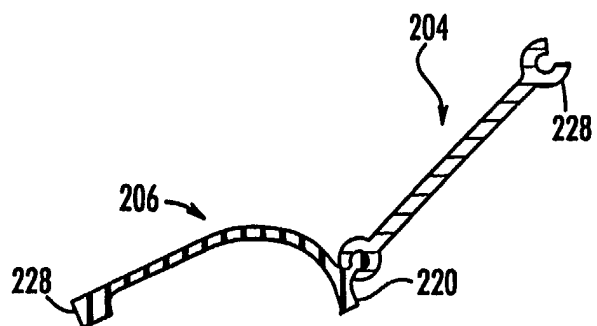


FIG. 16B

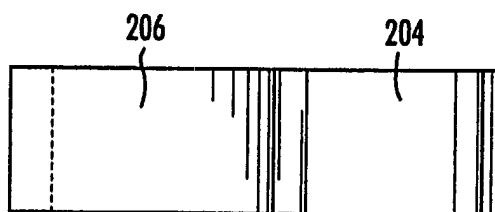


FIG. 17A

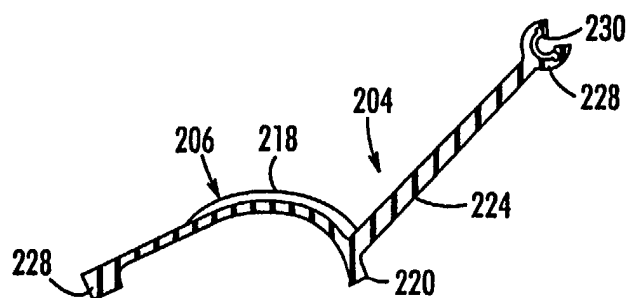


FIG. 17B

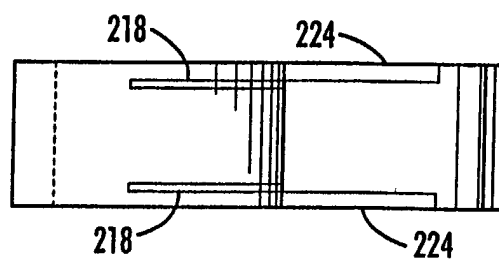


FIG. 18A

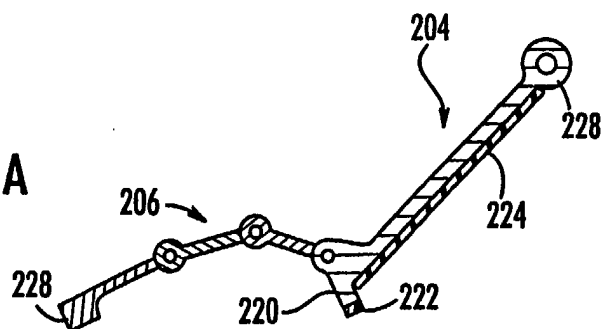


FIG. 18B

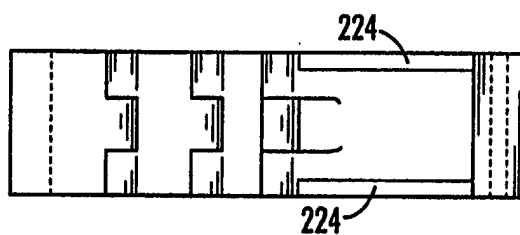


FIG. 19A

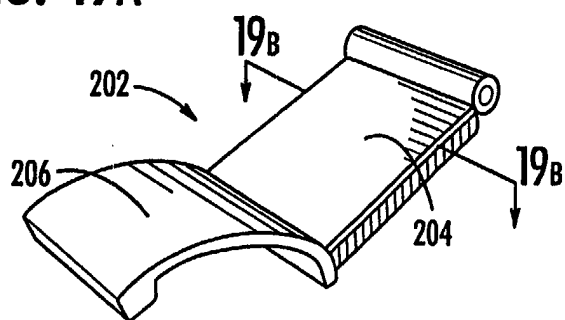


FIG. 19B

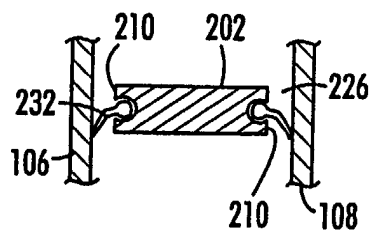


FIG. 19C

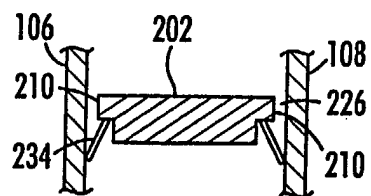


FIG. 20

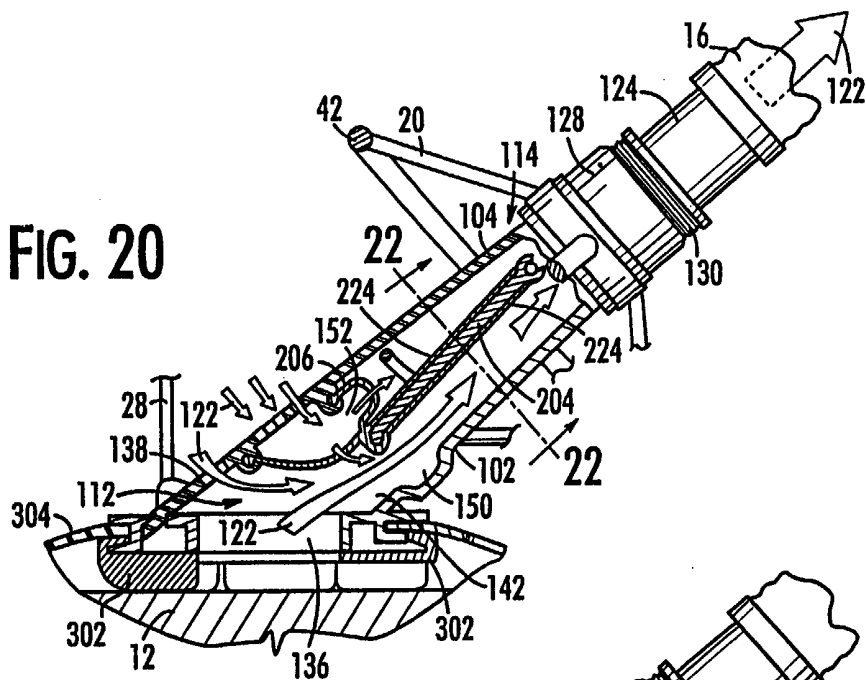


FIG. 21

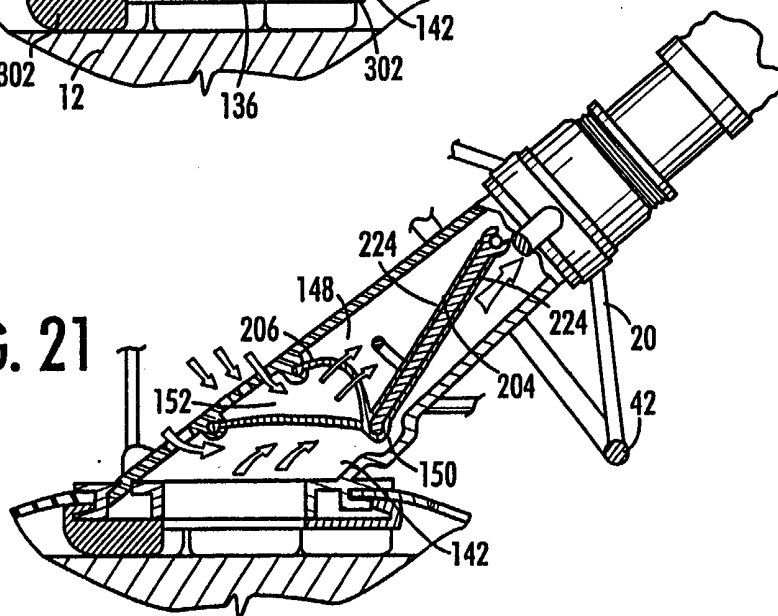


FIG. 22

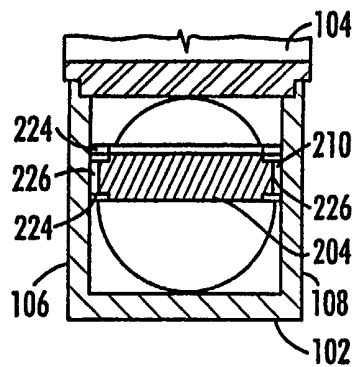


FIG. 23A

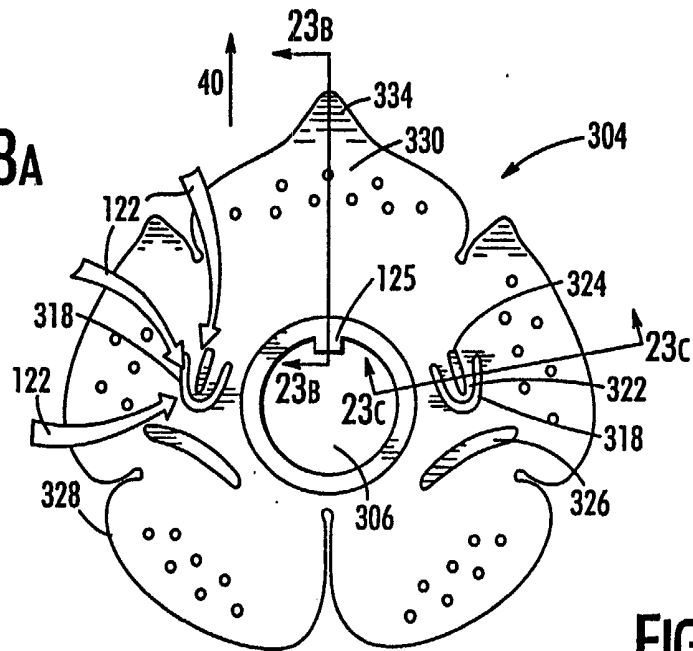


FIG. 23B



FIG. 23c

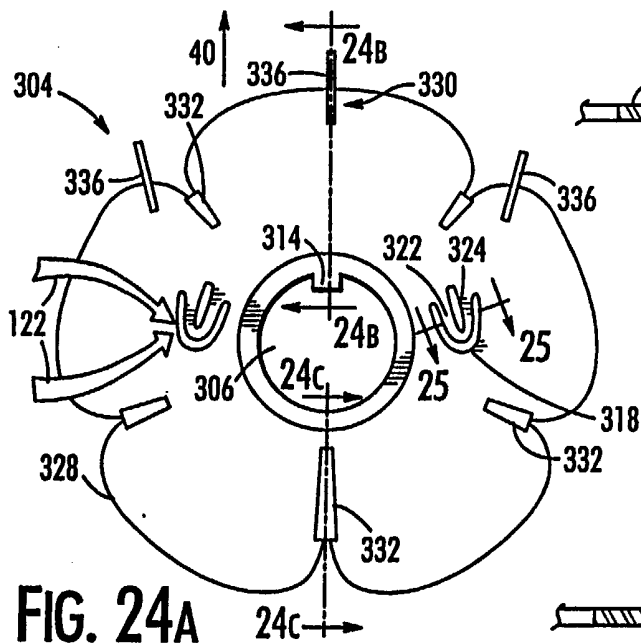



FIG. 24A

FIG. 24B



FIG. 24c



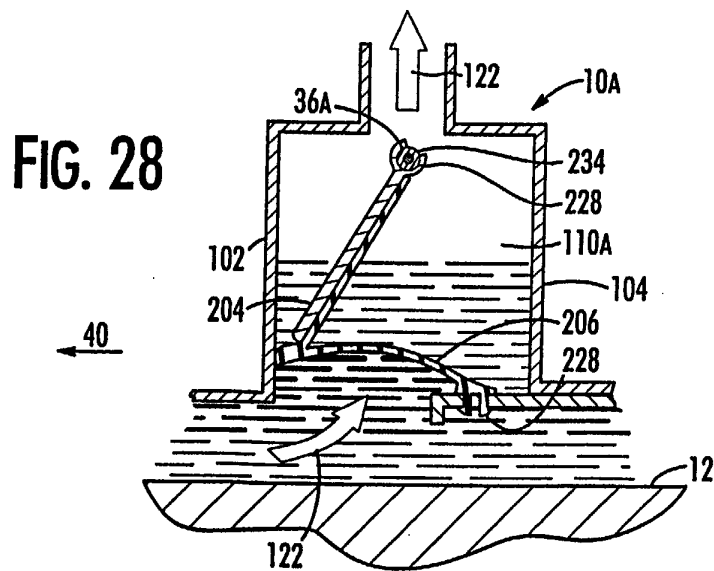
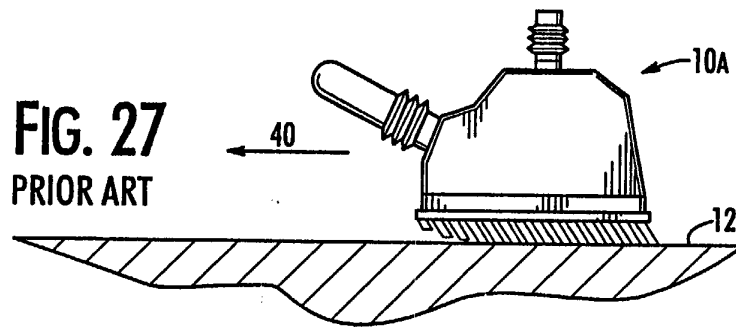
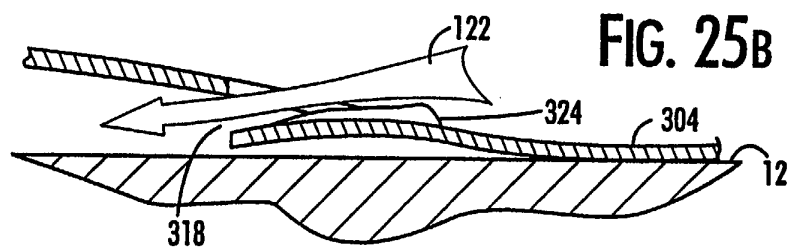
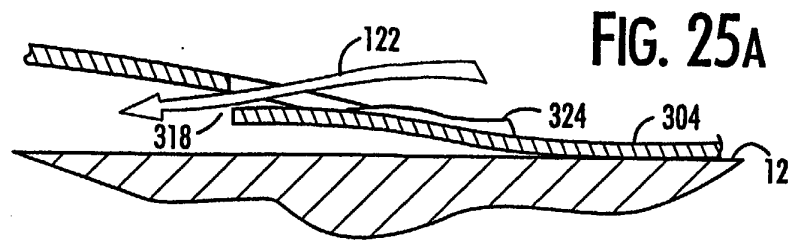


FIG. 29

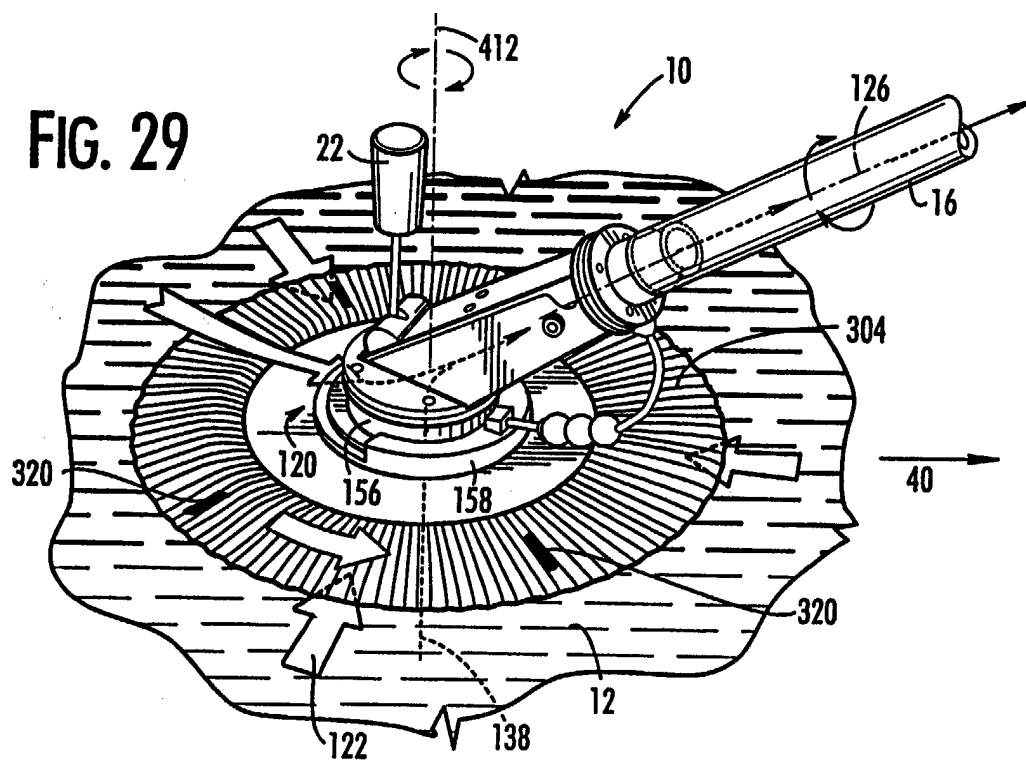
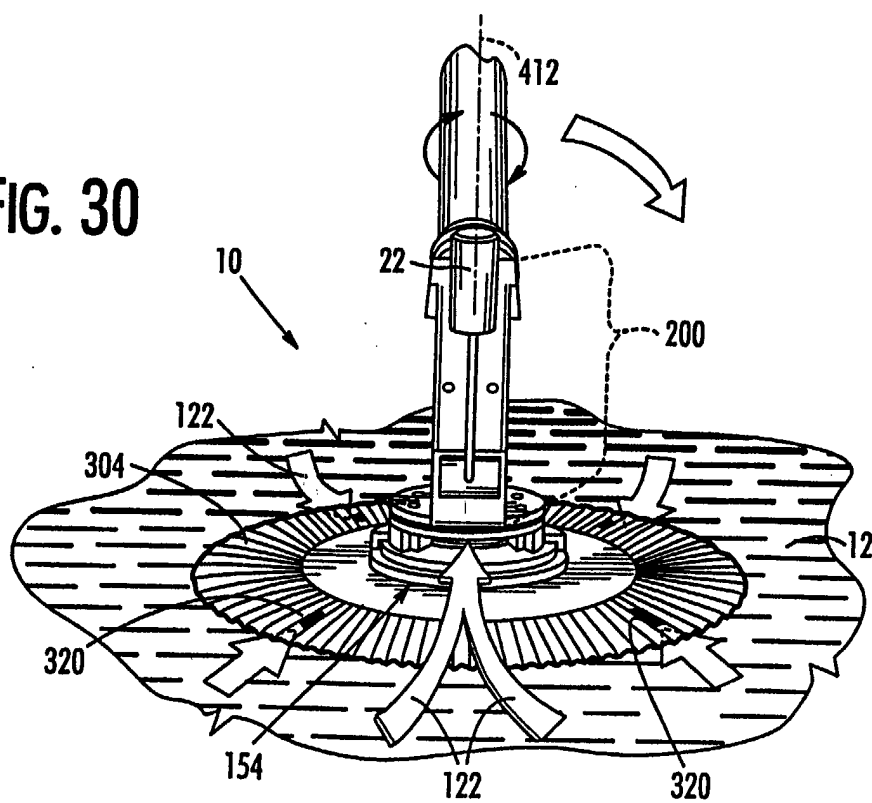


FIG. 30



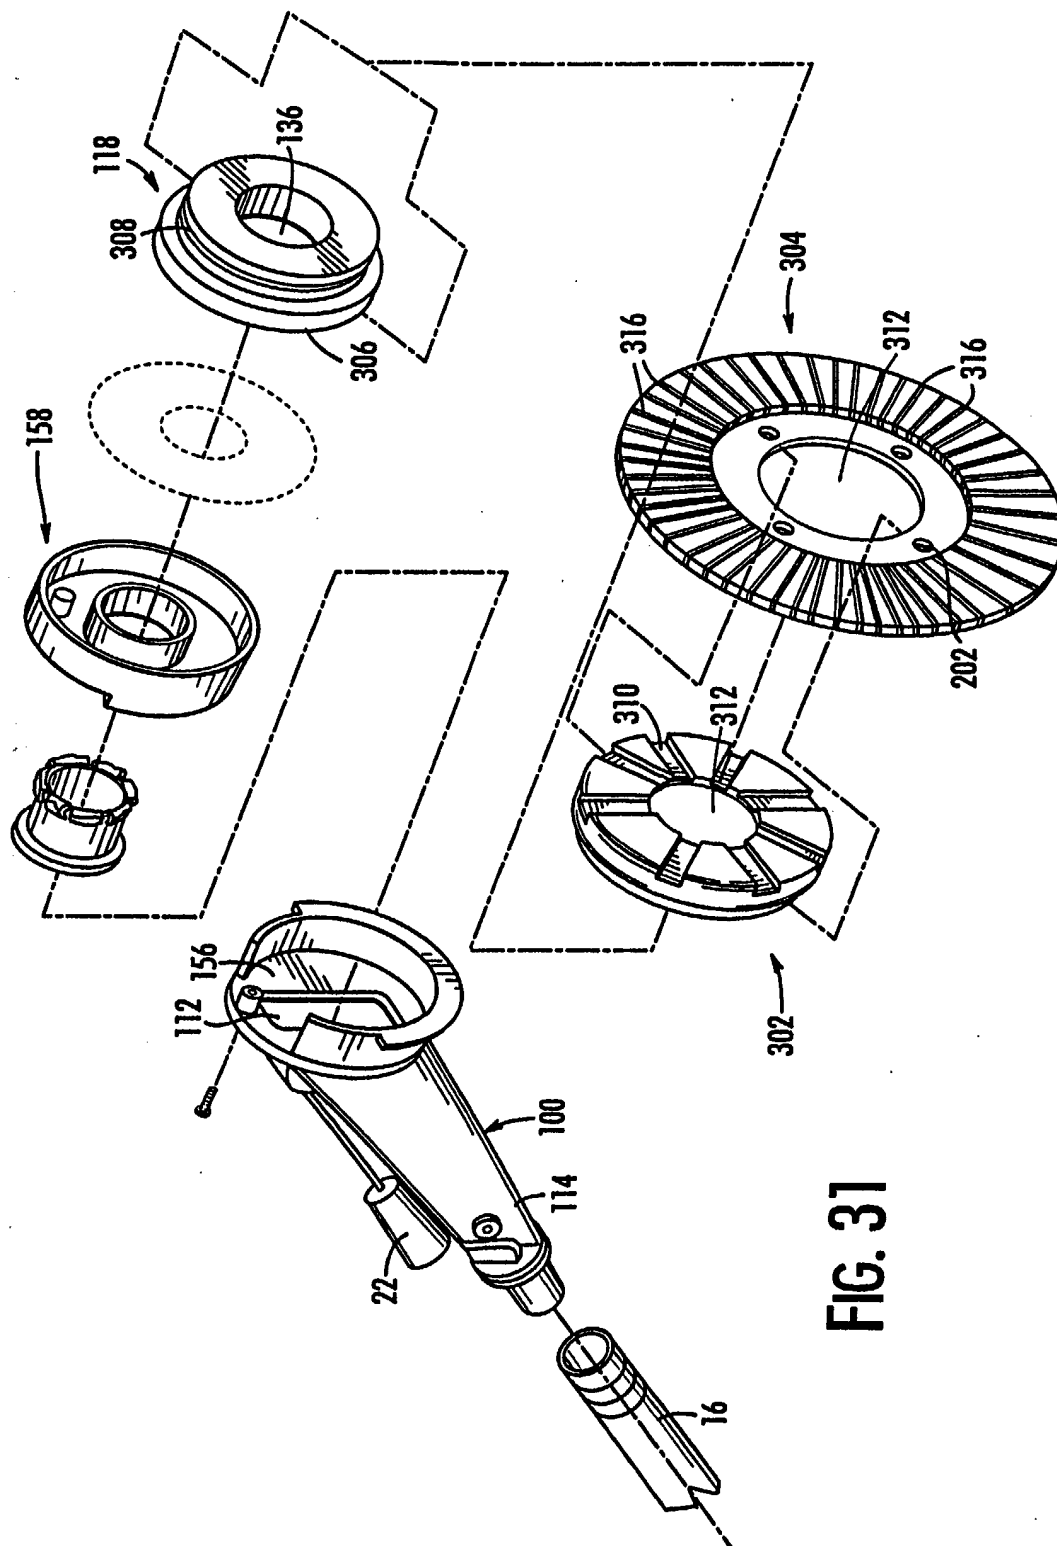


FIG. 31

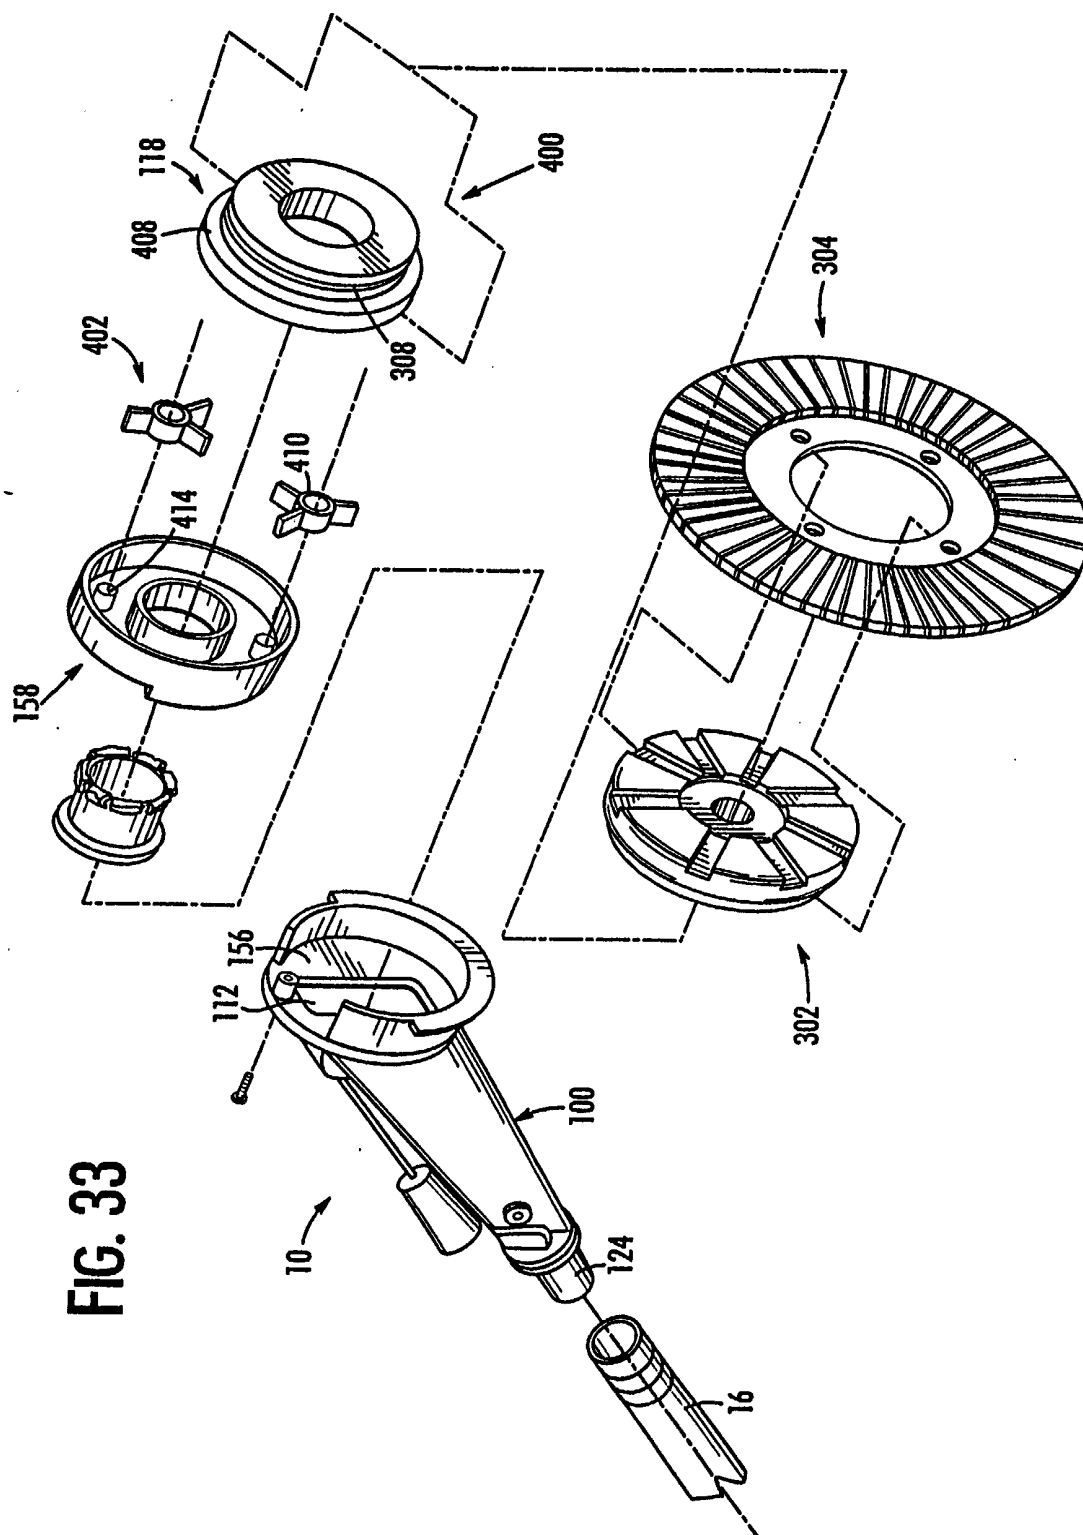


FIG. 33

FIG. 34A

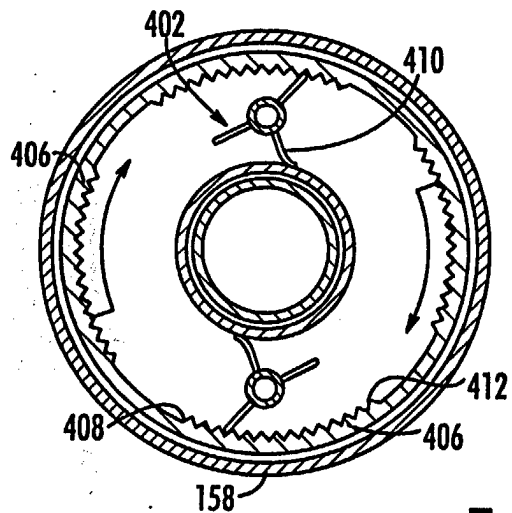


FIG. 34B

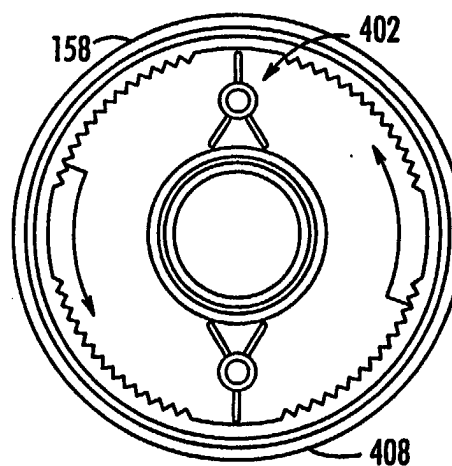


FIG. 34c

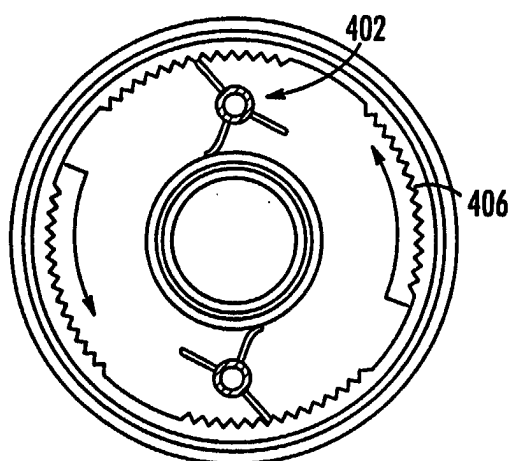
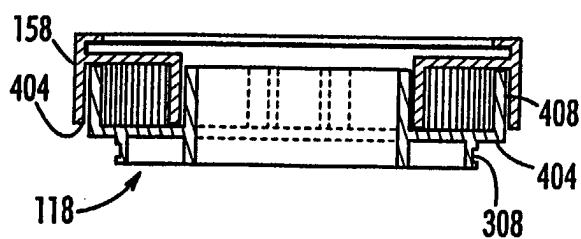


FIG. 34d



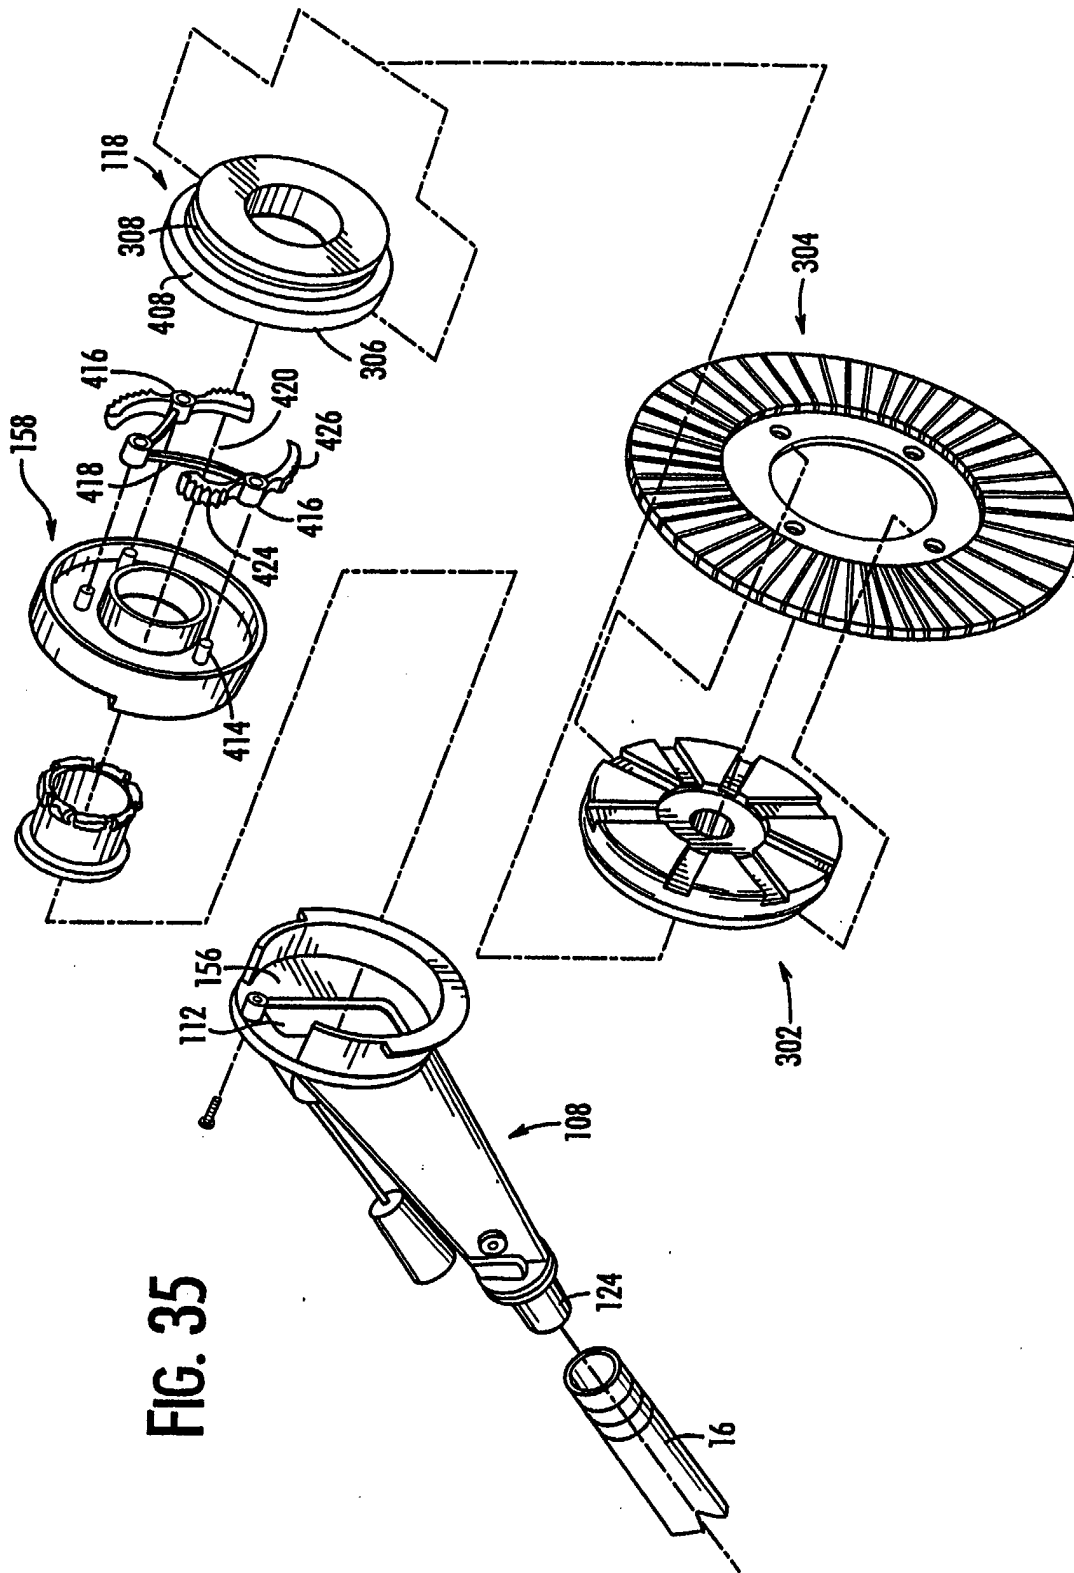


FIG. 35

FIG. 36

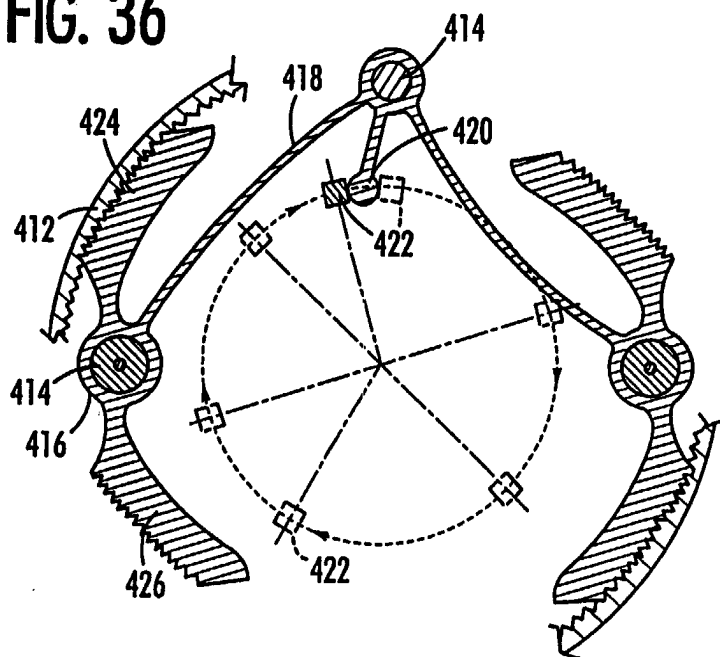


FIG. 37

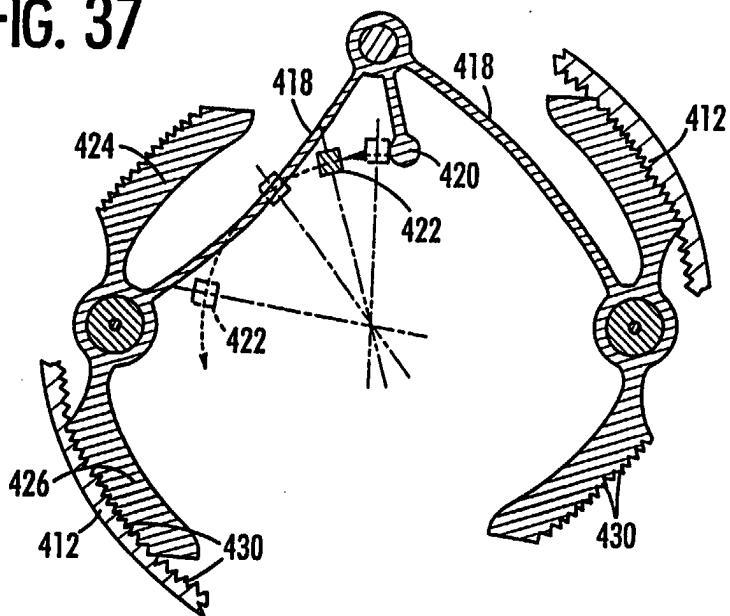


FIG. 38

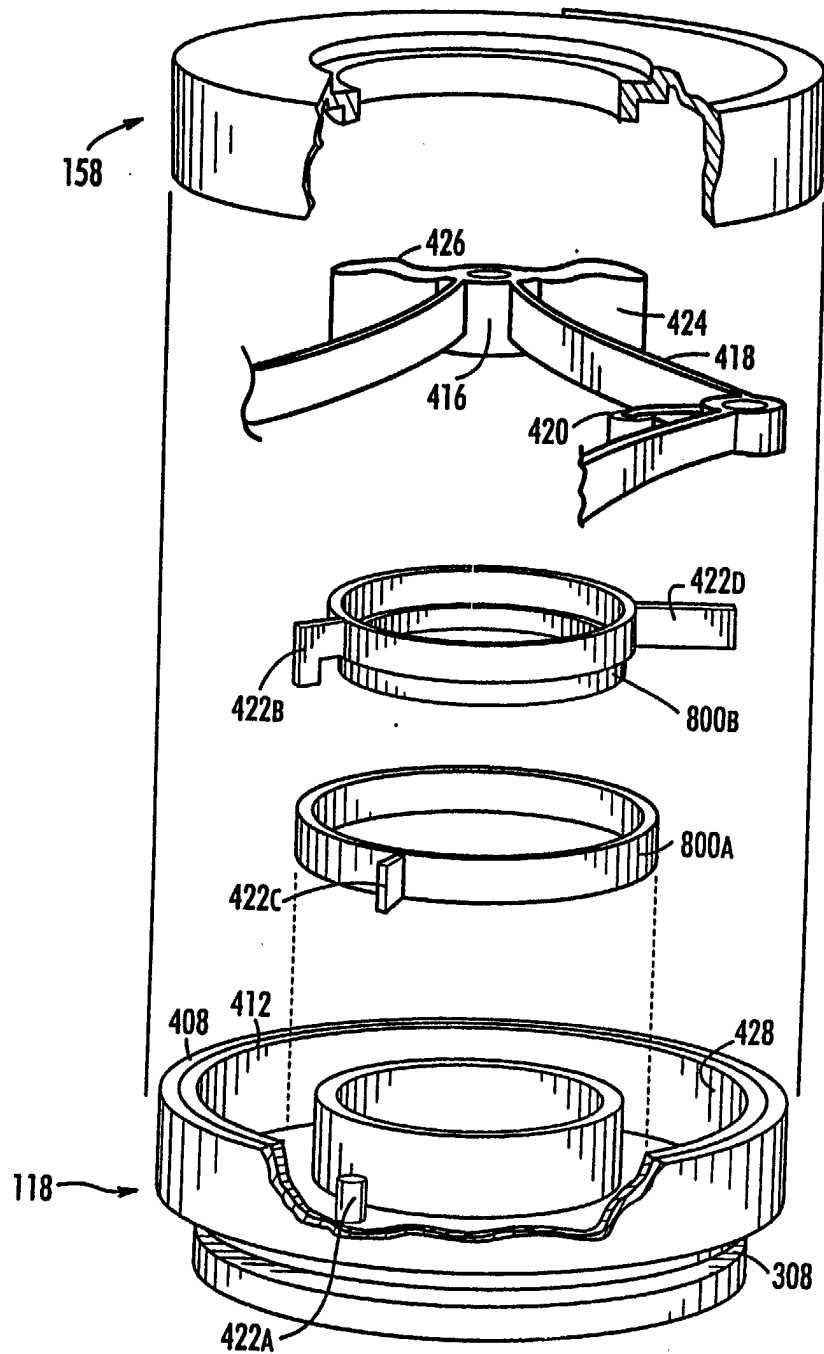


FIG. 39

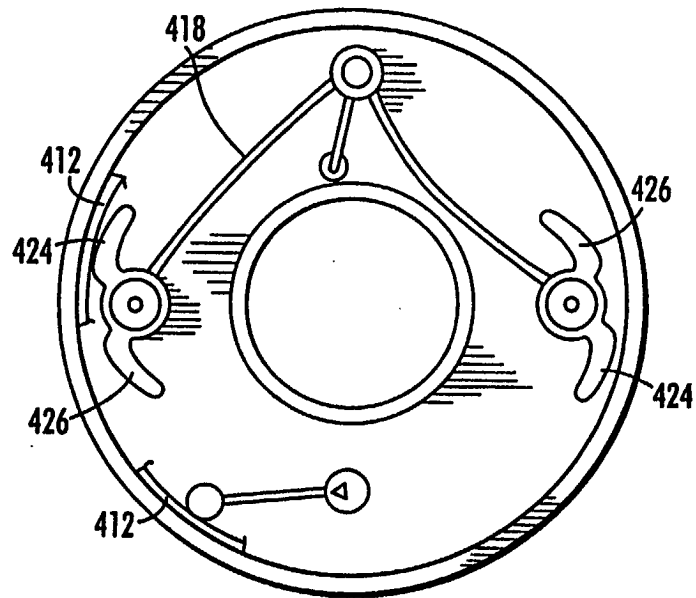


FIG. 40

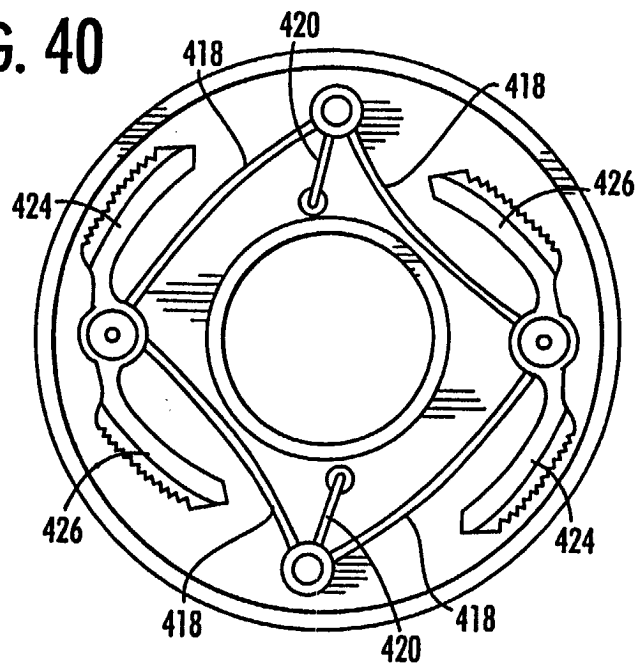


FIG. 41

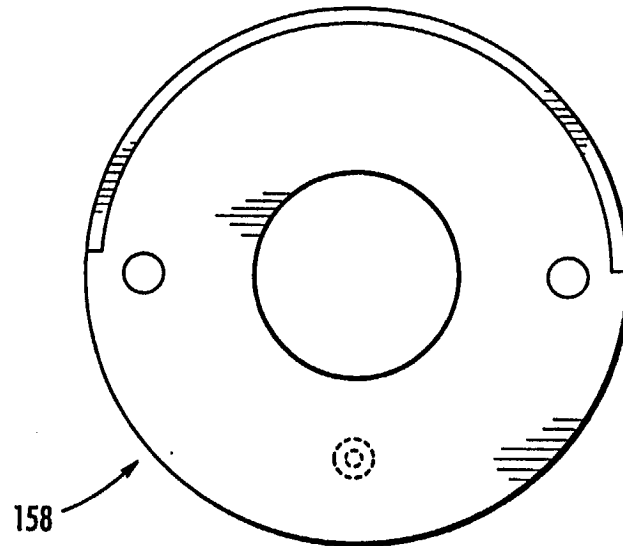


FIG. 42

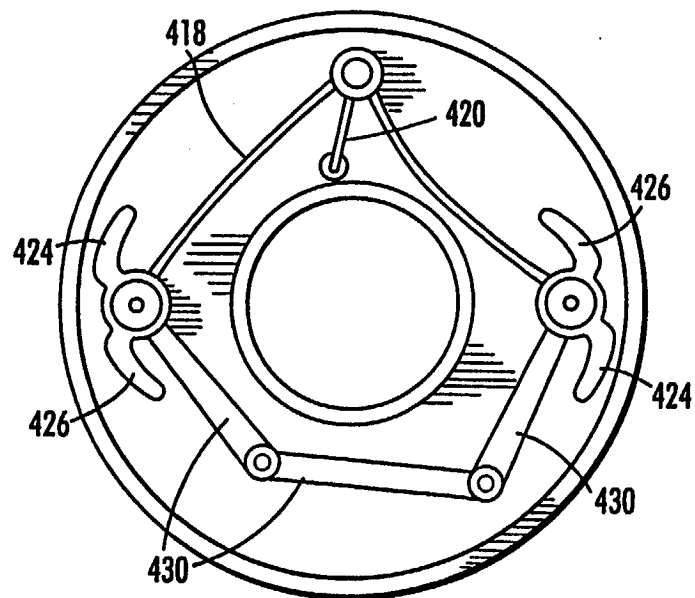


FIG. 43

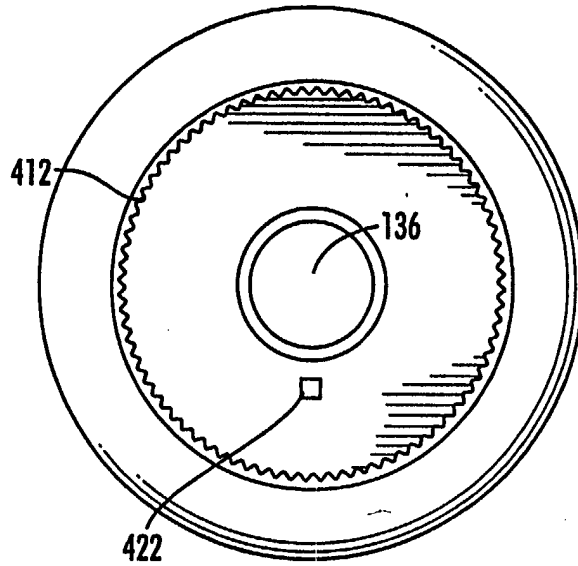
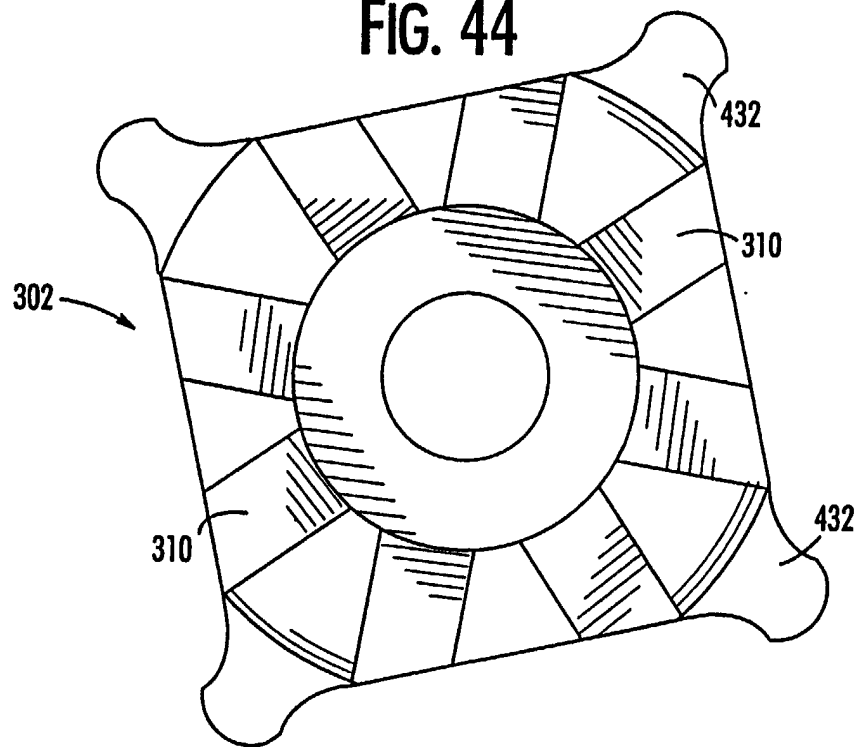


FIG. 44



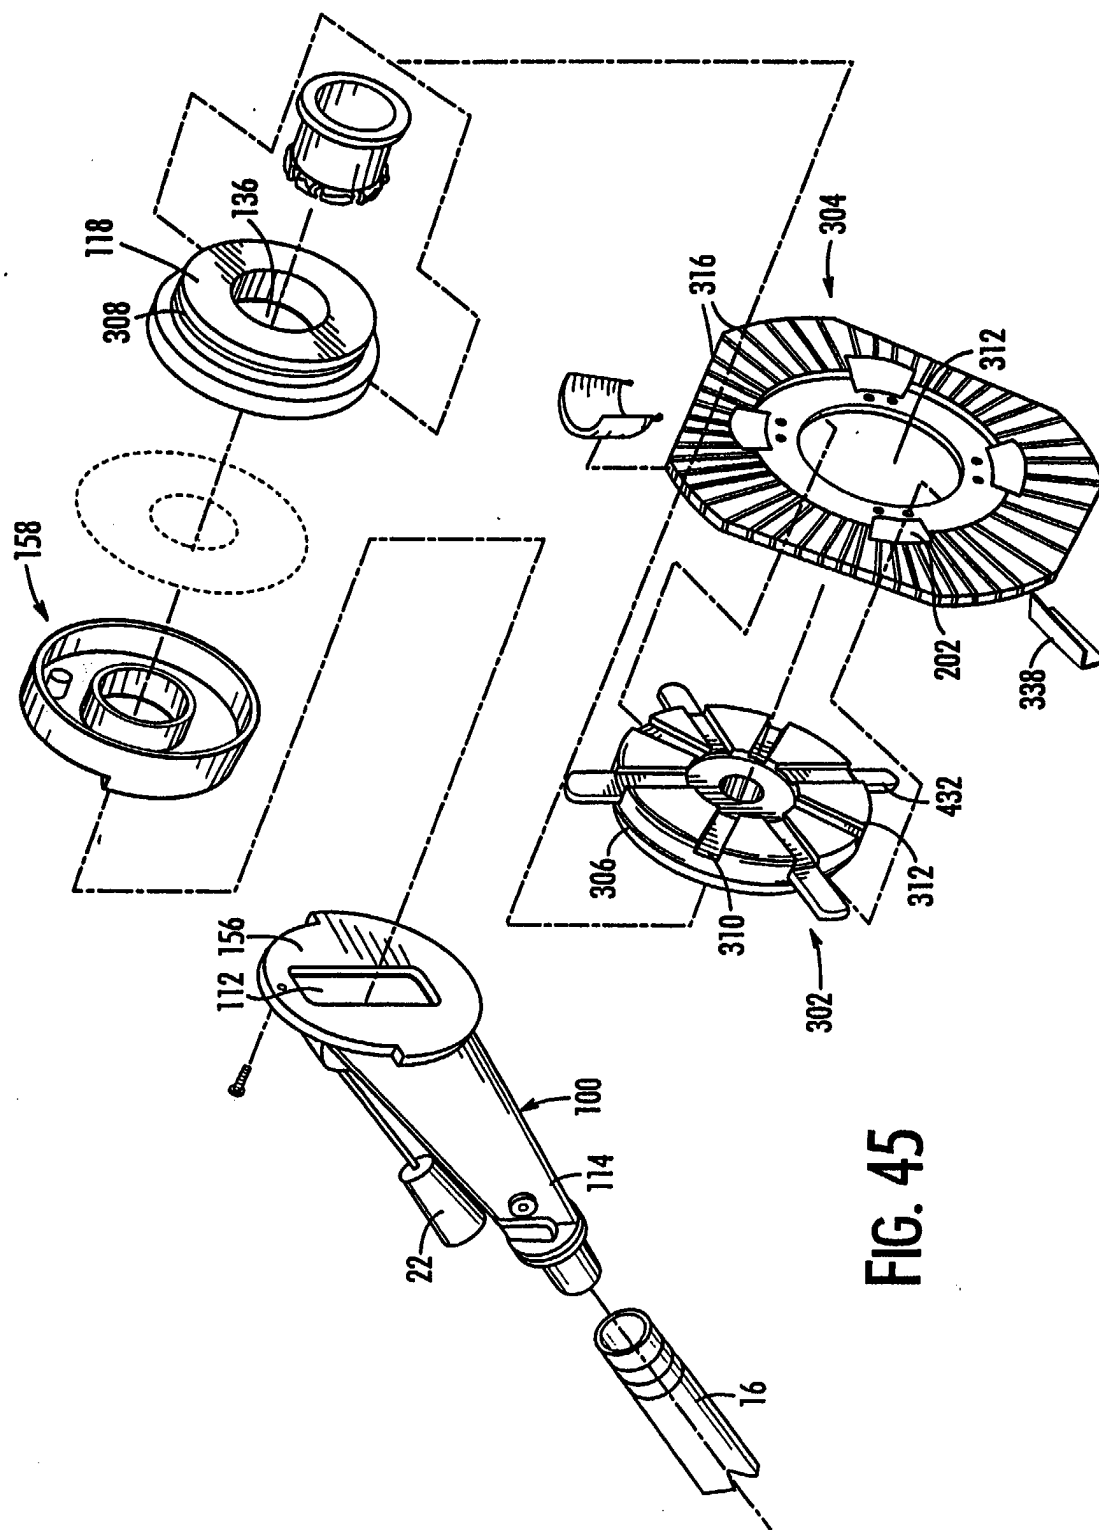


FIG. 45



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 07 6262

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.CI.7)
X	EP 0 556 029 A (STOLTZ GERHARDUS JOHANNES) 18 August 1993 (1993-08-18) * column 5, line 42 - column 8, line 30; figures 1,2 * -----	1,2	E04H4/16
			TECHNICAL FIELDS SEARCHED (Int.CI.7)
			E04H
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 3 July 2003	Examiner Porwoll, H
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 07 6262

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-07-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0556029	A	18-08-1993	AT 166127 T 15-05-1998
			AU 654229 B2 27-10-1994
			AU 3304593 A 19-08-1993
			BR 9300560 A 17-08-1993
			CA 2089409 A1 15-08-1993
			DE 69318439 D1 18-06-1998
			DE 69318439 T2 04-02-1999
			EP 0556029 A1 18-08-1993
			ES 2117095 T3 01-08-1998
			MX 9300798 A1 01-12-1993
			US 5317777 A 07-06-1994
			ZA 9300881 A 13-09-1993
