



(11) **EP 1 340 407 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
09.01.2008 Bulletin 2008/02

(21) Application number: **01999128.0**

(22) Date of filing: **14.11.2001**

(51) Int Cl.:
H04R 7/04 (2006.01)

(86) International application number:
PCT/GB2001/005014

(87) International publication number:
WO 2002/045460 (06.06.2002 Gazette 2002/23)

(54) **LOUDSPEAKERS**

LAUTSPRECHER

HAUT-PARLEURS

(84) Designated Contracting States:
DE ES FR GB NL SE

(30) Priority: **30.11.2000 GB 0029098**

(43) Date of publication of application:
03.09.2003 Bulletin 2003/36

(73) Proprietor: **New Transducers Limited**
Huntingdon,
Cambs PE29 6FW (GB)

(72) Inventors:
• **ELLIS, Christien**
Great Chishill,
Hertfordshire SG8 8SB (GB)
• **HILL, Nicholas Patrick Roland**
Cambridge CB4 8Qp (GB)

(74) Representative: **Maguire, Peter Albert et al**
Maguire Boss
24 East Street
St Ives
Cambridge PE27 5PD (GB)

(56) References cited:
EP-A- 0 969 691 WO-A-00/33612
WO-A-00/65869 WO-A-01/05189
WO-A-01/47320 WO-A-97/09846
WO-A-98/39947

Remarks:

The file contains technical information submitted after
the application was filed and not included in this
specification

EP 1 340 407 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

DescriptionTECHNICAL FIELD

5 **[0001]** The invention relates to bending wave panel loudspeakers, e.g. resonant bending wave panel speakers of the kind exemplified by WO97/09842, and to drive motors for such speakers.

BACKGROUND ART

10 **[0002]** In making electro-dynamic, that is moving coil, vibration transducers for bending wave panel speakers, current thinking on voice coil size and mass tends towards the use of small diameter and low mass voice coil systems, typically of the size of tweeter coils of conventional piston speakers. In certain applications, e.g. for driving bending wave panels or diaphragms as exemplified by WO98/39947, which are intended to be driven centrally e.g. so that they can act both

15 **[0003]** For such small diameter voice coils the drive point impedance (Z_m) approximates to that of a panel driven at a single point. As the frequency is increased Z_m oscillates with modal structure but is on average constant and approximates to the infinite panel value given by the following equation:

$$20 \quad Z_m = 8\sqrt{B\mu}$$

[0004] As a result for a given voice coil mass (M_c) there is a high frequency limit ($f(b)$) above which the rising impedance of this mass exceeds the constant drive point impedance. This frequency is given by the following equation:

$$25 \quad f(b) = \frac{Z_m}{2\pi M_c}$$

30 **[0005]** Consequently the voice coil mass on known bending wave panels has been kept low according to the above formula.

[0006] The obvious way is to increase Z_m or reduce M_c in order to keep the turnover frequency high in the audio band. Voice coil diameter has only ever been increased slightly and then only to find that the cell cap, drum-mode, resonance becomes dominant and causes premature roll-off.

35 **[0007]** Other issues that work against low mass voice coils for pistonically driven panels are sensitivity and bandwidth. In order to keep a realistic low frequency bandwidth in a realistic enclosed volume, the diaphragm mass needs to be high. So to keep sensitivity up, the BI force factor will need to be high. High BI drivers usually rely on the number of turns to increase the BI product and thus increase voice coil mass.

40 **[0008]** Another direction is to use an under-hung vibration exciter design relying on the magnet to increase the BI product and thus keeping voice coil mass low. This has been trialled using a 25mm voice coil diameter and an increased stiffness over the drive point. But power handling and excursion are still restricted.

45 **[0009]** It is known from WO97/09842 to provide a flat panel loudspeaker which operates pistonically at low frequencies and which is resonant at high frequencies. It is also known from US-A-4,542,383 to provide a loudspeaker having a moving coil transducer and a diaphragm, both being of similar diameter and the voice coil being arranged to drive the diaphragm around its periphery.

DISCLOSURE OF INVENTION

50 **[0010]** According to the invention, there is provided a loudspeaker according to claim 1.

[0011] The diameter of the circular voice coil junction is equal to at least the length of a bending wave in the portion of the acoustic member defined by the junction, or circumscribed by the voice coil, at the highest operating frequency of the loudspeaker.

55 **[0012]** The mechanical impedance of a panel is equal to the ratio of force applied at a single point to the resultant velocity at this point. Where the panel is driven by force acting over a line, the effective mechanical impedance is the ratio of total force applied over the line to the resultant velocity averaged over the length of the line. In the present description and claims the use of the term mechanical impedance is used to describe this ratio for both drive arrangements.

[0013] It will be understood that for a point driven plate or diaphragm it is only an infinite diaphragm that has a truly

constant Z_m . A finite diaphragm has a Z_m that oscillates about the infinite diaphragm value. Similarly the mechanical impedance seen by a large area voice coil on the diaphragm will oscillate with modal structure but will on average rise with frequency.

[0014] The portion of the acoustic member circumscribed by the said voice coil may be of different stiffness to a portion of the acoustic member outside the voice coil.

[0015] The transducer may be arranged both to move the acoustic member in whole body mode and to apply bending wave energy to the acoustic member. The size and position of the junction between the voice coil and the acoustic member is adjusted in relation to the modal distribution of the diaphragm or acoustic member in order to achieve a smooth transition from whole body motion at low frequencies to resonant bending wave behaviour at higher frequencies. In the case of a circular diaphragm, normally driven, the second resonance may give rise to an irregularity in the output. With a circular driveline the effective perimeter of the driveline is chosen in location and size to lie on or near to the nodal circle of the second resonance. In this context the first resonance is the whole body or piston equivalent resonance. By coupling at or near the nodal circle for the second resonance its effect is reduced and the mode is driven weakly or not at all. Thus the designer may adjust the drive parameters to increase the sound quality from the low piston frequencies to the modally denser region at mid frequencies.

[0016] Mass loading may be applied to the acoustic member within the diameter of the voice coil. The acoustic member is circular in shape. The transducer voice coil is concentric with the geometric centre of the acoustic member.

[0017] A second transducer may be coupled to the acoustic member within the portion thereof circumscribed by the said voice coil and adapted to cause high frequency bending wave activity of the said portion. The second transducer may be offset from the axis of the said voice coil.

[0018] Coupling means may be provided to attach the said voice coil to the acoustic member.

[0019] The portion of the acoustic member circumscribed by the voice coil may be stiffer than a portion of the acoustic member outside the voice coil. The bending stiffness of the acoustic member may be anisotropic. The acoustic member may be curved or dished or otherwise formed to increase its bending stiffness.

[0020] The loudspeaker may comprise a chassis having a portion surrounding the acoustic member, and a further portion supporting the electrodynamic transducer, and may further comprise means connected between the acoustic member and the said chassis portion and resiliently suspending the acoustic member on the chassis. The suspension means may be connected between the chassis and the margin of the acoustic member. The resilient suspension may be adapted to mass load the acoustic member. The resilient suspension may be adapted to damp the acoustic member. The resilient suspension may be at least partly formed by a skin of the acoustic radiator.

[0021] The acoustic member may have a front side from which acoustic energy is radiated, and may comprise acoustic masking means positioned over the portion of the acoustic member circumscribed by the said voice coil, the masking means defining an acoustic aperture.

[0022] The action of the large area voice coil on the diaphragm can produce a distribution of excited modes that results in significant beaming of the radiation on-axis, at least over some of the frequency range. In some applications, such as zoning of the output sound, this may be advantageous, but in many applications off-axis power is desirable. One approach to improving off-axis power is to excite the panel in bending wave vibrations at frequencies near to or greater than the coincidence frequency.

[0023] The coincidence frequency is the frequency at which the bending wave velocity in the plate equals the velocity of sound in air. Above this frequency the velocity in the plate exceeds the velocity in air, and this supersonic vibration can give rise to strongly directional radiation off-axis. In fact at the coincidence frequency, radiation is beamed directly off-axis, with the angle of beaming moving closer to the on-axis direction with increasing frequency. The coincidence frequency of a plate is determined by its bending stiffness (B) and mass density (μ). These parameters may be varied such that the narrowing of the radiation pattern resulting from the large area voice coil is compensated for, at least to some degree, by the additional energy beamed off-axis by the bending wave vibration above the coincidence frequency.

[0024] The loudspeaker of the present invention may be adapted to operate as a full range device.

BRIEF DESCRIPTION OF DRAWINGS

[0025] The invention is diagrammatically illustrated, by way of example, in the accompanying drawings, in which:-

Figure 1 is a front view of a loudspeaker driver motor;

Figure 2 is a cross-sectional side view of the drive motor of Figure 1;

Figure 3 is a front view of a loudspeaker enclosure;

Figure 4 is a side view of the loudspeaker enclosure;

Figure 5 is a graph of frequency response;

Figure 6 is a graph of near field bass frequency response;

Figures 7 to 9 are front views of embodiments of diaphragm each having a supplementary vibration exciter;

Figures 10 to 13 are front views of further examples of diaphragm not falling with in the scope of the appended claims;
Figure 14 is a perspective diagram of a further example of diaphragm not falling with in the scope of the appended claims;

Figures 15 to 18 cross-sectional views of embodiments of diaphragm;

Figures 19 to 21 show cross-sections of embodiments of diaphragm surrounds or suspensions;

Figure 22 is a cross-sectional view of an embodiment of speaker driver motor;

Figure 23 is front view of an example of diaphragm not falling with in the scope of the appended claims;

Figure 24 is a cross-sectional view of an embodiment of diaphragm;

Figure 25 is a polar diagram comparing the response of a conventional piston speaker with that of the present invention, and

Figures 26 and 27 are front views of further examples of voice coil/diaphragm line drive junctions not falling with in the scope of the appended claims.

BEST MODES FOR CARRYING OUT THE INVENTION

[0026] In Figures 1 and 2 there is shown a loudspeaker driver motor (1) adapted to be mounted to a baffle, e.g. in an enclosure, see Figures 3 and 4 below, comprising a circular flat diaphragm of stiff lightweight material, comprising, for example, a core sandwiched between skins of high tensile sheet material, which forms an acoustic member or radiator intended to operate both pistonically and by flexure as a bending wave resonant device at higher frequencies. In this way the driver motor of the present invention is able to operate as a full range device covering substantially the whole of the audio spectrum with wide acoustic dispersion, unlike a conventional piston driver, whose frequency band or at least its dispersion angle is limited at high frequencies by the diameter of the diaphragm, see Figure 25 below, and a bending wave driver, which tends to roll-off at frequencies below about 200Hz, unless of very large diaphragm size.

[0027] In generally conventional manner the diaphragm (2) is supported in a chassis or basket (3), e.g. of metal formed at its front with an annular flange (4) having a plurality of spaced fixing holes (5) whereby the chassis can be fixed in a suitable aperture a loudspeaker enclosure, see Figures 3 and 4 below. A corrugated suspension (6) e.g. of rubber-like material is fixed to the diaphragm round its periphery by means of an adhesive and the suspension is clamped to the annular flange (4) with the aid of a clamping ring (7), whereby the diaphragm can move pistonically relative to the chassis.

[0028] The chassis supports an electrodynamic moving coil transducer (8) for moving the diaphragm pistonically and for applying bending wave energy to the diaphragm to cause it to resonate, e.g. in the manner generally described in WO97/09842. The transducer comprises a magnet assembly (9) fixed to the chassis and defining an annular gap (10) concentric with the diaphragm and a voice coil and former assembly (11) mounted for axial movement in the annular gap and which is fixed to the diaphragm concentrically therewith by a coupler ring (12). In generally conventional fashion, a corrugated suspension spider (13) is fixed between the voice coil assembly and the chassis to ensure the proper axial movement of the voice coil in the annular gap.

[0029] The voice coil diameter is large in relation to the bending wave length and the effect of this is that of a line drive to the diaphragm instead of a point drive as is normal for bending wave radiators using electrodynamic exciters having small diameter voice coils. This line drive provides a significant increase in the mechanical drive impedance presented to the voice coil, and this higher mechanical impedance enables the system to tolerate relatively high mass voice coils without premature roll off of high frequencies. Also, because of the large diameter of the voice coil, it is possible to manipulate the diaphragm panel stiffness to allow the portion of the diaphragm circumscribed by the voice coil to have multiple modes instead of a single dominant drum mode as can happen with a small diameter voice coil. An inner portion (16) of the diaphragm is circumscribed by the voice coil as seen in Figure 1, while an outer portion (17) of the diaphragm extends radially outside the voice coil.

[0030] As shown in Figures 1 and 2, small masses (14,15) are attached to the diaphragm inside the voice coil diameter to tune and/or smooth the frequency response of the acoustic radiator. Such masses are not always essential but may usually be desirable. These masses are shown as discrete masses but need not necessarily be discrete. They may have masses in the range 0.5 g to 100 g, and typically in the range 2 to 20 g. One or more such mass may be provided.

[0031] The loudspeaker driver embodiment of Figures 1 and 2 has been optimised for use in a hi-fi loudspeaker, when coupled to an amplifier which has a flat voltage transfer function throughout the audio band. With this as part of the design criteria for this embodiment, the following design parameters are applicable.

[0032] The transducer has a large 75mm diameter voice coil mounted in a low inductance motor system having a vent (18), having a copper eddy current shield (19) over the pole piece or front plate (20). Figure 2 shows a cross section of a magnetic ring (21) of neodymium, centrally mounted in a steel magnetic circuit comprising a magnet cup (22) and the front plate (20) resulting in an average B field of 0.8T. The voice coil (11) over-hangs the magnet front plate (20) to give an over-hung configuration. The voice coil consists of a winding height of 14.5mm of aluminium turns on a 0.1mm thick aluminium former. The voice coil parameters are given below:

Mandrel or former diameter =75mm

EP 1 340 407 B1

Number of coil layers =2

Wire diameter =0.3mm

Number of turns =71

[0033] The coupler ring (12) is required to provide a secure interface between the voice coil and the diaphragm. This nests inside of the voice coil. A 2.5mm overlap is provided to allow for a good bond area between the coupler and the voice coil former. The coupler ring extends the effective length of the voice coil by 1.7mm, giving a ring width of 3.5mm to couple to the diaphragm. This is show in Figure 2. The material of the coupler ring is commercial grade thermoplastic or thermoset resin e.g. ABS which gives a mass of 3.4g. For the bonding between the voice coil and coupler a thermal resistant cyanoacrylate is used (Loctite 4212). This is also used to bond the coupler to the diaphragm.

[0034] The dynamic parameters of the motor system with the coupler ring are shown below:

$M_{ms} = 11g$ (Moving mass of the voice coil assembly)

$R_{ms} = 1.95Ns/m$ (Mechanical resistance of suspension)

$BI = 8.1Tm$ (Motor conversion factor)

$R_e = 6.50hm$ (DC resistance of voice coil)

$F_s = 40Hz$ (Mass spring resonance of system)

$L_e = 0.2mH$ (Inductance factor of voice coil @1kHz)

[0035] The diaphragm material used along with its parameters are given below:

Material = Rotrex Lite 51LS (Trade Name) 3.5mm (3.5mm thick 51LS grade uncompressed Rohacell (Trade Name)core of rigid closed cell polymethacrylimide thermoplastic foam with a glass veil/thermoplastic skin). Diameter =120mm.

[0036] Parameters are given below in Table 1:

Table 1

Mass Area Density	M	0.35	Kg/m ²
Poisson ratio	N	0.11	
Bending rigidity	D ₁	2.4	Nm
Bending Rigidity	D ₂	1.8	Nm
Damping D	D	0.02	
In plane shear ratio	Shr	0.36	
Thickness	T	3.5mm	M
Shear modulus	G _z	19M	Pa
D _{amping} G _z	D	1	
Coincidence Frequency	F _c	7.7	KHz

[0037] From the parameters given in table 1, the wavelength of the panel may be calculated at the highest frequency of operation, i.e. 20kHz. This calculation gives a wavelength of 28mm, based on an average bending stiffness of 2.1 Nm. The voice coil diameter is therefore 2.7 times the wavelength at the highest frequency of operation. In the prior art of bending wave speakers, the first aperture resonance corresponds to a half wavelength within the voice coil.

[0038] The coincidence lobe of this panel gives strong acoustic output off axis close to or above coincidence frequency as given in Table 1 above. As indicated in the directivity plot of Figure 25, in which the thin line or trace (45) is a plot of a speaker according to the invention with a 300 mm diameter diaphragm, and the thick trace (44) is of a conventional pistonic diaphragm of 250 mm diameter.

[0039] The chassis consists of an aluminium back plate (23) to support the transducer (8) and which is connected to the front flange (4). Allen bolts (not shown) are used to secure the clamping ring (7) to the flange (4).

[0040] The pair of masses (14,15) fixed to the diaphragm are to smooth the first drum mode within the inner portion of the diaphragm, at approximately 2kHz.

[0041] The motor drive unit parameters are given below:

EP 1 340 407 B1

$dD=14\text{cm}$ (Diameter of radiating area (centre to centre of the surround))

$M_{ms}=27\text{g}$ (Moving mass of the voice coil and diaphragm assembly)

5 $R_{ms}=2.4\text{Ns/m}$ (Mechanical resistance of suspension)

$BI=8.1\text{Tm}$ (Motor conversion factor)

10 $R_e=6.50\text{hm}$ (DC resistance of voice coil)

$F_s=33\text{Hz}$ (Mass spring resonance of system)

$L_e=0.2\text{mH}$ (Inductance factor of voice coil @1kHz)

15 **[0042]** Figures 3 and 4 show a loudspeaker enclosure (24) for the drive unit of Figures 1 and 2 and having a sloping front (25) and sides (26). An aperture (27) is provided in the front (25) to receive the drive unit or motor (1). The enclosure has been designed to give a volume of 17 litres giving a maximally flat alignment. The enclosure form is chosen to smear internal enclosure standing waves, although this is not essential to the design and operation of the speaker. The enclosure is constructed from 18mm medium density fibreboard (MDF). The joints are glued (using PVA wood glue) and screwed

20 to give an air tight seal.
[0043] The following measurements of the above embodiment of the speaker were taken in an anechoic chamber with the microphone positioned at 1m (on axis with the diaphragm) at 2.83v. Inaccuracies occur below approximately 200Hz for the measurement shown in Figure 5, so a near field measurement showing the low frequency performance is given in Figure 6.

25 **[0044]** While the embodiment of Figures 1 and 2 employs a single large diameter voice coil driver, a supplementary exciting device could be used to improve the high frequency level and/or extension and directivity performance of the loudspeaker. The supplementary exciter could be placed anywhere on the diaphragm to provide a smaller radiation area. Devices such as piezos of large area, small area or strip-like form or smaller moving coil devices could be used. This is illustrated in Figures 7 to 9. In Figure 7 it will be seen that a circular piezo disc vibration exciter (28) has been

30 mounted on the diaphragm (2) at its centre and inside the diameter of the voice coil (11). In the embodiment of Figure 8, a piezo strip vibration exciter (29) has been mounted on the diaphragm (2) concentrically therewith and inside the diameter of the voice coil (11). In Figure 9, a circular disc vibration exciter (30) has been mounted on the diaphragm (2) inside the voice coil diameter (11) but off centre.
[0045] It can be shown that the voice coil moving mass has little effect on the high frequency extension of the speaker. Therefore the present invention is not restricted to lightweight voice coils. This implies scope for employing moving magnet motor systems and/or relatively high mass coupler rings between the voice coil assembly and the diaphragm which currently might be excluded from small drive area or point drive designs of bending wave speaker. This could allow complex coupler designs to transform the voice coil ring to other beneficial shapes so as to improve performance. Examples, not falling within the scope of the appended claims, of triangular, square and oval shapes of coupler ring are

35 shown in Figures 10 to 12 respectively under references (31) to (33) respectively. These shapes have implications on the distribution of modes excited and therefore directivity implications. If for example, as shown in Figure 13, a rectangular diaphragm (34) has been chosen this, together with a rectangular coupler ring (32) rotated by an angle relative to the diaphragm sides, could provide a more irregular modal pattern in the diaphragm. This could also further improve frequency response on and off axis.

40 **[0046]** In the embodiment of Figures 1 and 2, the voice coil diameter is 75mm. This can be increased or decreased depending on the design specification. If the design specification requires narrow directivity for zoning applications, a larger voice coil coupled to a low wave speed panel, i.e. having a very high F_c , could be used. Conversely, if wide directivity is required a smaller voice coil can be used, within the criteria of line drive. However this may need electrical high frequency boost to maintain constant pressure throughout the audio band.

45 **[0047]** As indicated in Figure 13 above, other shapes not falling within the scope of the appended claims can be beneficial in directivity and/or frequency response, because of the different mode shapes that result from the geometry of the panel. It is expected that the more complex the mode shapes in the panel, the less directivity there will be in the acoustic output. Examples include square, rectangular and hexagonal panels.
[0048] Also, as shown in Figure 14 not falling within the scope of the appended claims the behaviour of the diaphragm at low frequency may be quasi-tympanic at low frequencies. The diaphragm (34) could be a large radiating panel. This would provide a means of self-baffling giving a dipole bass response as indicated by opposed arrows. The panel edges could be free or clamped.

50 **[0049]** The invention is not restricted to a flat diaphragm or to a single material type. Profiling and shaping of the

diaphragm can be used to alter the modal behaviour. For example, the part of the diaphragm circumscribed by the voice coil could be constructed from a different material or the same material but thicker or thinner. Exemplary embodiments are shown in Figures 15 to 18. Stiffness can be applied to the diaphragm by profiling. Stiffness variation can also be realised by using material isotropy. Thus in Figure 15, the inner portion (16) of the diaphragm (2) is thinned by dishing its undersurface. In Figure 16, the inner portion (16) of the diaphragm is thickened. In Figure 17, the inner portion (16) of the diaphragm (2) is uniformly thinner than the outer portion (17) of the diaphragm. In Figure 18 the outer portion (17) of the diaphragm (2) progressively tapers in thickness towards the inner portion, as soon in the lefthand side of the Figure, and is formed with a curved profile of varying thickness as seen on the right-hand side of the Figure.

[0050] It can be shown that the diaphragm surround affects acoustic performance. Both the piston and modal region can be varied by changing the material properties of the surround. In particular, if mass is applied to the perimeter of the diaphragm as shown at (36) in Figure 19, high frequency performance can be improved. Edge damping of the diaphragm can be applied to control its modal behaviour. This can be in the form of surface treatment or edge damping can be by means of the surround footprint, as indicated at (37) in Figure 20. The panel skins, or one of them, could be used to form the surround as indicated in Figure 21. In this embodiment the diaphragm comprises a core (38) and skins (39,40) covering the core. The lower skin (40) is extended to form the surround or suspension (6). This may give cost advantages. Advantages could also include low-loss termination of the diaphragm.

[0051] Radiation at frequencies close to and greater than the coincidence frequency (f_c) is used in the preferred embodiment to widen directivity at high frequency. However coincidence can be set at either end of the spectrum. Increasing the panel stiffness/lowering the coincidence frequency should still give wide directivity and improved modal region sensitivity.

[0052] Using isotropic diaphragms, e.g. at approximately two times F_c , will give side lobes in the same position in both planes. When using non-isotropic panels, coincidence can be set independently in alternate planes thus giving a smoother total power response.

[0053] Mechanical components, e.g. mass or voice coil coupling to the panel, can provide a means of mechanical filtering. By placing an interface between the voice coil coupler and the panel the frequency response can be modified. Passive component electrical shelving or amplifier transfer function shelving/high frequency boost could also be employed to modify the acoustic output of the device.

[0054] In the embodiment of Figures 1 and 2, coherent sound radiates from the annular area where the voice coil is fixed to the diaphragm. This can cause beaming at high frequencies due to the large radiating area relative to the wavelength in air. As shown in Figure 22, to widen the directivity at high frequencies, a mask (41) having a small aperture (42) can be placed over the inner portion (16) of the diaphragm (2) on a support (43) mounted on the chassis (3) to transform this into a smaller radiating area. This effect has been seen when measurements have been taken from the rear of the device. In the embodiment of Figures 1 and 2 the vent (18) in the motor system forms the mask aperture, as concerns rear radiation.

[0055] If desired, as shown in Figure 23 not falling within the scope of the appended claims, the voice coil (11) may be positioned off-centre on the diaphragm (2) to improve the distribution of resonant modes excited in the diaphragm, with a counterbalancing mass (35) positioned on the diaphragm to prevent rocking.

[0056] As shown in Figure 24, the diaphragm (2) need not be flat and can be dished or otherwise formed to increase its stiffness. This may be in the form of a curvature which varies across the diaphragm so that the stiffness is greater towards the edges of the diaphragm, as shown. This curvature or profiling of the diaphragm may assist in scaling the diaphragm while keeping the f_c constant, and may also be beneficial in smoothing the piston to modal transition, especially for larger diaphragms.

[0057] In Figure 26 not falling within the scope of the appended claims there is shown a circular diaphragm (2) which is driven by the voice coil of a transducer, not shown, having a rectilinear coupler (46), equivalent to the coupler ring (12) of the embodiment of Figures 1 and 2, connected between the voice coil and the diaphragm to provide a straight line drive junction. The coupler (46) is arranged and disposed on a diameter of the diaphragm and with its ends equally spaced from the opposite edges of the diaphragm.

[0058] In Figure 27 not falling within the scope of the appended claims there is shown a rectangular diaphragm (2) driven by a voice coil of a transducer, not shown, with a rectilinear coupler (46) connected between the voice coil and the diaphragm to provide a straight line drive junction. The coupler (46) is positioned off centre of the diaphragm and angled with respect to the sides of the diaphragm.

INDUSTRIAL APPLICABILITY

[0059] The present invention thus provides an effective way of increasing the frequency bandwidth of a bending wave speaker.

Claims

1. A loudspeaker comprising a circular panel-form acoustic member intended for operation in whole body mode and as a bending wave radiator as a full range device, an electrodynamic moving coil transducer having a voice coil mounted to the acoustic member concentrically therewith to excite bending wave vibration in the acoustic member and to move the acoustic member in whole body mode, a chassis having a portion surrounding the acoustic member and having a further portion supporting the electrodynamic transducer, and a suspension connected between the acoustic member and the chassis and resiliently suspending the acoustic member on the chassis, wherein the junction between the voice coil and the acoustic member is circular and is of sufficient diameter in relation to the size of the acoustic member to represent a line drive such that the acoustic member has a mechanical impedance which has a rising trend with bending wave frequency, and wherein the position of the junction between the voice coil and the acoustic member is on or near to a nodal circle of the second resonance of the acoustic member to achieve a smooth transition from whole body motion at low frequencies to resonant bending wave behaviour at higher frequencies.
2. A loudspeaker according to claim 1, wherein the junction between the voice coil and the acoustic member is substantially continuous.
3. A loudspeaker according to claim 2, wherein the portion of the acoustic member circumscribed by the said voice coil is of different stiffness to a portion of the acoustic member outside the voice coil.
4. A loudspeaker according to any one of claims 1 to 3, comprising means mass loading the acoustic member within the diameter of the voice coil.
5. A loudspeaker according to any preceding claim, comprising a second transducer coupled to the acoustic member within the portion thereof circumscribed by the said voice coil and adapted to cause high frequency bending wave activity of the said portion.
6. A loudspeaker according to claim 5, wherein the second transducer is offset from the axis of the said voice coil.
7. A loudspeaker according to any preceding claim, wherein the portion of the acoustic member circumscribed by the voice coil is stiffer than a portion of the acoustic member outside the voice coil.
8. A loudspeaker according to any preceding claim, wherein the bending stiffness of the acoustic member is anisotropic.
9. A loudspeaker according to any preceding claim, wherein the suspension is connected between the chassis and the margin of the acoustic member.
10. A loudspeaker according to any preceding claim, wherein the suspension is adapted to mass load the acoustic member.
11. A loudspeaker according to any preceding claim, wherein the suspension is adapted to damp the acoustic member.
12. A loudspeaker according to any preceding claim, wherein the suspension is at least partly formed by a skin of the acoustic radiator.
13. A loudspeaker according to any preceding claim, wherein the acoustic member has a front side from which acoustic energy is radiated, and comprising acoustic masking means positioned over the portion of the acoustic member circumscribed by the said voice coil, the masking means defining an acoustic aperture.
14. A loudspeaker according to any preceding claim, wherein the acoustic member is dished or otherwise formed to increase its stiffness.
15. A loudspeaker according to any preceding claim, wherein the arrangement is such that the acoustic member is excited in bending wave vibration at frequencies near to or greater than the coincidence frequency.

Patentansprüche

- 5 1. Lautsprecher mit einem runden paneelförmigen akustischen Element, das zum Betrieb in einem Ganzkörpermodus und als Biegewellenabstrahler als Gesamtbereichseinrichtung vorgesehen ist, einem elektrodynamischen Wandler mit einer sich bewegenden Spule, der eine konzentrisch zu diesem an dem akustischen Element angebrachte Schwingspule aufweist, um eine Biegewellenschwingung in dem akustischen Element anzuregen und das akustische Element im Gesamtkörpermodus zu bewegen, einem Gehäuse, das einen das akustische Element umgebenden Abschnitt und einen den elektrodynamischen Wandler abstützenden weiteren Abschnitt aufweist, und einer Aufhängung, die zwischen dem akustischen Element und dem Gehäuse verbunden ist und das akustische Element elastisch an dem Gehäuse aufhängt, wobei die Verbindung zwischen der Schwingspule und dem akustischen Element rund ist und im Verhältnis zur Größe des akustischen Elements einen ausreichenden Durchmesser aufweist, um einen Linienantrieb darzustellen, so dass das akustische Element eine mechanische Impedanz aufweist, die in Abhängigkeit der Biegewellenfrequenz einen ansteigenden Trend hat, und wobei die Position der Verbindung zwischen der Schwingspule und dem akustischen Element bei einem Knotenkreis oder in der Nähe eines Knotenkreises der zweiten Resonanz des akustischen Elements liegt, um einen gleichmäßigen Übergang von der Gesamtkörperbewegung bei niedrigen Frequenzen zu einem Resonanzbiegewellenverhalten bei höheren Frequenzen zu erreichen.
- 20 2. Lautsprecher nach Anspruch 1, bei dem die Verbindung zwischen der Schwingspule und dem akustischen Element im Wesentlichen kontinuierlich ist.
3. Lautsprecher nach Anspruch 2, bei dem der durch die Schwingspule abgegrenzte Abschnitt des akustischen Elements eine andere Steifigkeit aufweist als ein Abschnitt des akustischen Elements außerhalb der Schwingspule.
- 25 4. Lautsprecher nach einem der Ansprüche 1 bis 3, der eine Einrichtung umfasst, die innerhalb des Durchmessers der Schwingspule eine Masse auf das akustische Element aufbringt.
- 30 5. Lautsprecher nach einem der vorhergehenden Ansprüche mit einem zweiten Wandler, der mit dem akustischen Element innerhalb seines durch die Schwingspule abgegrenzten Abschnitts gekoppelt und dazu eingerichtet ist, eine Hochfrequenzbiegewellenaktivität dieses Abschnitts zu verursachen.
6. Lautsprecher nach Anspruch 5, bei dem der zweite Wandler von der Achse der Schwingspule versetzt ist.
- 35 7. Lautsprecher nach einem der vorhergehenden Ansprüche, bei dem der durch die Schwingspule abgegrenzte Abschnitt des akustischen Elements steifer ist als ein Abschnitt des akustischen Elements außerhalb der Schwingspule.
8. Lautsprecher nach einem der vorhergehenden Ansprüche, bei dem die Biegesteifigkeit des akustischen Elements anisotrop ist.
- 40 9. Lautsprecher nach einem der vorhergehenden Ansprüche, bei dem die Aufhängung zwischen dem Gehäuse und dem Rand des akustischen Elements verbunden ist.
10. Lautsprecher nach einem der vorhergehenden Ansprüche, bei dem die Aufhängung dazu eingerichtet ist, eine Masse auf das akustische Element aufzubringen.
- 45 11. Lautsprecher nach einem der vorhergehenden Ansprüche, bei dem die Aufhängung dazu eingerichtet ist, das akustische Element zu dämpfen.
- 50 12. Lautsprecher nach einem der vorhergehenden Ansprüche, bei dem die Aufhängung zumindest teilweise durch eine Haut des akustischen Abstrahlers gebildet ist.
- 55 13. Lautsprecher nach einem der vorhergehenden Ansprüche, bei dem das akustische Element eine Vorderseite aufweist, von der akustische Energie abgestrahlt wird, und eine akustische Maskeneinrichtung umfasst, die über dem durch die Schwingspule abgegrenzten Abschnitt des akustischen Elements positioniert ist, wobei die Maskeneinrichtung eine akustische Öffnung festlegt.
14. Lautsprecher nach einem der vorhergehenden Ansprüche, bei dem das akustische Element bombiert oder anderweitig geformt ist, um seine Steifigkeit zu erhöhen.

15. Lautsprecher nach einem der vorhergehenden Ansprüche, bei dem die Anordnung so gewählt ist, dass das akustische Element bei Frequenzen in der Nähe der oder größer als der Koinzidenzfrequenz in einer Biege wellenschwin-
gung angeregt wird.

5

Revendications

1. Un haut-parleur comprenant un élément acoustique en forme de panneau circulaire prévu pour fonctionner en mode de corps entier et comme un radiateur à ondes de flexion comme un dispositif couvrant la gamme complète, un transducteur électrodynamique à bobine mobile ayant une bobine d'excitation montée sur l'élément acoustique, de manière concentrique à celui-ci, pour exciter une vibration d'ondes de flexion dans l'élément acoustique et pour déplacer l'élément acoustique en mode de corps entier, un châssis ayant une partie entourant l'élément acoustique et ayant une partie supplémentaire supportant le transducteur électrodynamique, et une suspension intercalée entre l'élément acoustique et le châssis et suspendant l'élément acoustique de façon élastique sur le châssis, dans lequel la jonction entre la bobine d'excitation et l'élément acoustique est circulaire et a un diamètre suffisant, en relation avec la taille de l'élément acoustique, pour représenter une excitation selon une ligne, de façon que l'élément acoustique ait une impédance mécanique qui a tendance à croître avec la fréquence d'ondes de flexion, et dans lequel la position de la jonction entre la bobine d'excitation et l'élément acoustique est sur un cercle nodal de la deuxième résonance de l'élément acoustique, ou à proximité de ce cercle, pour réaliser une transition progressive à partir d'un mouvement en mode de corps entier à des fréquences basses vers un comportement de résonance d'ondes de flexion à des fréquences supérieures,
2. Un haut-parleur selon la revendication 1, dans lequel la jonction entre la bobine d'excitation et l'élément acoustique est sensiblement continue.
3. Un haut-parleur selon la revendication 2, dans lequel la partie de l'élément acoustique circonscrite par la bobine d'excitation a une raideur différente de celle d'une partie de l'élément acoustique à l'extérieur de la bobine d'excitation.
4. Un haut-parleur selon l'une quelconque des revendications 1 à 3, comprenant un moyen qui charge l'élément acoustique avec une masse à l'intérieur du diamètre de la bobine d'excitation.
5. Un haut-parleur selon l'une quelconque des revendications précédentes, comprenant un deuxième transducteur couplé à l'élément acoustique à l'intérieur de la partie de celui-ci circonscrite par ladite bobine d'excitation, et adapté pour produire une activité d'ondes de flexion de fréquence élevée de ladite partie.
6. Un haut-parleur selon la revendication 5, dans lequel le deuxième transducteur est décalé par rapport à l'axe de la bobine d'excitation.
7. Un haut-parleur selon l'une quelconque des revendications précédentes, dans lequel la partie de l'élément acoustique circonscrite par la bobine d'excitation est plus raide qu'une partie de l'élément acoustique à l'extérieur de la bobine d'excitation.
8. Un haut-parleur selon l'une quelconque des revendications précédentes, dans lequel la raideur en flexion de l'élément acoustique est anisotrope.
9. Un haut-parleur selon l'une quelconque des revendications précédentes, dans lequel la suspension établit une liaison entre le châssis et le bord de l'élément acoustique.
10. Un haut-parleur selon l'une quelconque des revendications précédentes, dans lequel la suspension est adaptée pour charger l'élément acoustique avec une masse.
11. Un haut-parleur selon l'une quelconque des revendications précédentes, dans lequel la suspension est adaptée pour amortir l'élément acoustique.
12. Un haut-parleur selon l'une quelconque des revendications précédentes, dans lequel la suspension est au moins partiellement formée par une peau du radiateur acoustique.
13. Un haut-parleur selon l'une quelconque des revendications précédentes, dans lequel l'élément acoustique a une

EP 1 340 407 B1

face avant à partir de laquelle de l'énergie acoustique est rayonnée, et comprend un moyen de masquage acoustique positionné au-dessus de la partie de l'élément acoustique circonscrite par la bobine d'excitation, le moyen de masquage définissant une ouverture acoustique.

- 5 **14.** Un haut-parleur selon l'une quelconque des revendications précédentes, dans lequel l'élément acoustique est incurvé ou mis en forme d'une autre manière pour augmenter sa raideur.
- 10 **15.** Un haut-parleur selon l'une quelconque des revendications précédentes, dans lequel l'agencement est tel que l'élément acoustique soit excité en vibration d'ondes de flexion à des fréquences proches de la fréquence de coïncidence, ou supérieures à celle-ci.

15

20

25

30

35

40

45

50

55

Figure 1

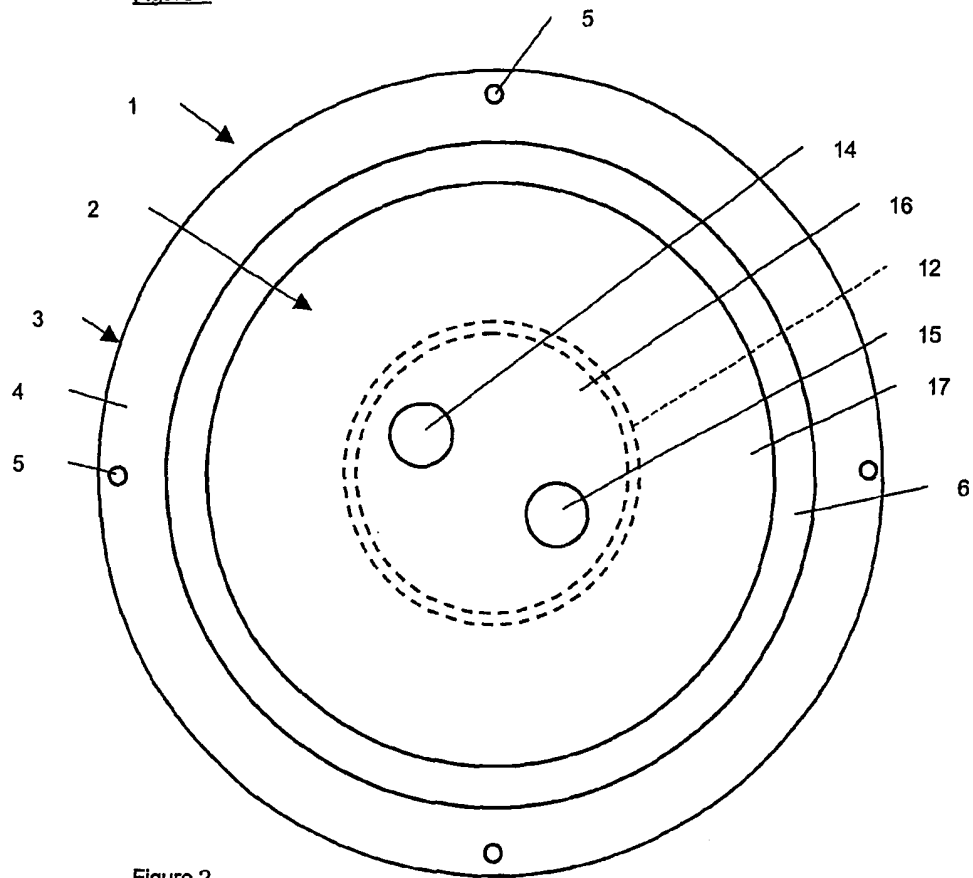


Figure 2

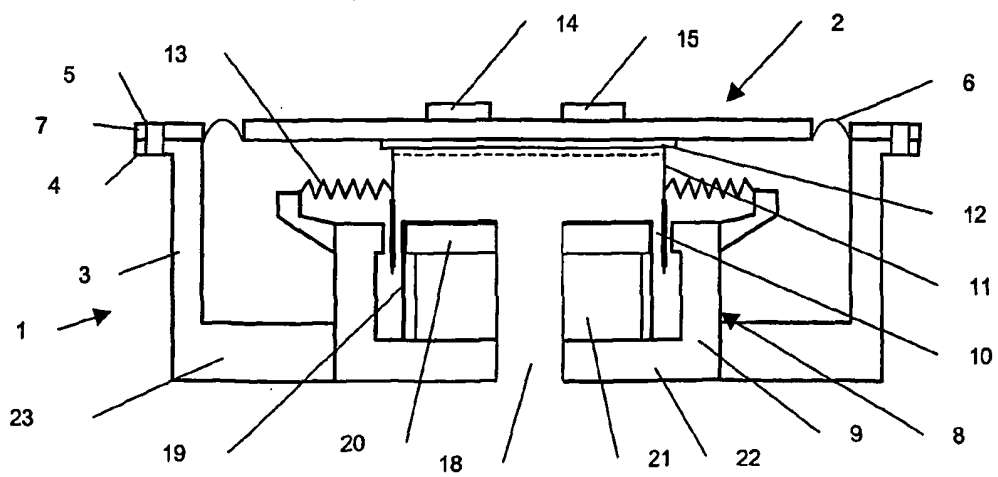


Figure 3

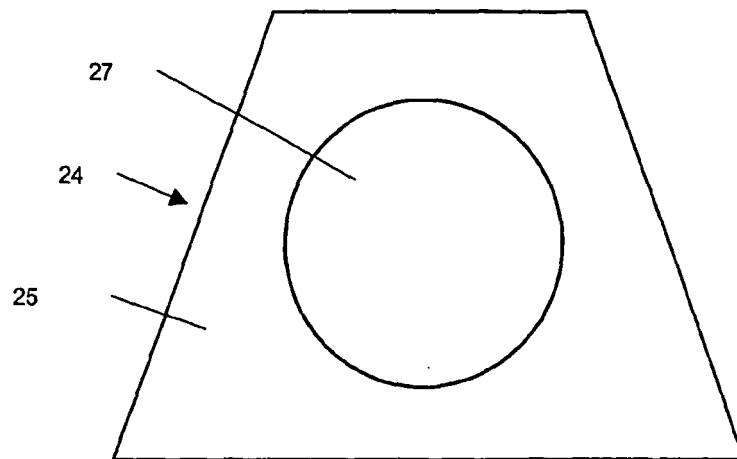


Figure 4

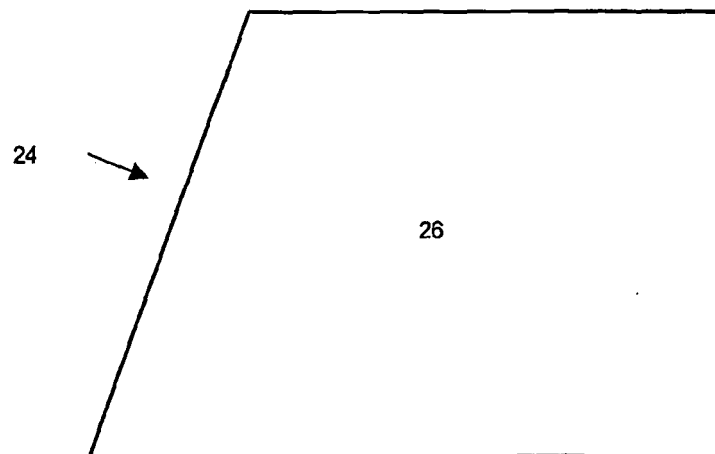


Figure 5

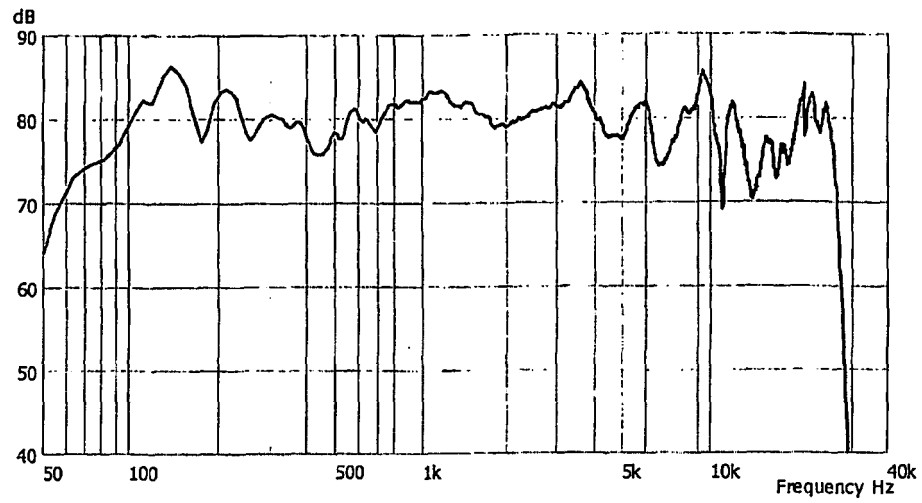


Figure 6

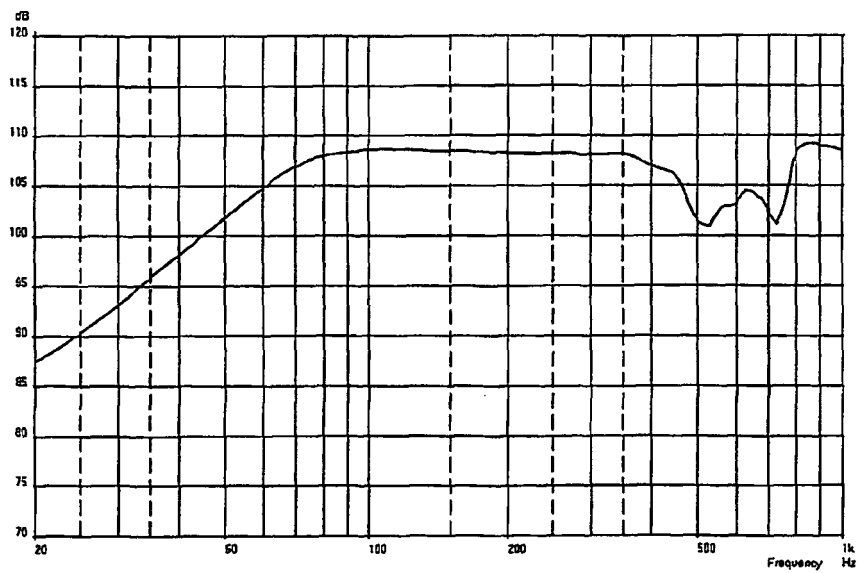


Figure 7

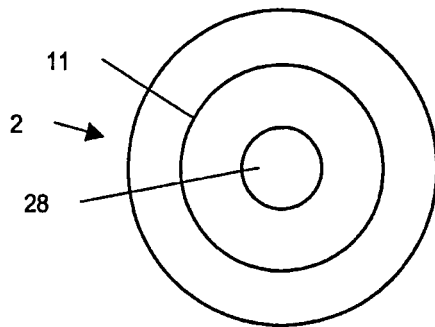


Figure 8

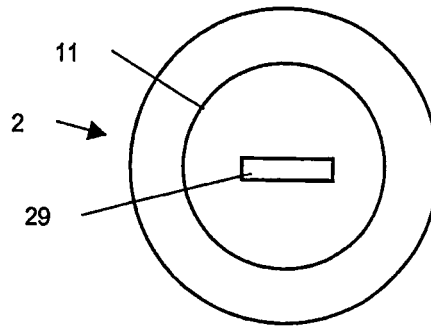


Figure 9

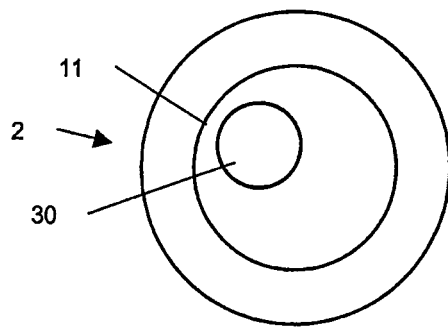


Figure 10

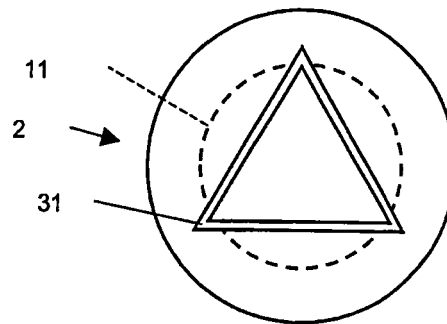


Figure 11

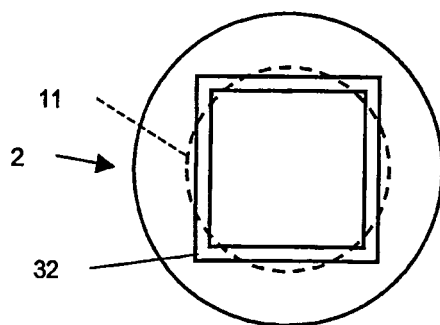


Figure 12

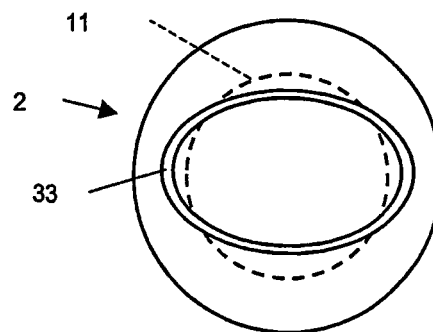


Figure 13

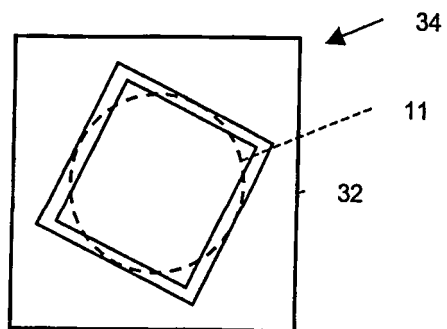


Figure 14

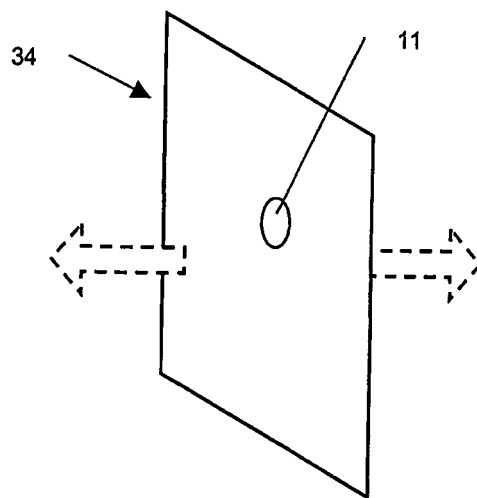


Figure 15

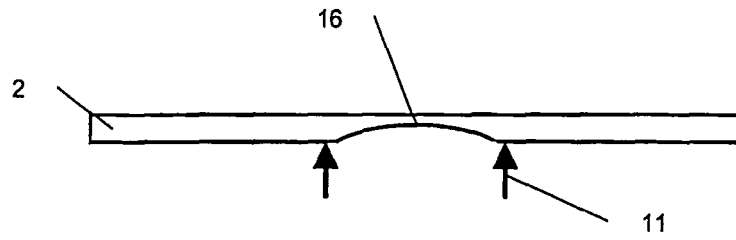


Figure 16

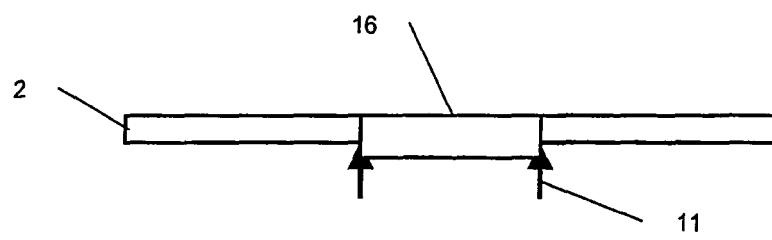


Figure 17

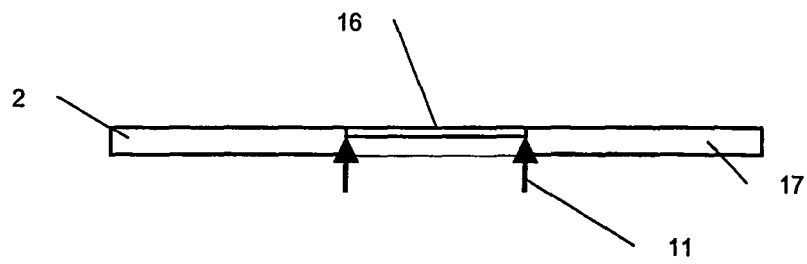


Figure 18

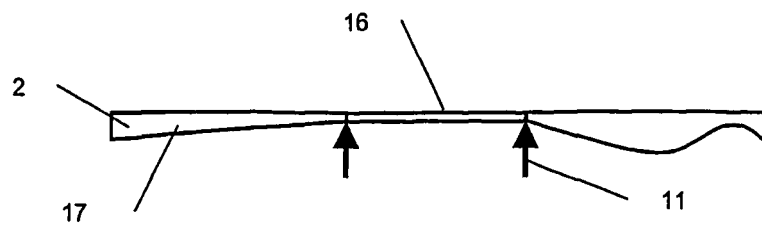


Figure 19

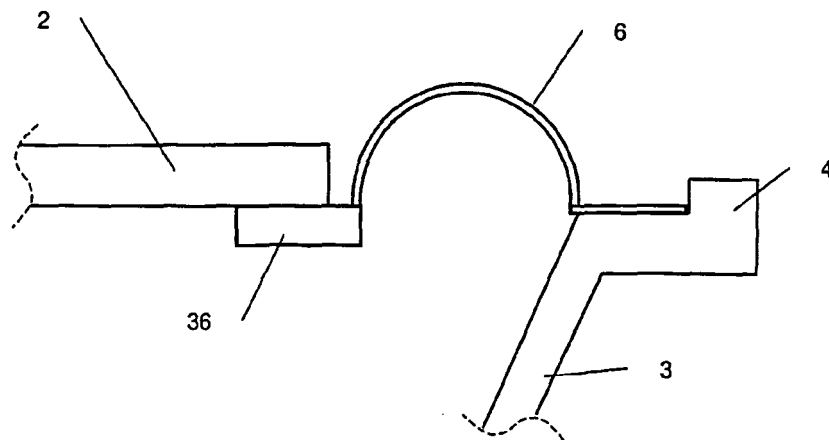


Figure 20

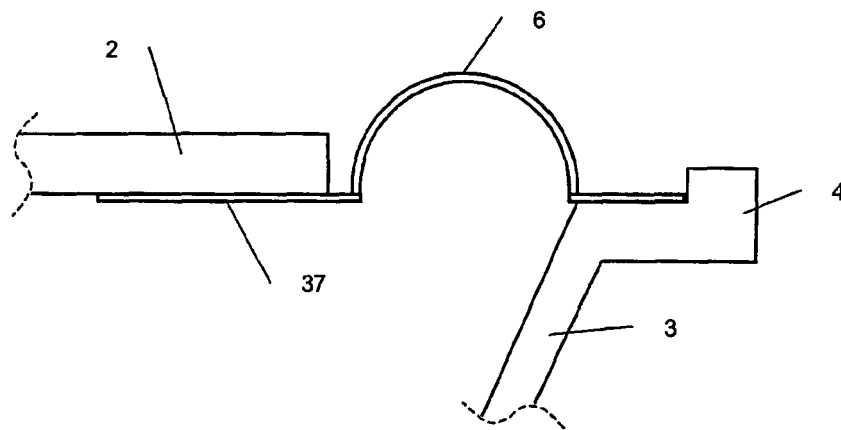


Figure 21

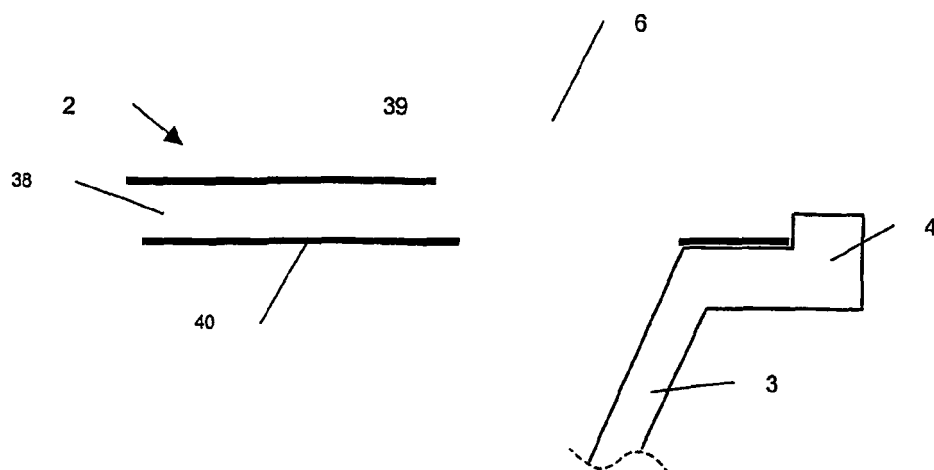


Figure 22

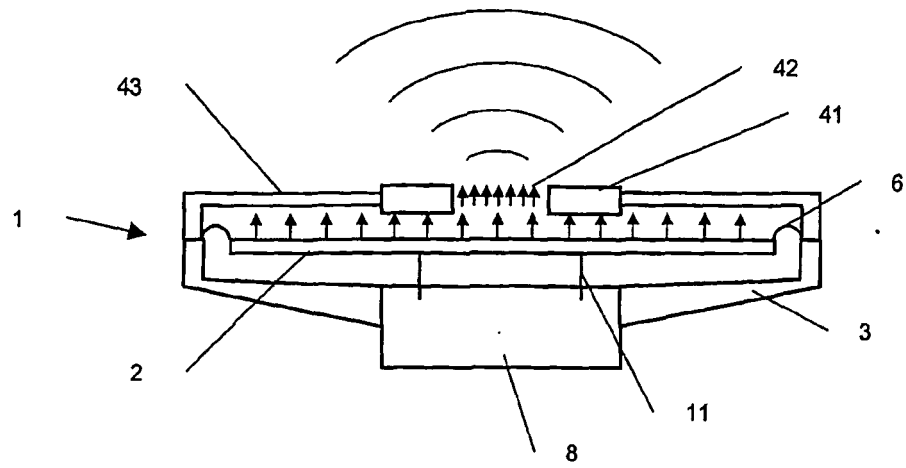


Figure 23

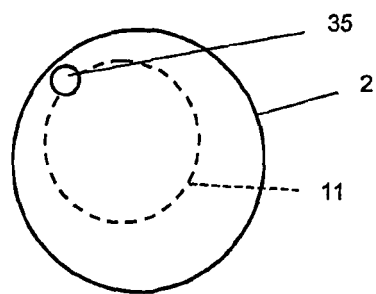


Figure 24

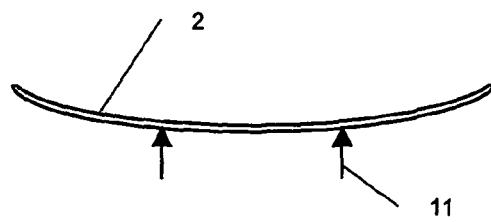


Figure 25

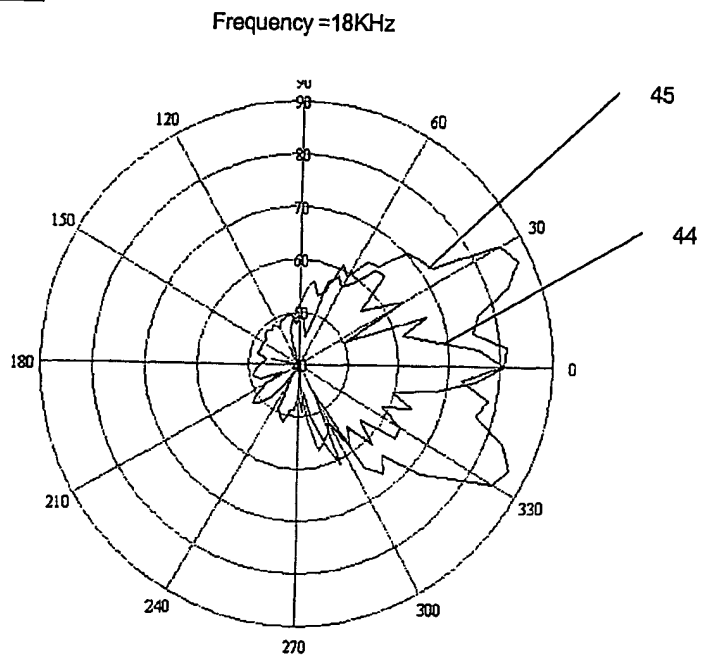


Figure 26


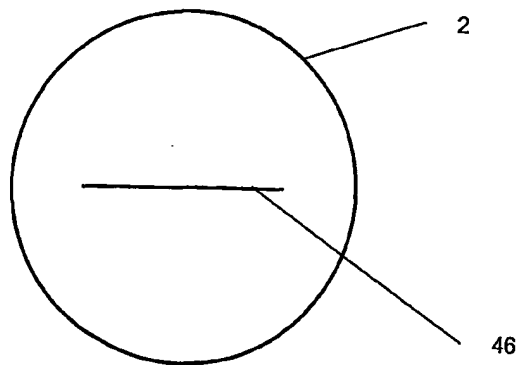


Figure 27

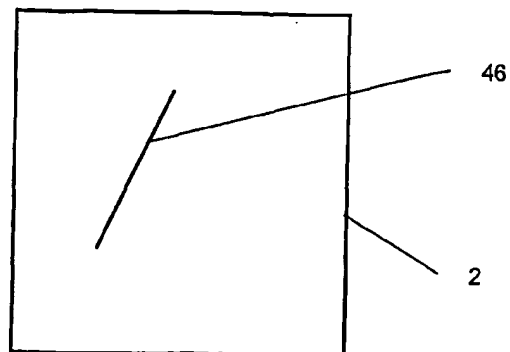

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 9709842 A [0001] [0009] [0028]
- WO 9839947 A [0002]
- US 4542383 A [0009]