



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
03.09.2003 Bulletin 2003/36

(51) Int Cl.7: **G03G 15/00**

(21) Application number: **03012724.5**

(22) Date of filing: **02.04.1998**

(84) Designated Contracting States:
DE FR GB

(30) Priority: **11.04.1997 US 43579 P**
25.11.1997 US 978307

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:
98106059.3 / 0 877 304

(71) Applicant: **Xerox Corporation**
Rochester, New York 14644 (US)

(72) Inventors:
• **Perez, Porfirio J.**
Walworth, NY 14568 (US)
• **Vanbortel, David P.**
Macedon, NY 14502 (US)
• **Beard, Michael E.**
Webster, NY 14580 (US)
• **Kulbida, Ihor**
Fairport, NY 14450 (US)
• **Budnik, Roger W.**
Rochester, NY 14622 (US)

- **Pacer, James M.**
Webster, NY 14580 (US)
- **Raj, Guru B.**
Fairport, NY 14450 (US)
- **Shoemaker, Ralph A.**
Rochester, NY 14618 (US)
- **Swales, Michael G.**
Sodus, NY 14450 (US)
- **Rollins, David E.**
Lyons, NY 14489 (US)
- **Bhattacharya, Ameet S.**
Rochester, NY 14607 (US)
- **Kolb, Steven E.**
Estero, FL 33928 (US)

(74) Representative: **Grünecker, Kinkeldey,**
Stockmair & Schwanhäusser Anwaltssozietät
Maximilianstrasse 58
80538 München (DE)

Remarks:

This application was filed on 04 - 06 - 2003 as a
divisional application to the application mentioned
under INID code 62.

(54) **Method for operating a printing system and printing apparatus**

(57) A method of operating a printing apparatus a sub system in the apparatus is provided, wherein this sub system is disposed in the module which is separable from the apparatus. A code is associated to the module. A message derived from said code is communicated from the module and/or the apparatus over a network to a network user to order an ancillary part separate from the module, a part of the sub system or a replacement module. By such a method in a corresponding printing apparatus it is possible to provide corresponding information with a simple construction and with high speed to a location outside of the printing apparatus where such information is requested or needed.

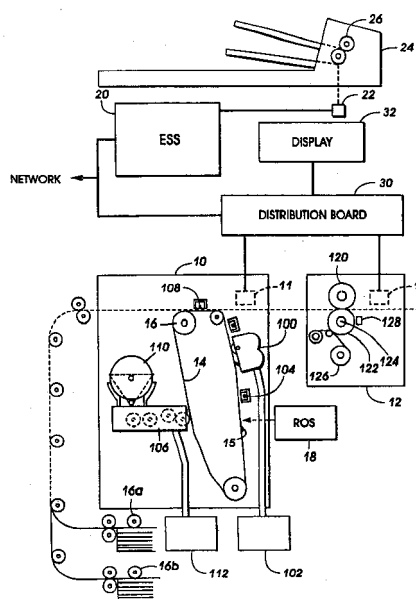


FIG. 1

Description

[0001] The present invention relates to a system for controlling replaceable modules, also known as "customer replaceable units" or CRUs, in a digital printing apparatus, such as a digital electrophotographic printer/copier.

[0002] In the office equipment industry, different customers have different requirements as to their business relationship with the manufacturer of the equipment or other service provider. For various reasons, some customers may wish to own their equipment, such as copiers and printers, outright, and take full responsibility for maintaining and servicing the equipment. At the other extreme, some customers may wish to have a "hands off" approach to their equipment, wherein the equipment is leased, and the manufacturer or service provider takes the entire responsibility of keeping the equipment maintained. In such a "hands off" situation, the customer may not even want to know the details about when the equipment is being serviced, and further it is likely that the manufacturer or service provider will want to know fairly far in advance when maintenance is necessary for the equipment, so as to minimize "down time." Other business relationships between the "owning" and "leasing" extremes may be imagined, such as a customer owning the equipment but engaging the manufacturer or service provider to maintain the equipment on a renewable contract basis.

[0003] A common trend in the maintenance of office equipment, particularly copiers and printers, is to organize the machine on a modular basis, wherein certain distinct subsystems of a machine are bundled together into modules which can be readily removed from machines and replaced with new modules of the same type. A modular design facilitates a great flexibility in the business relationship with the customer. By providing subsystems in discrete modules, visits from a service representative can be made very short, since all the representative has to do is remove and replace a defective module. Actual repair of the module takes place away at the service provider's premises. Further, some customers may wish to have the ability to buy modules "off the shelf," such as from an office supply store. Indeed, it is possible that a customer may lease the machine and wish to buy a succession of modules as needed. Further, the use of modules, particularly for supply units such as toner bottles, are conducive to recycling activities which are available, and occasionally mandatory, in many countries.

[0004] In order to facilitate a variety of business arrangements among manufacturers, service providers, and customers of office equipment such as copiers and printers, it is known to provide these modules with electronically-readable chips which, when the module is installed in a machine, enable the machine to both read information from the memory and also write information, such as a print count, to the module. The present inven-

tion is directed to a generalized system for information exchanges between modules and machines in an environment of printers and copiers.

[0005] US Patent 4,586,147 discloses an electrophotographic printing apparatus having a "history information providing device." The device includes a non-volatile memory for taking out the latest failure information, such as the number of times of paper jam, and the latest maintenance information such as the total number of pages of printed paper and storing this information therein. The information thus stored in the non-volatile memory is accessed by causing the printer to print out the information stored in the non-volatile memory.

[0006] US patent 4,961,088 discloses the basic concept of using an electronically-readable memory permanently associated with a replaceable module which can be installed in a digital printer. The embodiment disclosed in this patent enables a printer to check an identification number of the module, to make sure the module is authorized to be installed in the machine, and also enables a count of prints made with the module to be retained in the memory associated with the module.

[0007] US Patent 5,491,540 discloses a printer/copier having a plurality of replaceable parts therein. Each replaceable part has a memory chip associated therewith, and, within the total apparatus, the various memory chips are connected in serial fashion by only a single wire.

[0008] It is an object of the present invention to provide a method of operating a printing apparatus and a corresponding printing apparatus according to which, it is not only possible to exchange information between corresponding parts within the printing apparatus but also to provide such information with a simple construction and with high speed to a location outside of the printing apparatus where such information is requested or needed.

[0009] This object is solved by the features of claims 1 and 6.

[0010] According to the invention, the corresponding information or message from the printing apparatus is transmitted over the network to a user that needs this information or has requested the transmission of this information or message. In response to the message, an ancillary part of the printing apparatus separate from the module, a part of the subsystem of the module or the module itself will be replaced.

[0011] Preferably, the communication between printing apparatus and the network user is a two-way communication such that information may be transmitted from the printing apparatus to the user and vice-versa.

[0012] To identify, for example the module or its subsystem, the code may be an optical barcode. By reading this code, it is possible to order a replacement module for the module to be exchanged. Of course, a corresponding bar code may also be assigned to the ancillary art.

[0013] To obtain a code that can be easier adapted

and may represent different parameters or other characteristics of the module, such a code may be stored in an electronically readable memory in the module.

[0014] The codes can represent such parameters or characteristics of the module or subsystem as use of the subsystem, malfunction of a predetermined type, fault of some hardware, status of the module, identity of the printing apparatus or the module, etc.

[0015] To simplify within the printing apparatus, the transmission of a corresponding message from a module, a distribution board may be arranged within the printing apparatus with a communication connection to said module and said network. Of course, it is also possible that corresponding module has a direct connection to the network.

[0016] Such a network may be realized in different ways. A simple possibility for a network or network channel is a telephone or facsimile line. Correspondingly, the message is transmitted as a telefax or for example as an email. It is of course also possible that the corresponding network is realized by internet channels or connections.

[0017] Beside a replacement order submitted with the message, further information may be transmitted together with this message. Such information may be the status of the module, information about the relationship between the customer and the manufacturer or a service organization, the module serial number, the date of manufacture of the module, a set point code or data related to specific operating requirements of various components of the module or the printing apparatus, component failure/fault codes, a service plan code, a print count value, a maximum print volume value, pixel usage, print count security, etc.

[0018] According to one embodiment of the invention, the electronically readable memory may be realized by customer replaceable unit monitors (CRUM) wherein the distribution boards interact with at least one of these (CRUM's) associated with one or all of the modules within the printing apparatus.

[0019] Figure 1 is a simplified, partially-elevational, partially-schematic view of an electrophotographic printing apparatus in which the aspects of the present invention can be embodied.

[0020] Figure 1 is a simplified partially-elevational, partially-schematic view of an electrophotographic printing apparatus (hereinafter a "machine"), in this case a combination digital copier/printer, in which many of the aspects of the present invention can be embodied. (As used in the claims herein, a "printing apparatus" can apply to any machine that outputs prints in whatever manner, such as a light-lens copier, digital printer, facsimile, or multifunction device, and can create images electrostatically, by ink-jet, hot-melt, or by any other method.) The two main portions of hardware in the machine include a "xerographic module" indicated as 10, and a "fuser module" indicated as 12. As is familiar in the art of electrostatic printing, there is contained

within xerographic module 10 many of the essential hardware elements required to create desired images electrophotographically. The images are created on the surface of a rotating photoreceptor 14 which is mounted on a set of rollers, as shown. Disposed at various points around the circumference of photoreceptor 14 are a cleaning device generally indicated as 100, which empties into a "toner reclaim bottle" 102, a charging corotron 104 or equivalent device, a developer unit 106, and a transfer corotron 108. Of course, in any particular embodiment of an electrophotographic printer, there may be variations on this general outline, such as additional corotrons, or cleaning devices, or, in the case of a color printer, multiple developer units.

[0021] With particular reference to developer unit 106, as is familiar in the art, the unit 106 generally comprises a housing in which a supply of developer (which typically contain toner particles plus carrier particles) which can be supplied to an electrostatic latent image created on the surface of photoreceptor 14 or other charge receptor. Developer unit 106 may be made integral with or separable from xerographic module 10; and in a color-capable embodiment of the invention, there would be provided multiple developer units 106, each unit developing the photoreceptor 14 with a different primary-color toner. A toner bottle 110, which could contain either pure toner or an admixture of carrier particles, continuously or selectably adds toner or developer into the main body of developer unit 106. In one particular embodiment of an electrophotographic printer, there is further supplied a developer receptacle here indicated as 112, which accepts excess developer directly from the housing of developer unit 106. In this particular embodiment, the developer receptacle 112 should be distinguished from the toner reclaim bottle 102, which reclaims untransferred toner from cleaning device 100. Thus, in the illustrated embodiment, there are two separate receptacles for used or excess developer and toner.

[0022] Turning to fuser module 12, there is included in the present embodiment all of the essential elements of a subsystem for fusing a toner image which has been electrostatically transferred to a sheet by the xerographic module 10. As such, the fuser module 12 includes a pressure roll 120, a heat roll 122 including, at the core thereof, a heat element 124, and a web supply 126, which provides a release agent to the outer surface of heat roll 122 so that paper passing between heat roll 122 and pressure roll 120 does not stick to the heat roll 122. For purposes of the claims herein, either a heat roll or a pressure roll can be considered a "fuser roll." Also typically included in a fusing subsystem is a thermistor such as 128 for monitoring the temperature of a relevant portion of the subsystem.

[0023] Paper or other medium on which images are desired to be printed are retained on one or more paper stacks. Paper is drawn from the stacks, typically one sheet at a time, by feed rolls such as indicated as 16a and 16b. When it is desired to print an image on a sheet,

a motor (not shown) activates one of the feed rolls 16a, 16b, depending on what type of sheet is desired, and the drawn sheet is taken from the stack and moved through a paper path, shown by the dot-dash line in the Figure, where it eventually comes into contact with the photoreceptor 14 within xerographic module 10. At the transfer corotron 108, the sheet receives an unfused image, as is known in the art. The sheet then passes further along the paper path through a nip formed between pressure roll 120 and heat roll 124. The fuser subsystem thus causes the toner image to be permanently fixed to the sheet, as is known in the art.

[0024] In a digital printing apparatus, whether in the form of a digital printer or in a digital copier, images are created by selectively discharging pixel-sized areas on the surface of photoreceptor 14, immediately after the surface is generally charged such as by corotron 104. Typically, this selective discharging is performed by a raster output scanner (ROS) indicated as 18, which, as is known, includes a modulating laser which reflects a beam off a rotating reflective polygon. Other apparatus for imagewise discharging of the photoreceptor 14, such as an LED bar or ionographic head, are also known. The image data operative of the ROS 18 or other apparatus typically generated by what is here called an "electronic subsystem" or ESS, here indicated as 20. (For clarity, the necessary connection between ESS 20 and ROS 18 is not shown.)

[0025] The ESS 20 can receive original image data either from a personal computer, or one of several personal computers or other apparatus on a network, or, in the case where the apparatus is being used as a digital copier, via a photosensor bar here indicated as 22. Briefly, the photosensor bar 22 typically includes a linear array of pixel-sized photosensors, on which a sequence of small areas on an original hard-copy image are focused. The photosensors in the array convert the dark and light reflected areas of the original image into electrical signals, which can be compiled and retained by ESS 20, ultimately for reproduction through ROS 18.

[0026] If the apparatus is being used in digital copier mode, it is typically desired to supply an original document handler, here generally indicated as 24, to present either or both sides of a sequence of hard-copy original pages to the photosensor bar 22. As is familiarly known, a document handler such as 24 may include any number of rollers, nudgers, etc. one of which is here indicated as 26.

[0027] According to one aspect of the present invention, there is further provided within an electrophotographic printing/copying apparatus, what is here called a "distribution board" 30. The distribution board 30 can send or receive messages, as will be described below, through the same network channels as ESS 20, or alternately through a telephone or facsimile line (not shown); alternately, the distribution board 30 can cause messages to be displayed through a display 32, typically in the form of a touch screen disposed on the exterior

of the apparatus.

[0028] Distribution board 30 interacts with specially-adapted memory devices, here called "customer replaceable unit monitors," or CRUMs, which are associated with one or more customer-replaceable modules within the apparatus. In the illustrated embodiment, xerographic module 10 and fuser module 12 are each designed to be customer-replaceable; i.e., for servicing purposes, the entire module 10 or 12 is simply removed in its entirety from the apparatus, and can then be immediately replaced by another module of the same type. As is familiar in the copier or printer industry, consumers can buy or lease individual modules as needed, and typically replace the modules without any special training. As illustrated, the xerographic module 10 has associated therewith a CRUM 11, while the fuser module 12 has associated therewith a CRUM 13. In a particular embodiment, the xerographic module 10 may further have associated therewith the toner reclaim bottle 102 and the developer receptacle 112, both of which are separable units.

[0029] The overall purpose, which will be described at length below, of each CRUM 11 and 13 is to retain information for the particular module about how that module is being used within a machine. Each CRUM 11 or 13 can be considered a small "notepad" on which certain key data is entered and retained, and also periodically updated. Thus, if a particular module 10 or 12 is removed from an apparatus, the information will stay with the module. By reading the data that is retained within a CRUM at a particular time, certain use characteristics of the CRUM can be discovered.

[0030] According to a preferred embodiment of the present invention, the CRUM 11 or 13 is basically in the form of a 2K bit serial EEPROM (electrically erasable programmable read only memory). Each CRUM 11, 13 is connected to distribution board 30 using a two-wire serial bus architecture. The non-volatile memory within the CRUM is designed for special applications requiring data storage in a ROM, PROM, and EEPROM mode. There is also preferably included in the device a special protection circuit which can be activated only one time. If this protection circuit is used, the memory content cannot be accessed regardless of the power supply or bus conditions. Each CRUM such as 11 or 13 can serve as both a transmitter and receiver in the synchronous transfer of data with distribution board 30 in accordance with a bus protocol.

[0031] The bus connecting distribution board 30 with one of the CRUMs 11 or 13 comprises two bidirectional lines, one for data signals and the other for clock signals. According to a preferred embodiment of the present invention, each data transfer, either data being sent to the CRUM or recordation therein, or being sent out of the CRUM for reading thereof, is initiated with a special "start data transfer" condition, which for example could be defined as a change in the state of the data line from high to low, while the clock is high. Each data transfer,

in either direction, is terminated with a stop condition, one example of which can be a change in the state of the data line from low to high while the clock is high. The serial data passing between the distribution board 30 and a CRUM thus exists between the start condition and the stop condition; in a preferred embodiment, the number of data bytes between the two conditions is limited to 8 bytes when updating data within the CRUM, and is not limited when reading data out of the CRUM. Typically, each byte of 8 bits is followed by one acknowledge bit. This acknowledge bit is a low level put on the bus by the CRUM, whereas the distribution board receiving the data will generate an extra acknowledge-related clock pulse. US Patent 4,961,088, incorporated by reference above, gives a general teaching of the hardware required for reading a numerical code from a memory associated with a replaceable module in a digital printing apparatus.

[0032] With respect to the different types of data which can be stored in a CRUM such as 11 or 13 to be read or updated by distribution board 30, the following detailed descriptions of each type of data can be applied to either CRUM 11 or CRUM 13, although of course certain types of data will be particularly unique to one type of module, either the xerographic module 10 or the fuser module 12.

[0033] Service plan: This is a code placed at a location in the one-time programmable memory of the CRUM. A service plan is given a number associated with the particular arrangement that exists between the user of the machine and the manufacturer or service organization. For example, one service plan could specify that the machine is owned by the user, and the user will buy modules and other parts as they become necessary to replace. Alternately, another service plan could be a lease arrangement where it becomes the responsibility of the manufacturer or service organization to replace modules well in advance of any end-of-life of a module. In terms of data transfers between a CRUM and the distribution board 30, the identity of the service plan which is loaded by the manufacturer into the CRUM and read by the distribution board 30 at install of the module will affect what information is displayed through distribution board 30, and in what manner. For example, a "lease" arrangement (symbolized by a particular service plan code in the CRUM) could instruct the distribution board 30 to send a request to re-order new modules through the network or over a phone line to the manufacturer, in a manner which is invisible to the user; in contrast, under a "ownership" arrangement (symbolized by a different service plan code in the CRUM), where it is the responsibility of the user to obtain new modules, an indication that a module needs to be replaced will instead be displayed on display 32. Similarly, if some sort of unauthorized module is placed in the machine, that is a module in which the "service plan" code is not recognized by the distribution board 30, then distribution board 30 can cause a warning to be displayed on display 32 that, for

example, a warranty is in danger of being voided.

[0034] Market region: This is another code, placed by the manufacturer in a predetermined address in the CRUM memory, which identifies the module as belonging to a particular market region, such as a geographical region. For various reasons it may be desirable that the geographic regions of the module and the complete apparatus be the same: for instance, a European machine is designed for 220 volts, while a US machine is designed for 110 volts, and to place a wrong type of module in a machine could be catastrophic. Thus, within an initialization procedure, the distribution board 30 reads a code describing a market region stored in the CRUM memory for a confirmation that the market region of both the modules and the machine match.

[0035] Print count: This is the number of prints which have been created by a particular module. This number is derived by having the distribution board 30 first read the current value of this print count from the CRUM memory, and subtract from (or add to) this number every time the ESS 20 causes a print to be output. Periodically, such as every five minutes or after every predetermined amount of time in which the machine is not outputting prints, the value of the print count is updated in the CRUM memory.

[0036] Maximum print volume value: This is a number, entered into a predetermined location in the CRUM memory at manufacture or remanufacture of the module, which states the maximum rated number for prints the particular module is designed to output before replacement. This maximum print volume will of course be compared with the current print count, and when the print count reaches a certain range relative to the maximum print volume, the distribution board 30 can (depending on the service plan) display a particular message on display 32 and/or place a "reorder" notice over the network or phone line to the manufacturer or supplier, indicating that the module will soon need replacement.

[0037] The maximum print volume code can further relate to a service plan selected by the user. For example, if a user prefers a long life of a module over print quality, a relatively high maximum print volume can be written into the CRUM, even if that means the later prints may not be of optimal quality; conversely, a user with high quality requirements may desire a service plan with relatively low maximum print volume so that optimal print quality can be guaranteed for all prints. Such differences in desired service plans can be manifest in a service plan code and/or the maximum print volume code; a particular service plan code in a CRUM such as 11 may even signal the print-quality algorithms in the machine to be more or less tolerant of less-than-optimal print quality, depending on user desires.

[0038] Print count security: This is a number, placed in one-time programmable memory within the CRUM memory, which acts as a "check" to the CRU print count. In a typical embodiment, after every 15,000 (or other

number) prints counted by the print count, the number in print count security is changed, typically by changing one bit in the print count security memory from 1 to 0 or vice versa. An important feature of the print count security value is that, because it is in one-time programmable memory, it cannot be tampered with by someone trying to artificially extend the useful life of the module. A fuller description of the principle of using a print count security feature is given in US patent 5,283,613.

[0039] Pixel usage: This is a number, periodically updated through the distribution board 30, which represents the total cumulative usage of the particular module in terms of the number of pixels, or only print-black pixels, which have been printed by the module. The cumulative number of pixels can be used as an important parameter for judging the overall use of the particular module. A relatively high number of black pixels, for example, would indicate a relatively high toner coverage of sheets passing through a particular module, and is a strong indication of how much physical wear is being experienced by the module. Similarly, the cumulative pixel usage can be compared with a simultaneous print count in a particular CRUM memory at a particular time, and a number of pixels (or just black pixels) per individual print can be readily determined. (The pixel coverage per print can also be normalized taking into account different sheet sizes.) The raw data by which pixel usage is determined can be derived either from the image data output by the ESS 20, or more directly could be derived by simply monitoring the behavior of the ROS 18 over time. For example, the relative amount of time a laser in ROS 18 is on or off when printing a sheet-sized image can be readily used as an indication of how much black-area coverage exists on a every sheet.

[0040] Of course, in a color-capable embodiment of the invention, where there would be a separate developer unit 106 for each primary color toner, the "black" pixel usage calculation could be performed and recorded with respect to each color separation generated by the machine.

[0041] Maximum pixel usage value: This is a number placed in one-time programmable memory at manufacture or remanufacture of the module, which indicates a maximum rated value of number of pixels, or black pixels, which could be output by the module. Once again, as with print count, the pixel usage stored in the CRUM memory is periodically compared with the maximum pixel usage, and once the pixel usage count reaches a certain range relative to the maximum pixel usage value, the distribution board 30 can either display a message on display 32 and/or notify a manufacturer or service representative through the network or phone line. It is also possible to provide a system which retains the average daily pixel count, once again by dividing the pixel usage by a number of days, and this number may also be useful in servicing or remanufacture.

[0042] US Patent 5,636,032 gives a general teaching of pixel-counting techniques useful for determining a

consumption rate of marking material.

[0043] Machine average daily print volume: This is a number stored at a predetermined location within the CRUM memory, which represents the number of prints that have been made with the module divided by a certain number of days. The specific technique by which this number is derived and daily updated by distribution board 30 can be approached in a number of ways. For example, with every daily update, the distribution board 30 can maintain a ten-day moving average of prints per day. Alternately, if a remote service organization accessing the distribution board over the network systematically polls the machine on a periodic basis, such as every three days, the number can be derived by counting the number of prints since the last remote polling, and this number can be divided by the number of days since the last polling. This number can be particularly valuable when the module is being serviced or remanufactured, because it can be an indication of the overall stress that takes place on a daily basis on the module.

[0044] In a preferred embodiment of the invention, there are provided at least four status messages at which a machine will display or otherwise communicate the approach of a need to replace a module. These status messages are determined by the machine extrapolating the average daily print volume, and when a particular threshold number of days to module replacement is reached, an appropriate status message is communicated by the machine, either to the end user through the display 32 or directly to the service provider over a network. For example, the machine can communicate a "reorder module" message at some point between 10 and 25 days (the exact day being set by user preference, or as a result of particular service plan code) before the expected end of life of the module; a "prepare to replace" message at some point between 2 and 5 days; a "replace today" message at 1-2 days; and finally a "hard stop" message when the module runs out. The particular service plan code stored in the CRUM, mentioned above, can signal to the apparatus at what predetermined threshold number of days (such as between 10 and 25 days) a particular status message should be communicated (either through the network or through the display) to the user.

[0045] The service plan code can also include data symbolic of an instruction to communicate a particular status message over the network (in the case of, for example, a leased machine), or through display 32 (in the case of for example, a user-owned machine or a stand-alone copier), or both. Of course, depending on a particular design, certain types of messages can be displayed and other types of messages can be transmitted over the network, and how any message is communicated can be determined by the service plan code.

[0046] Machine speed code: In a product family, a design option is to provide essentially the same hardware across different-speed products, e.g., the same basic machine, including the same basic design of replacea-

ble modules, can be sold in either a 40 ppm (page-per-minute) or 60 ppm version. According to one aspect of the present invention, a code relating to whether a module such as 10 or 12 is suitable for use at a particular speed (or both speeds) is retained in the associated CRUM 11 or 13. A machine design option is to program the machine to operate only at a maximum speed "authorized" by the machine speed code in the CRUM, so that, for example, if a 40 ppm module is installed in a machine with a "top speed" of 60 ppm, the machine reading the machine speed code of 40 ppm will be constrained to operate only at 40 ppm, such as by operating stepper motors in the machine at a special, lower frequency.

[0047] Ancillary part code: In one practical embodiment of the present invention, a xerographic module such as when shipped to the customer is bundled with a number of feed rolls such as shown in Figure 1 as 16a or 16b. Although in this particular embodiment feed rolls are at issue, the general concept here can be applied to any part within the apparatus which is not part of a module, but which nonetheless should be periodically replaced by the user. Another possible candidates for occasional replacement would be, for example, the roller 26 or other part associated with the automatic document handler 24.

[0048] The overall intention is that an ancillary replaceable part which is not directly part of the module can still rely on a CRUM within a particular module to remind the user (through display 32) and/or instruct the manufacturer (by distribution board 30 communicating to the manufacturer or service organization through the network) that a particular part is due to be replaced. In the case where it is the user's responsibility to replace the feed roll 16a or 16b, typically the distribution board 30 will have a protocol in which the user is requested to enter in via the display a confirmation that he has indeed replaced a particular feed roll. Other possible ancillary parts include the toner bottle 110, toner reclaim bottle 102 or the used developer receptacle 112, which typically do not have CRUMs directly associated therewith. Depending on the particular ancillary part that has to be replaced in addition to the module, the presence of such a feature will be adapted accordingly depending on how often the particular part must be replaced relative to the rate of replacement of the module having the CRUM.

[0049] In one currently-preferred embodiment of the invention, a particular code in the CRUM is used to retain a value related to a number of feed rolls which were shipped with the whole module. However, more generally, such a code in the CRUM can store information about an "installation condition" of the ancillary part: for instance the code can relate to whether the ancillary part was installed substantially simultaneously with the module, or to the date the ancillary part was installed in the apparatus.

[0050] The high level of detail in machine and module performance afforded by CRUM systems of the present

invention facilitates sophisticated relationships between the customer and the manufacturer or other service organization. For example, toner bottle 110, which as mentioned above can contain either pure toner or toner with an admixture of carrier particles, is typically replaced relatively often by a customer, typically ten replacements of a toner bottle 110 relative to each replacement of a module 10. Similarly, the developer receptacle 112 and toner reclaim bottle 102 occasionally fill and similarly must be emptied and/or replaced by the user. With the features of the present invention, those parts which are replaced fairly often by a relatively untrained user can be monitored without the expense of, for example, placing sensors within the parts, which is a common practice. For example, because the distribution board 30 is capable of determining values of average print count per day and average pixel count per day, the system is capable of extrapolating how many days in the future the toner bottle 110 will run out or toner reclaim bottle 102 or developer receptacle 112 will fill.

[0051] In the case of toner bottle 110, once an amount of toner (or, in the general case, any marking material such as liquid ink) consumption per day is established, and if the cumulative daily consumption and original volume of toner in bottle 110 is known, the machine can predict when the toner bottle 110 will be empty, based on the same criteria used to determine the expected replacement date of the xerographic module 10: the maximum usable amount of toner in toner bottle 110, the cumulative use of toner from toner bottle 110, and the calculated rate of toner usage per day. (One or all of the numbers relating to the amount of toner and the usage thereof can be retained in CRUM 11, or else in a memory within the machine itself.) This information facilitates a system where the distribution board 30 can display, a predetermined number of days in advance, that the toner bottle will need replacement. In the case where orders for new toner bottles are made directly by distribution board 30 over a network to the service organization, the machine can be programmed to place the order for a new toner bottle two or three days in advance of expected run out, so that a new toner bottle 110 can be mailed to the customer. The same principle will apply to the emptying and/or replacing of developer receptacle 112.

[0052] In the case of toner reclaim bottle 102, the rate at which the receptacle is filled will depend not only on the amount of coverage of images created by ROS 18, but also on the transfer efficiency of the transfer corotron 108: If the transfer efficiency is relatively low, a relatively large amount of toner will remain on the surface of photoreceptor 14 even after the transfer step, and this untransferred toner will end up in toner reclaim bottle 102. Thus, according to one aspect of the present invention, the expected fill-up point of toner reclaim bottle 102 is determined by an average number of pixels per day and a measured transfer efficiency of the module 10.

[0053] In order to obtain this value of transfer efficiency, one technique is to have the module 10 tested at

manufacture or remanufacture and a transfer efficiency code relating to the actual transfer efficiency written into the CRUM 11. In this way, at install, the distribution board 30 can simply read out the transfer efficiency of the particular module 10, and use that number in calculations of the expected fill-up time, in days, of toner reclaim bottle 102.

[0054] Module serial number, module date of manufacture or remanufacture, list of machine serial numbers: These numbers are either entered into a predetermined location in the CRUM by the manufacturer, or, in the case of the machine serial number, entered into the CRUM by the machine itself, via distribution board 30, at install. This information is always useful when the module is being remanufactured or serviced, and the machine itself may have a use for knowing the module serial number and date of manufacture. For example, the distribution board 30 may be programmed to recognize that a module manufactured before a certain date will lack certain updated features, and can operate the module accordingly. Maintaining a list of the serial numbers of all machines in which the module has been installed in its lifetime may be useful in determining whether a particular machine is acting on a particular module in an undesirable manner. (With regard to the claims herein, the original manufacture of a module can count as a "remanufacture" for dating purposes.)

[0055] Set point data: The CRUM such as 11 can have loaded at certain predetermined locations in the memory therein, numbers or other codes which directly relate to specific operating requirements of various components within xerographic module 10. For instance, the charge corotron 104, the development unit 106, and transfer corotron 108, along with any other electrical structure within the module 10, may each need to be biased to a very specific potential in order for the machine to operate optimally. In a more sophisticated variation, any or all of the various components to be biased may optimally be biased according to a specific function which may relate to one or more external variables such as, for example, temperature, humidity, and current toner level in the development unit. (In the claims herein, a "xerographic component" shall include any electric device or electronic component, such as charge corotron 104, development unit 106, or transfer corotron 108, which operates to change a potential on a charge receptor such as photoreceptor 14.)

[0056] Thus, according to one aspect of the present invention, there can be stored at predetermined locations within the memory of CRUM 11 "set point codes" (either absolute numbers, or special codes which relate to absolute numbers) of how much each individual xerographic component within the module 10 should be biased by the machine (or, some other relevant operating characteristic of the xerographic component, such as AC frequency). Alternately, the set point codes could indicate one of a selectable set of functions, such as look-up tables, which represent functions by which the

optimal bias of different components should be calculated.

[0057] Further, the CRUM 11 or 13 could contain or retain information useful in calibrating on-board sensors such as thermistors or electrostatic voltmeters: the calibration could be done at manufacture or remanufacture, and the results of the calibration (i.e., the tested resistance of a thermistor as a function of temperature at certain test points, or an offset value for a voltmeter) could be loaded into the CRUM just before delivery of the module to the customer.

[0058] Further, with reference to set points, it may be desirable to provide a system in which a module 10 of a single basic design can be installed in machines which operate at different speeds, such as 40 ppm or 60 ppm. It is likely that a particular component in a module which is installed in a 40 ppm machine will have different voltage, power, and/or frequency requirements than if the module were installed in a 60 ppm machine. A similar system can be provided to retain in the CRUM 11 or 13 one set of power and voltage requirements if the module is installed in a monochrome machine, and another set of requirements for when the module is installed in a color-capable machine. According to one variation of the present invention, different sets of set points can be stored in different predetermined locations in memory, and the machine will access those addresses in memory depending on whether the machine is rated at one speed or capability or the other. In this way, a module of a single basic design can be installed and function successfully in machines rated at different speeds.

[0059] Seam signature: This is a feature unique to the CRUM 11 associated with the xerographic module 10. In one particular embodiment of the invention, a belt type photoreceptor such as 14 in Figure 1 has a seam where an image should not be created. It is therefore desirable that one should know the location of the seam or other "landmark" around the circumference of photoreceptor belt 14 if the module 10 is removed from a machine. Such a seam or other landmark is indicated in the Figure as 15. It is useful to remember the location of the seam 15 for the benefit for a subsequent machine in which the module 10 is installed, so that the subsequent machine will not accidentally cause an image to be placed over the seam. There are many possible ways in which the distribution board 30 can determine the location of the seam 15 in belt 14 at a given time, so that it may relay this information to the CRUM memory just before the module is removed. One possible technique is to provide encoder marks (not shown) which can be read by various photosensitive devices distributed on the circumference of photoreceptor belt 14 in a manner known in the art. Another technique is simply to have the distribution board maintain a running count of the different types of images that have been printed with the module 10 since the last time the location of the seam 15 was determined (e.g., when the module 10 was first installed into the machine, and the seam location was

read).

[0060] Storage of a seam signature code in the CRUM 11 can also be used in a system in which the CRUM 11 retains data relating to "disabled pitches" along the photoreceptor belt. For example, US Patent 5,173,733 discloses an electrophotographic printing apparatus in which latent images can be formed on a plurality of pitches on a rotating photoreceptor belt. If a defect is detected in one of the pitches, the particular pitch along the circumference of the photoreceptor belt can be disabled so that the formation of images on that section is prevented. With the present invention, by using the seam signature code in the CRUM 11, the location relative to the seam 15 of such a disabled pitch along the photoreceptor belt can be retained by a disabled-pitch code in the CRUM as well, so that the disabled pitch can be quickly identified by service personnel servicing the module, or, alternately, so the pitch will continue to be disabled if the module 10 is installed in another machine.

[0061] Component failure/ fault code: This is a space within the CRUM memory where fault codes, each code being associated with a particular type of hardware failure or other malfunction within the machine, can be recorded, along with the date and time of the failure, in a predetermined memory location in the CRUM of a particular module. Such information is noted by the distribution board or other control system within the machine in a manner familiar in the art. This information is useful when the module is disinstalled and remanufactured.

[0062] Fuser power and voltage requirements: This is a number, unique to the CRUM 13 in fuser module 12, which is loaded into the CRUM memory at manufacture where numbers relating to the voltage and power requirements required to operate the particular fusing subsystem in module 12. Upon the install of module 12, distribution board 30 reads these requirements from the CRUM 13, and then is capable of sending the desired voltage and power levels to the fuser subsystem. This feature is important, for example, because successive generations of fusing subsystems may require different voltage and power levels, and it is useful to be able to take advantage of lower requirements afforded by newer module designs.

[0063] An important variation is to provide a system whereby the CRUM 13 provides to the machine different requirements depending on the rated output speed of the machine, such as either 60 ppm or 40 ppm. The speed rating of the particular machine may have an effect on the power requirements to the fusing subsystem, and thus the CRUM 13 will provide different answers to different power requirements depending on the speed of the machine it is installed in. The CRUM 13 can retain the requirements for one speed at one address in memory, and the requirements for the other speed at another address, and the machine will read out of one memory address or the other depending on its speed. In this way, the same basic fusing module 12 can be installed in machines of different rated speeds, and the CRUM 13 will

"request" particular wattage and voltage accordingly. The same principle can be applied so that the CRUM 13 can retain different requirements at different memory locations for either a monochrome or a color-capable machine.

[0064] Another variation on this principle is to provide at a predetermined memory location in CRUM 13 numbers representative of temperature requirements or upper or lower temperature limits, as opposed to electricity requirements, for the fuser subsystem (in such a case, for instance, if an upper temperature limit is reached, a safety problem can result and the apparatus may simply shut itself off). If the apparatus includes temperature-sensing devices, the machine can provide suitable power and voltage to obtain the desired temperature as sensed by the device. Once again, different speed or type machines (or the use of different materials as print sheets, such as heavy stock or transparencies) may require different fuser temperatures, and so the different numbers can be stored at different memory locations.

[0065] Further with reference to CRUM 13, there may be provided at a predetermined location in memory a code useful for calibration of a thermistor such as 128. For instance, a thermistor will have associated therewith an offset voltage which can be interpreted as a certain absolute temperature, and/or there may be a particular slope of a function relating output voltage to temperature. The CRUM 13 can retain codes symbolic of the offset and/or the slope (the slope and offset are referred to in the claims generally as "calibration parameters"). These codes can be loaded into CRUM 13 at manufacture or remanufacture based on a direct test of the thermistor in a particular module. This is also useful in cases where a new design of a thermistor is incorporated in a new fuser module 12: by loading the offset and slope into CRUM 13, a new design fuser module can be readily installed in a relatively old machine.

[0066] Web usage: This is a requirement of fusing module 12. This is a number stored in the CRUM 13 and periodically updated by distribution board 30, reflective of the cumulative amount of use, either in terms of length or number of prints made, of fuser cleaning web 126 within the fuser module. Also preferably retained in CRUM 13 is a code symbolic of a maximum use, either in terms of web length or number of prints, that can be made with the web 126. Once again, as with other consumables, the usage per unit time of web 126 can be determined and compared with the maximum use to predict a replacement time. After a predetermined amount of web 126 has been consumed, the distribution board 30 can communicate either through display 32 or over the network that the web 126, or the module 12 as a whole, should be replaced within a certain calculated amount of time.

[0067] The usage of the web 126 can be measured in any manner familiar in the art, such as by associating a counter with a stepper motor or other mechanism (not shown) which moves web 126; or, alternately, the usage

of web 126 can be inferred from a number of prints made by the apparatus since the last install of a fuser module 12. The CRUM 13 can also retain at a predetermined location therein a code symbolic of the length of web 126 provided at install of a particular module 12; in this way, alternate designs of fuser module 12 (such as a "long-life" web 126 of a particularly long length, or a low-cost module with a relatively short web 126) can be taken into account. Further, CRUM 13 can retain at a predetermined location therein a code symbolic of a desired web speed for web 126, which would be manifest in, for example, the frequency of signals sent to a stepper motor which moves web 126; in this way, a module 12 having a new design web 126, which may not require as fast a motion for effective cleaning as a previous design, can be installed.

Claims

1. A method of operating a printing apparatus comprising the steps of:
 - providing a subsystem in the apparatus, the subsystem being disposed in a module (10,12) which is separable from the apparatus, the module having a code associated therewith, and
 - communicating a message derived from said code from the module (10,12) and/or the apparatus over an network to a network user to order an ancillary part separate from the module, a part of the subsystem or a replacement module.
2. The method according to claim 1, **characterised by** storing the code in an electronically readable memory (11,13) in the module (10,12).
3. The method according to claims 1 or 2, **characterised by** monitoring the use of the subsystem, wherein said code is related to an maximum use of the subsystem.
4. The method according to one of the previous claims, **characterised by** monitoring when a malfunction occurs and assigning a fault code as said code to the malfunction.
5. The method according to one of the previous claims, **characterised by** communicating said message at some calculated time prior to the subsystem or module wearout.
6. A printing apparatus with at least one module releasably installed therein, said module comprising a subsystem and a code associated with the module, wherein said module (10, 12) and/or the printing

apparatus are connected to a network to transmit the message related to said code to a network user.

7. The printing apparatus according to claim 6, **characterised in that** said module comprises an electronically readable memory (11,13) for storing said code.
8. The printing apparatus according to claim 6 or 7, **characterised in that** said code is related to said printing apparatus in which the module is installed.
9. The printing apparatus according to one of the claims 6 to 8, **characterised in that** said code is status code.
10. The printing apparatus according to one of the previous claims 6 to 9, **characterised in that** a distribution board (30) is arranged within the printing apparatus which board comprises a communication connection to said module (10,12) and said network.
11. The printing apparatus according to one of the previous claims 6 to 10, **characterised in that** the network is at least one of the group comprising an internet connection, a telephone line or a facsimile line.
12. The printing apparatus according to one of the previous claims 6 to 11, **characterised in that** said message is a replacement order message.
13. The printing apparatus according to one of the previous claims 6 to 12, **characterised in that** said message to or from the module includes at least one information from the group comprising the status of the module, relationship between customer and manufacturer or service organisation, module serial number, date of manufacture of module, set point codes, component failure/fault code, service plan, print count, maximum print volume value, pixel usage, print count security, etc.
14. The printing apparatus according to one of the previous claims 6 to 13, **characterised in that** said distribution board interacts with at least one customer replaceable unit monitor (CRUM) associated with one module within the printing apparatus.

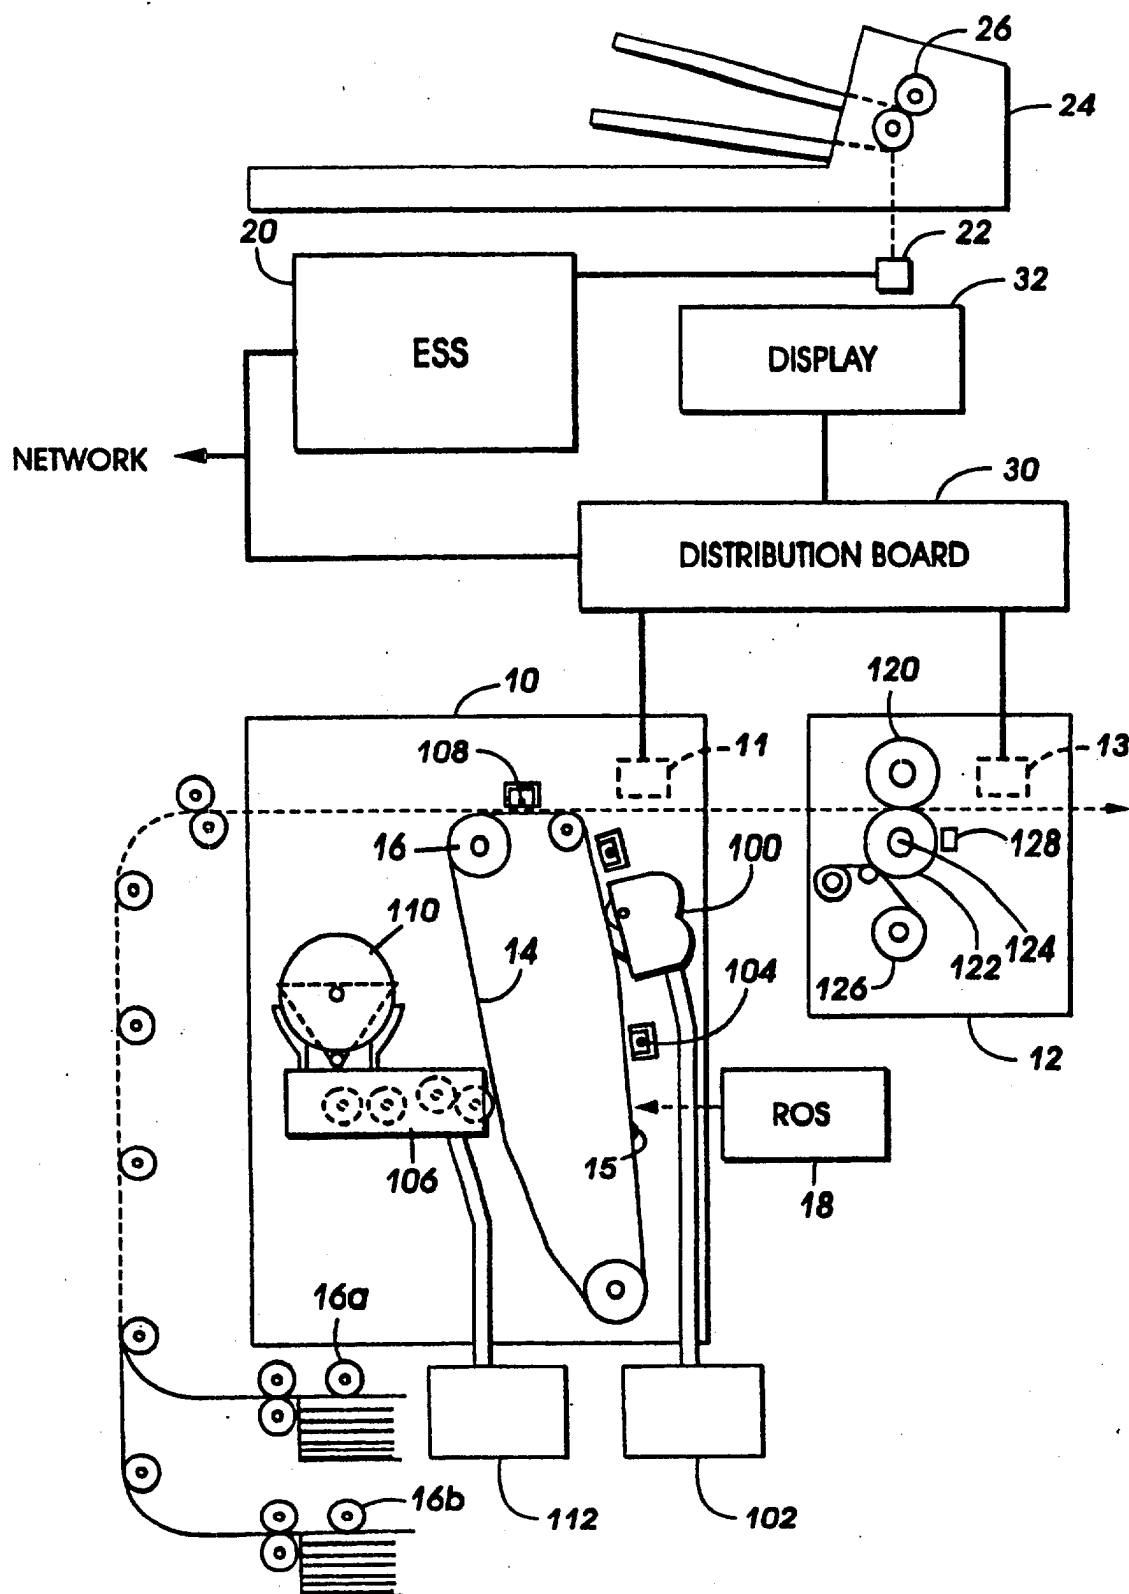


FIG. 1



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 03 01 2724

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 4 876 606 A (BANNO MASAHIKO ET AL) 24 October 1989 (1989-10-24)	6,8,9, 11,13	G03G15/00
A	* column 3, line 68 - column 5, line 38 * * column 7, line 38 - column 8, line 42; figures 1,5 *	1,4,5	
A	----- PATENT ABSTRACTS OF JAPAN vol. 018, no. 309 (P-1753), 13 June 1994 (1994-06-13) -& JP 06 067484 A (RICOH CO LTD), 11 March 1994 (1994-03-11) * abstract *	1-3,6,7	
A	----- EP 0 532 308 A (XEROX CORP) 17 March 1993 (1993-03-17) * column 4, line 4 - line 19; figure 3 *	1-3,6, 13,14	
A	----- EP 0 685 768 A (XEROX CORP) 6 December 1995 (1995-12-06) * column 6, line 34 - line 52; figure 8 *	1,6,11, 12	
A	----- EP 0 342 910 A (MONITEL PRODUCTS CORP) 23 November 1989 (1989-11-23) * column 17, line 16 - line 58; figure 4 *	1,4,6, 8-11,13	TECHNICAL FIELDS SEARCHED (Int.Cl.7) G03G
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 14 July 2003	Examiner Cigoj, P
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 01 2724

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

14-07-2003

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 4876606	A	24-10-1989	JP	1026866 A	30-01-1989
JP 06067484	A	11-03-1994	NONE		
EP 0532308	A	17-03-1993	DE	69217304 D1	20-03-1997
			DE	69217304 T2	17-07-1997
			EP	0532308 A2	17-03-1993
			JP	5197233 A	06-08-1993
EP 0685768	A	06-12-1995	BR	9502646 A	30-04-1996
			EP	0685768 A1	06-12-1995
			JP	7333749 A	22-12-1995
EP 0342910	A	23-11-1989	US	5077582 A	31-12-1991
			AU	625640 B2	16-07-1992
			AU	3483089 A	23-11-1989
			DE	68924725 D1	14-12-1995
			DE	68924725 T2	13-06-1996
			DE	68928579 D1	12-03-1998
			DE	68928579 T2	18-06-1998
			EP	0342910 A2	23-11-1989
			EP	0658824 A2	21-06-1995
			ES	2112008 T3	16-03-1998
			HK	1003344 A1	23-10-1998
			HK	1003337 A1	23-10-1998
			JP	2034864 A	05-02-1990
			JP	2618272 B2	11-06-1997
			KR	9401080 B1	12-02-1994
			US	5184179 A	02-02-1993
			ZA	8903684 A	31-01-1990
			CA	1335385 C	25-04-1995

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82