



(11) **EP 1 345 247 B2**

(12) **NEW EUROPEAN PATENT SPECIFICATION**  
After opposition procedure

(45) Date of publication and mention of the opposition decision:  
**13.10.2010 Bulletin 2010/41**

(51) Int Cl.:  
**H01H 85/30 (2006.01)**

(45) Mention of the grant of the patent:  
**21.02.2007 Bulletin 2007/08**

(21) Application number: **03251452.3**

(22) Date of filing: **11.03.2003**

(54) **Fuse assembly**

Schmelzsicherungsanordnung

Ensemble de coupe-circuit à fusible

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LI LU MC NL PT RO SE SI SK TR**

(30) Priority: **12.03.2002 GB 0205762**

(43) Date of publication of application:  
**17.09.2003 Bulletin 2003/38**

(73) Proprietor: **Cooper Technologies Company**  
**Leicestershire LE12 5TH (GB)**

(72) Inventors:

- **Laxton, David**  
**Melton Mowbray, LE13 0EP (GB)**
- **Brown, Russell**  
**Loughborough, LE11 3JE (GB)**
- **Cooper, Gareth John**  
**West Bridgeford,**  
**Nottingham, NG2 5DN (GB)**
- **Gunn, Mark William**  
**Loughborough, LE11 5YX (GB)**
- **Sharma, Sheila**  
**Loughborough, LE11 4RC (GB)**

- **Butters, John William Michael**  
**Loughborough, LE11 3JP (GB)**
- **Bruce, Dean Christopher**  
**Loughborough, LE11 2PB (GB)**

(74) Representative: **Clarkson, Paul Magnus et al**  
**Howrey LLP**  
**Rembrandt Tower, 31st Floor**  
**Amstelplein 1**  
**1096 HA Amsterdam (NL)**

(56) References cited:

<b>EP-A- 0 049 374</b>	<b>EP-A- 0 420 351</b>
<b>EP-B1- 0 917 723</b>	<b>WO-A1-99/40599</b>
<b>CH-A- 317 661</b>	<b>DE-A- 2 557 289</b>
<b>DE-A1- 1 792 662</b>	<b>DE-A1- 10 005 145</b>
<b>DE-A1- 19 644 901</b>	<b>DE-A1- 19 723 540</b>
<b>DE-A1- 19 831 376</b>	<b>DE-B- 1 034 751</b>
<b>DE-C- 902 879</b>	<b>DE-U1- 29 807 928</b>
<b>FR-A- 1 465 397</b>	<b>FR-A- 1 465 397</b>
<b>GB-A- 580 462</b>	<b>US-A- 2 794 095</b>
<b>US-A- 3 601 739</b>	<b>US-A- 3 678 430</b>
<b>US-A- 4 023 133</b>	<b>US-A- 5 418 515</b>

**EP 1 345 247 B2**

## Description

**[0001]** The present invention relates to a fuse assembly, particularly to a fuse assembly for use as a low-voltage high-breaking capacity fuse, commonly referred to in the art as a fuse link.

**[0002]** Low-voltage high-breaking fuse links are specified in International Standard IEC 60269-2-1, Section 1 and are commonly referred to in the art as "NH" fuses. Typically, fuse links of the aforementioned kind have a housing, generally rectangular in shape, across the interior of which extends a main fuse element. An indicator fuse element is arranged in parallel to the main fuse element and serves to control the position of an indicator assembly. The indicator assembly is arranged to provide to an observer an indication of the state of the main fuse element, in particular to provide a clear indication of the fuse in the blown state.

**[0003]** German patent application no. DE 1 034 751 discloses a fuse assembly of the aforementioned general configuration. An indicator assembly has an indicator element disposed at one end of the housing and has an indicator portion extending into a longitudinal channel formed in the housing wall. The indicator fuse element retains the indicator element in a first position against the biasing action of a helical spring. The helical spring is retained in an enlarged end portion of the channel in the housing wall and applies a force coaxial to the longitudinal axis of the indicator portion within the channel. Although available for some considerable time, the fuse assembly of DE 1 034 751, in particular the indicator assembly, does not appear to have been put into widespread use.

**[0004]** More recently, a considerable number and variety of designs of fuse assembly have been proposed, relying upon the use of a strip of sprung metal as the essential component of the indicator element. In particular, German Patent publication No. DE 32 03 211 A1 discloses a fuse assembly of the aforementioned general kind, having an indicator assembly comprising a single strip of sprung metal secured at one end to an end terminal of the fuse assembly, adjacent the end face of the fuse housing. The strip is formed so as to have a permanent curve and is arranged such that, in its rest state, the free end of the strip is displaced from the end face. The strip is held flat against the end face of the housing against its natural sprung bias by an indicator fuse element. Operation of the fuse assembly in the case of a current overload releases the strip, which assumes its natural curved rest position, thus indicating a melting of the fuse and a potentially problematic electrical circuit. A single strip indicator assembly is also disclosed in German Utility Model application No. G 90 06 337.6.

**[0005]** European Patent No. EP 0 044 997 discloses a fuse assembly of the aforementioned general kind having an indicator assembly activated by an indicator fuse element. The indicator assembly consists essentially of a metal strip folded to form two arms. The fold of the

metal strip is formed such as to act as a spring, biasing the arms away from one another. One arm is secured to one end face of the housing, with the second arm being held in contact with the first by the indicator fuse element. Melting of the indicator fuse element releases the second arm of the indicator, which moves away from the end of the housing in an arcuate motion about the fold spring. Displacement of the second arm in this manner indicates to the observer an operated fuse assembly.

**[0006]** A similar arrangement to that of EP 0 044 997 is disclosed in German Patent publication No. DE 197 23 540 A1. The indicator assembly of EP 0 044 997 is supplemented in the device of DE 197 23 540 A1 by an indicator strip extending along a channel formed in one side of the fuse housing and extending from the end face of the housing. A window is present in the side face of the housing, opening into the channel, with the indicator strip extending across the window. Upon melting of the fuse elements of DE 197 23 540 A1, the second arm moves in an arc away from the end face of the housing, at the same time moving the indicator strip within the channel to a position distant from the window. In this way, the fuse assembly contains a double indication system for the condition of the fuse. Similar arrangements are disclosed in German Patent publication No. DE 197 44 535 A1, International Patent Application publication WO 98/07172, International Patent Application publication WO 00/11698 and German Utility Model DE 297 18 230 U1.

**[0007]** A further modification to the indicator assemblies of EP 0 044 997 and DE 197 23 540 A1 is described and shown in German Utility Model DE 298 07 928 U1. The indicator assembly of DE 298 07 928 U1 employs a folded metal strip, as described above. However, the first arm is secured to the end face of the housing of the fuse assembly at just its end. Upon operation of the fuse assembly, both the first and second arms of the indicator strip move in an arcuate path away from the end face of the housing. An indicator strip extending within a channel in the side of the housing provides a second indicator, as described above.

**[0008]** In yet a further modification to the aforementioned fuse assemblies, International Patent Application publication WO 99/40599 discloses a fuse assembly having an indicator assembly comprising a folded metal strip. The metal strip is folded upon itself twice, forming a Z-shaped indicator element, the base of which is secured to an end face of the housing. The folded metal strip is held flat against the end face of the housing by the indicator fuse element. Upon operation of the fuse, the indicator fuse element releases the folded metal strip, which moves in an arcuate motion and assumes its Z-shaped form. An indicator strip extending within a channel in the side wall of the fuse is attached to the free end of the folded metal strip and is employed to provide a second indication of the state of the fuse assembly.

**[0009]** While the aforementioned designs of fuse assembly have found a measure of success in the market,

it has been found that a problem can arise due to the indicator assembly failing to fully respond to operation of the fuse. In such a case, the observer is not given a clear indication that the fuse has operated or blown. This can result in the fuse being missed during an inspection. The potential of this occurring is markedly increased when an observer is required to inspect a bank containing a large number of identical fuse assemblies, in order to identify the operated item.

**[0010]** US4023133 discloses a fuse assembly comprising a blown fuse indicator including an indicating pin biased in a direction at right angles to the longitudinal axis of the fuse, the pin indicates the state of the fuse from a lateral face of the fuse assembly.

**[0011]** According to the present invention, there is provided, a fuse assembly according to the features of claim 1.

**[0012]** The arrangement of having the force biasing the indicator into the second position acting coaxially with the restraining force exerted by the indicator fuse element retaining the indicator element in the first position provides an improved operation of the indicator assembly. In particular, it prevents the movable elements of indicator assembly from travelling in an arcuate path, upon operation of the fuse. Such movement of the indicator assembly components can cause elements to become caught or trapped. For example, a portion of the indicator fuse element can become trapped as it is pulled out of the housing by the moving indicator to which it is attached. This can prevent a full and complete indication being given.

**[0013]** Further, movement of the indicator elements in an arcuate pattern results in one or more components of the indicator assembly moving laterally with respect to the end face of the housing. This lateral movement can also lead to portions of the indicator assembly becoming trapped or restricted in their movement. For example, in fuse assemblies in which a dual indication system is provided, lateral movement as aforementioned causes the indicator element extending within the channel in the side of the housing to be forced against the side of the channel. This can restrict the element from moving freely within the channel, in turn causing the indicator assembly to be held in an intermediate position between the first and second positions. The arrangement of the present invention prevents a lateral displacement of the elements of the indicator assembly parallel to the end face of the fuse housing.

**[0014]** The fuse assembly of the present invention provides an improved indicator assembly, in terms of its speed and reliability. It has been found that by eliminating the presence of a moment of forces generated within the indicator assembly between the point of connection of the indicator fuse element with the indicator assembly and the axis of action of the biasing force, the problems associated with the action of the indicator assembly discussed above can be prevented.

**[0015]** Preferably, the fuse assembly of the present

invention comprises an indicator assembly providing an indication of the state of the fuse when viewed from two directions. More preferably, the indicator assembly provides an indication at both an end face of the housing and a side face of the housing.

**[0016]** In one preferred embodiment, the indicator assembly comprises a first indicator element, which, when in the first position, is flat against or substantially flush with an end face of the housing and, when in the second position, is displaced outwardly from the end face. The indicator assembly of the invention comprises an indicator element extending along one side of the housing. Preferably, the indicator element extends along a channel or groove formed in or on the surface of the side of the housing. If the channel is enclosed, a window is provided, through which the position of the indicator element may be seen to determine the state of the fuse assembly. A preferred embodiment of the fuse assembly of the present invention comprises an indicator assembly having both of the aforementioned indicator elements. The indicator elements may be any suitable form and colour necessary in order to provide a clear indication to an observer. A most convenient arrangement is one in which each indicator element is prepared from a strip of metal.

**[0017]** The biasing element and the indicator fuse element are preferably arranged whereby the biasing force exerted by the biasing element is acting along the longitudinal axis of the indicator fuse element.

**[0018]** The biasing element may be any suitable means capable of biasing the indicator element into the second position, for example a spring. Alternatively, a resilient material may be employed to provide the required biasing, or the inherent properties of the indicator element may be employed. If a resilient member is employed to provide the biasing means, this member may be held in tension or compression by the indicator fuse element. It is preferred that the resilient member is held in compression and provides its biasing force from a partially or wholly compressed state. The biasing force may also be provided by a portion of the indicator being held in an unnatural state, for example a naturally curved indicator being held flat or straight, or vice versa.

**[0019]** A first preferred embodiment of the fuse assembly of the present invention employs a helical spring arranged co-axially with the indicator fuse element, the coils of the spring extending around the indicator fuse element.

**[0020]** An alternative embodiment of the present invention employs a leaf spring arrangement to bias the indicator element into the second position. A preferred leaf spring arrangement is one comprising two leaves extending on opposing sides of the indicator fuse element and acting between the indicator element and the housing. A most suitable leaf spring arrangement is one in which the indicator element comprises a metal strip having opposing biasing leaves extending from one surface of the strip and bearing against a surface of the housing. The biasing leaves are disposed uniformly about the in-

indicator fuse element.

**[0021]** It has been found that such an arrangement of opposing leaf springs may be applied in a more general manner to provide the biasing necessary in fuse assemblies both according to the present invention and as a replacement for the biasing arrangements of the fuse assemblies of the prior art. Accordingly, in a further aspect, the present invention provides a fuse assembly, comprising:

- a main fuse element;
- an indicator fuse element, arranged electrically in parallel with the main fuse element; and
- an indicator assembly, the indicator assembly comprising an indicator element movable between a first position and a second position, a biasing element biasing the indicator element to the second position, the indicator being retained in the first position by the indicator fuse element against the action of the biasing element; wherein the biasing element comprises two leaf spring elements extending in opposing directions between the indicator element and a surface of the housing.

**[0022]** The leaf spring elements are preferably unitary with the indicator element, a most suitable arrangement being one in which the indicator element and the leaf spring elements are each formed from a single strip of sprung metal. Preferably, the leaf spring elements extend in opposite directions towards each other. As noted above, an essential feature of the fuse assembly of the first aspect of the present invention is that the biasing force exerted by the biasing element acts along substantially the same line as the retaining force exerted by the indicator fuse element, especially along the longitudinal axis of the indicator fuse element. Accordingly, the leaf spring elements are preferably arranged one on opposing sides of the indicator fuse element. By having the leaf spring elements of the same form and equidistant from the indicator fuse element, the required directly opposing and biasing forces is achieved.

**[0023]** It is an advantage of the fuse assembly of the present invention that operation of the fuse provides a positive and consistent operation of the indicator. In the fuse assembly of the present invention, the indicator may be employed simply to provide a visual indication of the state of the fuse elements within the housing. Alternatively, the biasing element may be used to urge the indicator into the second position and activate an electrical switch, for example a microswitch. The switch may in turn be used to provide an indication to an observer, for example by means of a lamp on a control panel remote from the fuse assembly, or to initiate another function, for example sound an alarm, shut down an item of equipment, and the like.

**[0024]** Embodiments of the present invention will now be described, by way of example only, having reference to the accompanying drawings, in which:

Figure 1 is a perspective view of a first embodiment of the fuse assembly according to the present invention;

Figure 2 is a plan view of the first embodiment of the fuse assembly of Figure 1;

Figure 3 is a cross-sectional view of the first embodiment of the fuse assembly along the line III - III of Figure 2;

Figure 4 is an enlarged cross-sectional view of the indicator assembly of the fuse assembly of Figure 3; Figure 5 is a cross-sectional view of a second embodiment of the fuse assembly according to the present invention;

Figure 6 is a plan view of a third embodiment of the fuse assembly according to the present invention;

Figure 7 is a cross-sectional view of the third embodiment of the fuse assembly along the line VI - VI of Figure 6; and

Figure 8 is a perspective view of the indicator element of the third embodiment of the fuse assembly.

**[0025]** Referring to Figure 1, a fuse assembly, generally indicated as 2, is shown, having a hollow, generally rectangular housing, generally indicated as 4. The housing 4 comprises a housing body 6 constructed from an electrically non-conductive material, typically a ceramic, and having a side wall 8. The hollow interior of the housing is filled with an inert filler, such as sand. The housing 4 further comprises two end plates 10, 12, secured at end of the housing body 6 by screws 14. An insulating gasket 16 extends between each end plate 10, 12 and the housing body 6.

**[0026]** Electrical terminals 18, 20 extend through each end plate 10, 12 respectively and outwards from each end of the housing 4. A main fuse element 22, visible in Figure 3, extends between the terminals 18, 20 and is secured to each terminal in a manner that provides an electrically conductive path through the fuse assembly. The shape and configuration of the main fuse element 22 is determined by the electrical current to be accommodated or the rating of the fuse assembly. The appropriate form of the main fuse element 22 for a given duty is known in the art and readily determined by the person skilled in the art.

**[0027]** Referring to Figure 3, the fuse assembly 2 has an indicator assembly, generally indicated as 30. An indicator fuse element 32 is connected at one end to the terminal 20 by means of connection plate 34. The indicator fuse element 32 is arranged in parallel with the main fuse element 22. The indicator fuse element 32 is typically a fuse wire, of such a gauge that melting of the main fuse element 22, as a result of excessive electrical current, will cause the virtual immediate melting of the indicator fuse element 32. The state of the indicator fuse element 32 is used to control the indicator assembly 30, as will now be described in more detail, having reference to Figure 4.

**[0028]** As shown in Figure 4, a channel 34 is provided

in the housing 4, in the form of a bore extending longitudinally through the side wall 8. A bore extending from the outer surface of the side wall 8 to the channel 34 provides a window 36, through which an observer may view a portion of the interior of the channel 34. The indicator assembly 30, comprises a cylindrical indicator housing 38 having one closed end 40 and secured so as to extend inwards through a hole in the end plate 10, with the closed end 40 innermost. The closed end 40 of the indicator housing 38 is provided with a hole 42 located at its center. A helical coil spring 44 is located in the indicator housing 38. The end coil of the spring 44 is an interference fit within the indicator housing 38. A retainer assembly 46 is held co-axially within the coils of the spring 44 and comprises a cylindrical retainer 48 having a closed end 50 arranged innermost within the spring 44 and an open end with a flange 52, against which the end coil of the spring 44 bears. A hole 54 is provided centrally in the closed end 50 of the retainer 48. A retainer plug 56 is an interference fit within the retainer 48. The second end portion of the indicator fuse wire extends through holes 42 and 54 in the ends 40 and 50 of the indicator housing 38 and the retainer 48 respectively. The second end of the indicator fuse element is held firmly between the retainer plug 56 and the inside of the retainer 48.

**[0029]** An L-shaped indicator 60 is provided having a first, short indicator element 62 and a second, long indicator element 64. The first indicator element 62 extends parallel to the surface of the end plate 10 across the open end of the indicator housing 38 and is secured to the retainer plug 56. The second indicator element 64 extends perpendicular to the first indicator element 62 within the channel 34 in the side wall 8 of the housing body 4. The second indicator element 64 is of a length sufficient to extend past the window 36.

**[0030]** In an alternative embodiment (not shown in the figures), the second indicator element extends along the outer surface of the side wall 8 of the housing. A groove may be provided in the outer surface to accommodate the second indicator element. If desired, a label with a hole may be affixed over the groove, to provide a window.

**[0031]** In use, the fuse assembly 2 is installed with the main and indicator fuse elements 22, 32 intact and electrically conductive. The spring 44 biases the indicator 60 into the second position (not shown), in which the first indicator element is displaced from the end plate 10 of the housing 4. The indicator fuse element 32 retains the indicator assembly 30 in the first position, as shown in Figures 1, 3 and 4. In particular, the indicator 60 is held with the spring 44 compressed and the first indicator element 62 against the end plate 10 by the indicator fuse element 32, acting against the biasing force of the spring 44. Melting of the main and indicator fuse elements 22, 32 releases the retainer assembly 46 and the indicator 60, which, under the action of the spring 44 move to the second position. Means (not shown) prevent the indicator 30 from being expelled completely from the fuse assembly under the action of the biasing force of the spring 44

upon melting of the indicator fuse element 32.

**[0032]** The state of the fuse assembly 2 is indicated to an observer in two manners. A first indication is provided by the position of the first indicator element 62 relative to the end plate 10 of the housing 4. A second indication is provided through the window 36 in the side wall 8 of the housing. In the embodiment shown in Figure 4, the second indicator element 64 is visible through the window when in the first position (as shown), but is not visible through the window when in the second position. In the alternative, the second indicator element 64 may be sufficiently long as to be visible through the window, when in both the first and second positions. In this case, an indication of the state of the fuse assembly is given, for example, by a change in colour or shape of the indicator visible through the window.

**[0033]** Referring to Figure 5, a second embodiment of the fuse assembly according to the first aspect of the present invention is shown. Elements common to the first and second embodiments are indicated using the same reference numerals. For a description of these features reference is made to the preceding disclosure relating to the first embodiment. The fuse assembly shown in Figure 5 is similar to that of Figures 1 to 4, in that it relies upon a helical spring 144 to bias the indicator 160 into the second position, as shown in Figure 5. In the embodiment of Figure 5, the indicator fuse element 32 is retained at its first end by a plug 100 held in a hole in the end plate 12 of the housing 4 by an interference fit. The indicator 160 comprises first and second indicator elements 162, 164. The helical spring 144 is not retained in a recess within the housing 4, as is the case with the first embodiment. Rather, as shown in Figure 5, the helical spring 144 bears on the surface of the end plate 10 and the first indicator element 162. The second end portion of the indicator fuse element 32 extends through a second plug 102 in the end plate 10, through the center of the helical spring 144 and is secured to the first indicator element 162. The second indicator element 164 is provided with a step 166 in its surface. A taper 168 allows the second indicator element 164 to be inserted into the channel 34 in the side wall 8 of the housing 4. Once inserted, the step 166 abuts the gasket 16 and prevents complete removal of the second indicator element 164.

**[0034]** The fuse assembly of Figure 5 is shown with the indicator assembly 130 in the second position, that is indicating an operated or blown fuse. Operation of the fuse assembly of this embodiment is substantially as hereinbefore described with respect to the first embodiment.

**[0035]** Referring to Figures 6, 7 and 8, a third embodiment of the fuse assembly of the present invention is shown. Elements common to the first and third embodiments are indicated using the same reference numerals. For a description of these features, reference is made to the preceding disclosure relating to the first embodiment. The embodiment shown in Figures 6 and 7 comprises an alternative indicator assembly 230. The indicator as-

sembly comprises an indicator 232 having a first indicator element 234 and a second indicator element 236. The indicator is shown in detail in Figure 8 and comprises the first and second indicator elements 234, 236 arranged to form an L-shape. The first indicator element 234 has first and second leaf spring elements 240 and 242 unitary with it and extending from one face. Each leaf spring element 240, 242 is in the form of an arcuate leaf having a free end curved to form a foot. The leaf spring elements 240, 242 extend from the same face of the first indicator element 234, but in opposite directions towards each other. As shown in Figure 7, the two leaf spring elements 240, 242 are disposed equidistant on either side of the indicator fuse element 32. The leaf spring elements have substantially the same length and radius of curvature. Being formed from a single member, this provides the leaf spring elements 240, 242 with the same biasing properties. The leaf spring elements 240, 242 together bias the indicator 230 into the second position, as shown in Figure 7. The second end of the indicator fuse element 32 is secured to the first indicator element 234 at a point between the two leaf spring elements 240, 242, as shown in Figure 7.

**[0036]** In operation, the fuse assembly 2 is installed with the indicator assembly 230 retained in the first position (not shown) by the indicator fuse element 32. In the first position, the indicator 232 is held with the first indicator portion retained close to or in contact with the end plate 10 of the housing 4. In this position, the leaf springs 240, 242 are compressed, with their feet forced outwards from the indicator fuse element 32. Upon melting of the main and indicator fuse elements 22 and 32, the indicator assembly 230 is freed to move, under the action of the leaf spring elements 240, 242, to move to the second position. The indications regarding the state of the fuse assembly given to an observer are as described above with respect to the first embodiment

**[0037]** As noted above, the fuse assembly shown in Figures 6 to 8 employs the indicator 232 in accordance with the first aspect of the present invention. However, as also noted, the use of leaf spring elements to bias the indicator into the second position has a more general application, such as a replacement for the biasing means of the prior art fuse assemblies discussed above.

## Claims

1. A fuse assembly, comprising:

a housing (4);  
 a main fuse element (22);  
 an indicator fuse element (32), arranged electrically in parallel with the main fuse element (22);  
 and  
 an indicator assembly (30, 130, 230), the indicator assembly comprising an indicator (60, 160, 232) movable between a first position and

a second position, a biasing means (44, 144, 240, 242) biasing the indicator to the second position, the indicator being retained in the first position by the indicator fuse element acting against the action of the biasing means along a line of a retaining force; whereby melting of the indicator fuse element releases the indicator for movement from the first position to the second position, the biasing element acting to provide a biasing force against the indicator fuse element applied substantially along the line of the retaining force during said movement,

the indicator comprising an indicator element (64, 164, 236) extending along one side of the housing (4) wherein its position can be seen, thereby providing an indication of the state of the fuse assembly at a side face of the housing.

2. A fuse assembly according to claim 1, wherein the biasing element acts to provide a biasing force substantially co-axially with the longitudinal axis of the indicator fuse element.
3. A fuse assembly according to either of claims 1 or 2, wherein the biasing element comprises a resilient member.
4. A fuse assembly according to claim 3, wherein the resilient member is a spring.
5. A fuse assembly according to claim 4, wherein the spring is a helical spring.
6. A fuse assembly according to claim 5, wherein the helical spring is housed in a recess (38) extending inwards from one end of the housing.
7. A fuse assembly according to either of claims 5 or 6, wherein a single helical spring is provided, the coils of which extend around the longitudinal axis of the indicator fuse element.
8. A fuse assembly according to claim 4, wherein the spring comprises one or more leaf spring elements.
9. A fuse assembly according to claim 8, wherein the spring comprises two leaf spring elements, each element being secured at one end to the indicator and extending between the indicator and the housing.
10. A fuse assembly according to claim 9, wherein the two spring elements extend in opposite directions.
11. A fuse assembly according to claim 10, wherein the two spring elements extend towards each other.
12. A fuse assembly according to any of claims 9 to 11,

wherein the two leaf spring elements are spaced equidistant from and on opposing sides of the longitudinal axis of the indicator fuse element.

13. A fuse assembly according to any of claims 8 to 12, wherein each leaf spring element is unitary with the indicator. 5
14. A fuse assembly according to any one of the preceding claims wherein the indicator element extends along a channel (34) or groove formed in or on the surface of a side of the housing. 10
15. A fuse assembly according to claim 14 wherein the channel is enclosed and a window is provided, through which the position of the indicator element may be seen to determine the state of the fuse assembly. 15
16. A fuse assembly according to any preceding claim, wherein the indicator comprises two indicator elements (62, 162, 234, 64, 164, 236), each indicator element giving a separate indication of the state of the fuse assembly. 20
17. A fuse assembly according to claim 16, wherein the indicator elements extend perpendicular to each other. 25
18. A fuse assembly according to claim 17, wherein one indicator element provides an indication on one end of the housing. 30
19. A fuse assembly according to any preceding claim, wherein the indicator is provided with a retainer, to prevent complete ejection or removal of the indicator from the fuse assembly. 35
20. A fuse assembly according to claim 19, wherein the retainer comprises a step profile on a surface of the indicator, the step profile engaging with an element of the housing to limit the movement of the indicator to movement between the first and the second position. 40
21. A fuse assembly according to any preceding claim, wherein, when in the second position, at least a portion of the indicator is displaced from the surface of the housing. 45

#### Patentansprüche

1. Sicherungsanordnung, umfassend:

ein Gehäuse (4);  
 ein Hauptsicherungselement (22);  
 ein Indikatorsicherungselement (32), das elek-

trisch parallel zum Hauptsicherungselement (22) geschaltet ist; und  
 eine Indikatoranordnung (30, 130, 230), wobei die Indikatoranordnung Folgendes umfasst: einen Indikator (60, 160, 232), der zwischen einer ersten Position und einer zweiten Position beweglich ist, ein Vorspannungselement (44, 144, 240, 242), das den Indikator auf die zweite Position vorspannt, wobei der Indikator durch das Indikatorsicherungselement, das entlang einer Linie einer Rückhaltekraft gegen die Wirkung des Vorspannungselements wirkt, in der ersten Position zurückgehalten wird, wobei durch das Schmelzen des Indikatorsicherungselements der Indikator zur Bewegung aus der ersten Position zur zweiten Position freigesetzt wird, wobei das Vorspannungselement so wirkt, dass es während der Bewegung für eine Vorspannungskraft gegen das Indikatorsicherungselement, das im Wesentlichen entlang der Richtung der Rückhaltekraft wirkt, sorgt,  
 wobei der Indikator ein Indikatorelement (64, 164, 236) umfasst, das sich entlang einer Seite des Gehäuses (4) erstreckt, wobei seine Position zu sehen ist, was für eine Anzeige des Zustands der Sicherungsanordnung an einer Seitenfläche des Gehäuses sorgt.


2. Sicherungsanordnung gemäß Anspruch 1, wobei das Vorspannungselement so wirkt, dass es für eine Vorspannungskraft im Wesentlichen koaxial mit der Längsachse des Indikatorsicherungselements sorgt.
3. Sicherungsanordnung gemäß einem der Ansprüche 1 oder 2, wobei das Vorspannungselement ein elastisches Element umfasst.
4. Sicherungsanordnung gemäß Anspruch 3, wobei das elastische Element eine Feder ist.
5. Sicherungsanordnung gemäß Anspruch 4, wobei die Feder eine Spiralfeder ist.
6. Sicherungsanordnung gemäß Anspruch 5, wobei die Spiralfeder in einer Aussparung (38) untergebracht ist, die sich von einem Ende des Gehäuses aus nach innen erstreckt.
7. Sicherungsanordnung gemäß einem der Ansprüche 5 oder 6, wobei eine einzige Spiralfeder vorhanden ist, deren Windungen sich um die Längsachse des Indikatorsicherungselements herum erstrecken.
8. Sicherungsanordnung gemäß Anspruch 4, wobei die Feder ein oder mehrere Blattfederelemente umfasst.

9. Sicherungsanordnung gemäß Anspruch 8, wobei die Feder zwei Blattfederelemente umfasst, wobei jedes Element an einem Ende des Indikators befestigt ist und sich zwischen dem Indikator und dem Gehäuse erstreckt. 5
10. Sicherungsanordnung gemäß Anspruch 9, wobei sich die beiden Federelemente in entgegengesetzte Richtungen erstrecken. 10
11. Sicherungsanordnung gemäß Anspruch 10, wobei sich die beiden Federelemente aufeinander zu erstrecken. 15
12. Sicherungsanordnung gemäß einem der Ansprüche 9 bis 11, wobei sich die beiden Blattfederelemente im gleichen Abstand zu und auf entgegengesetzten Seiten der Längsachse des Indikatorsicherungselements befinden. 20
13. Sicherungsanordnung gemäß einem der Ansprüche 8 bis 12, wobei jedes Blattfederelement einteilig mit dem Indikator ist. 25
14. Sicherungsanordnung gemäß einem der vorstehenden Ansprüche, wobei sich das Indikatorelement entlang eines Kanals (34) oder einer Rinne erstreckt, der bzw. die in oder auf der Oberfläche einer Seite des Gehäuses gebildet ist. 30
15. Sicherungsanordnung gemäß Anspruch 14, wobei der Kanal umschlossen ist und ein Fenster vorhanden ist, durch das die Position des Indikatorelements gesehen werden kann, um den Zustand der Sicherungsanordnung zu bestimmen. 35
16. Sicherungsanordnung gemäß einem der vorstehenden Ansprüche, wobei der Indikator zwei Indikatorelemente (62, 162, 234, 64, 164, 236) umfasst, wobei jedes Indikatorelement eine getrennte Anzeige des Zustands der Sicherungsanordnung ergibt. 40
17. Sicherungsanordnung gemäß Anspruch 16, wobei sich die Indikatorelemente senkrecht zueinander erstrecken. 45
18. Sicherungsanordnung gemäß Anspruch 17, wobei ein Indikatorelement (62, 162, 234) für eine Anzeige an einem Ende des Gehäuses sorgt. 50
19. Sicherungsanordnung gemäß einem der vorstehenden Ansprüche, wobei der Indikator mit einem Rückhalteelement versehen ist, um einen vollständigen Auswurf oder eine vollständige Entfernung des Indikators aus der Sicherungsanordnung zu verhindern. 55
20. Sicherungsanordnung gemäß Anspruch 19, wobei das Rückhalteelement ein Stufenprofil auf einer Oberfläche des Indikators umfasst, wobei das Stufenprofil an ein Element des Gehäuses angreift, so dass die Bewegung des Indikators auf eine Bewegung zwischen der ersten und der zweiten Position eingeschränkt ist.
21. Sicherungsanordnung gemäß einem der vorstehenden Ansprüche, wobei, wenn sich der Indikator in der zweiten Position befindet, wenigstens ein Teil des Indikators gegenüber der Oberfläche des Gehäuses wegbewegt ist.


### Revendications

1. Ensemble de coupe-circuit à fusible comprenant :
- un boîtier (4) ;
  - un élément formant fusible principal (22) ;
  - un élément formant fusible indicateur (32) arrangé électriquement en parallèle avec l'élément de fusible principal (22) ; et
  - un ensemble indicateur (30, 130, 230), l'ensemble indicateur comprenant un indicateur (60, 160, 232) qui peut se déplacer entre une première position et une deuxième position, des moyens de sollicitation (44, 144, 240, 242) qui sollicitent l'indicateur vers la deuxième position, l'indicateur étant retenu dans la première position par l'élément formant fusible indicateur agissant à l'encontre de l'action des moyens de sollicitation le long d'une ligne d'une force de retenue ; moyennant quoi une fusion de l'élément formant fusible indicateur libère l'indicateur pour un mouvement depuis la première position à la deuxième position, l'élément de sollicitation ayant pour fonction de fournir une force de sollicitation à l'encontre de l'élément formant fusible indicateur appliqué sensiblement le long de la ligne de la force de retenue lors du dit mouvement,
  - l'indicateur comprenant un élément indicateur (64, 164, 236) qui se prolonge le long d'un côté du boîtier (4), dans lequel sa position peut être vue, fournissant ainsi une indication de l'état de l'ensemble de coupe-circuit à fusible au niveau d'une surface latérale du boîtier.
2. Ensemble de coupe-circuit à fusible selon la revendication 1, dans lequel l'élément de sollicitation a pour fonction de fournir une force de sollicitation sensiblement co-axialement avec l'axe longitudinal de l'élément formant fusible indicateur.
3. Ensemble de coupe-circuit à fusible selon l'une quelconque des revendications 1 ou 2, dans lequel l'élément de sollicitation comprend un élément résilient.


4. Ensemble de coupe-circuit à fusible selon la revendication 3, dans lequel l'élément résilient est un ressort.
5. Ensemble de coupe-circuit à fusible selon la revendication 4, dans lequel le ressort est un ressort hélicoïdal.
6. Ensemble de coupe-circuit à fusible selon la revendication 5, dans lequel le ressort hélicoïdal est logé à l'intérieur d'un renforcement (38) qui s'étend vers l'intérieur à partir de l'une des extrémités du boîtier.
7. Ensemble de coupe-circuit à fusible selon l'une quelconque des revendications 5 ou 6, dans lequel un seul ressort hélicoïdal est prévu, dont les enroulements s'étendent autour de l'axe longitudinal de l'élément formant fusible indicateur.
8. Ensemble de coupe-circuit à fusible selon la revendication 4, dans lequel le ressort comprend un ou plusieurs éléments de ressort à lamelles ;
9. Ensemble de coupe-circuit à fusible selon la revendication 8, dans lequel le ressort comprend deux éléments de ressort à lamelles, chaque élément étant fixé au niveau d'une extrémité de l'indicateur et se prolongeant entre l'indicateur et le boîtier.
10. Ensemble de coupe-circuit à fusible selon la revendication 9, dans lequel les deux éléments de ressort s'étendent dans des directions opposées.
11. Ensemble de coupe-circuit à fusible selon la revendication 10, dans lequel les deux éléments de ressort s'étendent l'un vers l'autre.
12. Ensemble de coupe-circuit à fusible selon l'une quelconque des revendications 9 à 11, dans lequel les deux éléments de ressort à lamelles sont espacés équidistants par rapport à, et sur des côtés opposés de, l'axe longitudinal de l'élément formant fusible indicateur.
13. Ensemble de coupe-circuit à fusible selon l'une quelconque des revendications 8 à 12, dans lequel chaque élément de ressort à lamelles forme une seule pièce avec l'indicateur.
14. Ensemble de coupe-circuit à fusible selon l'une quelconque des revendications précédentes, dans lequel l'élément indicateur s'étend le long d'un canal (34) ou d'une gorge formé(e) dans, ou sur, la surface d'un côté du boîtier.
15. Ensemble de coupe-circuit à fusible selon la revendication 14, dans lequel le canal est fermé et une fenêtre est prévue à travers laquelle la position de l'élément indicateur peut être vue ce qui permet de déterminer l'état de l'ensemble de coupe-circuit à fusible.
16. Ensemble de coupe-circuit à fusible selon l'une quelconque des revendications précédentes, dans lequel l'indicateur comprend deux éléments indicateurs (62, 162, 234, 64, 164, 236), chaque élément indicateur fournissant une indication distincte de l'état de l'ensemble de coupe-circuit à fusible.
17. Ensemble de coupe-circuit à fusible selon la revendication 16, dans lequel les éléments indicateurs s'étendent perpendiculairement l'un à l'autre.
18. Ensemble de coupe-circuit à fusible selon la revendication 17, dans lequel l'un des éléments indicateurs (62, 162, 234) fournit une indication au niveau de l'une des extrémités du boîtier.
19. Ensemble de coupe-circuit à fusible selon l'une quelconque des revendications précédentes, dans lequel l'indicateur comporte un dispositif de retenue pour empêcher une éjection ou un retrait complet de l'indicateur hors de l'ensemble de coupe-circuit à fusible.
20. Ensemble de coupe-circuit à fusible selon la revendication 19, dans lequel le dispositif de retenue présente un profil étagé sur une surface de l'indicateur, le profil étagé s'engageant avec un élément du boîtier de façon à limiter le mouvement de l'indicateur au mouvement entre la première et la deuxième positions.
21. Ensemble de coupe-circuit à fusible selon l'une quelconque des revendications précédentes, dans lequel, quand l'indicateur est dans la deuxième position, au moins une portion de l'indicateur est déplacée par rapport à la surface du boîtier.

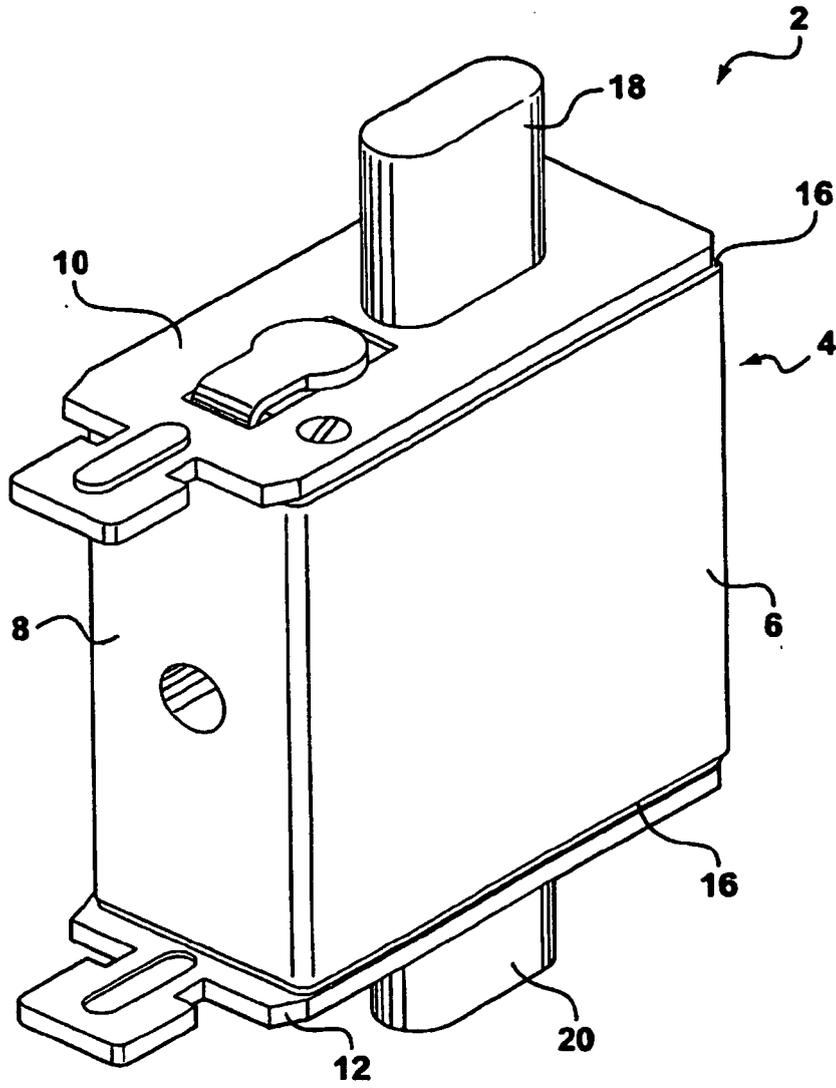


**Figure 1**

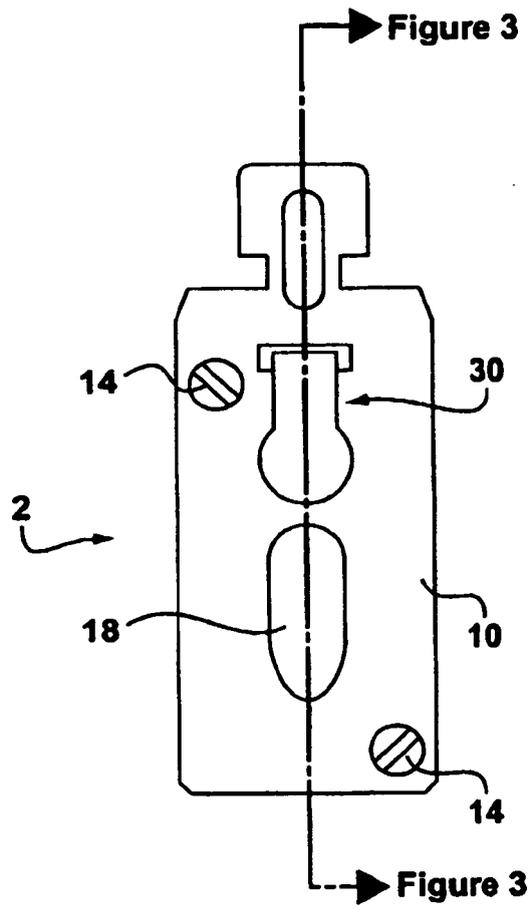


**Figure 2**

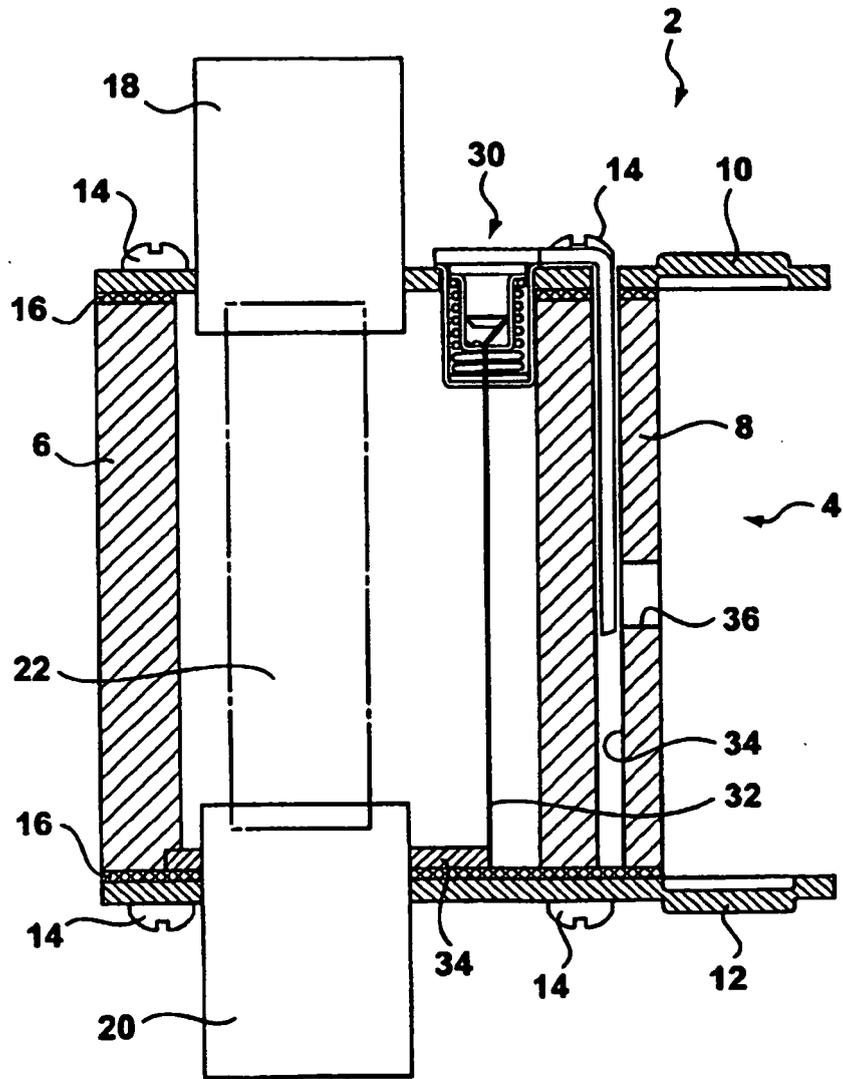


**Figure 3**

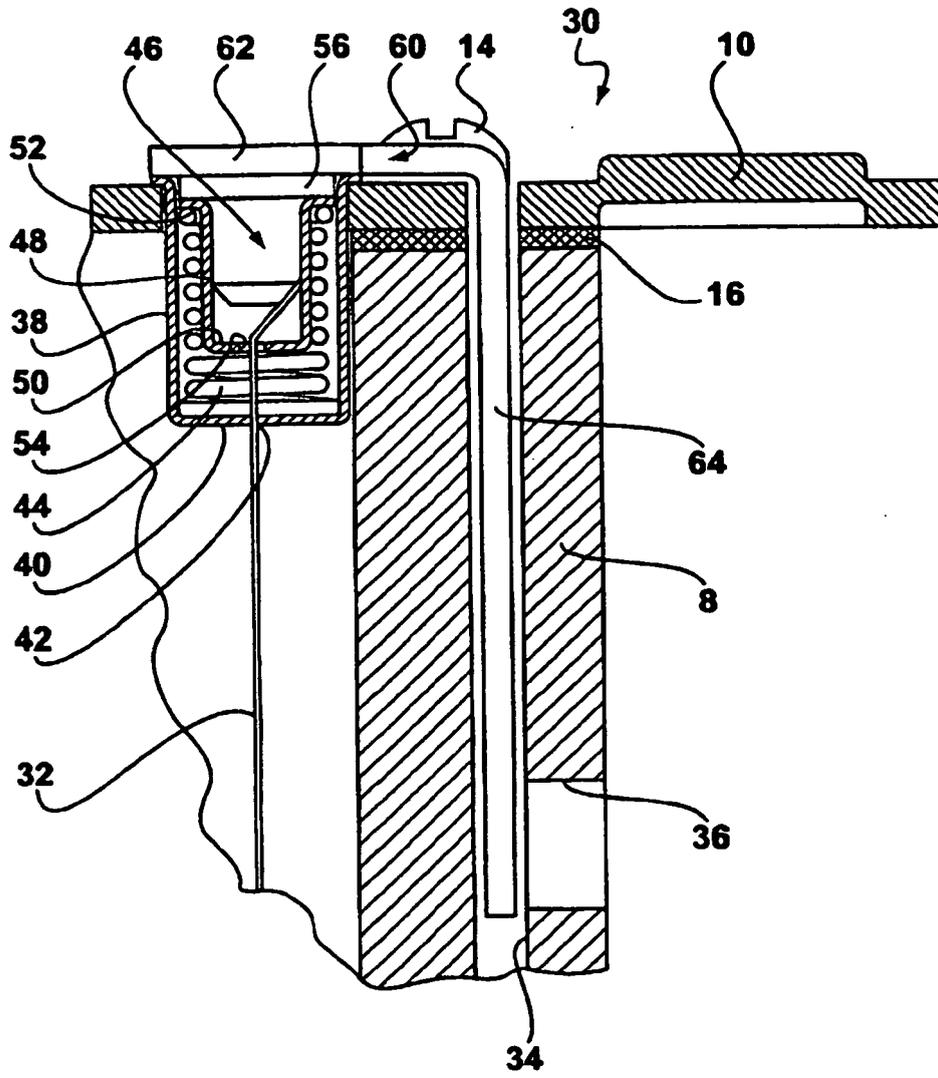

**Figure 4**

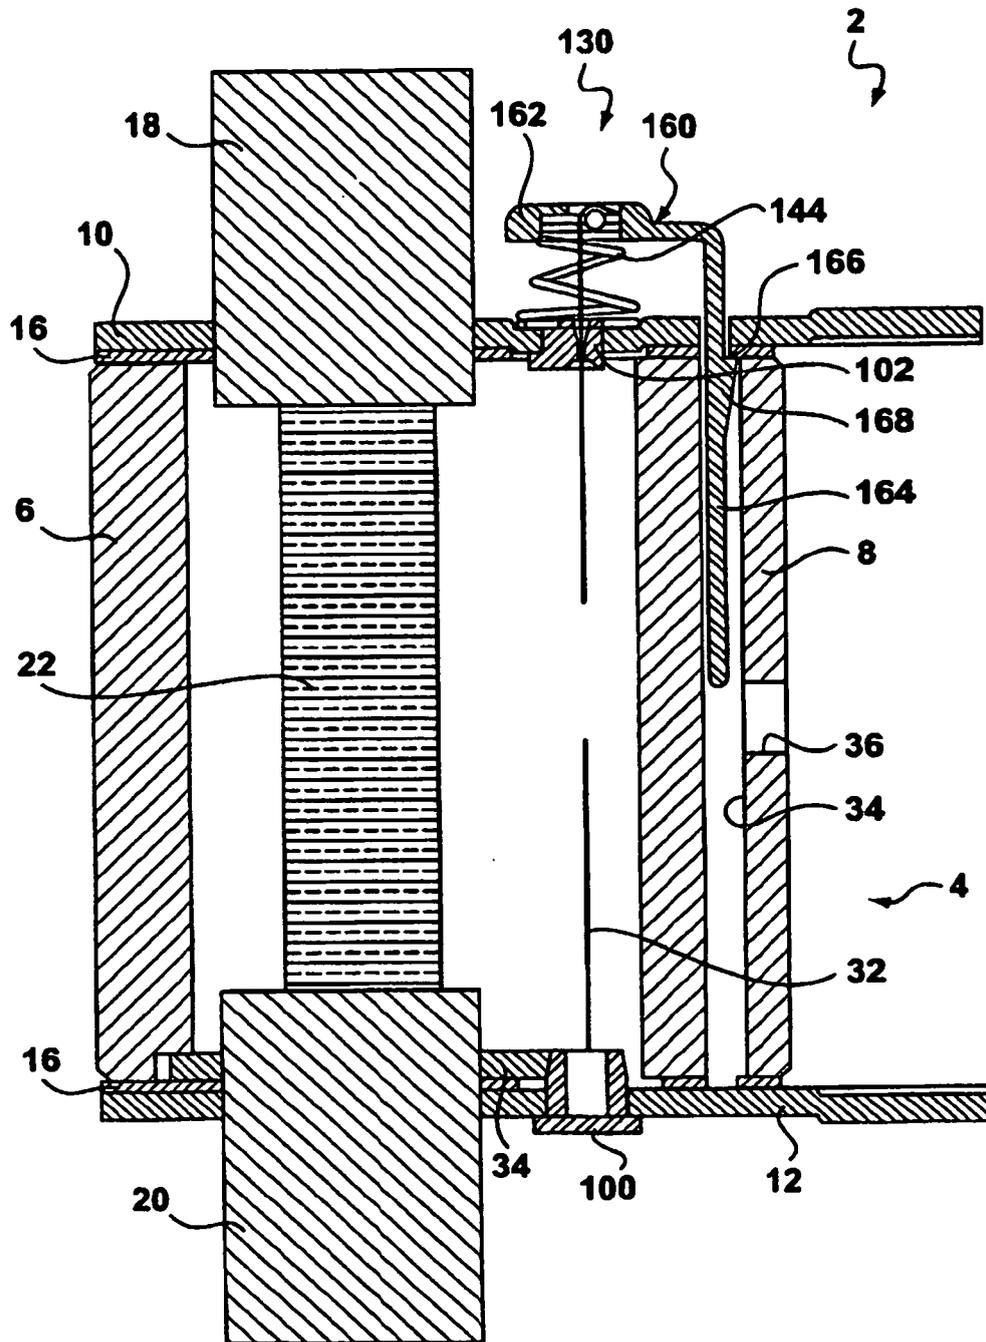


**Figure 5**

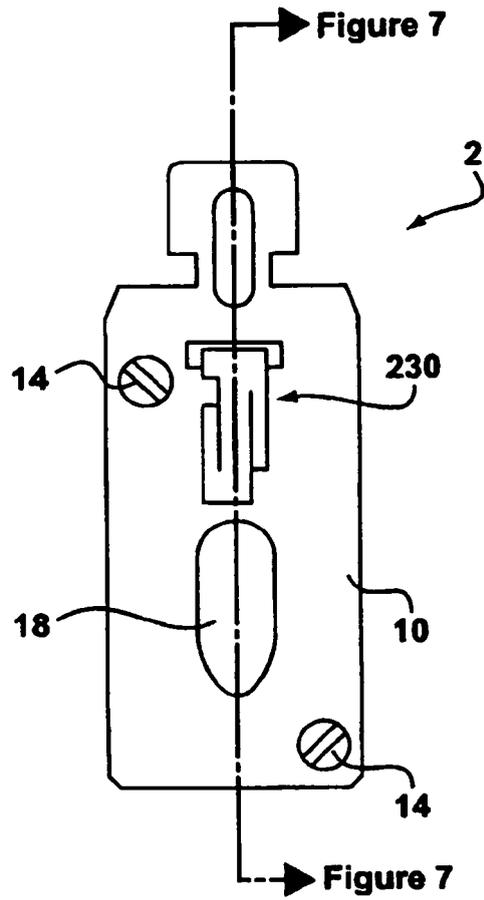

**Figure 6**



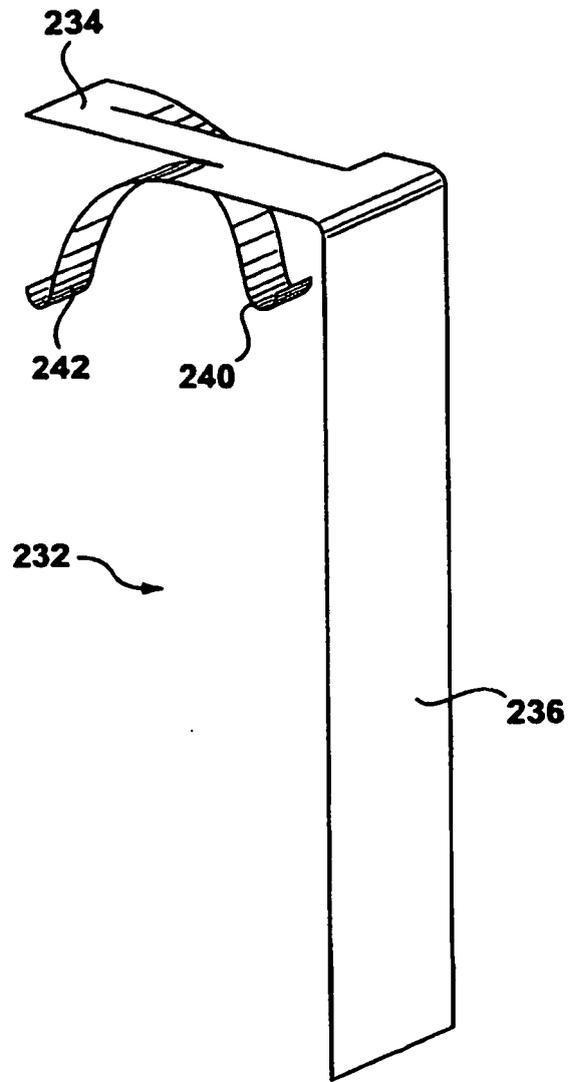

**Figure 8**

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- DE 1034751 [0003]
- DE 3203211 A1 [0004]
- DE G9006337 [0004]
- EP 0044997 A [0005] [0006] [0007]
- DE 19723540 A1 [0006] [0007]
- DE 19744535 A1 [0006]
- WO 9807172 A [0006]
- WO 0011698 A [0006]
- DE 29718230 U1 [0006]
- DE 29807928 U1 [0007]
- WO 9940599 A [0008]
- US 4023133 A [0010]